

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49 50–89 90–100

METRICS

[Expand view](#)

First Contentful Paint

0.3 s

Largest Contentful Paint

0.5 s

▲ Total Blocking Time

990 ms


Cumulative Layout Shift

0

Speed Index

0.4 s

[View Treemap](#)

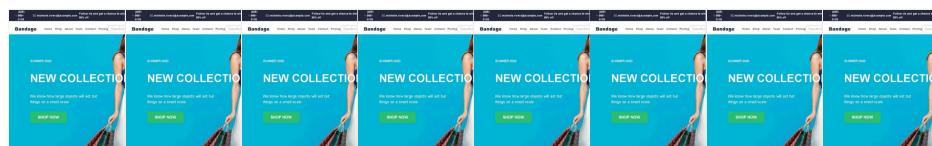

Show audits relevant to: [All](#) [FCP](#) [LCP](#) [TBT](#)

DIAGNOSTICS

▲ Reduce JavaScript execution time — **1.8 s**

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) [TBT](#)

URL	Total CPU Time	Script Evaluation	Script Parse
localhost 1st Party	1,758 ms	1,006 ms	477 ms
...app/layout.js (localhost)	1,019 ms	614 ms	318 ms
...app/page.js (localhost)	302 ms	200 ms	80 ms

URL	Total CPU Time	Script Evaluation	Script Parse
...chunks/main-app.js?v=173... (localhost)	260 ms	181 ms	76 ms
http://localhost:3000	178 ms	11 ms	3 ms
Unattributable	509 ms	307 ms	0 ms
webpack-internal:///app-pages-browser/.node_modules/next/dist/compiled/scheduler/cjs/scheduler.development.js	295 ms	289 ms	0 ms
Unattributable	214 ms	18 ms	0 ms

▲ Minimize main-thread work — 2.3 s	^																
Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to minimize main-thread work [TBT]																	
<table border="1"> <thead> <tr> <th>Category</th><th>Time Spent</th></tr> </thead> <tbody> <tr> <td>Script Evaluation</td><td>1,327 ms</td></tr> <tr> <td>Script Parsing & Compilation</td><td>481 ms</td></tr> <tr> <td>Other</td><td>312 ms</td></tr> <tr> <td>Style & Layout</td><td>116 ms</td></tr> <tr> <td>Garbage Collection</td><td>28 ms</td></tr> <tr> <td>Rendering</td><td>18 ms</td></tr> <tr> <td>Parse HTML & CSS</td><td>9 ms</td></tr> </tbody> </table>		Category	Time Spent	Script Evaluation	1,327 ms	Script Parsing & Compilation	481 ms	Other	312 ms	Style & Layout	116 ms	Garbage Collection	28 ms	Rendering	18 ms	Parse HTML & CSS	9 ms
Category	Time Spent																
Script Evaluation	1,327 ms																
Script Parsing & Compilation	481 ms																
Other	312 ms																
Style & Layout	116 ms																
Garbage Collection	28 ms																
Rendering	18 ms																
Parse HTML & CSS	9 ms																
<p>▲ Eliminate render-blocking resources — Potential savings of 60 ms</p> <p>Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. Learn how to eliminate render-blocking resources. [FCP] [LCP]</p> <table border="1"> <thead> <tr> <th>URL</th><th>Transfer Size</th><th>Potential Savings</th></tr> </thead> <tbody> <tr> <td>localhost 1st Party</td><td>13.8 KiB</td><td>60 ms</td></tr> <tr> <td>...app/layout.css?v=173... (localhost)</td><td>13.8 KiB</td><td>60 ms</td></tr> </tbody> </table>		URL	Transfer Size	Potential Savings	localhost 1st Party	13.8 KiB	60 ms	...app/layout.css?v=173... (localhost)	13.8 KiB	60 ms							
URL	Transfer Size	Potential Savings															
localhost 1st Party	13.8 KiB	60 ms															
...app/layout.css?v=173... (localhost)	13.8 KiB	60 ms															
<p>▲ Page prevented back/forward cache restoration — 4 failure reasons</p> <p>Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. Learn more about the bfcache</p> <table border="1"> <thead> <tr> <th>Failure reason</th><th>Failure type</th></tr> </thead> <tbody> <tr> <td>Pages with WebSocket cannot enter back/forward cache.</td><td>Pending browser support</td></tr> <tr> <td>http://localhost:3000</td><td></td></tr> <tr> <td>Pages whose main resource has cache-control:no-store cannot enter back/forward cache.</td><td>Not actionable</td></tr> </tbody> </table>		Failure reason	Failure type	Pages with WebSocket cannot enter back/forward cache.	Pending browser support	http://localhost:3000		Pages whose main resource has cache-control:no-store cannot enter back/forward cache.	Not actionable								
Failure reason	Failure type																
Pages with WebSocket cannot enter back/forward cache.	Pending browser support																
http://localhost:3000																	
Pages whose main resource has cache-control:no-store cannot enter back/forward cache.	Not actionable																

Failure reason	Failure type
http://localhost:3000	
JsNetworkRequestReceivedCacheControlNoStoreResource	Not actionable
http://localhost:3000	
WebSocketSticky	Not actionable
http://localhost:3000	

Preload Largest Contentful Paint image — Potential savings of -20 ms

If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. [Learn more about preloading LCP elements.](#) [\[LCP\]](#)

URL	Potential Savings
localhost 1st Party	-20 ms
 /images/product-slide-1.svg (localhost)	-20 ms
div.w-full.h-full.absolute.bg-[url('/images/product-slide-1.svg')].bg-center.bg-cover	

Minify JavaScript — Potential savings of 5 KiB

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#) [\[FCP\]](#) [\[LCP\]](#)

URL	Transfer Size	Potential Savings
localhost 1st Party	10.3 KiB	5.0 KiB
...chunks/webpack.js?v=173... (localhost)	10.3 KiB	5.0 KiB

Properly size images — Potential savings of 440 KiB

Serve images that are appropriately-sized to save cellular data and improve load time. [Learn how to size images.](#) [\[FCP\]](#) [\[LCP\]](#)

URL	Resource Size	Potential Savings
localhost 1st Party	479.0 KiB	440.4 KiB
 /_next/image?url=... (localhost)	129.0 KiB	118.6 KiB
img.object-contain		
 /_next/image?url=... (localhost)	102.0 KiB	93.8 KiB
img.object-contain		

URL	Resource Size	Potential Savings
 /_next/image?url=... (localhost)	70.8 KiB	65.1 KiB
 /_next/image?url=... (localhost)	59.6 KiB	54.8 KiB
 /_next/image?url=... (localhost)	50.4 KiB	46.4 KiB
 /_next/image?url=... (localhost)	39.3 KiB	36.2 KiB
 /_next/image?url=... (localhost)	27.9 KiB	25.6 KiB

Defer offscreen images — Potential savings of 621 KiB

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. [Learn how to defer offscreen images.](#) [FCP](#) [LCP](#)

UI
localhost 1st Party
<code>div.w-[34%].absolute.h-full.bottom-0.right-8.bg-[url('/images/person.svg')].bg-bottom.bg-contain.bg-no-repeat.max-lg:h-[60vh].max-lg:w-full.max-lg:static</code>
Avoid serving legacy JavaScript to modern browsers — Potential savings of 0 KiB
Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. Learn how to use modern JavaScript FCP LCP

URL	Potential Savings
localhost 1st Party	0.0 KiB
...chunks/main-app.js?v=173... (localhost)	0.0 KiB
<code>:3000/_next/static/c...?v=1738946266940:60</code>	@babel/plugin-transform-classes

Reduce unused CSS — Potential savings of 10 KiB ^

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) [FCP](#) [LCP](#)

URL	Transfer Size	Potential Savings
localhost 1st Party	13.4 KiB	10.4 KiB
...app/layout.css?v=173... (localhost)	13.4 KiB	10.4 KiB

Reduce unused JavaScript — Potential savings of 1,082 KiB ^

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) [FCP](#) [LCP](#)

URL	Transfer Size	Potential Savings
localhost 1st Party	5,603.4 KiB	1,082.2 KiB
...app/layout.js (localhost)	5,603.4 KiB	1,082.2 KiB

Avoid enormous network payloads — Total size was 9,836 KiB ^

Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#)

URL	Transfer Size
localhost 1st Party	9,566.3 KiB
...app/layout.js (localhost)	5,603.8 KiB
...app/page.js (localhost)	1,540.5 KiB
...chunks/main-app.js?v=173... (localhost)	1,312.8 KiB
/images/person.svg (localhost)	620.6 KiB
/_next/image?url=... (localhost)	129.4 KiB
/_next/image?url=... (localhost)	102.5 KiB
/images/product-slide-1.svg (localhost)	74.6 KiB
/_next/image?url=... (localhost)	71.2 KiB
/_next/image?url=... (localhost)	60.1 KiB
/_next/image?url=... (localhost)	50.9 KiB

Avoid an excessive DOM size — 876 elements ^

A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn how to avoid an excessive DOM size.](#) [TBT](#)

Statistic	Element	Value		
Total DOM Elements		876		
Maximum DOM Depth	circle	11		
Maximum Child Elements		28		
<code>div.w-full.grid.xcgrid-cols-4.gap-x-[30px].place-items-center.grid-flow-row.max-sm:grid-cols-1.sm:grid-cols-2.lg:grid-cols-3</code>				
<p>○ Avoid long main-thread tasks — 5 long tasks found</p> <p>Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. Learn how to avoid long main-thread tasks [TBT]</p>				
URL	Start Time	Duration		
localhost 1st Party		1,583 ms		
...app/layout.js (localhost)	8,761 ms	1,019 ms		
...app/page.js (localhost)	5,481 ms	303 ms		
...chunks/main-app.js?v=173... (localhost)	5,081 ms	261 ms		
Unattributable		147 ms		
webpack-internal:///app-pages-browser/../node_modules/next/dist/compiled/scheduler/cjs/scheduler.development.js	468 ms	74 ms		
webpack-internal:///app-pages-browser/../node_modules/next/dist/compiled/scheduler/cjs/scheduler.development.js	280 ms	73 ms		
<p>○ Initial server response time was short — Root document took 110 ms</p> <p>Keep the server response time for the main document short because all other requests depend on it. Learn more about the Time to First Byte metric [FCP] [LCP]</p>				
URL	Time Spent			
localhost 1st Party	110 ms			
http://localhost:3000	110 ms			
<p>○ Avoid chaining critical requests — 1 chain found</p> <p>The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. Learn how to avoid chaining critical requests.</p>				
<p>Maximum critical path latency: 177.963 ms</p> <p><i>Initial Navigation</i></p> <p>http://localhost:3000</p> <p>...app/layout.css?v=173... (localhost) - 25.391 ms, 13.75 KiB</p>				

○ Minimize third-party usage — Third-party code blocked the main thread for 0 ms

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn how to minimize third-party impact.](#) [TBT]

Third-Party	Transfer Size	Main-Thread Blocking Time
sanity.io	8 KiB	0 ms
...query/production?query=... (dbe yokym.apicdn.sanity.io)	8 KiB	0 ms

○ Largest Contentful Paint element — 500 ms

This is the largest contentful element painted within the viewport. [Learn more about the Largest Contentful Paint element \(LCP\)](#)

Element
 div.w-full.h-full.absolute.bg-[url("/images/product-slide-1.svg")].bg-center.bg-cover

Phase	% of LCP	Timing
TTFB	28%	140 ms
Load Delay	34%	170 ms
Load Time	13%	60 ms
Render Delay	25%	130 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (20)

Hide

Minify CSS

Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS.](#) [FCP] [LCP]

Efficiently encode images

Optimized images load faster and consume less cellular data. [Learn how to efficiently encode images.](#) [FCP] [LCP]

Serve images in next-gen formats

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. [Learn more about modern image formats.](#) [FCP] [LCP]

Enable text compression

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more about text compression.](#) [FCP] [LCP]

Preconnect to required origins

Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. [Learn how to preconnect to required origins.](#) [LCP] [FCP]

Avoid multiple page redirects

Redirects introduce additional delays before the page can be loaded. [Learn how to avoid page redirects.](#) [LCP] [FCP]

Use HTTP/2

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more about HTTP/2.](#) [LCP] [FCP]

Use video formats for animated content

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. [Learn more about efficient video formats.](#) [FCP] [LCP]

Remove duplicate modules in JavaScript bundles

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. [FCP] [LCP]

Uses efficient cache policy on static assets — 0 resources found

Along cache lifetime can speed up repeat visits to your page. [Learn more about efficient cache policies.](#)

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)

All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. [Learn more about font-display.](#)

Lazy load third-party resources with facades

Some third-party embeds can be lazily loaded. Consider replacing them with a facade until they are required. [Learn how to defer third-parties with a facade.](#) [TBT]

Largest Contentful Paint image was not lazily loaded

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more about optimal lazy loading.](#) [LCP]

Element
 div.w-full.h-full.absolute.bg-[url('/images/product-slide-1.svg')].bg-center.bg-cover

Avoid large layout shifts

These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to [windowing](#). [Learn how to improve CLS](#) [CLS]

Uses passive listeners to improve scrolling performance

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. [Learn more about adopting passive event listeners.](#)

Avoids `document.write()`

For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn how to avoid `document.write\(\)`](#).

○ Avoid non-composited animations ^

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) [CLS](#)

Image elements have explicit `width` and `height` ^

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) [CLS](#)

Has a `<meta name="viewport">` tag with `width` or `initial-scale` ^

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag](#).



Accessibility


These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

ARIA

▲ `[aria-*]` attributes do not match their roles ^

Each ARIA role supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. [Learn how to match ARIA attributes to their roles](#).

Failing Elements



```
p.montserrat-bold.text-[#23A6F0].text-sm.hover:text-blueHov.xxL:text-xxL
```

These are opportunities to improve the usage of ARIA in your application which may enhance the experience for users of assistive technology, like a screen reader.

NAMES AND LABELS

▲ Buttons do not have an accessible name ^

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible](#).

Failing Elements



```
button.bg-white.text-black.text-[12px].rounded-full.px-1.py-1
```

▲ Links do not have a discernible name

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#)

Failing Elements

a

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

CONTRAST

▲ Background and foreground colors do not have a sufficient contrast ratio.

Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)

Failing Elements

```

p.montserrat-bold.text-[#23A6F0].text-sm.hover:text-blueHov.xx:txl
html.light

button.bg-[#2DC071].py-[15px].px-[40px].montserrat-bold.text-[20px].text-white.rounded-[5px].hover:bg-[#26a05e].xx:txl

p.text-[#BDBDBD].montserrat-semibold.text-left.text-sm.xx:txl:[20px]
body__variable_1e4310.__variable_c3aa02.antiAliased

p.text-[#BDBDBD].ml-1.montserrat-semibold.text-left.text-sm.xx:txl:[20px]
body__variable_1e4310.__variable_c3aa02.antiAliased

p.text-[#BDBDBD].montserrat-semibold.text-left.text-sm.xx:txl:[20px]
body__variable_1e4310.__variable_c3aa02.antiAliased

p.text-[#BDBDBD].ml-1.montserrat-semibold.text-left.text-sm.xx:txl:[20px]
body__variable_1e4310.__variable_c3aa02.antiAliased

button.bg-[#2DC071].py-[15px].px-[40px].montserrat-bold.text-[20px].text-white.rounded-[5px].hover:bg-[#26a05e].xx:txl

button.bg-[#2DC071].py-[15px].px-[40px].montserrat-bold.text-sm.text-white.rounded-[5px].hover:bg-[#26a05e].max-md:bg-blueCol.xx:txl

button.bg-white.py-[15px].px-[40px].montserrat-bold.text-[#2DC071].text-sm.border-[1px].border-[#2DC071].rounded-[5px].hover:bg-[#2DC071].hover:text-white.m

p.montserrat-regular.text-blueCol.text-sm.xx:txl:[14px]
body__variable_1e4310.__variable_c3aa02.antiAliased

p.montserrat-regular.text-[14px].text-blueCol.xx:txl:[14px]
body__variable_1e4310.__variable_c3aa02.antiAliased

p.montserrat-regular.text-[14px].text-blueCol.xx:txl:[14px]
body__variable_1e4310.__variable_c3aa02.antiAliased

```

Failing Elements

```
button.px-[30px].h-full.bg-blueCol.rounded-[5px].text-sm.text-white.montserrat-bold.flex.items-center.justify-center.hover:bg-blueHov.xxL:text-xxL
```

These are opportunities to improve the legibility of your content.

TABLES AND LISTS

Lists do not contain only `` elements and script supporting elements (`<script>` and `<template>`).

Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more about proper list structure](#).

Failing Elements

```
ul.flex.items-center.gap-[15px]
  a
  a
  a
```

```
ul.flex.flex-col.gap-[20px].items-start
  h1.montserrat-bold.text-base.text-primaryCol.xxL:text-[22px]
  ul.flex.flex-col.gap-[20px].items-start
    h1.montserrat-bold.text-base.text-primaryCol.xxL:text-[22px]
  ul.flex.flex-col.gap-[20px].items-start
    h1.montserrat-bold.text-base.text-primaryCol.xxL:text-[22px]
  ul.flex.flex-col.gap-[20px].items-start
    h1.montserrat-bold.text-base.text-primaryCol.xxL:text-[22px]
  div.w-[320px].h-[58px].flex.items-center.justify-between.rounded-[5px].border-[#E6E6E6].border-[1px]
    p.text-[12px].text-secondaryCol.montserrat-bold.xxL:text-lg
```

List items (``) are not contained within ``, `` or `<menu>` parent elements.

Screen readers require list items (``) to be contained within a parent ``, `` or `<menu>` to be announced properly. [Learn more about proper list structure](#).

Failing Elements

```
li.montserrat-bold.text-secondaryCol.text-sm.hover:text-secondaryHov.xxL:text-xxL
  a
  li.montserrat-bold.text-secondaryCol.text-sm.hover:text-secondaryHov.xxL:text-xxL
    a
```

Failing Elements

li.montserrat-bold.text-secondaryCol.text-sm.hover:text-secondaryHov.xd:text-xl

li.montserrat-bold.text-secondaryCol.text-sm.hover:text-secondaryHov.xd:text-xl

li.montserrat-bold.text-secondaryCol.text-sm.hover:text-secondaryHov.xd:text-xl

li.montserrat-bold.text-secondaryCol.text-sm.hover:text-secondaryHov.xd:text-xl

li.montserrat-bold.text-secondaryCol.text-sm.hover:text-secondaryHov.xd:text-xl

These are opportunities to improve the experience of reading tabular or list data using assistive technology, like a screen reader.

NAVIGATION

▲ Heading elements are not in a sequentially-descending order

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#)

Failing Elements

h3.montserrat-bold.text-white.text-base.xd:text-[22px]

h3.montserrat-bold.text-secondaryCol.text-base.xd:text-[22px]

h3.montserrat-semibold.text-[22px].text-primaryCol.xd:text-3xl

These are opportunities to improve keyboard navigation in your application.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

- Interactive controls are keyboard focusable

Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#)
- Interactive elements indicate their purpose and state

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#)

<input type="radio"/> The page has a logical tab order	^
Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. Learn more about logical tab ordering.	
<input type="radio"/> Visual order on the page follows DOM order	^
DOM order matches the visual order, improving navigation for assistive technology. Learn more about DOM and visual ordering.	
<input type="radio"/> User focus is not accidentally trapped in a region	^
A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus traps.	
<input type="radio"/> The user's focus is directed to new content added to the page	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content.	
<input type="radio"/> HTML5 landmark elements are used to improve navigation	^
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements.	
<input type="radio"/> Offscreen content is hidden from assistive technology	^
Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.	
<input type="radio"/> Custom controls have associated labels	^
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels.	
<input type="radio"/> Custom controls have ARIA roles	^
Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls.	

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

PASSED AUDITS (18)

Hide

[aria-hidden="true"] is not present on the document <body>	^
Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body.	
[role]s have all required [aria-*] attributes	^
Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes.	
[aria-*] attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.	
[aria-*] attributes are valid and not misspelled	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	

Image elements have <code>[alt]</code> attributes
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.
<code>[user-scalable="no"]</code> is not used in the <code><meta name="viewport"></code> element and the <code>[maximum-scale]</code> attribute is not less than 5.
Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag.
ARIAattributes are used as specified for the element's role
Some ARIAattributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.
<code>[aria-hidden="true"]</code> elements do not contain focusable descendants
Focusable descendants within an <code>[aria-hidden="true"]</code> element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.
Elements use only permitted ARIAattributes
Using ARIAattributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIAroles.
<code>[role]</code> values are valid
ARIAroles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles.
Document has a <code><title></code> element
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.
<code><html></code> element has a <code>[lang]</code> attribute
If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.
<code><html></code> element has a valid value for its <code>[lang]</code> attribute
Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute.
Form elements have associated labels
Labels ensure that form controls are announced properly by assistive technologies, like screen readers. Learn more about form element labels.
Touch targets have sufficient size and spacing.
Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets.
Uses ARIAroles only on compatible elements
Many HTML elements can only be assigned certain ARIAroles. Using ARIAroles where they are not allowed can interfere with the accessibility of the web page. Learn more about ARIAroles.
Deprecated ARIAroles were not used
Deprecated ARIAroles may not be processed correctly by assistive technology. Learn more about deprecated ARIAroles.

Image elements do not have <code>[alt]</code> attributes that are redundant text.	^
Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the <code>alt</code> attribute.	

NOT APPLICABLE (32)

[Hide](#)

○ [accesskey] values are unique	^
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys.	
○ button, link, and menuitem elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible.	
○ Elements with <code>role="dialog"</code> or <code>role="alertdialog"</code> have accessible names.	^
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible.	
○ ARIAinput fields have accessible names	^
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels.	
○ ARIAmeter elements have accessible names	^
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name meter elements.	
○ ARIAprogressbar elements have accessible names	^
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to label progressbar elements.	
○ Elements with an ARIA [role] that require children to contain a specific [role] have all required children.	^
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements.	
○ [role]s are contained by their required parent element	^
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element.	
○ Elements with the <code>role=text</code> attribute do not have focusable descendants.	^
Adding <code>role=text</code> around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendants will not be announced. Learn more about the <code>role=text</code> attribute.	
○ ARIA toggle fields have accessible names	^
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields.	
○ ARIA tooltip elements have accessible names	^
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements.	

○ ARIA <code>treeitem</code> elements have accessible names	When a <code>treeitem</code> element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling <code>treeitem</code> elements.
○ The page contains a heading, skip link, or landmark region	Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks.
○ <code>dl</code> 's contain only properly-ordered <code>dt</code> and <code>dd</code> groups, <code><script></code> , <code><template></code> or <code><div></code> elements.	When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly.
○ Definition list items are wrapped in <code>dl</code> elements	Definition list items (<code>dt</code> and <code>dd</code>) must be wrapped in a parent <code>dl</code> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly.
○ ARIA IDs are unique	The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn how to fix duplicate ARIA IDs.
○ No form fields have multiple labels	Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels.
○ <code><frame></code> or <code><iframe></code> elements have a title	Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles.
○ <code><html></code> element has an <code>[xml:lang]</code> attribute with the same base language as the <code>[lang]</code> attribute.	If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.
○ Input buttons have discernible text.	Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons.
○ <code><input type="image"></code> elements have <code>[alt]</code> text	When an image is being used as an <code><input></code> button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text.
○ Links are distinguishable without relying on color.	Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable.
○ The document does not use <code><meta http-equiv="refresh"></code>	Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag.
○ <code><object></code> elements have alternate text	Screen readers cannot translate non-text content. Adding alternate text to <code><object></code> elements helps screen readers convey meaning to users. Learn more about alt text for object elements.

<input type="radio"/> Select elements have associated label elements.	^
Form elements without effective labels can create frustrating experiences for screen reader users. Learn more about the select element.	
<input type="radio"/> Skip links are focusable.	^
Including a skip link can help users skip to the main content to save time. Learn more about skip links.	
<input type="radio"/> No element has a <code>[tabindex]</code> value greater than 0	^
A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. Learn more about the tabindex attribute.	
<input type="radio"/> Tables have different content in the summary attribute and <code><caption></code> .	^
The summary attribute should describe the table structure, while <code><caption></code> should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption.	
<input type="radio"/> Cells in a <code><table></code> element that use the <code>[headers]</code> attribute refer to table cells within the same table.	^
Screen readers have features to make navigating tables easier. Ensuring <code><td></code> cells using the <code>[headers]</code> attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the headers attribute.	
<input type="radio"/> <code><th></code> elements and elements with <code>[role="columnheader"/"rowheader"]</code> have data cells they describe.	^
Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. Learn more about table headers.	
<input type="radio"/> <code>[lang]</code> attributes have a valid value	^
Specifying a valid BCP 47 language on elements helps ensure that text is pronounced correctly by a screen reader. Learn how to use the lang attribute.	
<input type="radio"/> <code><video></code> elements contain a <code><track></code> element with <code>[kind="captions"]</code>	^
When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more about video captions.	



Best Practices

GENERAL

<input type="triangle"/> Browser errors were logged to the console	^
Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more about this errors in console diagnostic audit	

Source	Description
web pac k- inter nal:/ //.../ ent/ app- inde x.js: 33	<p>Warning: Each child in a list should have a unique "key" prop.%s% See https://reactjs.org/link/warning-keys for more information.%s Check the render method of `Products` at Card (webpack-internal:///((app-pages-browser)/./src/app/components/Card/Card.tsx:15:11) at Products (webpack-internal:///((app-pages-browser)/./src/app/components/Products.Products.tsx:13:11) at main at Home (Server) at InnerLayoutRouter (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/layout-router.js:243:11) at RedirectErrorBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/redirect-boundary.js:74:9) at RedirectBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/redirect-boundary.js:82:11) at NotFoundErrorBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/not-found-boundary.js:76:9) at NotFoundBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/not-found-boundary.js:84:11) at LoadingBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/loading-router.js:349:11) at ErrorBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/error-boundary.js:160:11) at InnerScrollAndFocusHandler (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/layout-router.js:153:9) at ScrollAndFocusHandler (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/layout-router.js:228:11) at RenderFromTemplateContext (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/render-from-template-context.js:16:44) at OuterLayoutRouter (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/layout-router.js:370:11) at _ (webpack-internal:///((app-pages-browser)/./node_modules/next-themes/dist/index.mjs:54:24) at J (webpack-internal:///((app-pages-browser)/./node_modules/next-themes/dist/index.mjs:47:47) at ColorModeProvider at ChakraProvider (webpack-internal:///((app-pages-browser)/./node_modules/@chakra-ui/react/dist/esm/styled-system/provider.js:19:20) at Provider at body at exports.default (webpack-internal:///((app-pages-browser)/./node_modules/auth0/nextjs-auth0/dist/client/use-config.js:13:11) at exports.default (webpack-internal:///((app-pages-browser)/./node_modules/auth0/nextjs-auth0/dist/client/use-user.js:83:11) at html at RootLayout (Server) at RedirectErrorBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/redirect-boundary.js:74:9) at RedirectBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/redirect-boundary.js:82:11) at NotFoundErrorBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/not-found-boundary.js:76:9) at NotFoundBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/not-found-boundary.js:84:11) at DevRootNotFoundBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/dev-root-not-found-boundary.js:33:11) at ReactDevOverlay (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/react-dev-overlay/app/ReactDevOverlay.js:87:9) at HotReload (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/react-dev-overlay/app/hot-reloader-client.js:321:11) at Router (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/app-router.js:207:11) at ErrorBoundaryHandler (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/error-boundary.js:113:9) at ErrorBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/error-boundary.js:160:11) at AppRouter (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/app-router.js:585:13) at ServerRoot (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/app-index.js:112:27) at Root (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/app-index.js:117:11)</p> <p>Warning: Extra attributes from the server: %s% class,style at html at RootLayout (Server) at RedirectErrorBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/redirect-boundary.js:74:9) at RedirectBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/redirect-boundary.js:82:11) at NotFoundErrorBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/not-found-boundary.js:76:9) at NotFoundBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/not-found-boundary.js:84:11) at DevRootNotFoundBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/dev-root-not-found-boundary.js:33:11) at ReactDevOverlay (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/react-dev-overlay/app/ReactDevOverlay.js:87:9) at HotReload (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/react-dev-overlay/app/hot-reloader-client.js:321:11) at Router (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/app-router.js:207:11) at ErrorBoundaryHandler (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/error-boundary.js:113:9) at ErrorBoundary (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/error-boundary.js:160:11) at AppRouter (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/components/app-router.js:585:13) at ServerRoot (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/app-index.js:112:27) at Root (webpack-internal:///((app-pages-browser)/./node_modules/next/dist/client/app-index.js:117:11)</p> <p>▲ Missing source maps for large first-party JavaScript</p> <p>Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn more about source maps.</p>

URL	Map URL
localhost 1st Party	
...chunks/main-app.js?v=173... (localhost)	Large JavaScript file is missing a source map
...app/page.js (localhost)	Large JavaScript file is missing a source map
...app/layout.js (localhost)	Large JavaScript file is missing a source map

TRUST AND SAFETY

Description	Directive	Severity
No CSP found in enforcement mode		High

PASSED AUDITS (12)

Uses HTTPS	^
All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding mixed content , where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. Learn more about HTTPS .	^
Avoids deprecated APIs	^
Deprecated APIs will eventually be removed from the browser. Learn more about deprecated APIs .	^
Avoids third-party cookies	^
Chrome is moving towards a new experience that allows users to choose to browse without third-party cookies. Learn more about third-party cookies .	^
Allows users to paste into input fields	^
Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. Learn more about user-friendly input fields .	^
Avoids requesting the geolocation permission on page load	^
Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission .	^
Avoids requesting the notification permission on page load	^
Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications .	^
Displays images with correct aspect ratio	^
Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio .	^

Serves images with appropriate resolution ^

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

Has a `<meta name="viewport">` tag with `width` or `initial-scale` ^

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag.](#)

Page has the HTML doctype ^

Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration.](#)

Properly defines charset ^

A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

No issues in the [Issues](#) panel in Chrome Devtools ^

Issues logged to the [Issues](#) panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the [Issues](#) panel in Chrome DevTools for more details on each issue.

NOT APPLICABLE (3)

[Hide](#)

Redirects HTTP traffic to HTTPS ^

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)

Document uses legible font sizes ^

Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text ≥12px. [Learn more about legible font sizes.](#)

Detected JavaScript libraries ^

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#), [Learn more about Google Search Essentials](#).

CRAWLING AND INDEXING

▲ robots.txt is not valid [Lighthouse was unable to download a robots.txt file](#) ^

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#)

To appear in search results, crawlers need access to your app.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

[Hide](#)

- Structured data is valid

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more about Structured Data](#).

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (8)

[Hide](#)

- Page isn't blocked from indexing

Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives](#).

- Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles](#).

- Document has a meta description

Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description](#).

- Page has successful HTTP status code

Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes](#).

- Links have descriptive text

Descriptive link text helps search engines understand your content. [Learn how to make links more accessible](#).

- Links are crawlable

Search engines may use `href` attributes on links to crawl websites. Ensure that the `href` attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#).

- Image elements have `[alt]` attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty `alt` attribute. [Learn more about the alt attribute](#).

- Document has a valid `hreflang`

`hreflang` links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang](#).

NOT APPLICABLE (1)

[Hide](#)

- Document has a valid `rel=canonical`

Canonical links suggest which URL to show in search results. [Learn more about canonical links](#).

