

Vinsup Skill Academy

Bootstrap

Introduction



What is Bootstrap

- Bootstrap is the most popular CSS Framework for developing responsive and mobile-first websites.
- Bootstrap is a free front-end framework for faster and easier web development
- Bootstrap includes HTML and CSS based design templates for typography, forms, buttons, tables, navigation, modals, image carousels and many other, as well as optional JavaScript plugins
- Bootstrap also gives you the ability to easily create responsive designs

What is responsive design

Responsive web design is about creating web sites which automatically adjust themselves to look good on all devices, from small phones to large desktops.

Why Use Bootstrap?

- **Easy to use:** Anybody with just basic knowledge of HTML and CSS can start using Bootstrap
- **Responsive features:** Bootstrap's responsive CSS adjusts to phones, tablets, and desktops
- **Mobile-first approach:** In Bootstrap 3, mobile-first styles are part of the core framework
- **Browser compatibility:** Bootstrap is compatible with all modern browsers (Chrome, Firefox, Internet Explorer, Edge, Safari, and Opera)

Where to Get Bootstrap?

There are two ways to start using Bootstrap on your own web site.

You can:

- Download Bootstrap from getbootstrap.com
- Include Bootstrap from a CDN

MaxCDN:

```
<!-- Latest compiled and minified CSS →
<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/
3.4.1/css/bootstrap.min.css">
<!-- jQuery library →<script src="https://ajax.googleapis.com/ajax/libs/jqu
ery/3.7.1/jquery.min.js">
</script><!-- Latest compiled JavaScript →
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/js/bootstra
p.min.js">
</script>
```

BreakPoints

Breakpoints are **customizable widths that determine how your responsive layout behaves across device or viewport sizes in Bootstrap.**



Types of breakpoints

Breakpoint	Class Infix	Dimensions
Extra small	None	<576px
Small	sm	≥576px
Medium	md	≥768px
Large	lg	≥992px
Extra large	xl	≥1200px
Extra extra large	xxl	≥1400px

Bootstrap 5 Container

Containers are a fundamental building block of Bootstrap that contain, pad, and align your content within a given device or viewport.

Two container classes available:

1. The `.container` class provides a responsive **fixed width container**
2. The `.container-fluid` class provides a **full width container**, spanning the entire width of the viewport

Bootstrap 5 Container with padding

The container class gives a responsive or fixed width in page

Containers are a core Bootstrap building piece that contain and align your content within a specific device or viewport.

Bootstrap 5 Container fluid with padding

the container class gives a responsive or fixed width in page

Containers are a core Bootstrap building piece that contain and align your content within a specific device or viewport.

Default Container

Our default `.container` class is a responsive, fixed-width container, meaning its `max-width` changes at each breakpoint.

Example

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container">
  <h1>My First Bootstrap Page</h1>
  <p>This part is inside a .container class.</p>
  <p>The .container class provides a responsive fixed width container.</p>
```

```
<p>Resize the browser window to see that the container width will change at different breakpoints.</p>
</div>

</body>
</html>
```

My First Bootstrap Page

This part is inside a .container class.

The .container class provides a responsive fixed width container.

Resize the browser window to see that the container width will change at different breakpoints.

Fluid Container

Use the `.container-fluid` class to create a full width container, that will always span the entire width of the screen (`width` is always `100%`)

Example

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

  <div class="container-fluid">
    <h1>My First Bootstrap Page</h1>
    <p>This part is inside a .container-fluid class.</p>
    <p>The .container-fluid class provides a full width container, spanning the entire width of the viewport.</p>
  </div>
```

```
</body>
</html>
```

My First Bootstrap Page

This part is inside a `.container-fluid` class.

The `.container-fluid` class provides a full width container, spanning the entire width of the viewport.

Container Padding

By default, containers have left and right padding, with no top or bottom padding. Therefore, we often use **spacing utilities**, such as extra padding and margins to make them look even better. For example, `.pt-5` means "add a large **top padding**":

Example

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

  <div class="container pt-5">
    <h1>My First Bootstrap Page</h1>
    <p>This container has an extra top padding.</p>
    <p>Try to remove the .pt-5 class to see the difference.</p>
  </div>
```

```
</body>
</html>
```

My First Bootstrap Page

This container has an extra top padding.

Try to remove the .pt-5 class to see the difference.

Container background and Color

Other utilities, such as borders and colors, are also often used together with containers:

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

  <div class="container p-5 mt-5 bg-info text-white">
    <h1>My First Bootstrap Page</h1>
    <p>This container has a dark background color and a white text, and some extra padding and margins.</p>
  </div>
```

```
</body>
</html>
```

My First Bootstrap Page

This container has a dark background color and a white text, and some extra padding and margins.

Margin and Padding

Assign responsive-friendly `margin` or `padding` values to an element or a subset of its sides with shorthand classes. Includes support for individual properties, all properties, and vertical and horizontal properties. Classes are built from a default Sass map ranging from `.25rem` to `3rem`.

Where *property* is one of:

- `m` - for classes that set `margin`
- `p` - for classes that set `padding`

Where *sides* is one of:

- `t` - for classes that set `margin-top` or `padding-top`
- `b` - for classes that set `margin-bottom` or `padding-bottom`
- `x` - for classes that set both `-left` and `-right`
- `y` - for classes that set both `-top` and `-bottom`
- blank - for classes that set a `margin` or `padding` on all 4 sides of the element

Where *size* is one of:

- `0` - for classes that eliminate the `margin` or `padding` by setting it to `0`
- `1` - (by default) for classes that set the `margin` or `padding` to `$spacer * .25`
- `2` - (by default) for classes that set the `margin` or `padding` to `$spacer * .5`
- `3` - (by default) for classes that set the `margin` or `padding` to `$spacer`
- `4` - (by default) for classes that set the `margin` or `padding` to `$spacer * 1.5`

- `5` - (by default) for classes that set the `margin` or `padding` to `$spacer * 3`
- `auto` - for classes that set the `margin` to auto

Typography

- Typography is a Bootstrap 5 component for designing and formatting text content.
- It is used to produce customized headers, inline subheadings, lists, paragraphs, aligning, and adding additional design-oriented font styles, among other things.
- Bootstrap 5 has a default font-size of 1rem or 16px.
- It has a 1.5 line-height of font. Furthermore, all `<p>` elements have a margin-top: 0 and a margin-bottom: 1rem or 16px by default.

Example

```
<!DOCTYPE html>
<html lang = "en">
<head>
<title> Bootstrap 5 typography Example </title>
<meta charset = "utf-8">
<meta name = "viewport" content = "width=device-width, initial-scale=1">
<link href = "https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css" rel = "stylesheet">
<script src = "https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.bundle.min.js">
</script>
</head>
<body>
<div class="container">
<p class = "h1"> Bootstrap 5 heading (36px) </p>
<p class = "h2"> Bootstrap 5 heading (30px) </p>
<p class = "h3"> Bootstrap 5 heading (24px) </p>
<p class = "h4"> Bootstrap 5 heading (18px) </p>
<p class = "h5"> Bootstrap 5 heading (14px) </p>
<p class = "h6"> Bootstrap 5 heading (12px) </p>
</div>
```

```
</body>
</html>
```

Bootstrap 5 heading (36px)

Bootstrap 5 heading (30px)

Bootstrap 5 heading (24px)

Bootstrap 5 heading (18px)

Bootstrap 5 heading (14px)

Bootstrap 5 heading (12px)

Bootstrap 5 Display Headings

Display headers are intended to be more visible than regular headings.

Bootstrap 5 includes six display heading sizes (.display-1, .display-2, .display-3, .display-4, .display-5, and .display-6).

Example

```
<!DOCTYPE html>
<html lang="en">
<head>
<title> Bootstrap 5 typography Example </title>
<meta charset = "utf-8">
<meta name = "viewport" content = "width=device-width, initial-scale=1">
<link href = "https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css" rel = "stylesheet">
<script src = "https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.bundle.min.js">
</script>
</head>
<body>
<div class="container">
<p class = "display-1"> Bootstrap 5 Display heading 1 </p>
```

```
<p class = "display-2"> Bootstrap 5 Display heading 2 </p>  
<p class = "display-3"> Bootstrap 5 Display heading 3 </p>  
<p class = "display-4"> Bootstrap 5 Display heading 4 </p>  
<p class = "display-5"> Bootstrap 5 Display heading 5 </p>  
<p class = "display-6"> Bootstrap 5 Display heading 6 </p>  
</div>  
</body>  
</html>
```

Bootstrap 5 Display heading 1

Bootstrap 5 Display heading 2


Bootstrap 5 Display heading 3

Bootstrap 5 Display heading 4

Bootstrap 5 Display heading 5

Bootstrap 5 Display heading 6

Color

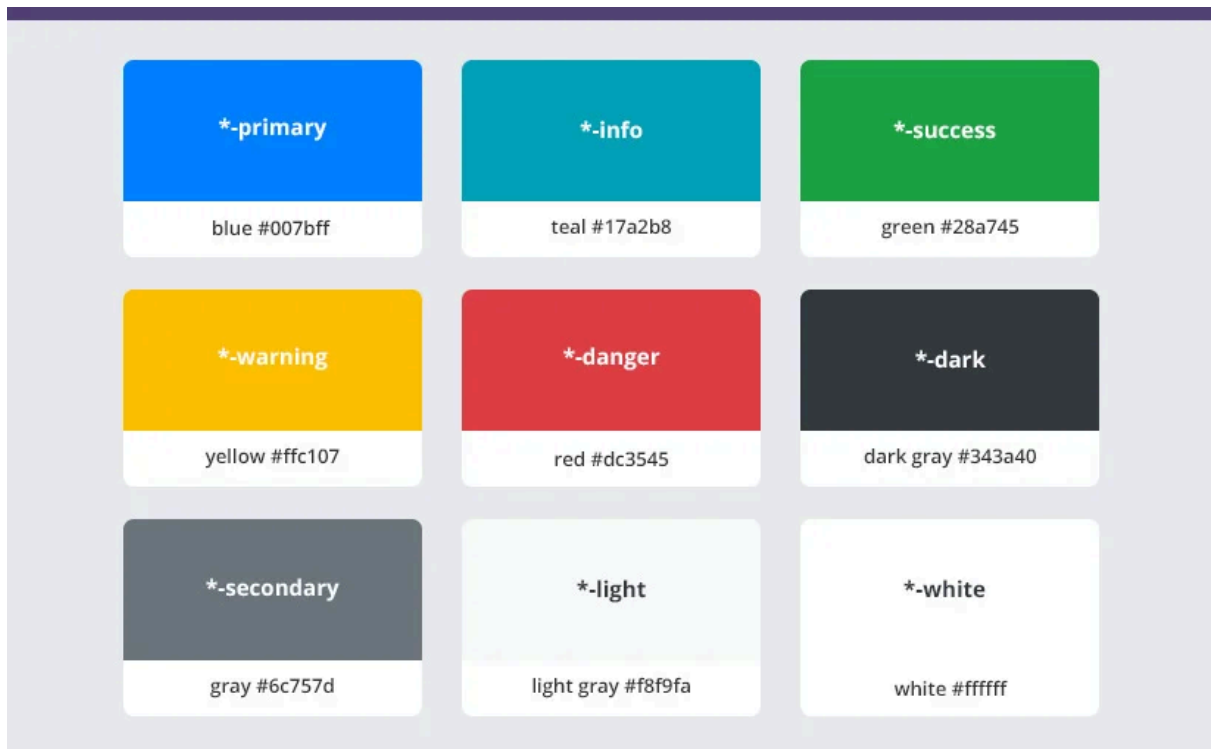

- Bootstrap 5 has some contextual classes that can be used to provide "meaning through colors".
- The classes for text colors are:
 - `.text-muted` ,
 - `.text-primary` ,
 - `.text-success` ,
 - `.text-info` ,
 - `.text-warning` ,
 - `.text-danger` ,
 - `.text-secondary` ,
 - `.text-white` ,
 - `.text-dark` ,
 - `.text-black`
 - (default body color/often black) and `.text-light`
- You can also add 50% opacity for black or white text with the `.text-black-50` or `.text-white-50` classes:

Example

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container mt-3">
  <h2>Contextual Colors</h2>
  <p>Use the contextual classes to provide "meaning through colors":</p>
  <p class="text-muted">This text is muted.</p>
  <p class="text-primary">This text is important.</p>
  <p class="text-success">This text indicates success.</p>
  <p class="text-info">This text represents some information.</p>
  <p class="text-warning">This text represents a warning.</p>
  <p class="text-danger">This text represents danger.</p>
  <p class="text-secondary">Secondary text.</p>
  <p class="text-dark">This text is dark grey.</p>
  <p class="text-body">Default body color (often black).</p>
  <p class="text-light">This text is light grey (on white background).</p>
  <p class="text-white">This text is white (on white background).</p>
</div>

</body>
</html>
```

This text is muted.

This text is important.

This text indicates success.

This text represents some information.

This text represents a warning.

This text represents danger.

Secondary text.

Dark grey text.

Body text.

Background Colors

- The classes for background colors are:

- `.bg-primary` ,
- `.bg-success` ,
- `.bg-info` ,
- `.bg-warning` ,
- `.bg-danger` ,
- `.bg-secondary` ,
- `.bg-dark`
- `.bg-light`


Button

- Use Bootstrap's custom button styles for actions in forms, dialogs, and more with support for multiple sizes, states, and more.



Button Styles

GeeksforGeeks



Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

  <div class="container mt-3">
    <h2>Button Styles</h2>
```

```

<button type="button" class="btn">Basic</button>
<button type="button" class="btn btn-primary">Primary</button>
<button type="button" class="btn btn-secondary">Secondary</button>
<button type="button" class="btn btn-success">Success</button>
<button type="button" class="btn btn-info">Info</button>
<button type="button" class="btn btn-warning">Warning</button>
<button type="button" class="btn btn-danger">Danger</button>
<button type="button" class="btn btn-dark">Dark</button>
<button type="button" class="btn btn-light">Light</button>
<button type="button" class="btn btn-link">Link</button>
</div>

</body>
</html>

```

Button Styles

Basic Primary Secondary Success Info Warning Danger Dark Light [Link](#)



The button classes can be used on `<a>`, `<button>`, or `<input>` elements:

Example:

```

<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>

```



```

<body>

<div class="container mt-3">
  <h2>Button Elements</h2>
  <a href="#" class="btn btn-success">Link Button</a>
  <button type="button" class="btn btn-success">Button</button>
  <input type="button" class="btn btn-success" value="Input Button">
  <input type="submit" class="btn btn-success" value="Submit Button">
  <input type="reset" class="btn btn-success" value="Reset Button">
</div>

</body>
</html>

```

Button Elements

Link Button

Button

Input Button

Submit Button

Reset Button

Button Outline

- Bootstrap 5 also provides eight outline/bordered buttons.
- Move the mouse over them to see an additional "hover" effect

Example:

```

<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>

```

```

</head>
<body>

<div class="container mt-3">
  <h2>Button Outline</h2>
  <button type="button" class="btn btn-outline-primary">Primary</button>
  <button type="button" class="btn btn-outline-secondary">Secondary</button>
  <button type="button" class="btn btn-outline-success">Success</button>
  <button type="button" class="btn btn-outline-info">Info</button>
  <button type="button" class="btn btn-outline-warning">Warning</button>
  <button type="button" class="btn btn-outline-danger">Danger</button>
  <button type="button" class="btn btn-outline-dark">Dark</button>
  <button type="button" class="btn btn-outline-light text-dark">Light</button>
</div>

</body>
</html>

```

Button Outline



Button Sizes

Use the `.btn-` class for large buttons or `.btn-sm` class for small buttons:

Large

Example

```

<!DOCTYPE html>
<html lang="en">
<head>

```


```

<title>Bootstrap Example</title>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container mt-3">
  <h2>Button Sizes</h2>
  <button type="button" class="btn btn-primary btn-lg">Large</button>
  <button type="button" class="btn btn-primary btn-md">Default</button>
  <button type="button" class="btn btn-primary btn-sm">Small</button>
</div>
</body>
</html>

```

Button Sizes



Block Level Buttons

To create a block level button that spans the entire width of the parent element, use the `.d-grid` "helper" class on the parent element

Example:

```

<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">

```

```

<meta name="viewport" content="width=device-width, initial-scale=1">
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container mt-3">
  <h2>Block Level Buttons</h2>
  <p>To create a block level button that spans the entire width of the parent element, use the .d-grid "helper" class on the parent element:</p>
  <div class="d-grid">
    <button type="button" class="btn btn-primary btn-block">Full-Width Button</button>
  </div>
</div>

</body>
</html>

```

Block Level Buttons

To create a block level button that spans the entire width of the parent element, use the .d-grid "helper" class on the parent element:

Full-Width Button

Example:

```

<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">

```

```

<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container mt-3">
  <h2>Block Level Buttons</h2>
  <p>If you have many block-level buttons, you can control the space between them with the .gap-* class:</p>
  <div class="d-grid gap-3">
    <button type="button" class="btn btn-primary btn-block">Full-Width Button</button>
    <button type="button" class="btn btn-primary btn-block">Full-Width Button</button>
    <button type="button" class="btn btn-primary btn-block">Full-Width Button</button>
  </div>
</div>

</body>
</html>

```

Block Level Buttons

If you have many block-level buttons, you can control the space between them with the .gap-* class:



Active/Disabled Buttons

- A button can be set to an active (appear pressed) or a disabled (unclickable) state:
Active Primary
- The class `.active` makes a button appear pressed, and the `disabled` attribute makes a button unclickable.
- Note that `<a>` elements do not support the disabled attribute and must therefore use the `.disabled` class to make it visually appear disabled.

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

  <div class="container mt-3">
    <h2>Button States</h2>
    <button type="button" class="btn btn-primary">Primary Button</button>
    <button type="button" class="btn btn-primary active">Active Primary</button>
    <button type="button" class="btn btn-primary disabled">Disabled Primary</button>
    <a href="#" class="btn btn-primary disabled">Disabled Link</a>
  </div>

</body>
</html>
```

Button States

Primary Button

Active Primary

Disabled Primary

Disabled Link

Spinner Buttons

You can also add "spinners" to a button.

Example:

```
<!DOCTYPE html>
<html>
<head>
  <title>Bootstrap Example</title>
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>
  <div class="container mt-3">
    <h2>Spinner Buttons</h2>
    <p>Add spinners to buttons:</p>

    <button class="btn btn-primary">
      <span class="spinner-border spinner-border-sm"></span>
    </button>

    <button class="btn btn-primary">
      <span class="spinner-border spinner-border-sm"></span>
      Loading..
    </button>

    <button class="btn btn-primary disabled">
      <span class="spinner-border spinner-border-sm"></span>
      Loading..
  </div>
</body>
</html>
```

```
</button>

<button class="btn btn-primary" disabled>
  <span class="spinner-grow spinner-grow-sm"></span>
  Loading..
</button>
</div>

</body>
</html>
```


Spinner Buttons

Add spinners to buttons:



Alert

Provide contextual feedback messages for typical user actions with the handful of available and flexible alert messages.

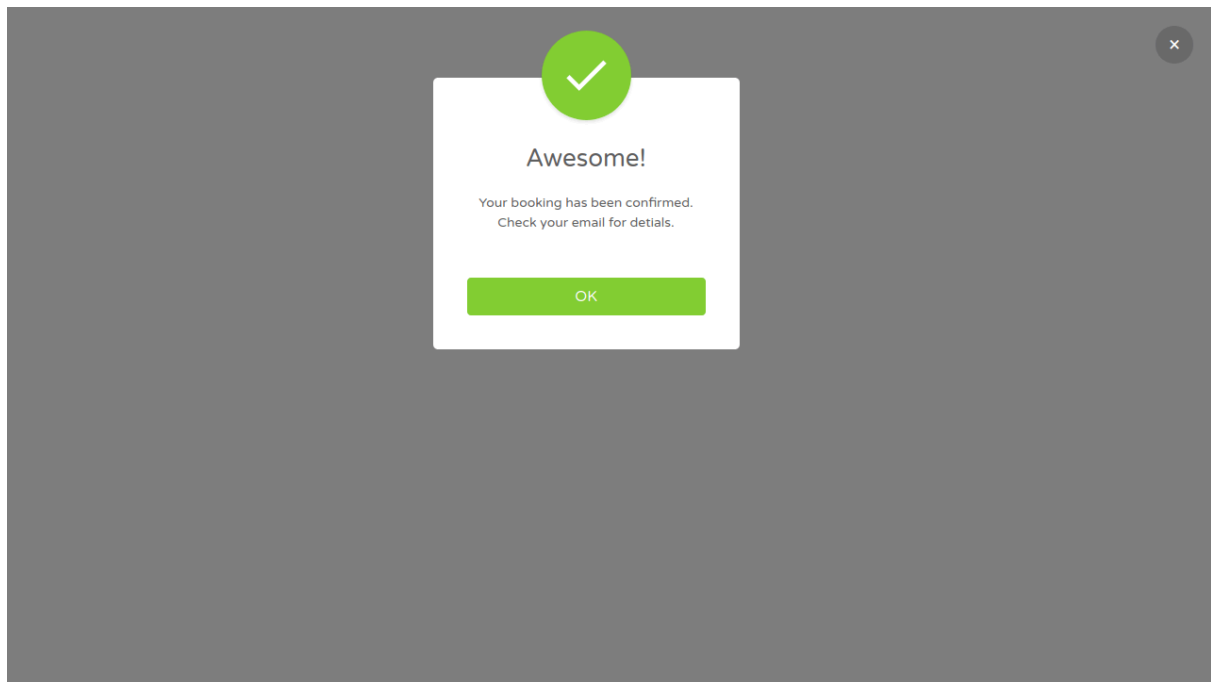

Alerts are created with the `.alert` class, followed by one of the contextual classes `.alert-success`, `.alert-info`, `.alert-warning`, `.alert-danger`, `.alert-primary`, `.alert-secondary`, `.alert-light` or `.alert-dark`

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

  <div class="container mt-3">
    <h2>Alerts</h2>
    <p>Alerts are created with the .alert class, followed by a contextual color classes:</p>
```

```
<div class="alert alert-success">
  <strong>Success!</strong> This alert box could indicate a successful or
  positive action.
</div>
<div class="alert alert-info">
  <strong>Info!</strong> This alert box could indicate a neutral informativ
  e change or action.
</div>
<div class="alert alert-warning">
  <strong>Warning!</strong> This alert box could indicate a warning that
  might need attention.
</div>
<div class="alert alert-danger">
  <strong>Danger!</strong> This alert box could indicate a dangerous or
  potentially negative action.
</div>
<div class="alert alert-primary">
  <strong>Primary!</strong> Indicates an important action.
</div>
<div class="alert alert-secondary">
  <strong>Secondary!</stro ng> Indicates a slightly less important action.
</div>
<div class="alert alert-dark">
  <strong>Dark!</strong> Dark grey alert.
</div>
<div class="alert alert-light">
  <strong>Light!</strong> Light grey alert.
</div>
</div>

</body>
</html>
```

Warning! This alert box could indicate a warning that might need attention.

Danger! This alert box could indicate a dangerous or potentially negative action.

Primary! Indicates an important action.

Secondary! Indicates a slightly less important action.

Dark! Dark grey alert.

Light! Light grey alert.

Alert Links

Add the `.alert-link` class to any links inside the alert box to create "matching colored links"

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
```

```

<body>

<div class="container mt-3">
  <h2>Alert Links</h2>
  <p>Add the alert-link class to any links inside the alert box to create "matching colored links".</p>
  <div class="alert alert-success">
    <strong>Success!</strong> You should <a href="#" class="alert-link">read this message</a>.
  </div>
  <div class="alert alert-info">
    <strong>Info!</strong> You should <a href="#" class="alert-link">read this message</a>.
  </div>
  <div class="alert alert-warning">
    <strong>Warning!</strong> You should <a href="#" class="alert-link">read this message</a>.
  </div>
  <div class="alert alert-danger">
    <strong>Danger!</strong> You should <a href="#" class="alert-link">read this message</a>.
  </div>
  <div class="alert alert-primary">
    <strong>Primary!</strong> You should <a href="#" class="alert-link">read this message</a>.
  </div>
  <div class="alert alert-secondary">
    <strong>Secondary!</strong> You should <a href="#" class="alert-link">read this message</a>.
  </div>
  <div class="alert alert-dark">
    <strong>Dark!</strong> You should <a href="#" class="alert-link">read this message</a>.
  </div>
  <div class="alert alert-light">
    <strong>Light!</strong> You should <a href="#" class="alert-link">read this message</a>.
  </div>

```

```
</div>

</body>
</html>
```

Add the alert-link class to any links inside the alert box to create "matching colored links".

Success! You should [read this message.](#)

Info! You should [read this message.](#)

Warning! You should [read this message.](#)

Danger! You should [read this message.](#)

Primary! You should [read this message.](#)

Closing Alerts

To close the alert message, add a `.alert-dismissible` class to the alert container. Then add `class="btn-close"` and `data-bs-dismiss="alert"` to a link or a button element (when you click on this the alert box will disappear).

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
```

```

<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container mt-3">
  <h2>Alerts</h2>
  <p>The button with class="btn-close" and data-bs-dismiss="alert" is used to close the alert box.</p>
  <p>The alert-dismissible class aligns the button to the right.</p>
  <div class="alert alert-success alert-dismissible">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>
    <strong>Success!</strong> This alert box could indicate a successful or positive action.
  </div>
  <div class="alert alert-info alert-dismissible">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>
    <strong>Info!</strong> This alert box could indicate a neutral informative change or action.
  </div>
  <div class="alert alert-warning alert-dismissible">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>
    <strong>Warning!</strong> This alert box could indicate a warning that might need attention.
  </div>
  <div class="alert alert-danger alert-dismissible">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>
    <strong>Danger!</strong> This alert box could indicate a dangerous or potentially negative action.
  </div>
  <div class="alert alert-primary alert-dismissible">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>

```

```

ton>
  <strong>Primary!</strong> Indicates an important action.
</div>
<div class="alert alert-secondary alert-dismissible">
  <button type="button" class="btn-close" data-bs-dismiss="alert"></but
ton>
  <strong>Secondary!</strong> Indicates a slightly less important action.
</div>
<div class="alert alert-dark alert-dismissible">
  <button type="button" class="btn-close" data-bs-dismiss="alert"></but
ton>
  <strong>Dark!</strong> Dark grey alert.
</div>
<div class="alert alert-light alert-dismissible">
  <button type="button" class="btn-close" data-bs-dismiss="alert"></but
ton>
  <strong>Light!</strong> Light grey alert.
</div>
</div>


</body>
</html>

```

Alerts

The button with class="btn-close" and data-bs-dismiss="alert" is used to close the alert box.

The alert-dismissible class aligns the button to the right.

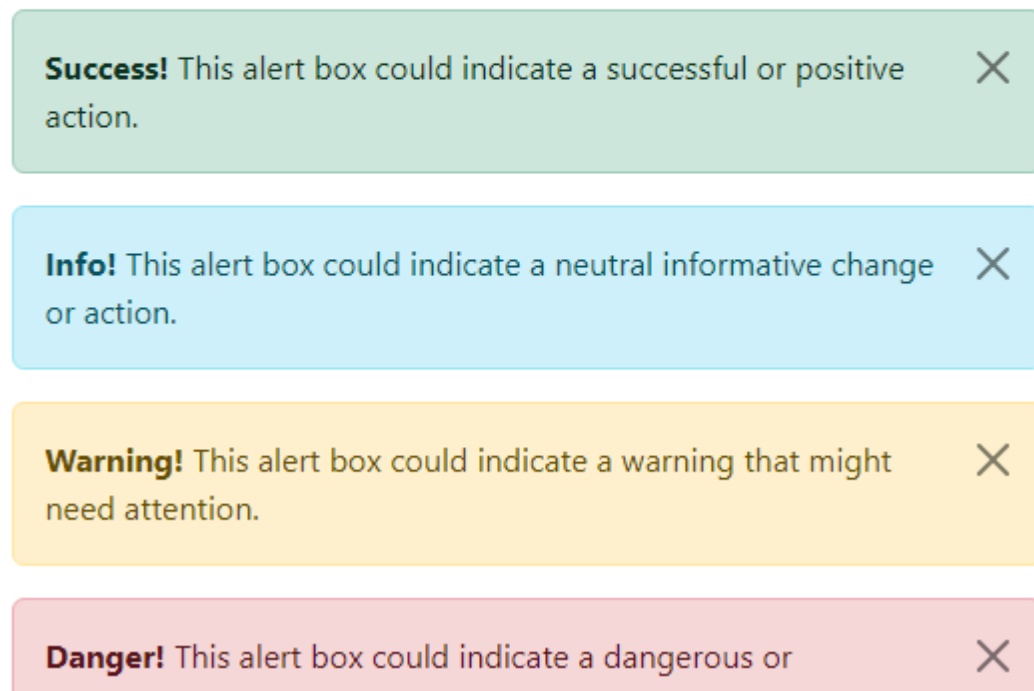

Animated Alerts

The `.fade` and `.show` classes add a fading effect when closing the alert message.

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
```



```

</head>
<body>

<div class="container mt-3">
  <h2>Animated Alerts</h2>
  <p>The .fade and .show classes adds a fading effect when closing the alert message.</p>
  <div class="alert alert-success alert-dismissible fade show">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>
    <strong>Success!</strong> This alert box could indicate a successful or positive action.
  </div>
  <div class="alert alert-info alert-dismissible fade show">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>
    <strong>Info!</strong> This alert box could indicate a neutral informative change or action.
  </div>
  <div class="alert alert-warning alert-dismissible fade show">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>
    <strong>Warning!</strong> This alert box could indicate a warning that might need attention.
  </div>
  <div class="alert alert-danger alert-dismissible fade show">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>
    <strong>Danger!</strong> This alert box could indicate a dangerous or potentially negative action.
  </div>
  <div class="alert alert-primary alert-dismissible fade show">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>
    <strong>Primary!</strong> Indicates an important action.
  </div>
  <div class="alert alert-secondary alert-dismissible fade show">
    <button type="button" class="btn-close" data-bs-dismiss="alert"></button>

```

```

ton>
  <strong>Secondary!</strong> Indicates a slightly less important action.
</div>
<div class="alert alert-dark alert-dismissible fade show">
  <button type="button" class="btn-close" data-bs-dismiss="alert"></but
ton>
  <strong>Dark!</strong> Dark grey alert.
</div>
<div class="alert alert-light alert-dismissible fade show">
  <button type="button" class="btn-close" data-bs-dismiss="alert"></but
ton>
  <strong>Light!</strong> Light grey alert.
</div>
</div>

</body>
</html>

```

The `.fade` and `.show` classes adds a fading effect when closing the alert message.

Warning! This alert box could indicate a warning that might need attention.



Danger! This alert box could indicate a dangerous or potentially negative action.



Primary! Indicates an important action.




Secondary! Indicates a slightly less important action.



Dark! Dark grey alert.



Button Group

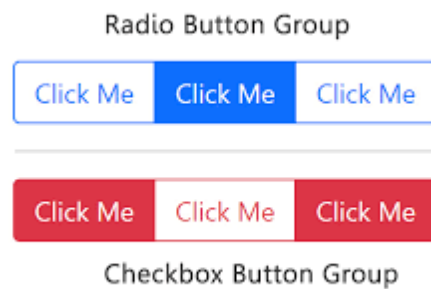

Bootstrap 5 allows you to group a series of buttons together (on a single line) in a button group:

Use a `<div>` element with class `.btn-group` to create a button group:

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container mt-3">
  <h2>Button Group</h2>
  <p>The .btn-group class creates a button group:</p>
  <div class="btn-group">
    <button type="button" class="btn btn-primary">Apple</button>
    <button type="button" class="btn btn-primary">Samsung</button>
    <button type="button" class="btn btn-primary">Sony</button>
  </div>
</div>
```

```
</body>
</html>
```

Button Group

The `.btn-group` class creates a button group:

Apple Samsung Sony



Tip: Instead of applying button sizes to every button in a group, use class `.btn-group-lg` for a large button group or the `.btn-group-sm` for a small button group

Large Buttons:

Apple Samsung Sony

Default Buttons:

Apple Samsung Sony

Small Buttons:

Apple Samsung Sony

Vertical Button Groups

- Bootstrap 5 also supports vertical button groups
- Use the class `.btn-group-vertical` to create a vertical button group:

Example:

```
<!DOCTYPE html>
<html lang="en">
```

```

<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>


<div class="container mt-3">
  <h2>Vertical Button Group</h2>
  <p>Use the .btn-group-vertical class to create a vertical button group:</p>
  <div class="btn-group-vertical">
    <button type="button" class="btn btn-primary">Apple</button>
    <button type="button" class="btn btn-primary">Samsung</button>
    <button type="button" class="btn btn-primary">Sony</button>
  </div>
</div>

</body>
</html>

```

Vertical Button Group

Use the .btn-group-vertical class to create a vertical button group:



Button Groups Side by Side

Button groups are "inline" by default, which makes them appear side by side when you have multiple groups

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container mt-3">
  <h2>Button Group</h2>
  <p>Button groups are "inline" by default, which makes them appear side by side when you have multiple groups:</p>
  <div class="btn-group">
    <button type="button" class="btn btn-primary">Apple</button>
    <button type="button" class="btn btn-primary">Samsung</button>
    <button type="button" class="btn btn-primary">Sony</button>
  </div>
  <div class="btn-group">
    <button type="button" class="btn btn-primary">BMW</button>
    <button type="button" class="btn btn-primary">Mercedes</button>
    <button type="button" class="btn btn-primary">Volvo</button>
  </div>
</div>
```

```
</body>
</html>
```

Button Group

Button groups are "inline" by default, which makes them appear side by side when you have multiple groups:



Nesting Button Groups & Dropdown Menus

Nest button groups to create dropdown menus (you will learn more about dropdowns in a later chapter):

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

  <div class="container mt-3">
    <h2>Nesting Button Groups</h2>
    <p>Nest button groups to create dropdown menus:</p>
    <div class="btn-group">
      <button type="button" class="btn btn-primary">Apple</button>
```

```


<button type="button" class="btn btn-primary">Samsung</button>
<div class="btn-group">
  <button type="button" class="btn btn-primary dropdown-toggle" data-
bs-toggle="dropdown">Sony</button>
  <ul class="dropdown-menu">
    <li><a class="dropdown-item" href="#">Tablet</a></li>
    <li><a class="dropdown-item" href="#">Smartphone</a></li>
  </ul>
</div>
</div>
</div>

</body>
</html>

```

Nesting Button Groups

Nest button groups to create dropdown menus:

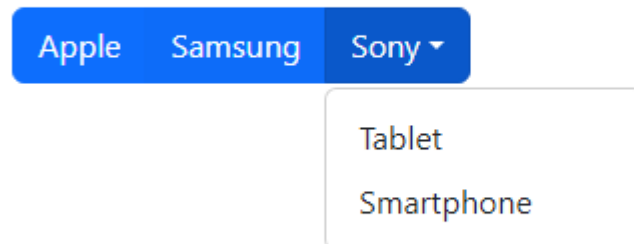

Badge

- In Bootstrap v5, Badges are **simple and basic components that are used to display an indicator or count a number**.
- This is quite useful for mail count and alerting purposes, among other things.
- Badges are identical to labels, with the exception that they have more rounded corners.

- Use the `.badge` class together with a contextual class (like `.bg-secondary`) within `<span>` elements to create rectangular badges.
- Note that badges scale to match the size of the parent element (if any)

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

  <div class="container mt-3">
    <h2>Badges</h2>
    <h1>Example heading <span class="badge bg-secondary">New</span></h1>
    <h2>Example heading <span class="badge bg-secondary">New</span></h2>
    <h3>Example heading <span class="badge bg-secondary">New</span></h3>
    <h4>Example heading <span class="badge bg-secondary">New</span></h4>
    <h5>Example heading <span class="badge bg-secondary">New</span></h5>
    <h6>Example heading <span class="badge bg-secondary">New</span></h6>
  </div>

</body>
</html>
```

Badges

Example heading New

Example heading New

Example heading New

Example heading New

Example heading New

Example heading New

Contextual Badges

Use any of the contextual classes (`.bg-*`) to change the color of a badge:

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container mt-3">
  <h2>Contextual Badges</h2>
  <span class="badge bg-primary">Primary</span>
  <span class="badge bg-secondary">Secondary</span>
  <span class="badge bg-success">Success</span>
  <span class="badge bg-danger">Danger</span>
```

```

<span class="badge bg-warning">Warning</span>
<span class="badge bg-info">Info</span>
<span class="badge bg-light">Light</span>
<span class="badge bg-dark">Dark</span>
</div>

</body>
</html>

```

Contextual Badges



Pill Badges

Use the `.rounded-pill` class to make the badges more round:

Example:

```

<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container mt-3">
  <h2>Pill Badges</h2>
  <span class="badge rounded-pill bg-primary">Primary</span>
  <span class="badge rounded-pill bg-secondary">Secondary</span>
  <span class="badge rounded-pill bg-success">Success</span>

```

```

<span class="badge rounded-pill bg-danger">Danger</span>
<span class="badge rounded-pill bg-warning">Warning</span>
<span class="badge rounded-pill bg-info">Info</span>
<span class="badge rounded-pill bg-light">Light</span>
<span class="badge rounded-pill bg-dark">Dark</span>
</div>

</body>
</html>

```

Pill Badges



Badge inside an Element

Example

```

<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

  <div class="container mt-3">
    <h2>Badge inside a Button</h2>
    <button type="button" class="btn btn-primary">
      Messages <span class="badge bg-danger">4</span>
    </button>

```

```
<button type="button" class="btn btn-danger">  
  Notifications <span class="badge bg-dark">7</span>  
</button>  
</div>  
  
</body>  
</html>
```

Badge inside a Button

