



Cara menginstal XAMPP 1.7.x - XAMPP merupakan sebuah paket instalasi untuk PHP, APACHE dan MySQL. Dengan menggunakan XAMPP, kita tidak perlu lagi repot menginstall ketiga software itu secara terpisah. Untuk **download XAMPP terbaru**, silahkan download di <http://www.apachefriends.org/index.html> dimana disediakan paket XAMPP for Windows, Linux dan Apple. Pada tutorial lengkap cara menggunakan XAMPP di windows ini, saya menggunakan XAMPP 1.7.2. Berikut proses instalasinya.


1. Jalankan file xampp-win32-1.7.2.exe
2. Kemudian akan tampil window untuk menentukan lokasi instalasi. Lalu silahkan anda pilih C:\ langsung klik install.

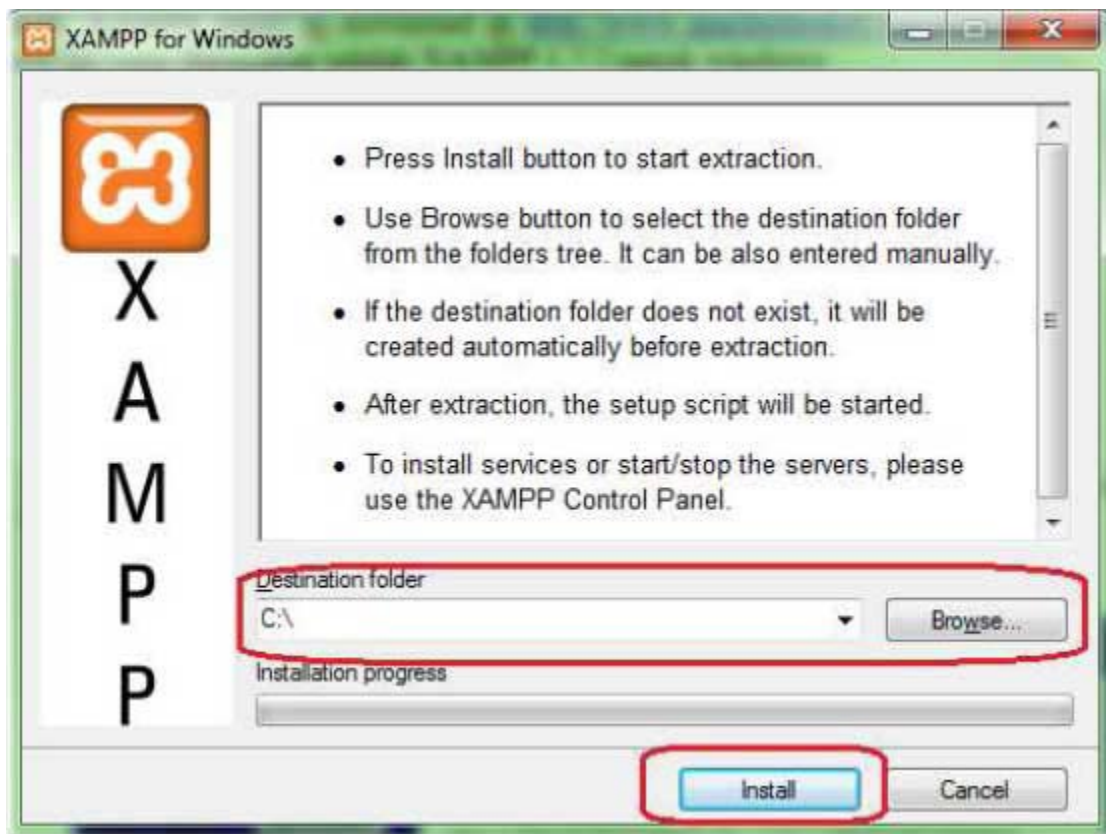


3. Proses instalasi akan berjalan. Tunggu beberapa saat.

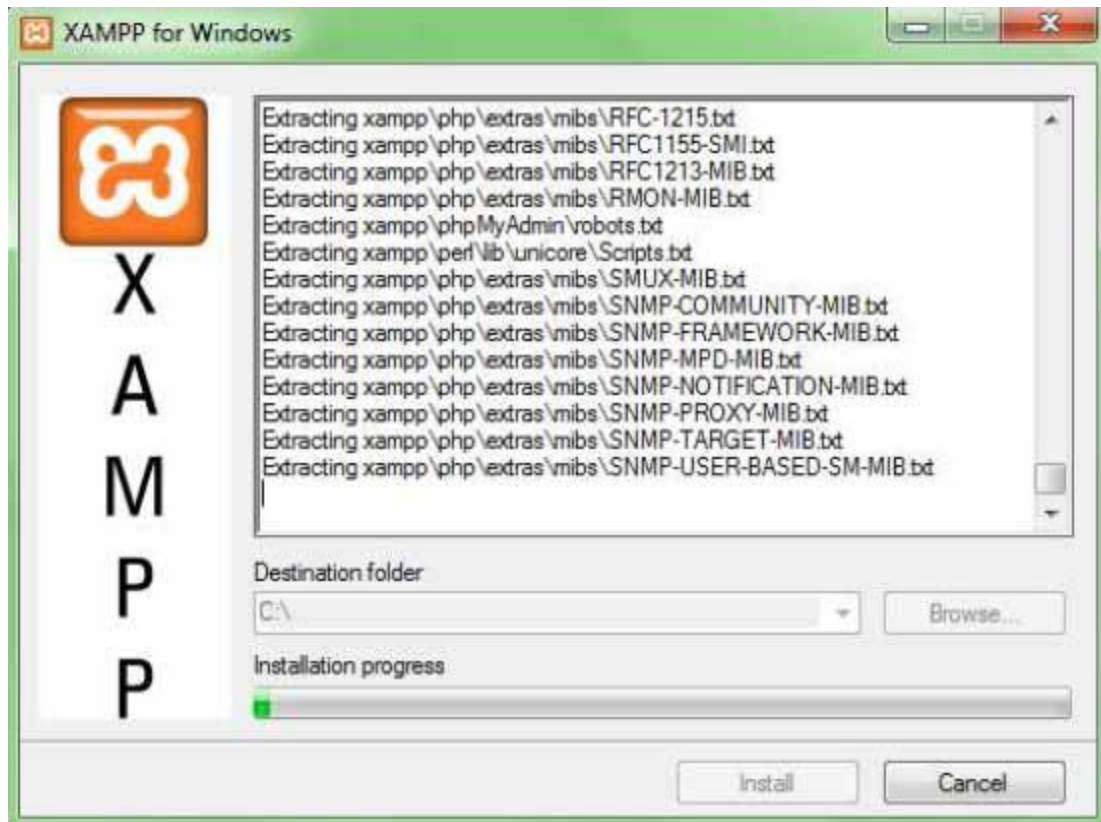

4. Kemudian command prompt akan muncul beberapa kali. Pertama adalah penambahan shortcut pada desktop/startmenu. Jika ingin ditambahkan shortcut, silahkan anda tekan y kemudian enter

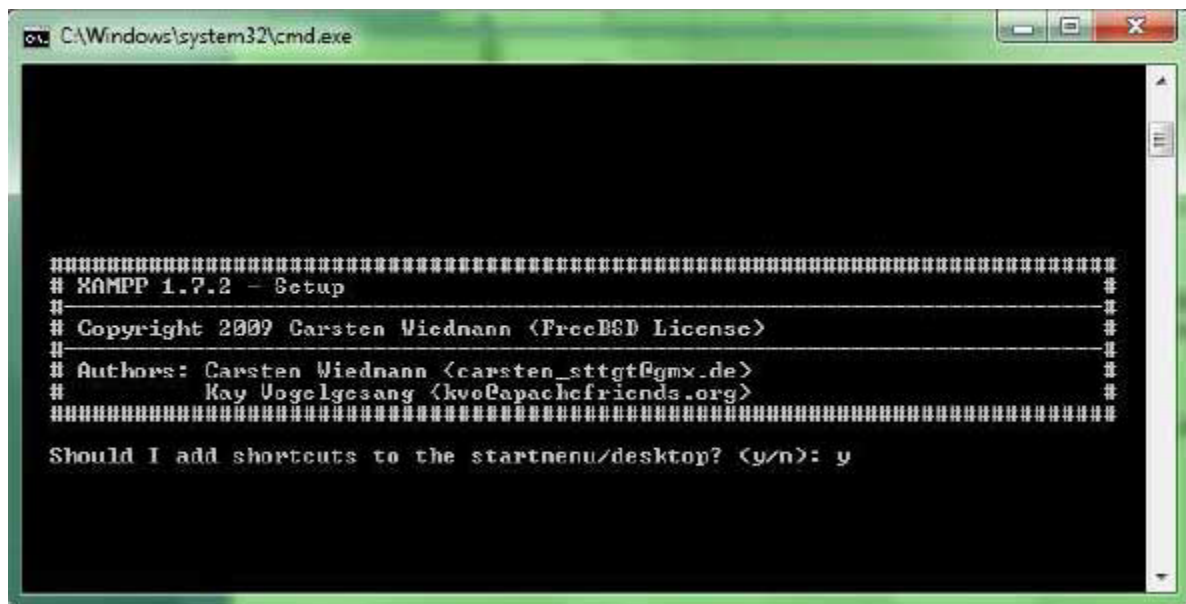

5. Untuk melanjutkan tekan y lagi kemudian enter

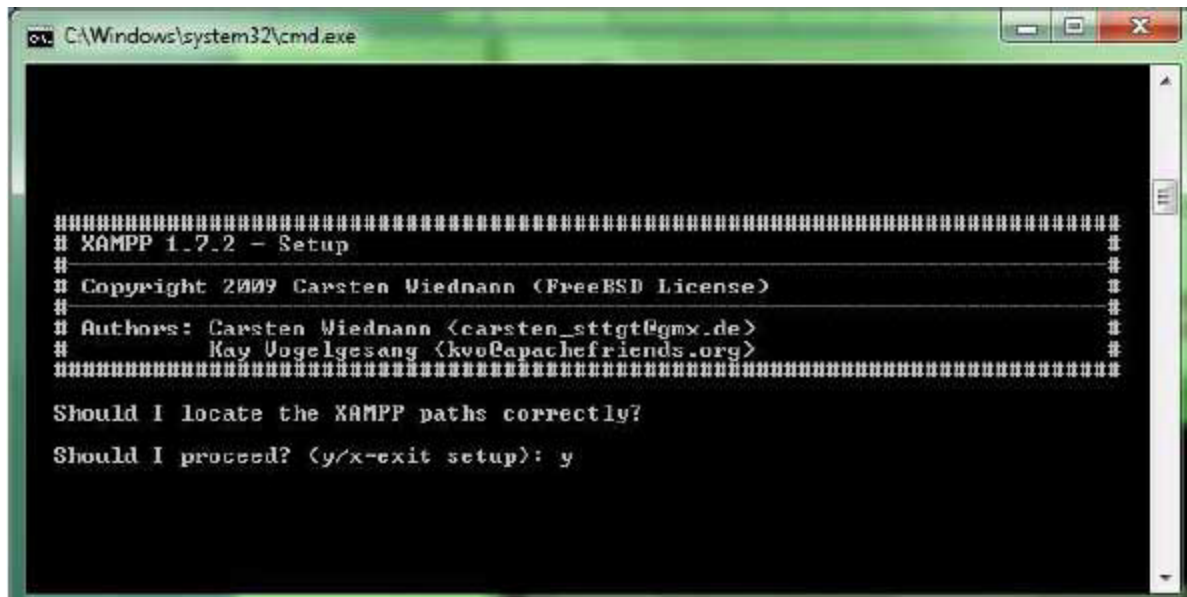


```
C:\Windows\system32\cmd.exe

#####
# XAMPP 1.7.2 - Setup                                     #
#                                                         #
# Copyright 2009 Carsten Wiedmann (FreeBSD License)      #
#                                                         #
# Authors: Carsten Wiedmann <carsten_stt@tgm.de>         #
#           Kay Vogelgesang <kvo@apache@friends.org>      #
#####

Should I locate the XAMPP paths correctly?
Should I proceed? (y/x-exit setup): y
```

6. Selanjutnya anda akan ditanyakan, apakah ingin menginstal XAMPP secara portable. Jika ingin instal portable, pilih y. Tapi bila anda menginstal di komputer, silahkan pilih n. Kemudian tekan enter.

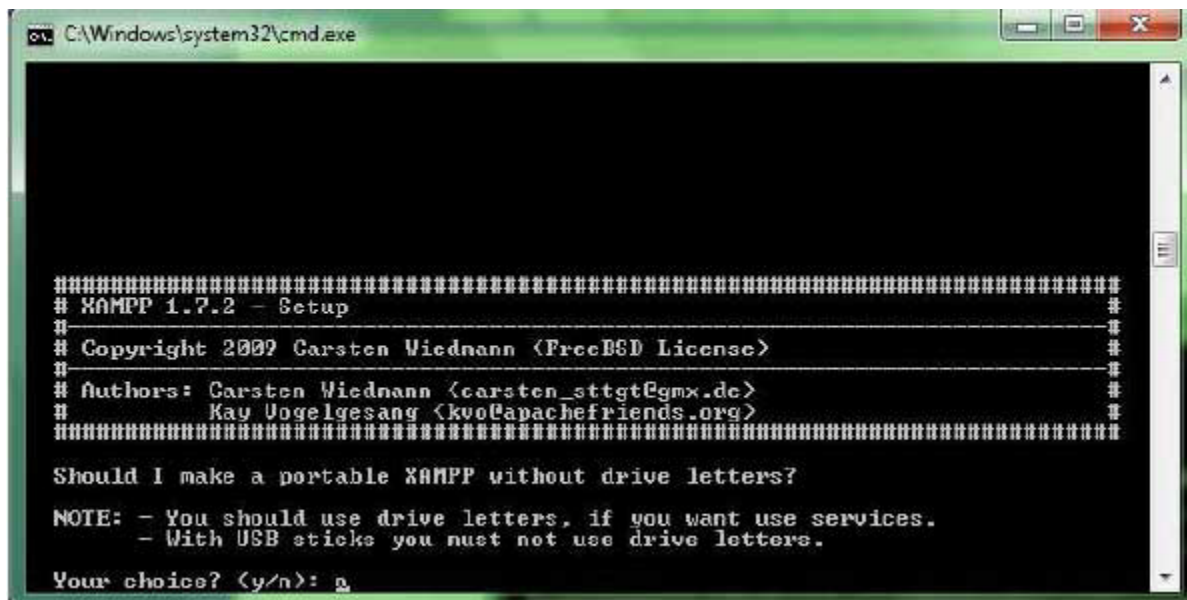

```
C:\Windows\system32\cmd.exe

#####
# XAMPP 1.7.2 - Setup                                     #
#                                                         #
# Copyright 2009 Carsten Wiedmann (FreeBSD License)      #
#                                                         #
# Authors: Carsten Wiedmann <carsten_stt@tgm.de>         #
#           Kay Vogelgesang <kvo@apache@friends.org>      #
#####

Should I make a portable XAMPP without drive letters?
NOTE: - You should use drive letters, if you want use services.
      - With USB sticks you must not use drive letters.
Your choice? (y/n): n
```

7. XAMPP telah siap, tekan enter 2 kali untuk melanjutkan

```
C:\Windows\system32\cmd.exe

Should I make a portable XAMPP without drive letters?

NOTE: - You should use drive letters, if you want use services.
      - With USB sticks you must not use drive letters.

Your choice? (y/n): n

relocating XAMPP...
relocate XAMPP base package
relocate Apache
relocate FileZilla FTP Server
relocate Mercury
relocate MySQL
relocate OpenSSL
relocate Perl
relocate PHP
relocate phpMyAdmin
relocate Sendmail
relocate Webalizer
relocate XAMPP Demopage
relocating XAMPP successful.

XAMPP is ready to use.

Press <Return> to continue:
```

```
C:\Windows\system32\cmd.exe

#####
# XAMPP 1.7.2 - Setup                                     #
#####
# Copyright 2009 Carsten Wiedmann (FreeBSD License)      #
#####
# Authors: Carsten Wiedmann <carsten_stt@tgm.de>        #
#           Kay Vogelgesang <kvo@apachefriends.org>      #
#####
I have set the timezone in 'php.ini' and 'my.ini' to 'Asia/Krasnoyarsk'.
You should correct these values if my guess was wrong.

Press <Return> to continue:
```

8. Instalasi selesai, **pilih 1** kemudian enter untuk menjalankan XAMPP Control Panel. Selanjutnya **pilih X** untuk keluar dari proses instalasi.


```
C:\Windows\system32\cmd.exe


#####
# XAMPP 1.7.2 - Setup
#####
# Copyright 2009 Carsten Uiedmann (FreeBSD License)
#####
# Authors: Carsten Uiedmann <carsten_stt@tgm.de>
#           Kay Vogelgesang <kvo@apachefriends.org>
#####

1. start XAMPP Control Panel
2. relocate XAMPP
   <current path: C:\xampp>
3. disable HTTPS (SSL)
4. disable Server Side Includes (SSI)
5. enable IPv4 only (current: IPv4/6 (auto))
6. disable mod_perl
7. disable Apache::ASP

x Exit


Please choose <1-7/x>: 1
```

9. Aktifkan Service “Apache” dan “MySQL” melalui XAMPP Control Panel. Klik tombol “Start”. XAMPP Control Panel bisa diakses dari desktop atau start menu. Jika tidak ada, langsung saja akses ke C:/xampp/xampp-control.exe

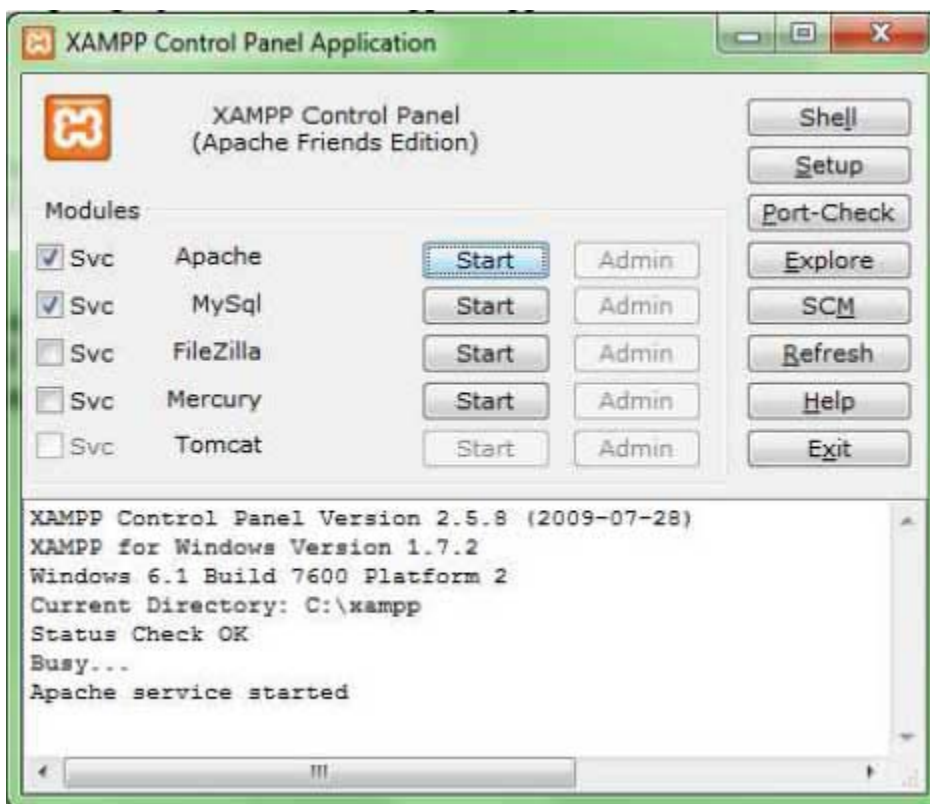

10. Sampai disini, Anda sudah berhasil menginstal XAMPP, artinya anda sudah berhasil instal PHP, APACHE dan MYSQL. Silahkan buka browser anda dan ketikkan <http://localhost> untuk memastikan

XAMPP sudah selesai terinstal. Jika hasilnya seperti gambar di bawah ini, instalasi yang anda lakukan berjalan dengan sukses.

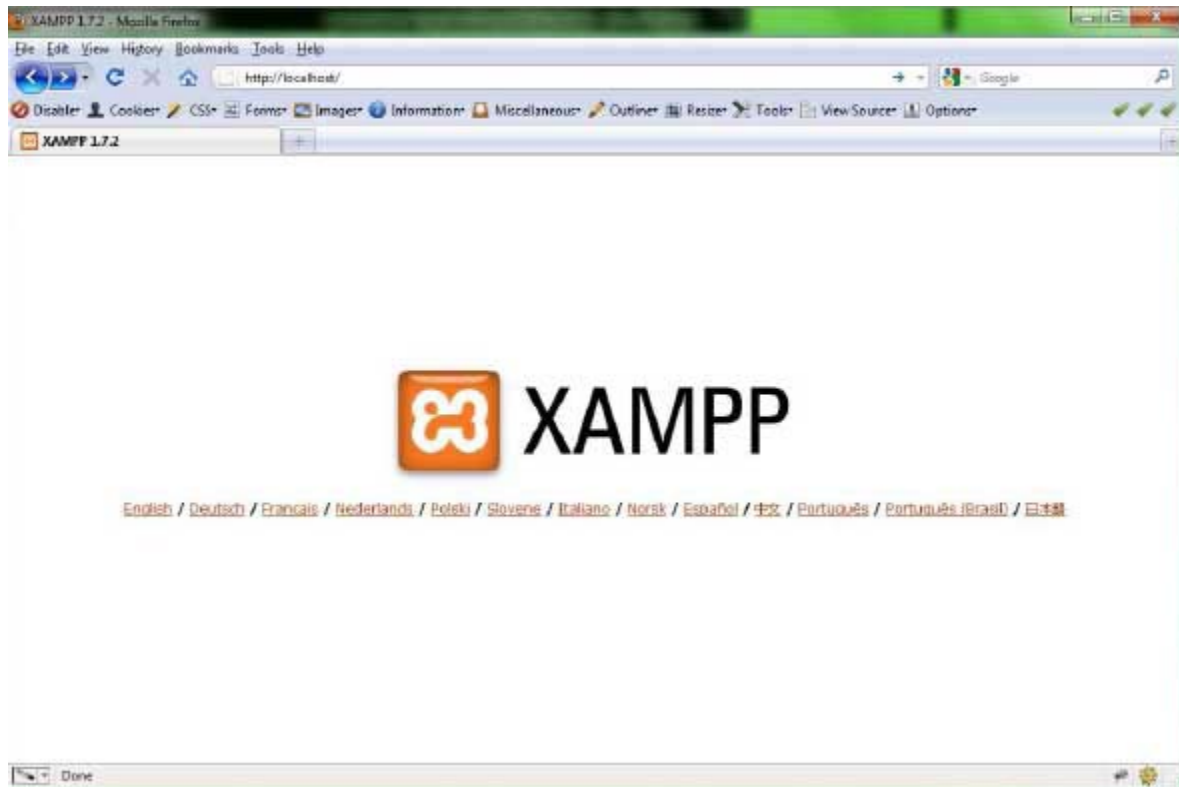

Untuk proses instalasi XAMPP di atas, bisa anda temukan juga pada artikel [Ebook lengkap pdf belajar php](#) atau bila anda mau menginstal MySQL secara terpisah, silahkan lihat artikel [tutorial lengkap belajar mysql](#) dilengkapi ebook pdf. Setelah proses instalasi, ada baiknya untuk mengubah documentroot dengan cara menyettingnya terlebih dahulu

Menyetting Document Root XAMPP


Documentroot merupakan lokasi/folder untuk menyimpan file PHP/web agar bisa dipanggil/dijalankan oleh webserver. Pada contoh ini, lokasi documentroot berada di c:/xampp/htdocs/. Berarti jika anda ingin agar file bisa dijalankan melalui webserver, letakkan file anda folder tersebut.

Akan tetapi lokasi documentroot bisa Anda pindahkan ke tempat lain sesuai dengan keinginan. Misalnya Anda ingin memindahkan ke drive D: komputer/laptop yang anda miliki. Berikut langkah-langkahnya:


1. Buatlah satu folder terlebih dahulu dengan nama htdocs di drive D:




Kemudian buka file `c:/xampp/apache/conf/httpd.conf` menggunakan notepad ataupun notepad++

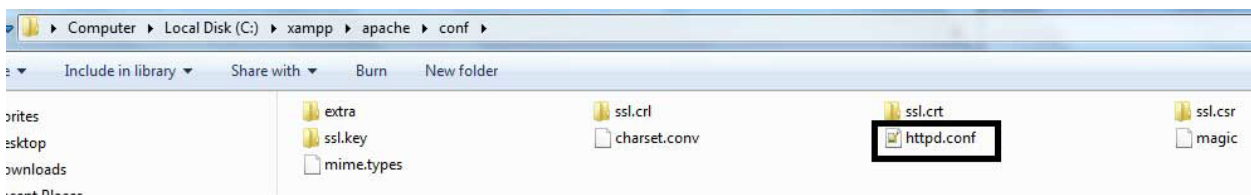

2. Setelah terbuka, Cari kata **documentroot** didalam file tersebut. Untuk memudahkan pencarian silahkan anda tekan Ctrl+F.

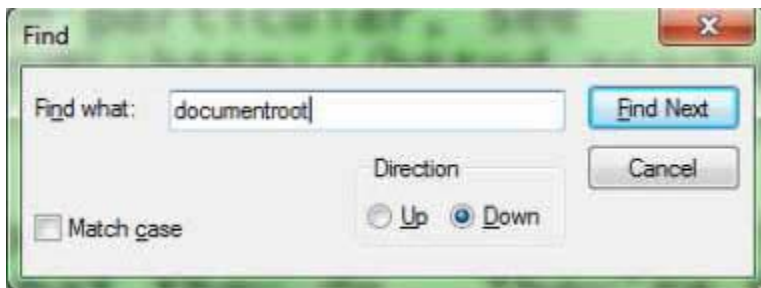


3. Anda akan menemukan satu baris sebagai berikut, lihat gambar di bawah ini:

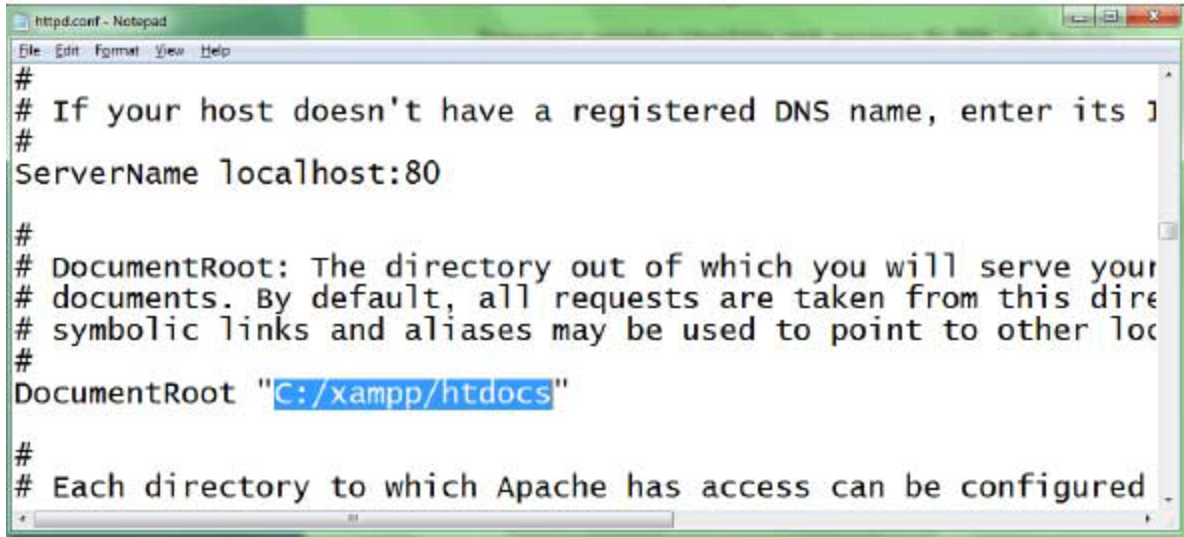


```
httpd.conf - Notepad
File Edit Format View Help
#
# If your host doesn't have a registered DNS name, enter its
#
ServerName localhost:80
#
# DocumentRoot: The directory out of which you will serve your
# documents. By default, all requests are taken from this dire
# symbolic links and aliases may be used to point to other loc
#
DocumentRoot "C:/xampp/htdocs"
#
# Each directory to which Apache has access can be configured
```

4. Ganti c:/xampp/htdocs dengan folder lain sesuai keinginan, bila anda sudah membuatnya di folder D, maka gantilah menjadi D:/htdocs sebagai documentroot.

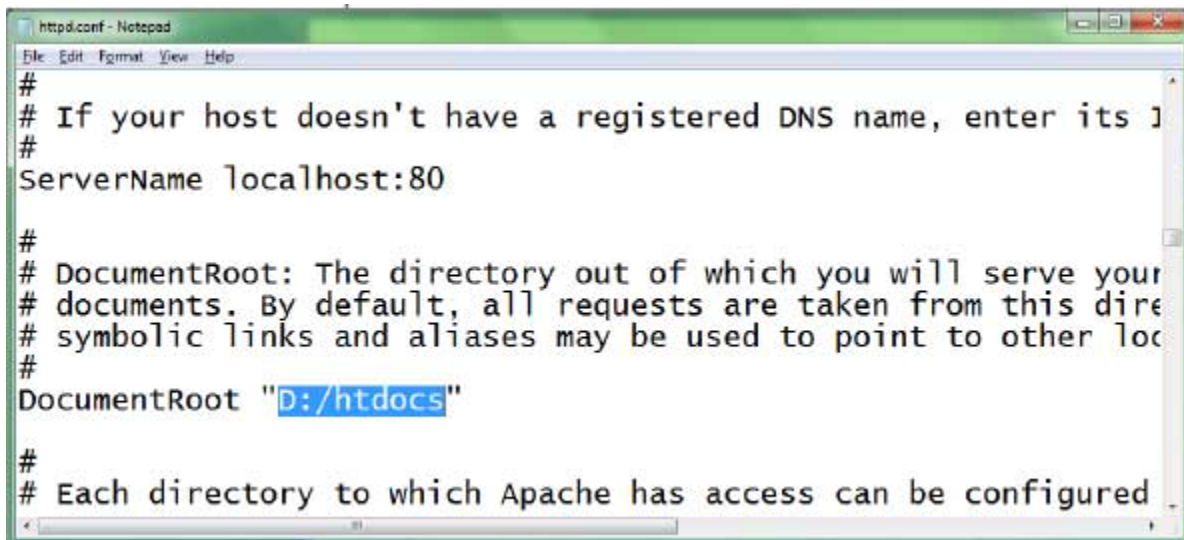


```
httpd.conf - Notepad
File Edit Format View Help
#
# If your host doesn't have a registered DNS name, enter its
#
ServerName localhost:80
#
# DocumentRoot: The directory out of which you will serve your
# documents. By default, all requests are taken from this dire
# symbolic links and aliases may be used to point to other loc
#
DocumentRoot "D:/htdocs"
#
# Each directory to which Apache has access can be configured
```

5. Kemudian ada beberapa settingan tersebut, terdapat tulisan **<Directory "C:/xampp/htdocs">**, ganti c:/xampp/htdocs dengan D:/htdocs

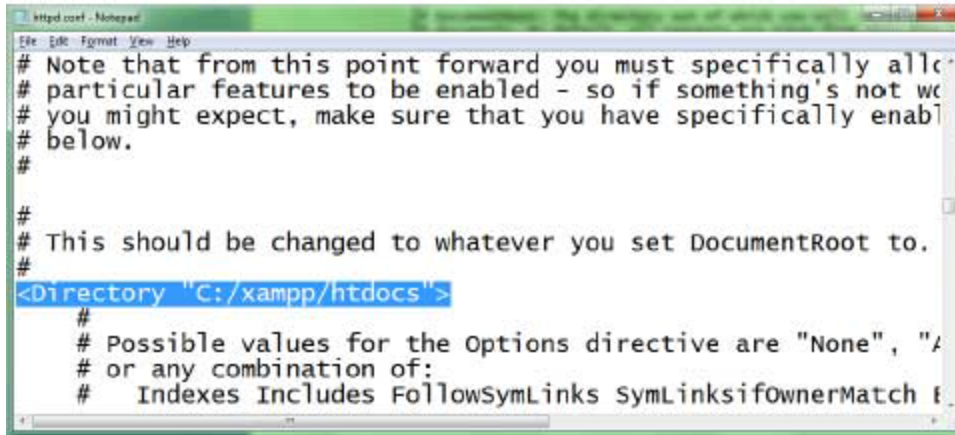

```
httpd.conf - Notepad
File Edit Format View Help
# Note that from this point forward you must specifically allow
# particular features to be enabled - so if something's not working
# you might expect, make sure that you have specifically enabled it
# below.
#
# This should be changed to whatever you set DocumentRoot to.
#
<Directory "C:/xampp/htdocs">
#
# Possible values for the Options directive are "None", "All",
# or any combination of:
#   Indexes Includes FollowSymLinks SymLinksifOwnerMatch
#
```

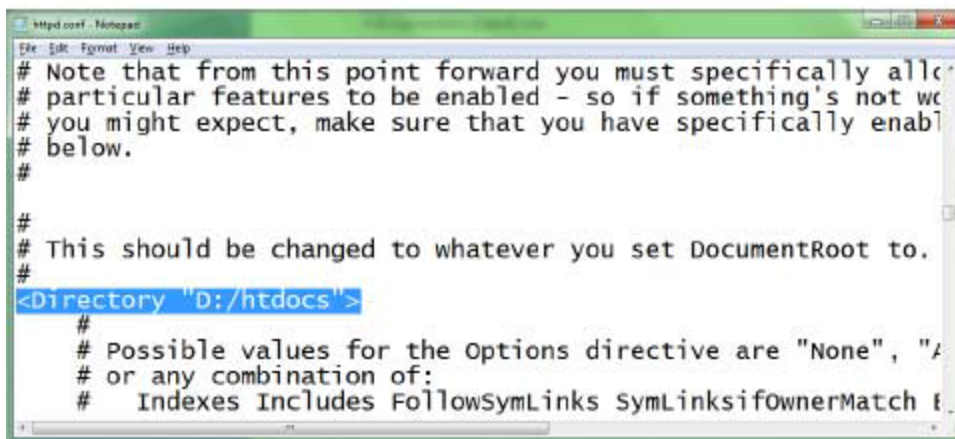

```
httpd.conf - Notepad
File Edit Format View Help
# Note that from this point forward you must specifically allow
# particular features to be enabled - so if something's not working
# you might expect, make sure that you have specifically enabled it
# below.
#
# This should be changed to whatever you set DocumentRoot to.
#
<Directory "D:/htdocs">
#
# Possible values for the Options directive are "None", "All",
# or any combination of:
#   Indexes Includes FollowSymLinks SymLinksifOwnerMatch
#
```

6. Terakhir, save file tersebut dan buka kembali XAMPP Control Panel. Restart Apache dengan mengklik "Stop" dan "Start" kembali. Sekarang semua file PHP harus disimpan di D:/htdocs/