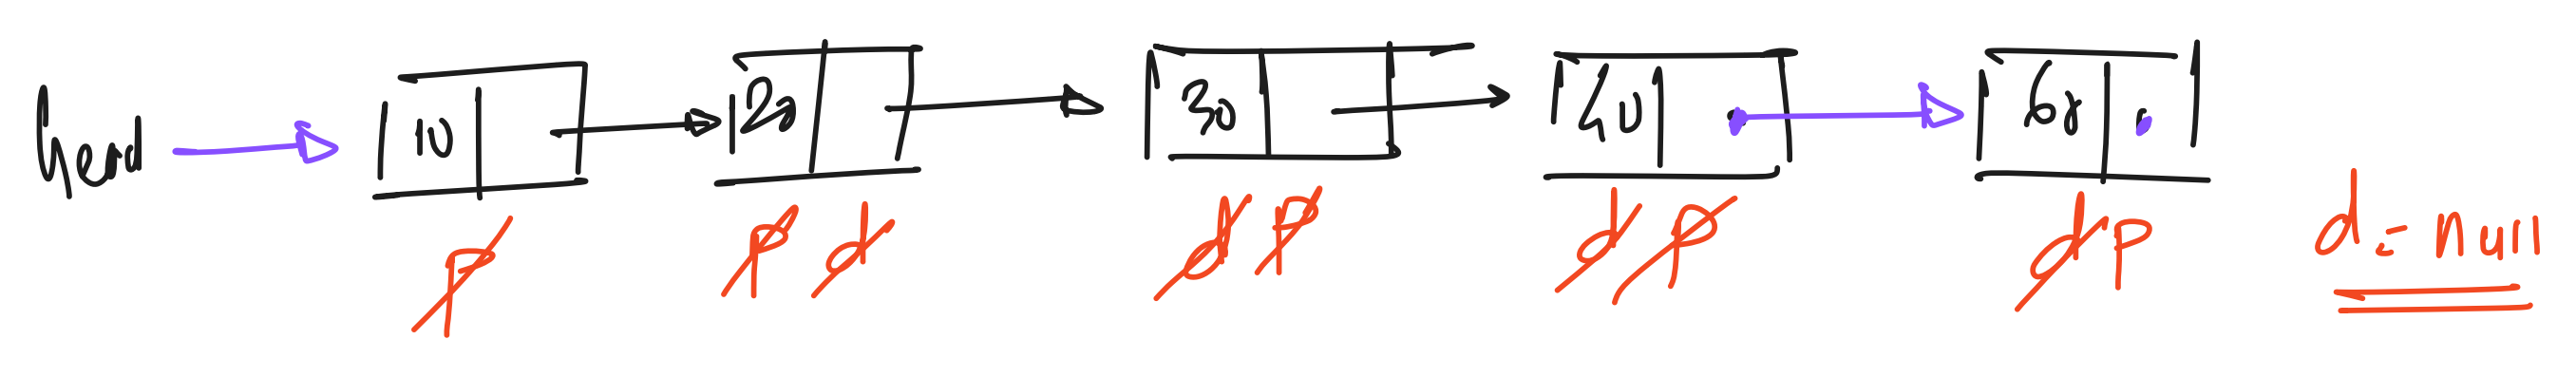
head
10
20
30
40
60
d p
d=null

```
p=h
d=h.gn()
ll.delByVal(40)

w( d.gD() != data) {
    p=d;
    d= d.gn()
}
p.sn( d.gn() );
```

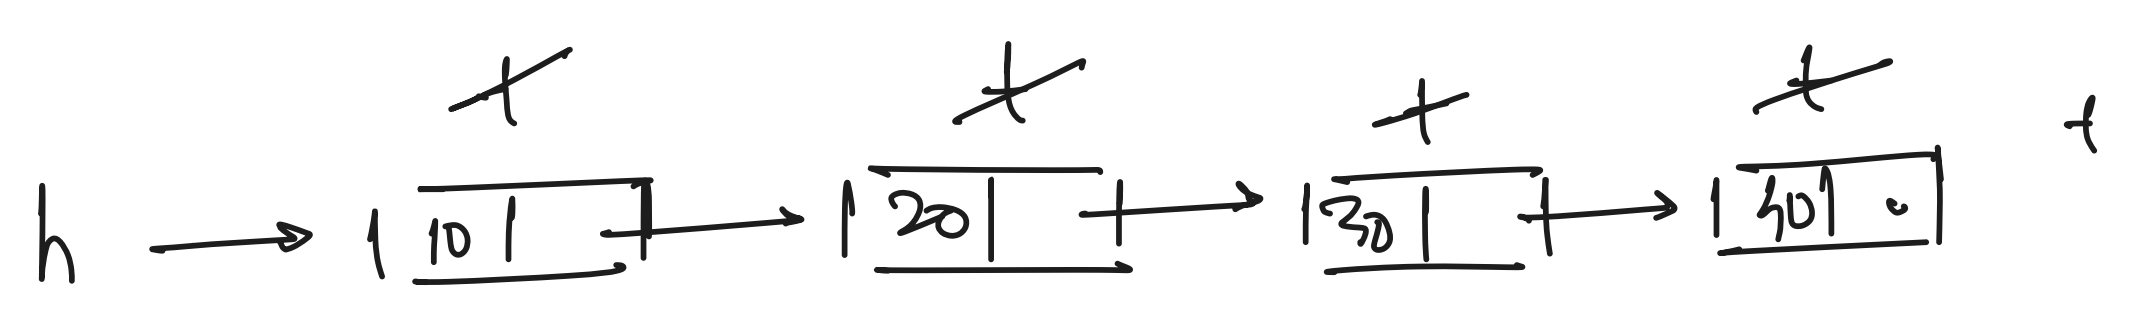
h
t
10
20
30
40

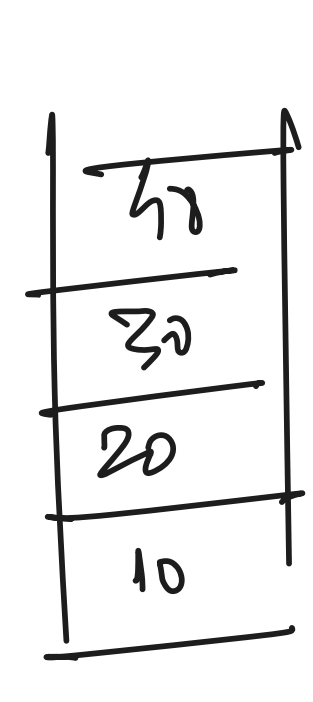

```
t=h
while( t != n) {
    push( t.gD() )
    t++
}

while(!s.isEmpty()){
    sop( s.pop())
}
```

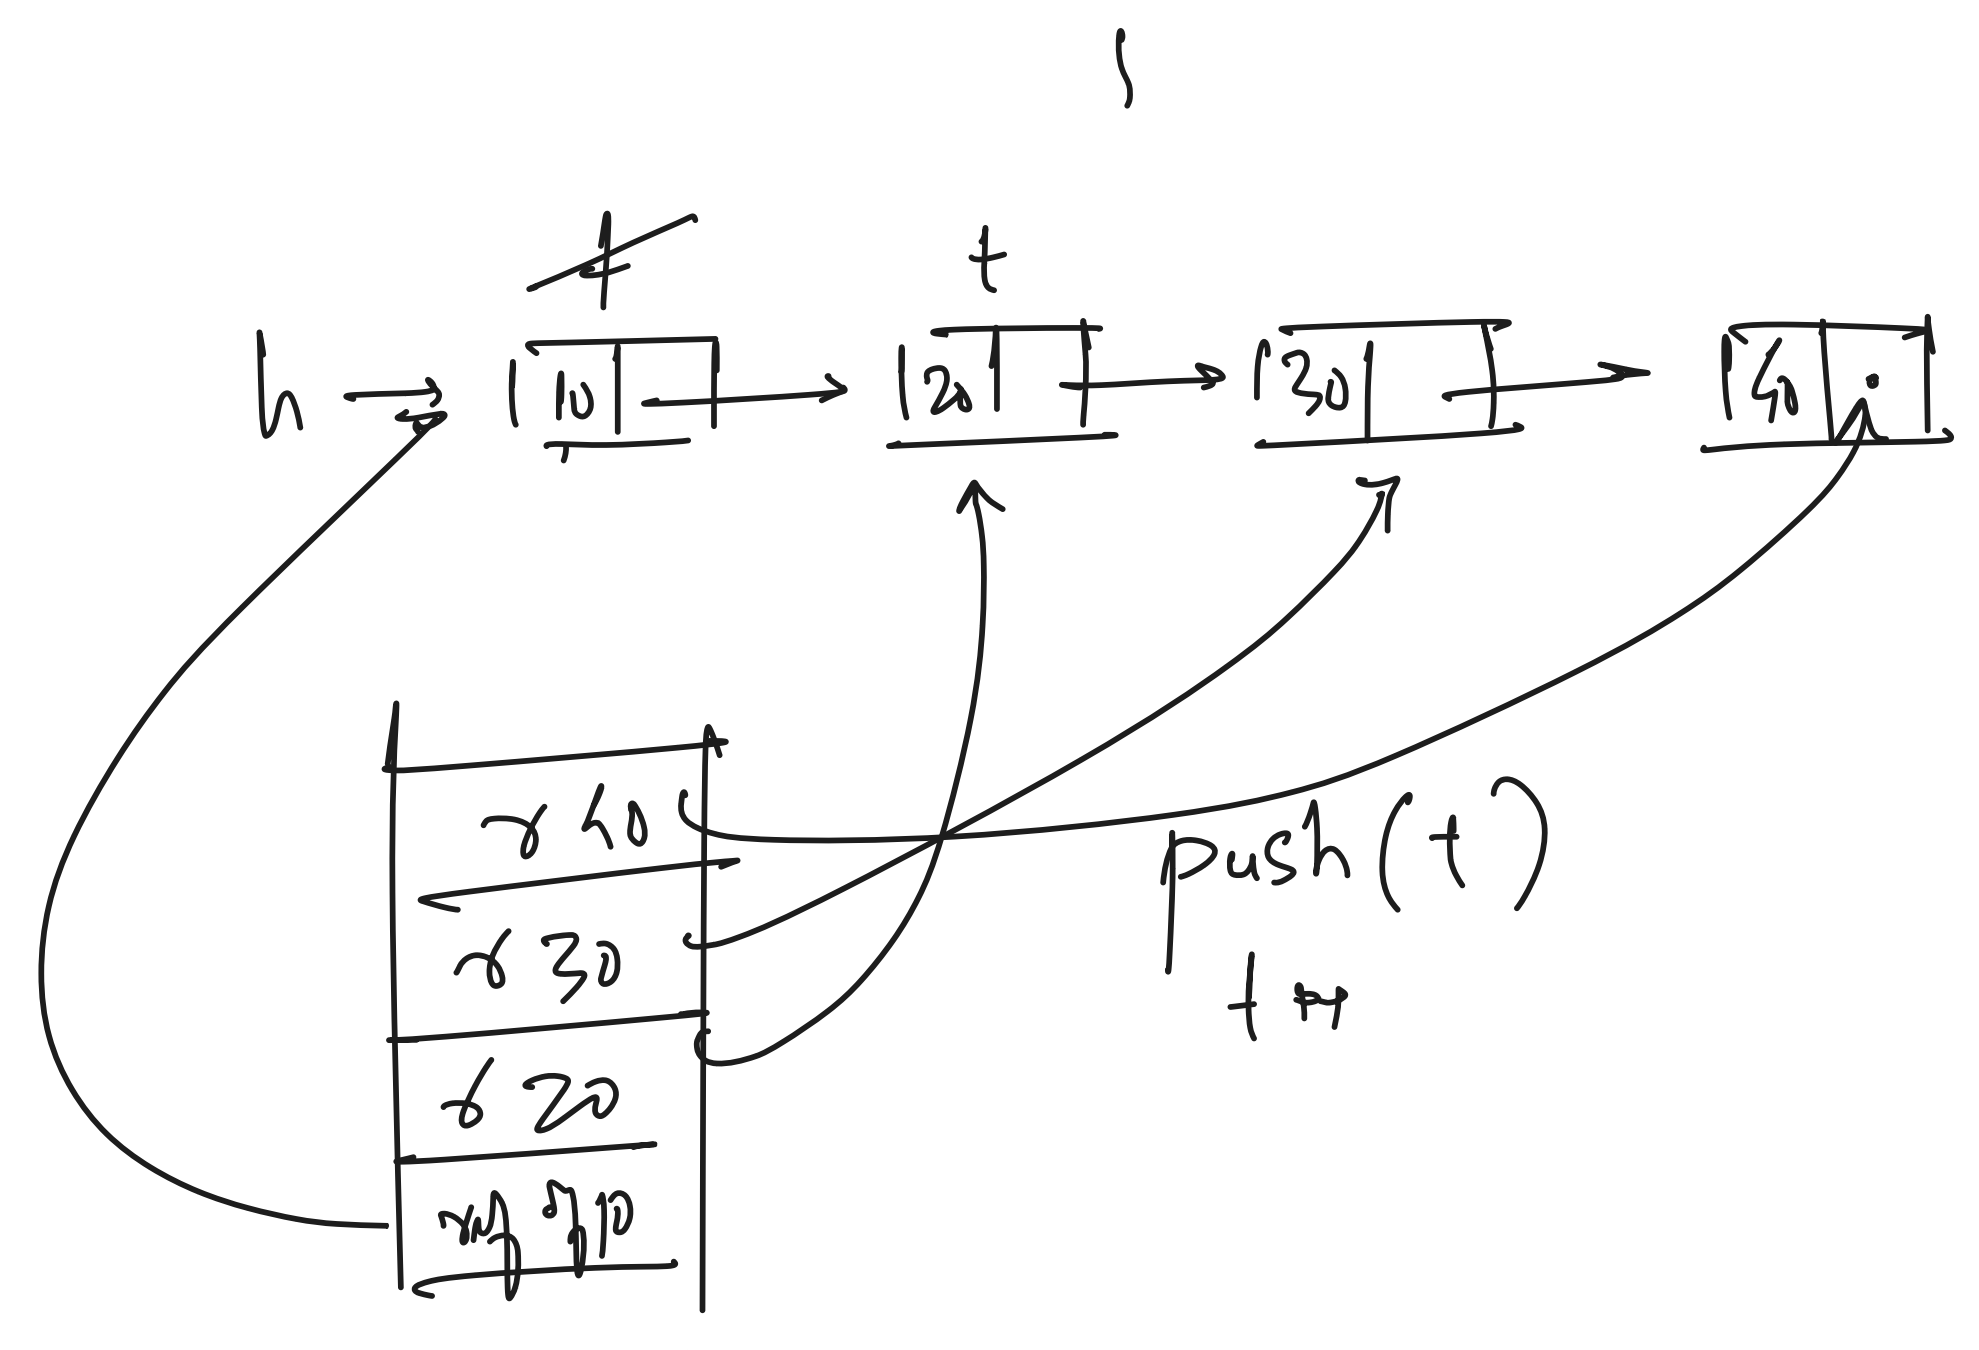
h
t
10
20
30
40
r 40
r 30
r 20
r 10
push(t)
t++
Node ref

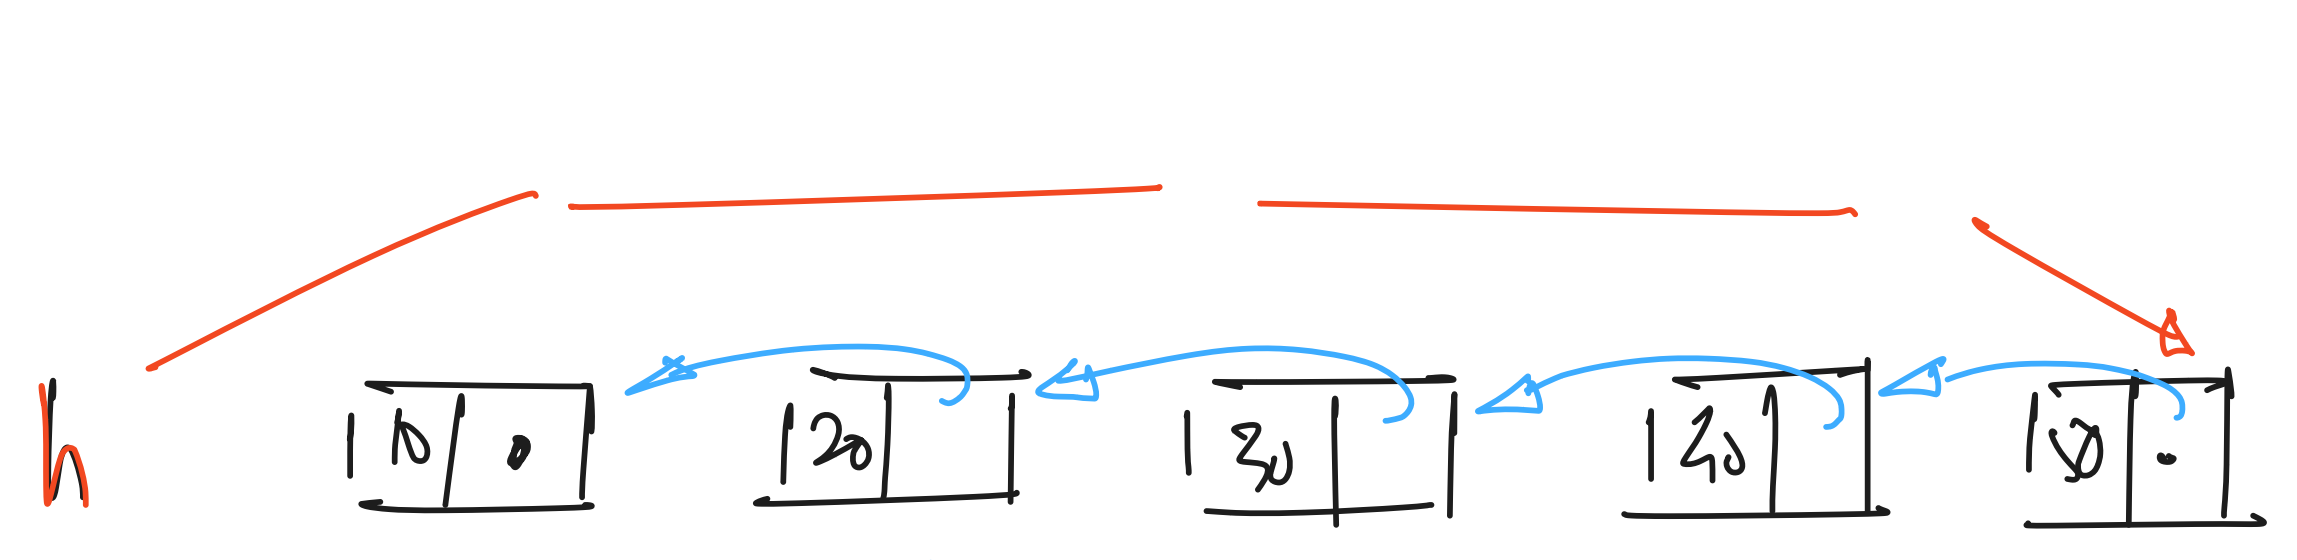
h
10
20
30
40
50
n1
n2
n3

```
n1 = h    n2 = h.gn()
Cond^n n2 != null
    n3 = n2.gn()
    n2.sn( n1 )
    n1 = n2
    n2 = n3

h.sn(null)
h = n1
```

n3
null

n2 = null

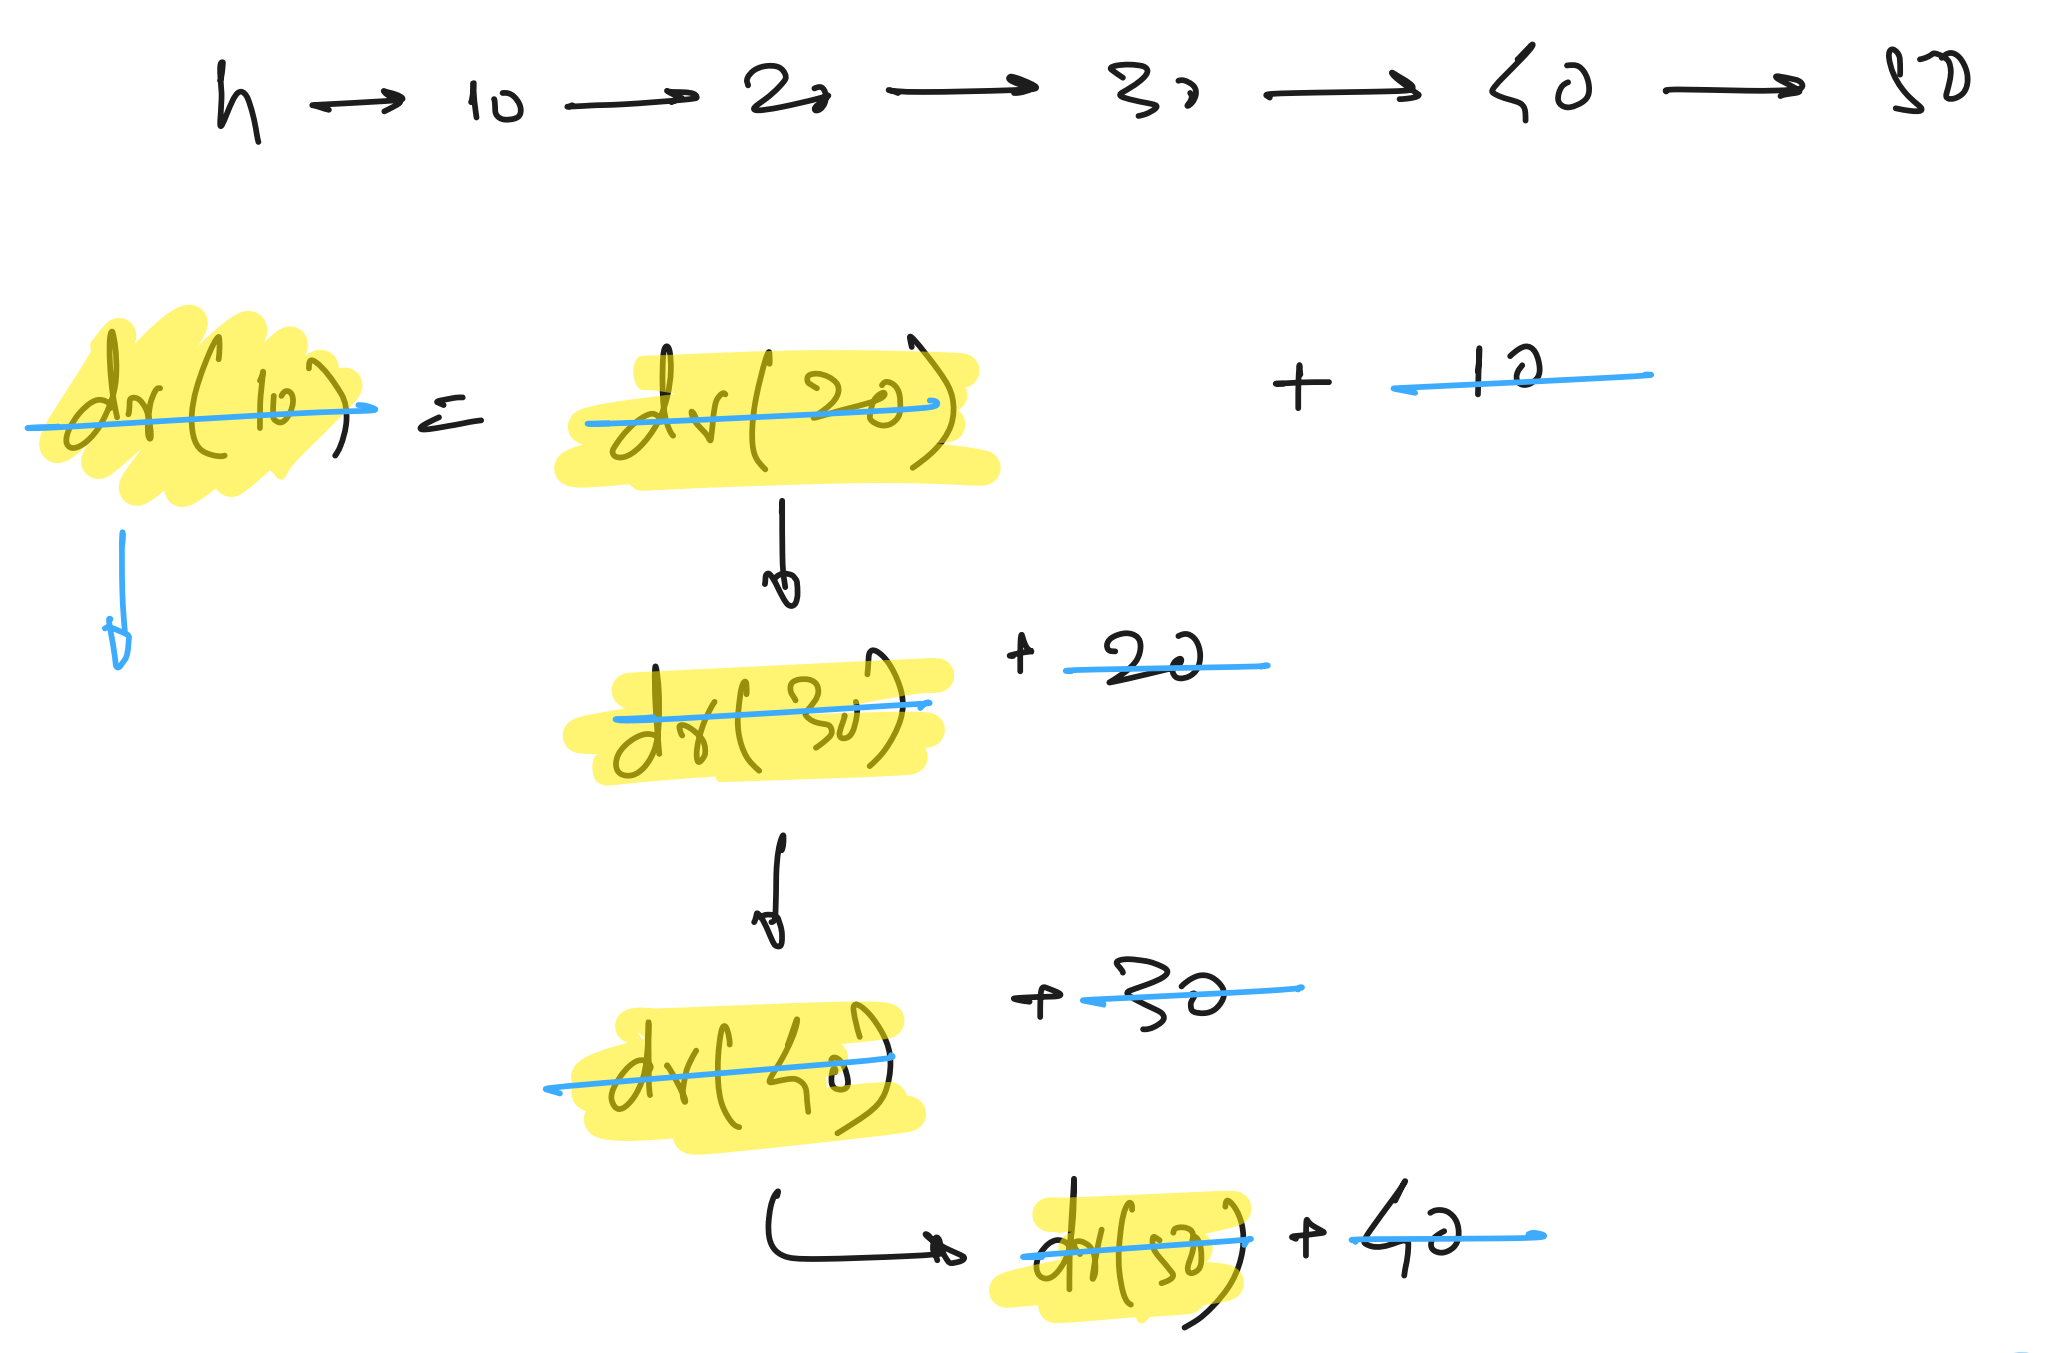
h → 10 → 20 → 30 → 40 → 50
dr(10) = dr(20) + 10
dr(30) + 20
dr(40) + 30
dr(50) + 40
dr(null) + 50

50 40 30 20 10

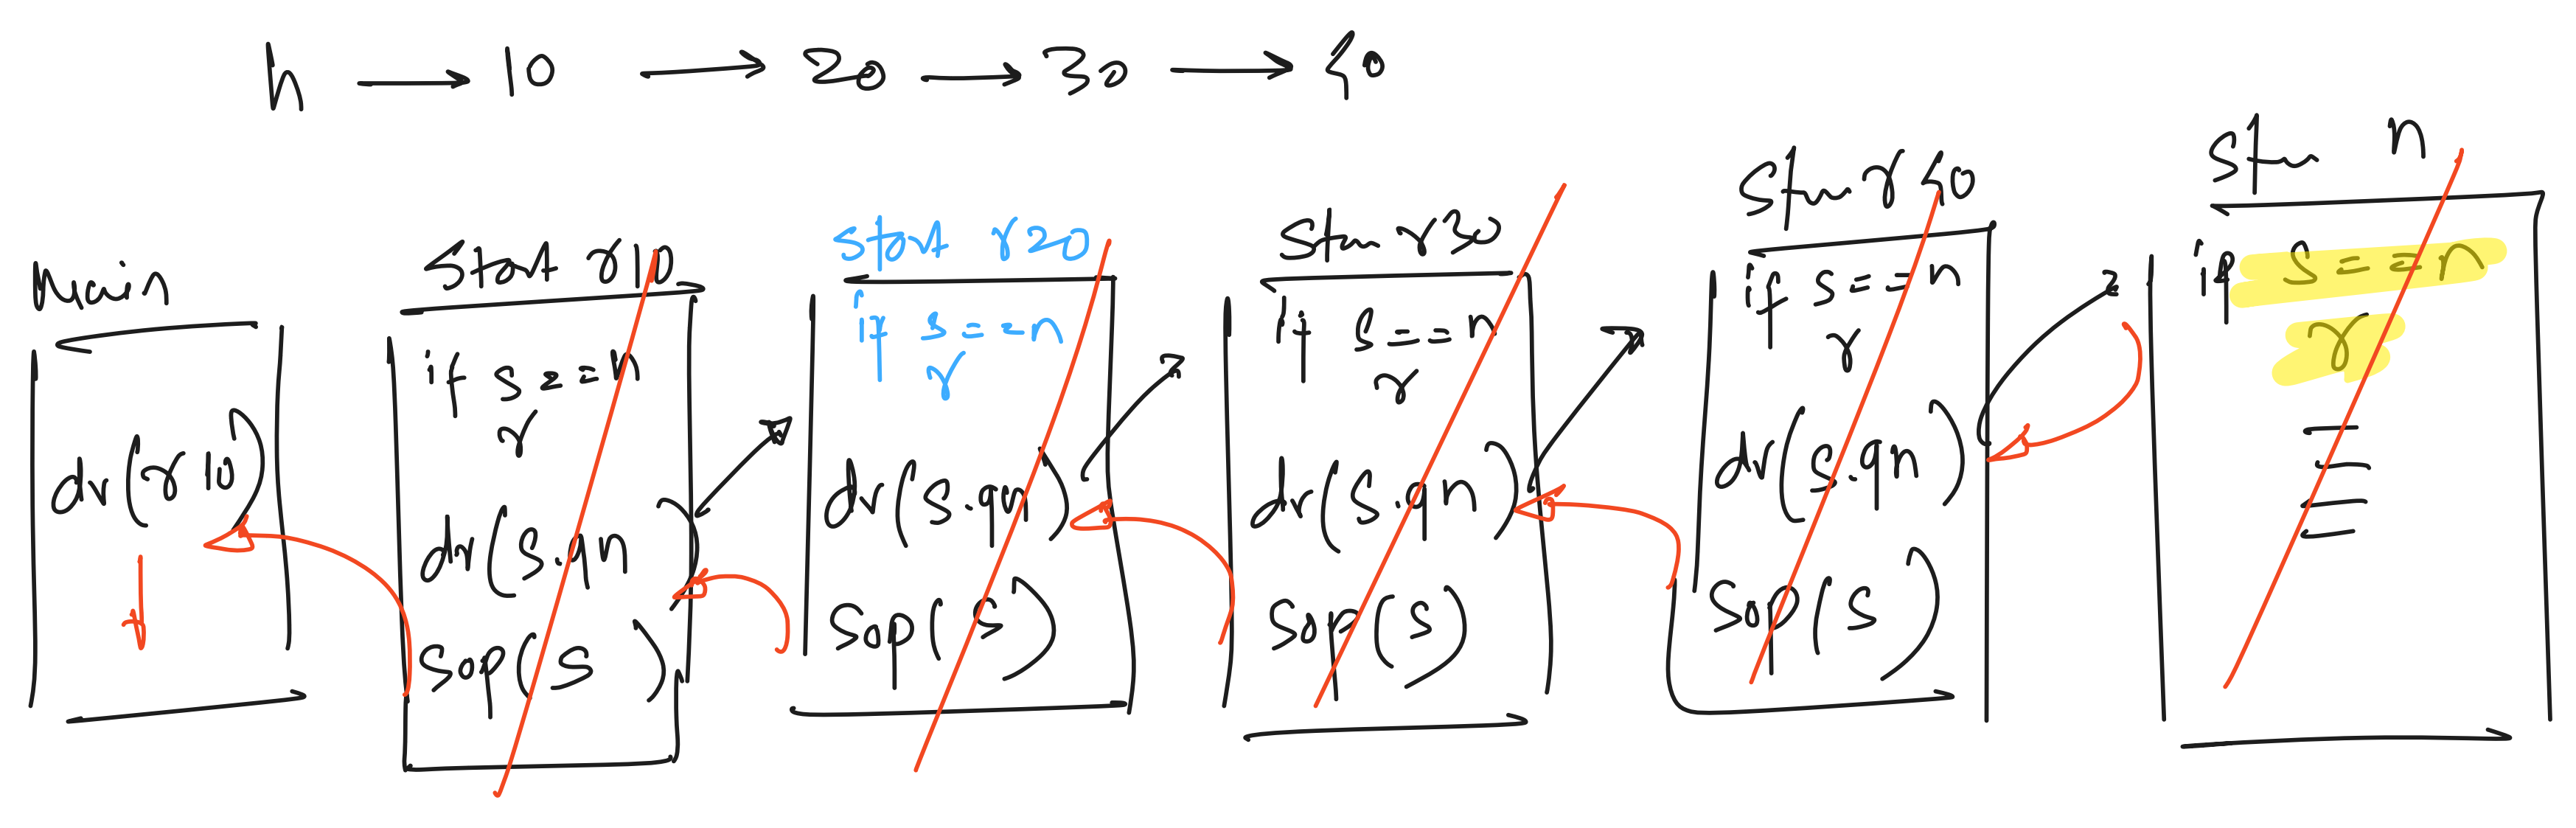
h → 10 → 20 → 30 → 40
main
dr(r 10)
Start r 10
if s==n
r
dr(s.gn)
sop(s)
Start r 20
Stm r 30
Stm r 40
Stm n

40 30 20 10

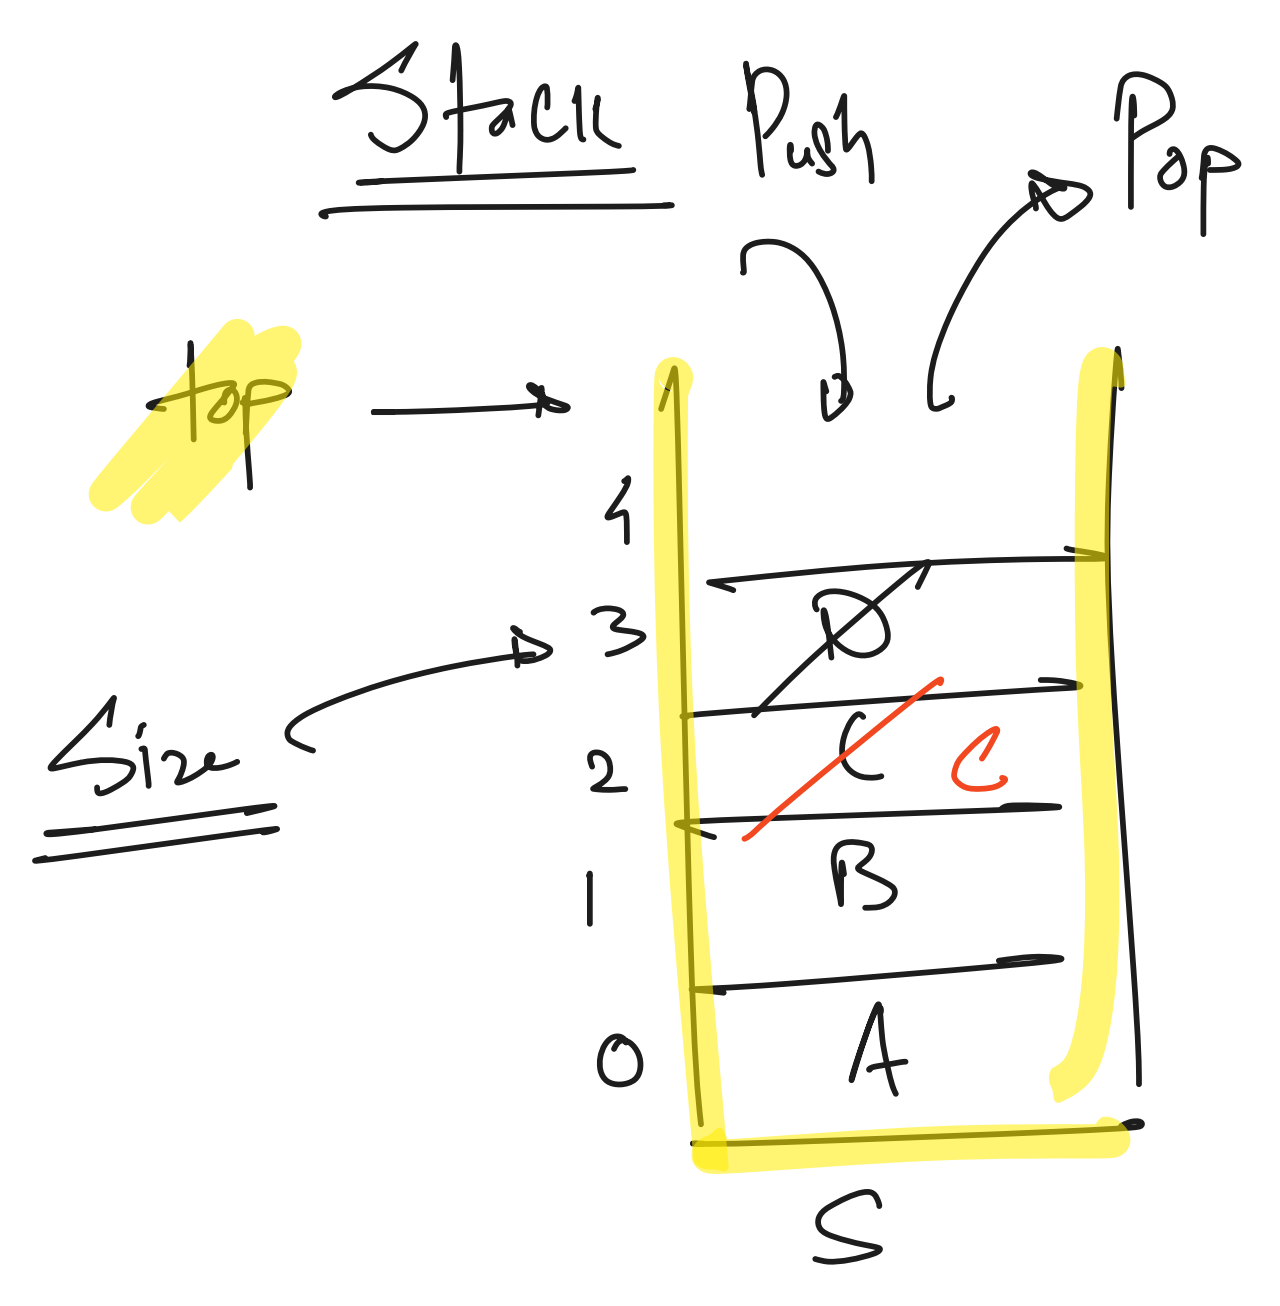
Stack
Push
Pop
top
Size
4
3
2
1
0
D
C
B
A
S

A B C D

D C B A

s.pop() → D

s.peek() → C

data = s.pop()

s.push(data)

top = -1

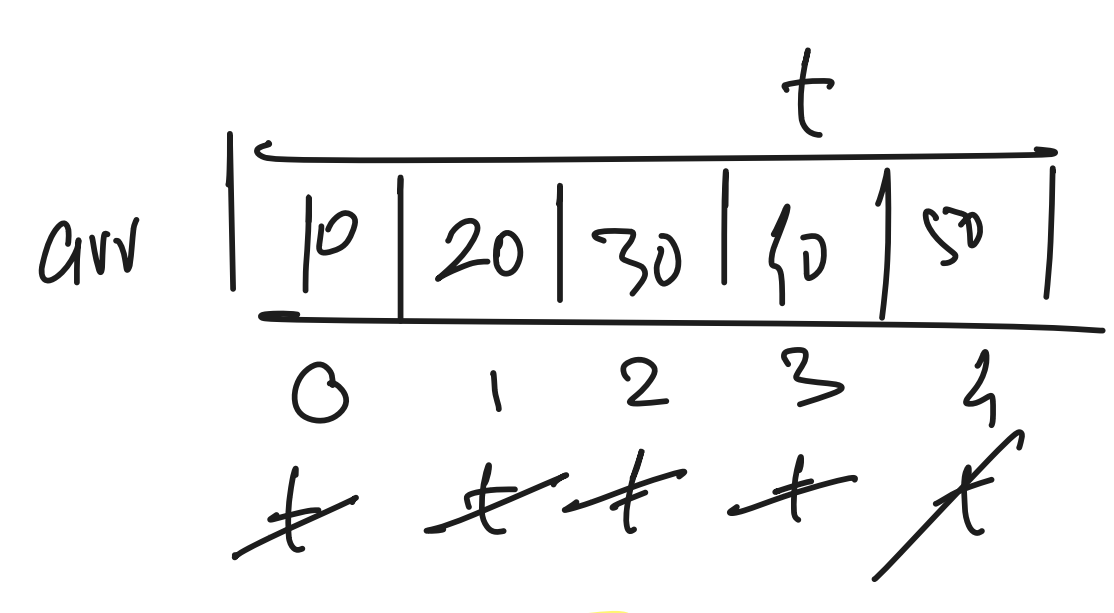
t
arr
10
20
30
40
50
0
1
2
3
4

Size = 5

isEmpty
top == -1

Push
top ++
arr[top] = data

Pop
data = arr[top]
top-- ret data

isFull
top == Size -1

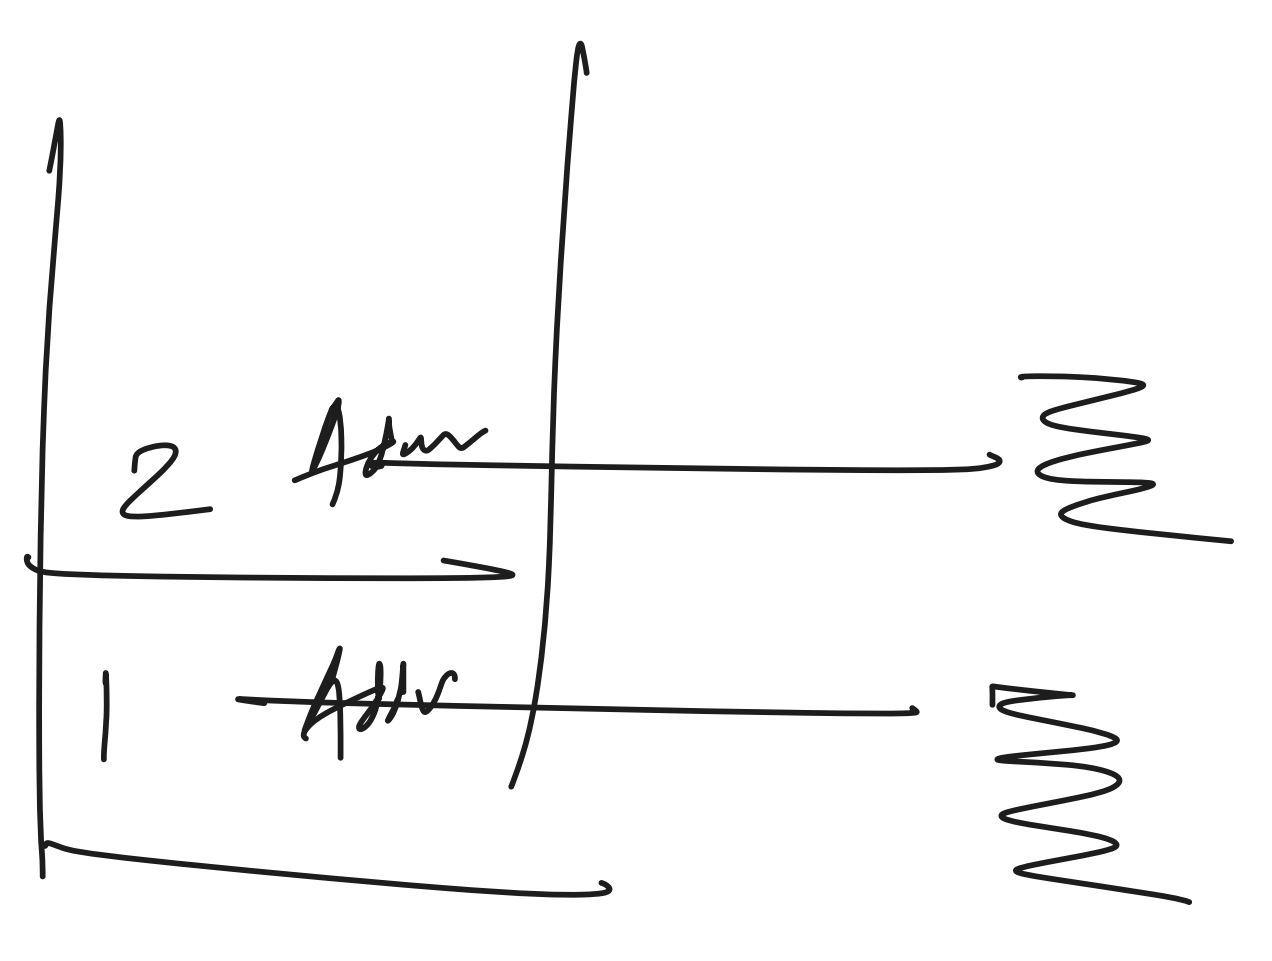
2 Addr
1 Addr

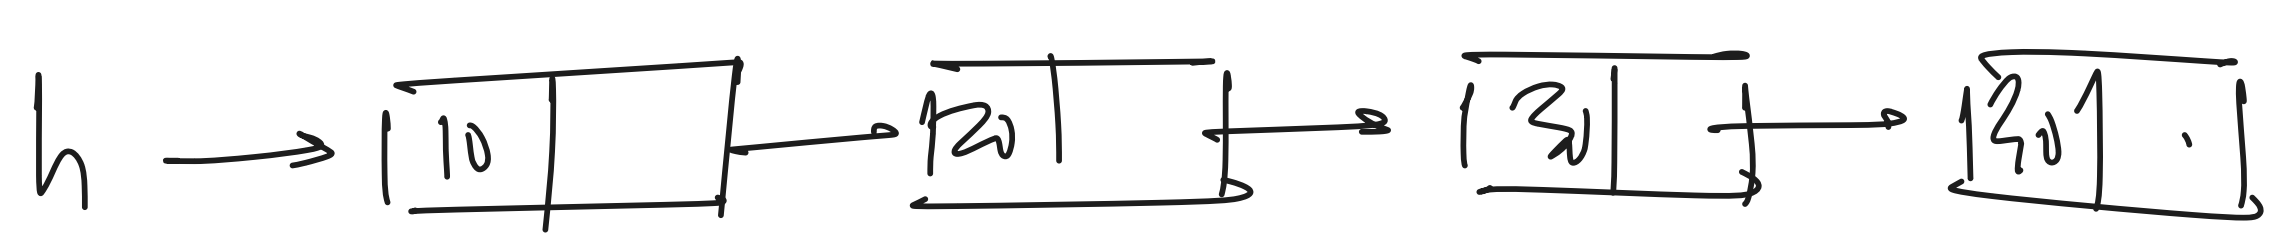

push : ins at the end of list

pop : delete from the end of list

Push : ins at pos 1

Pop : del at pos 1

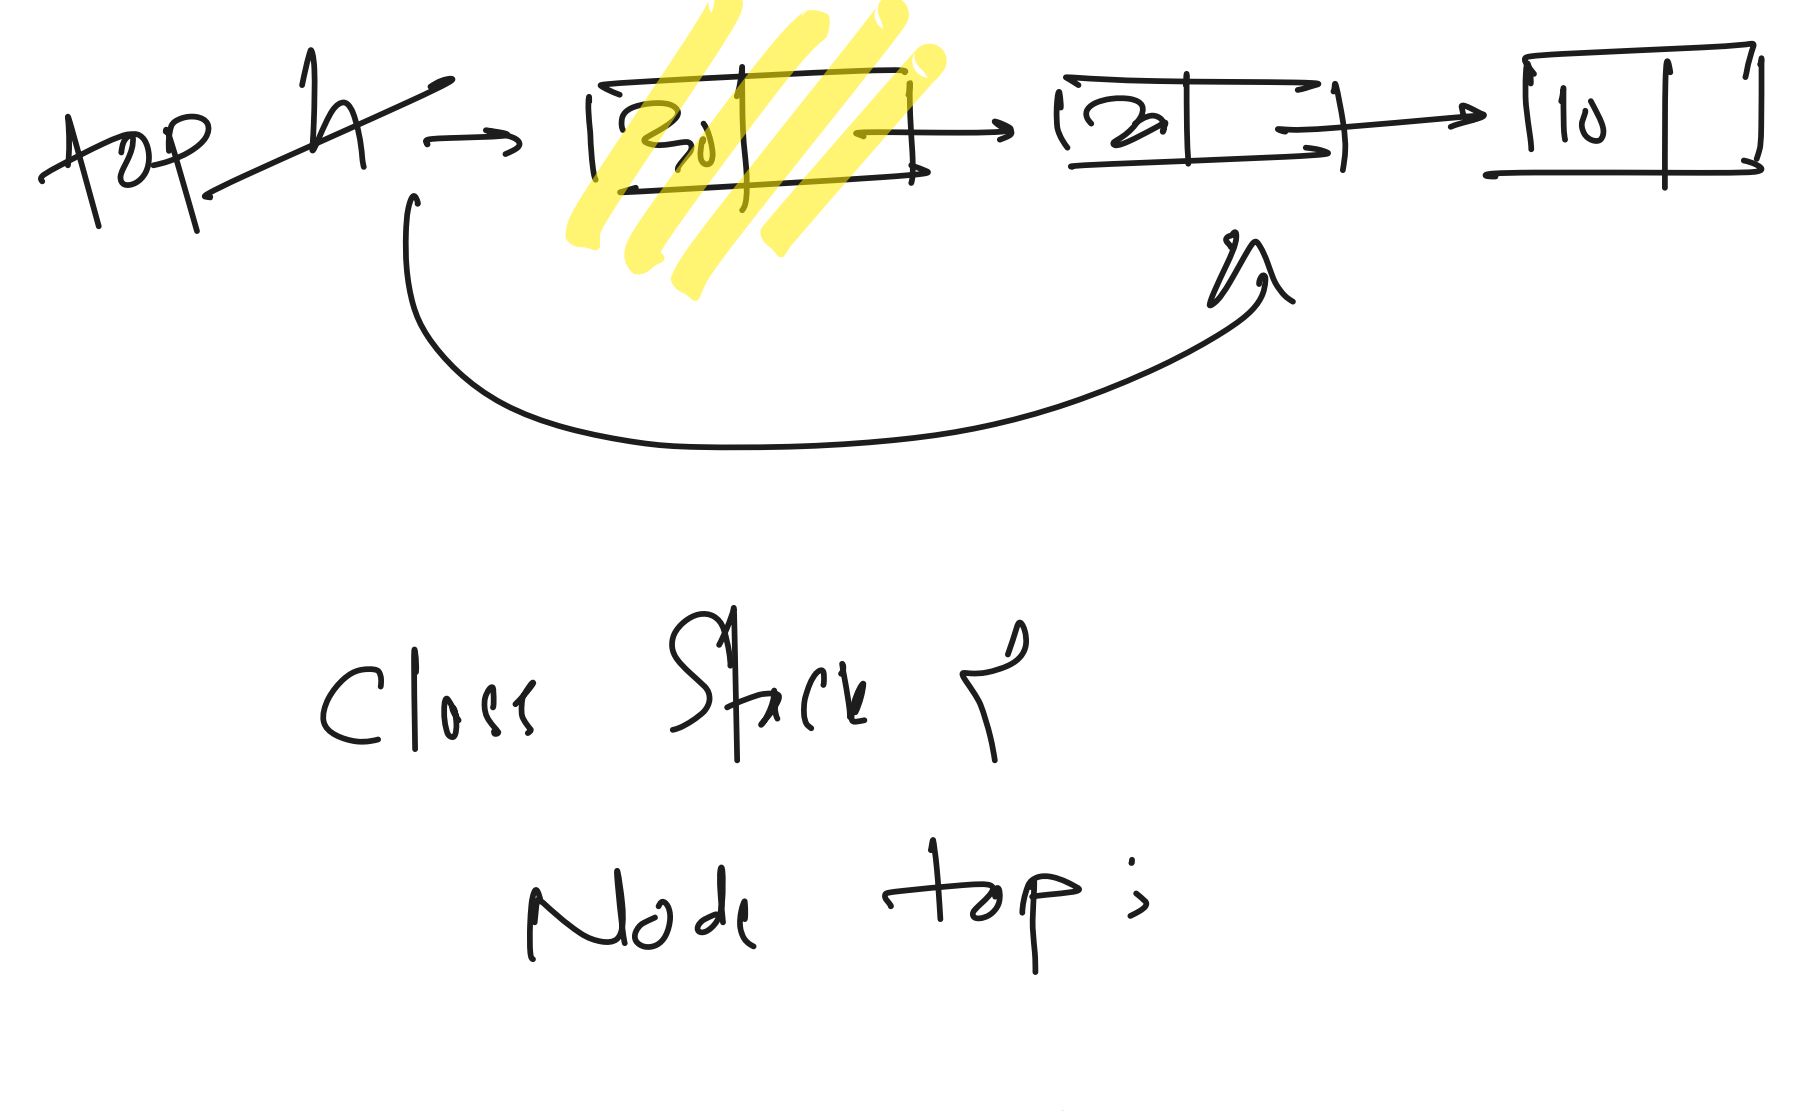
top h
10
20
30

```
Class Stack {
    Node top;

    push( data )
        ins at 1

    int pop() { del at 1 }
}
```