DataBase Lab 08 (Lab Task)

Muhammad Ghulam Mujtaba Qureshi

24k-0535

DML Trigger Task

- Create a DML trigger that logs changes to a specific table when records are inserted, updated, or deleted.

Welcome Page | hr

Worksheet | Query Builder

```oracle_plsql
CREATE TABLE emp_audit (
    emp_id NUMBER,
    action VARCHAR2(20),
    action_date DATE
);

CREATE OR REPLACE TRIGGER emp_audit_tr
AFTER INSERT OR UPDATE OR DELETE ON employees
FOR EACH ROW
BEGIN
    IF INSERTING THEN
        INSERT INTO emp_audit VALUES (:NEW.employee_id, 'INSERT', SYSDATE);
    ELSIF UPDATING THEN
        INSERT INTO emp_audit VALUES (:OLD.employee_id, 'UPDATE', SYSDATE);
    ELSIF DELETING THEN
        INSERT INTO emp_audit VALUES (:OLD.employee_id, 'DELETE', SYSDATE);
    END IF;
END;
/
```

Script Output | Task completed in 0.196 seconds

```
Table EMP_AUDIT created.


Trigger EMP_AUDIT_TR compiled
```

- Create a DML trigger that enforces a referential integrity constraint between two tables when inserting or updating records.

Welcome Page | hr

Worksheet | Query Builder

```oracle_plsql
CREATE OR REPLACE TRIGGER check_dept_fk
BEFORE INSERT OR UPDATE ON employees
FOR EACH ROW
DECLARE
    v_count NUMBER;
BEGIN
    SELECT COUNT(*) INTO v_count
    FROM departments
    WHERE department_id = :NEW.department_id;

    IF v_count = 0 THEN
        RAISE_APPLICATION_ERROR(-20001, 'Invalid Department ID');
    END IF;
END;
/
```

Script Output

Task completed in 0.041 seconds

```
Trigger CHECK_DEPT_FK compiled
```

- Create a DML trigger that automatically updates a "last_modified" time stamp when a record is updated in a table.

Welcome Page | hr

Worksheet | Query Builder

```
ALTER TABLE employees ADD last_modified DATE;

CREATE OR REPLACE TRIGGER update_timestamp
BEFORE UPDATE ON employees
FOR EACH ROW
BEGIN
    :NEW.last_modified := SYSDATE;
END;
/
```

Script Output

Task completed in 0.042 seconds

```
Table EMPLOYEES altered.


Trigger UPDATE_TIMESTAMP compiled
```

DDL Trigger Tasks

- Create a DDL trigger that logs all schema changes (e.g., table creations, modifications, and drops) in a dedicated audit table.

Welcome Page | hr

Worksheet | Query Builder

```
CREATE TABLE ddl_audit (
    ddl_date DATE,
    user_name VARCHAR2(30),
    object_type VARCHAR2(30),
    object_name VARCHAR2(30),
    operation VARCHAR2(30)
);

CREATE OR REPLACE TRIGGER ddl_audit_tr
AFTER DDL ON SCHEMA
BEGIN
    INSERT INTO ddl_audit
    VALUES (SYSDATE,
            sys_context('USERENV','CURRENT_USER'),
            ora_dict_obj_type,
            ora_dict_obj_name,
            ora_sysevent);
END;
/
```

Script Output

Task completed in 0.038 seconds

```
Table DDL_AUDIT created.


Trigger DDL_AUDIT_TR compiled
```

- Create a DDL trigger that prohibits any user from altering or dropping a specific critical table.

Welcome Page | hr

Worksheet | Query Builder

```
CREATE OR REPLACE TRIGGER protect_table
BEFORE DROP OR ALTER ON SCHEMA
BEGIN
    IF ora_dict_obj_name = 'EMPLOYEES' THEN
        RAISE_APPLICATION_ERROR(-20002, 'Cannot modify EMPLOYEES table');
    END IF;
END;
/
```

Script Output

Task completed in 0.035 seconds

```
Trigger PROTECT_TABLE compiled
```

- Create a DDL trigger that prevents the creation of new tables with a specific naming pattern.

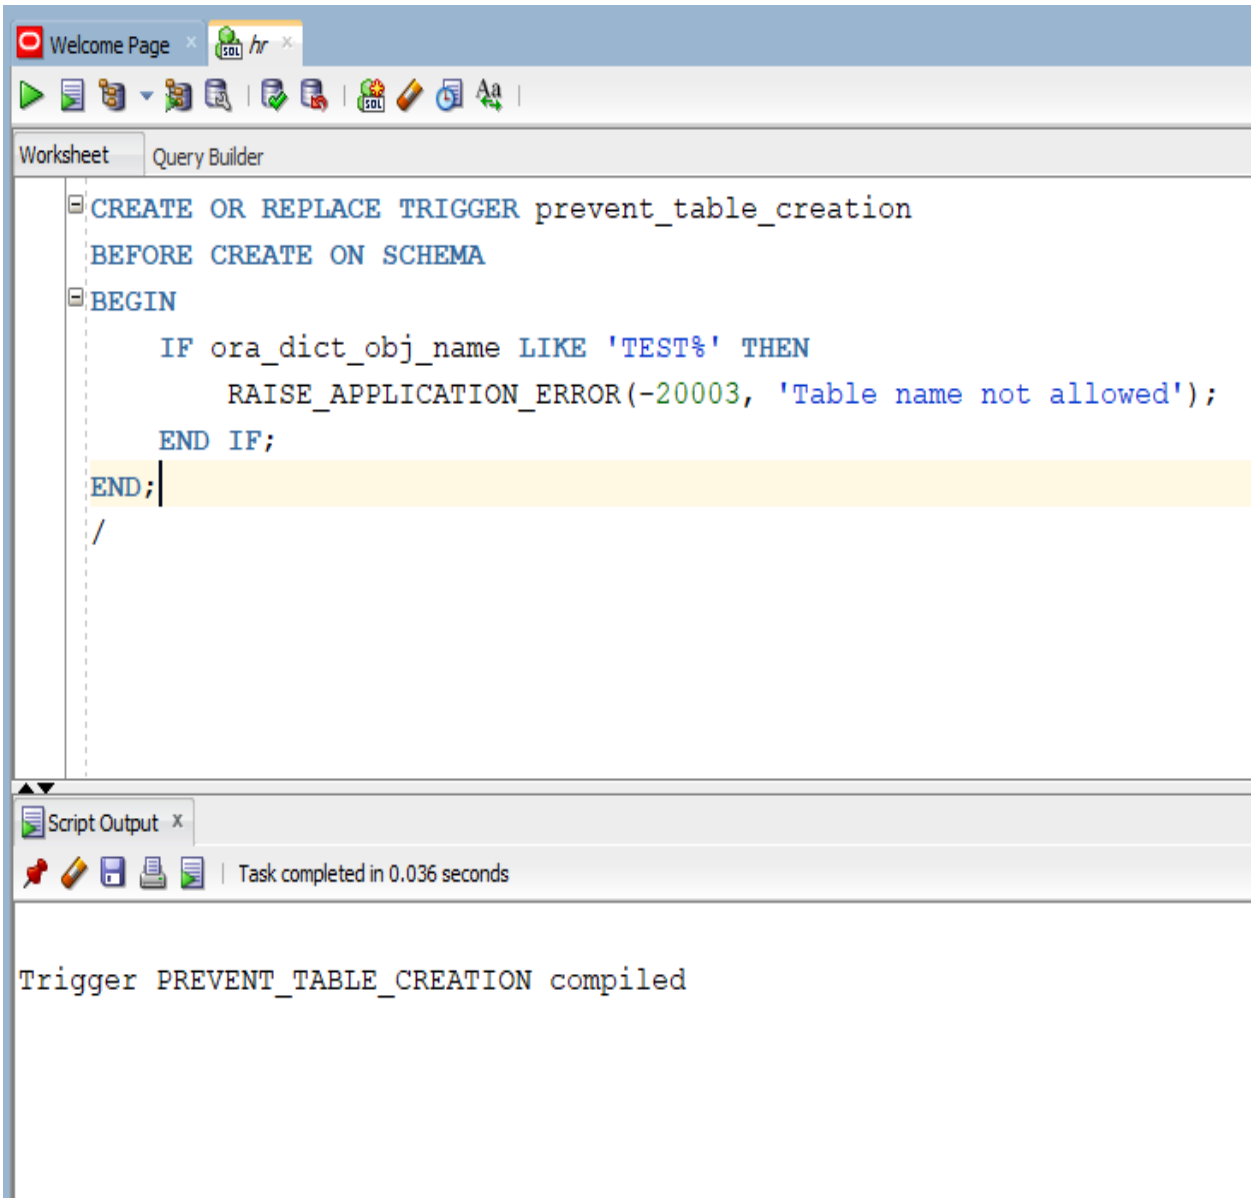

System/Database Trigger Task

- Create a system trigger that captures information when a user logs in.

Welcome Page | hr

Worksheet | Query Builder

```
CREATE TABLE login_audit (
    user_name VARCHAR2(30),
    login_time DATE
);

CREATE OR REPLACE TRIGGER login_tr
AFTER LOGON ON SCHEMA
BEGIN
    INSERT INTO login_audit
    VALUES (USER, SYSDATE);
END;
/
```

Script Output | Task completed in 0.035 seconds

```
Table LOGIN_AUDIT created.


Trigger LOGIN_TR compiled
```

- Create a system trigger that sends an email notification to the DBA whenever a user with specific privileges logs in.

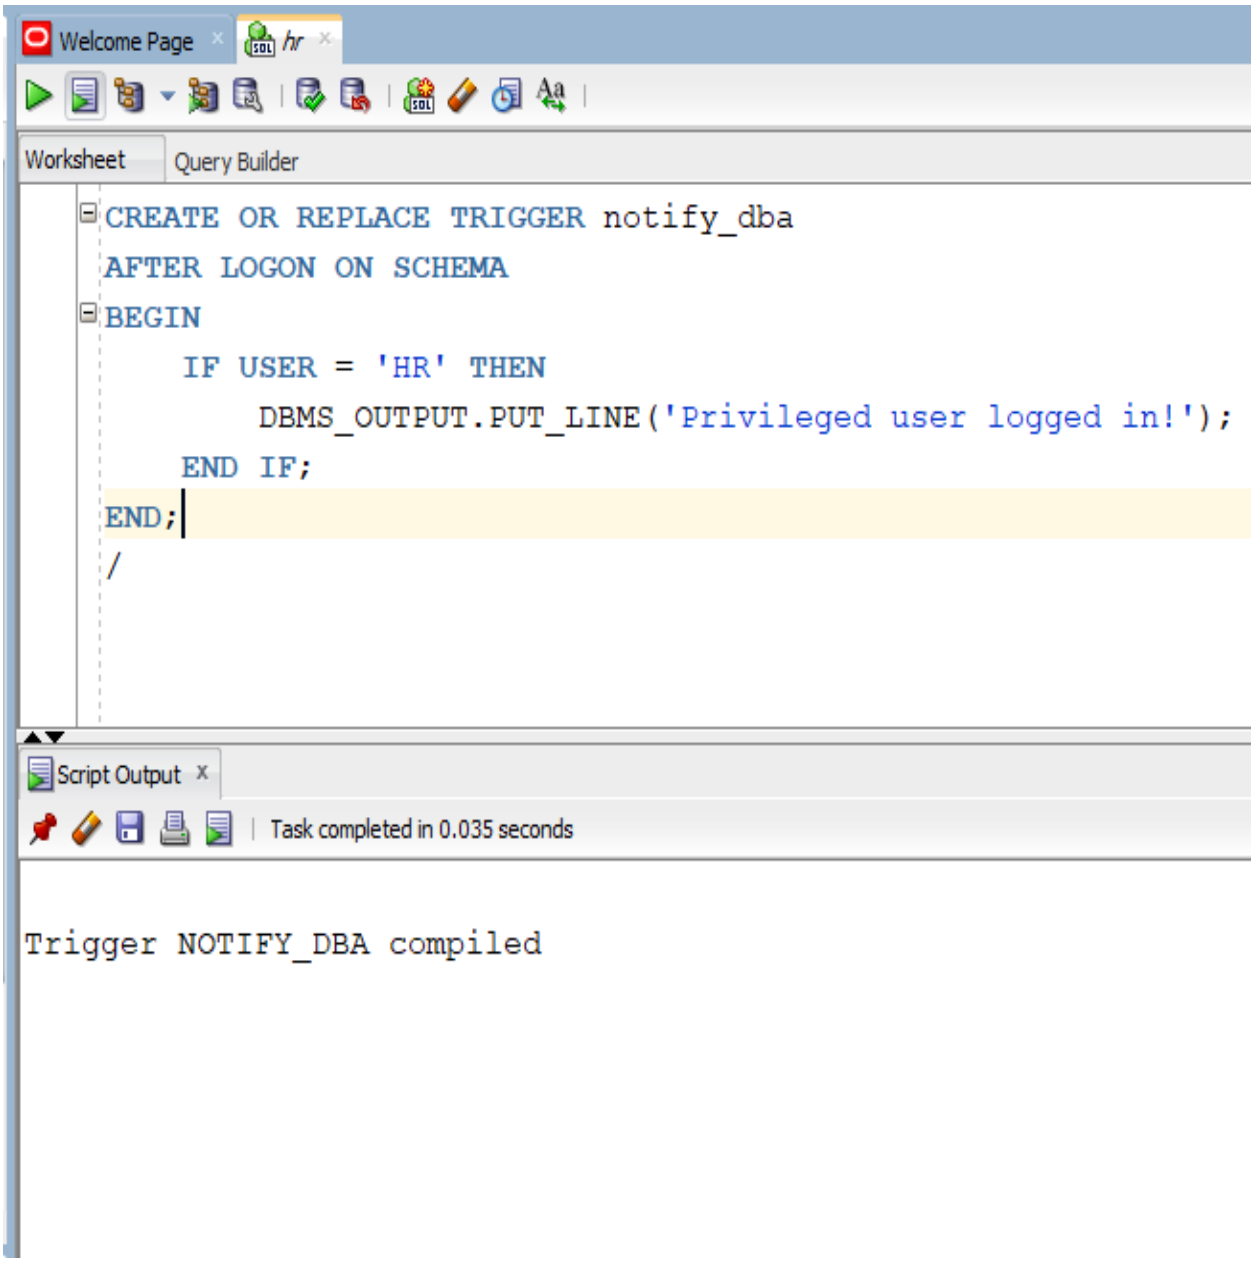

- Create a system trigger that automatically sets the session time zone for all users upon login.

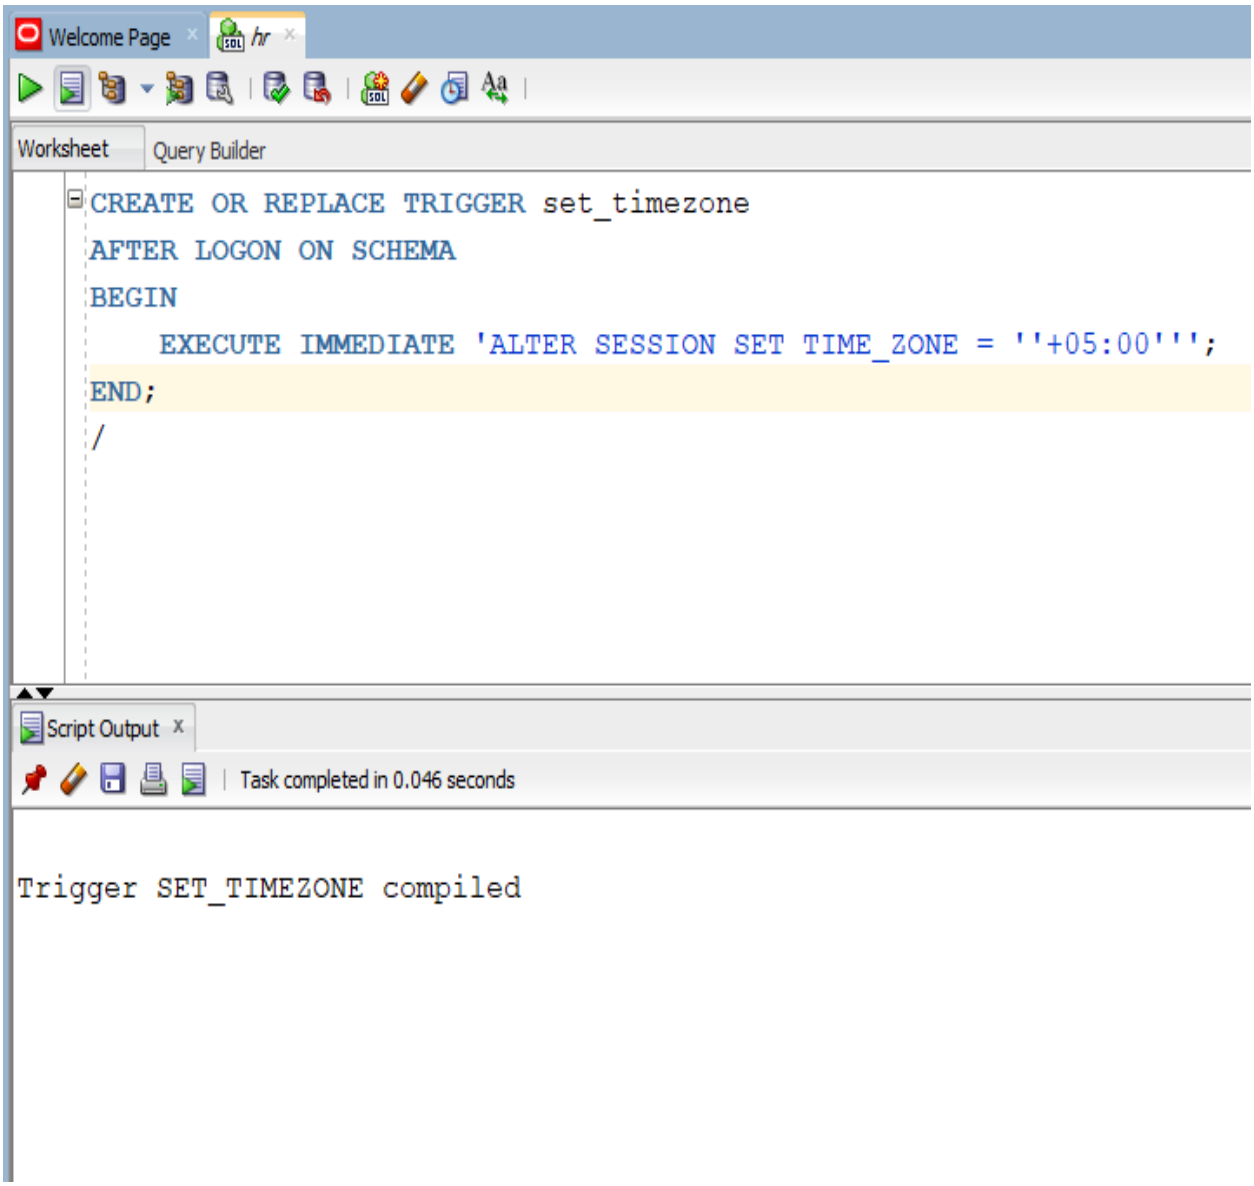

Instead of Trigger Task

- Create an "Instead of" trigger for a view that allows inserting data into multiple tables when an insert operation is performed on the view.

```
CREATE TABLE trainer (
    full_name VARCHAR2(30)
);

CREATE TABLE subject (
    subject_name VARCHAR2(30)
);


CREATE VIEW trainer_view AS
SELECT t.full_name, s.subject_name
FROM trainer t, subject s;



CREATE OR REPLACE TRIGGER insert_view_tr
INSTEAD OF INSERT ON trainer_view
FOR EACH ROW
BEGIN
    INSERT INTO trainer VALUES (:NEW.full_name);
    INSERT INTO subject VALUES (:NEW.subject_name);
END;
/
```

Script Output

Task completed in 0.048 seconds

```
Table TRAINER created.


Table SUBJECT created.


View TRAINER_VIEW created.


Trigger INSERT_VIEW_TR compiled
```

- Create an "Instead of" trigger for a view that allows users to update records in a way that calculates and updates a computed column.

Welcome Page | hr

Worksheet | Query Builder

```
CREATE OR REPLACE TRIGGER update_view_tr
INSTEAD OF UPDATE ON trainer_view
FOR EACH ROW
BEGIN
    UPDATE trainer
    SET full_name = :NEW.full_name
    WHERE full_name = :OLD.full_name;

    UPDATE subject
    SET subject_name = :NEW.subject_name
    WHERE subject_name = :OLD.subject_name;
END;
/
```

Script Output

Task completed in 0.039 seconds

```
Trigger UPDATE_VIEW_TR compiled
```
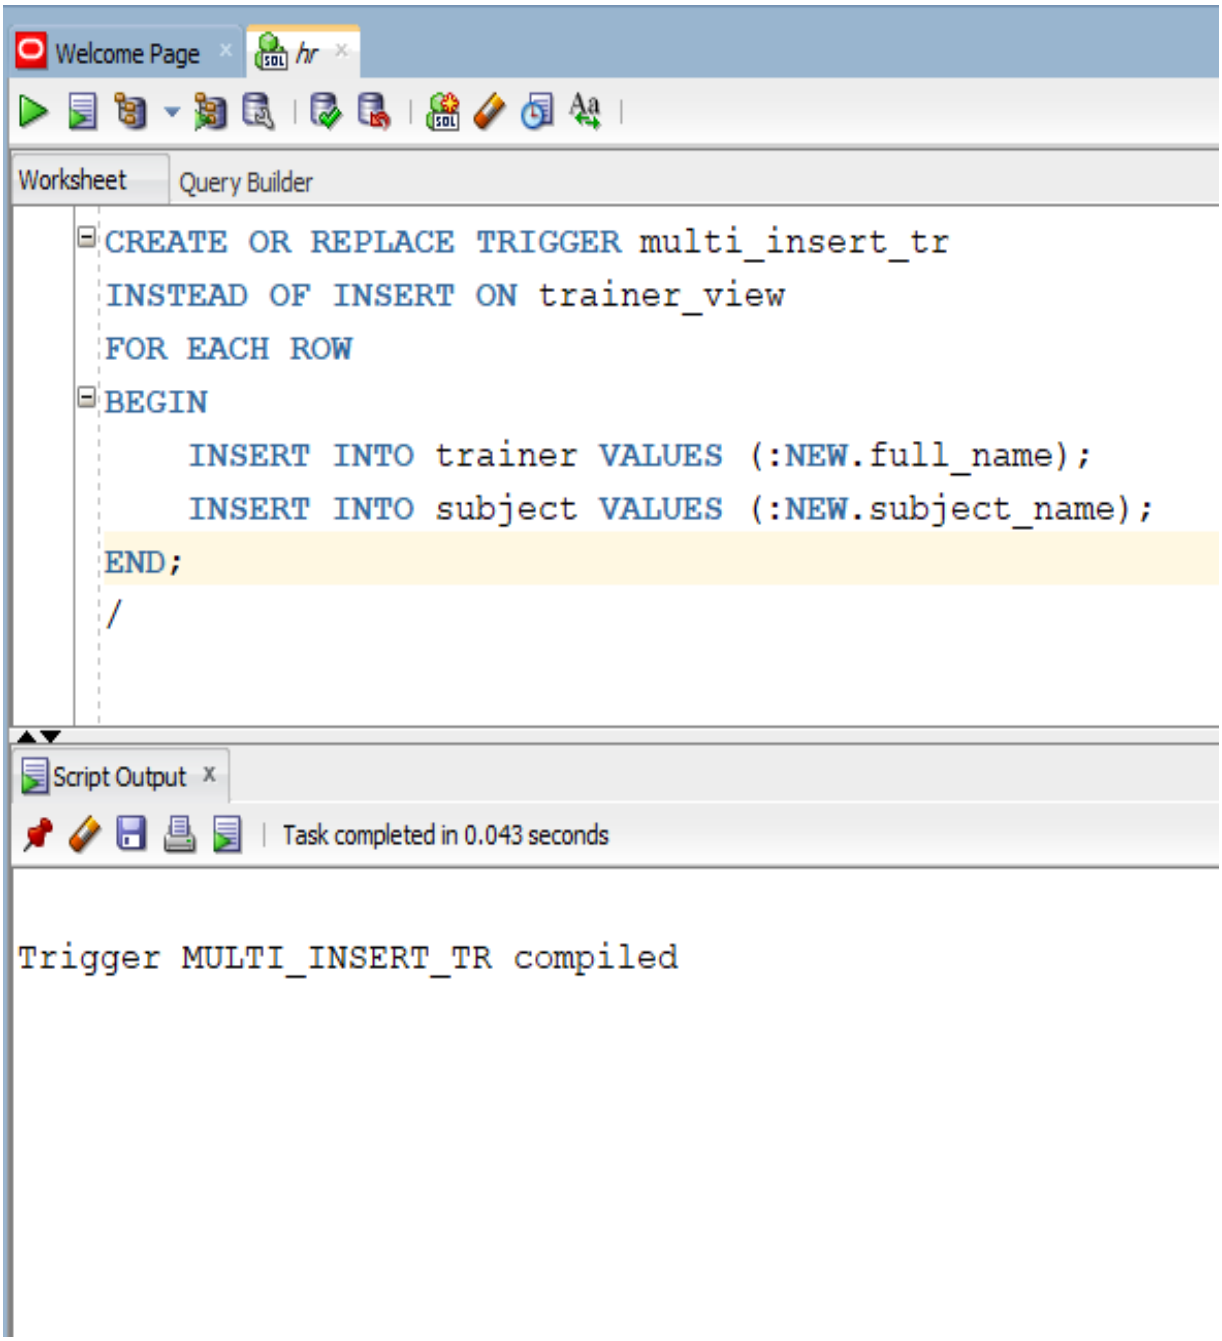
- Create an "Instead of" trigger for a view that allows users to insert records into multiple related tables through a single view.