


DataBase Lab 10 (In-Lab Task)

Muhammad Ghulam Mujtaba Qureshi
24k-0535

Task 1

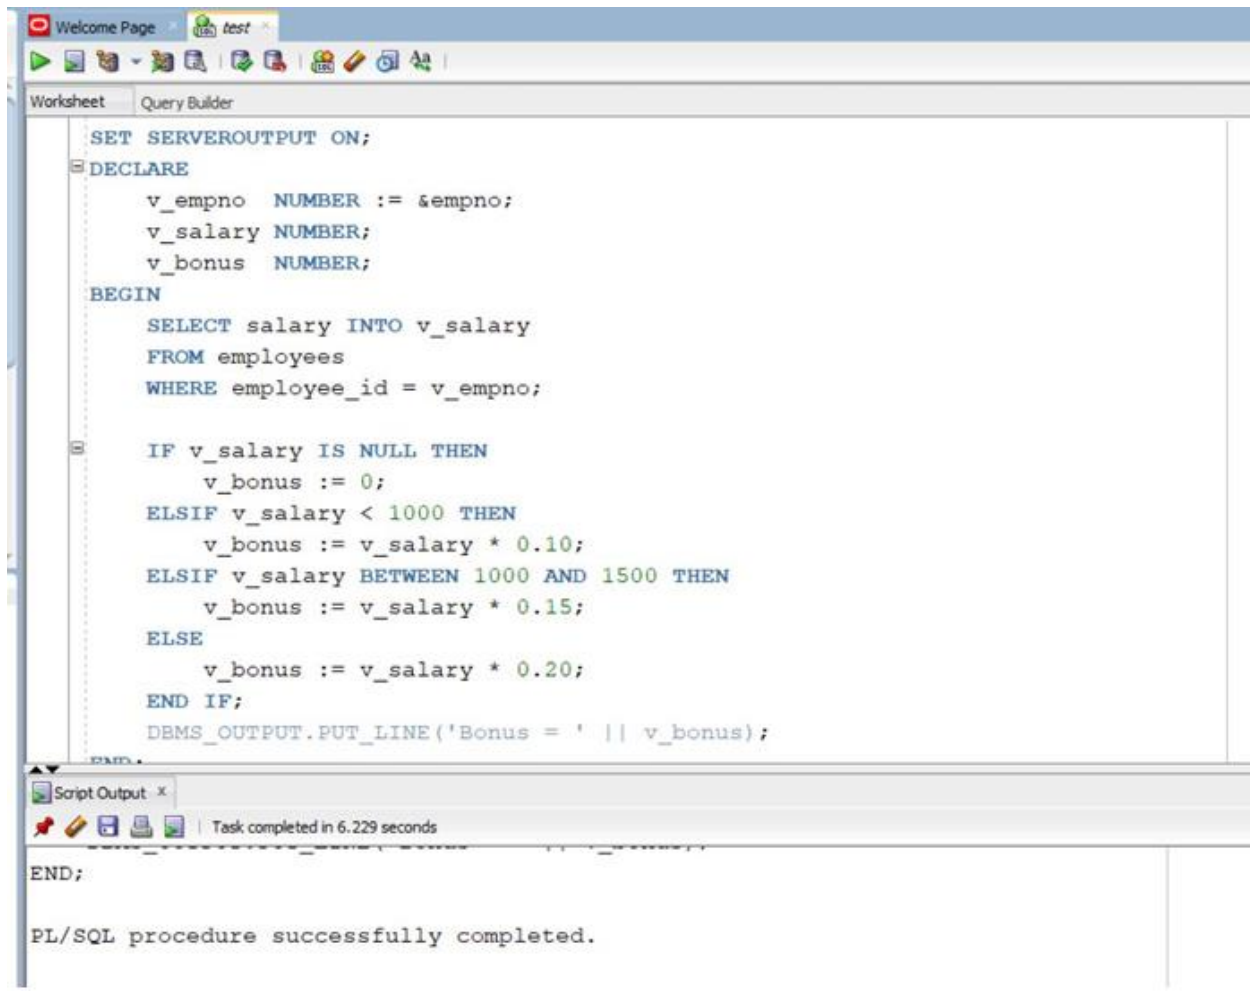

```
SET SERVEROUTPUT ON;

DECLARE
    v_empno NUMBER := &empno;
    v_salary NUMBER;
    v_bonus NUMBER;
BEGIN
    SELECT salary INTO v_salary
    FROM employees
    WHERE employee_id = v_empno;

    IF v_salary IS NULL THEN
        v_bonus := 0;
    ELSIF v_salary < 1000 THEN
        v_bonus := v_salary * 0.10;
    ELSIF v_salary BETWEEN 1000 AND 1500 THEN
        v_bonus := v_salary * 0.15;
    ELSE
        v_bonus := v_salary * 0.20;
    END IF;
    DBMS_OUTPUT.PUT_LINE('Bonus = ' || v_bonus);
END;
```


Script Output x

Task completed in 6.229 seconds

END;

PL/SQL procedure successfully completed.

Task 2

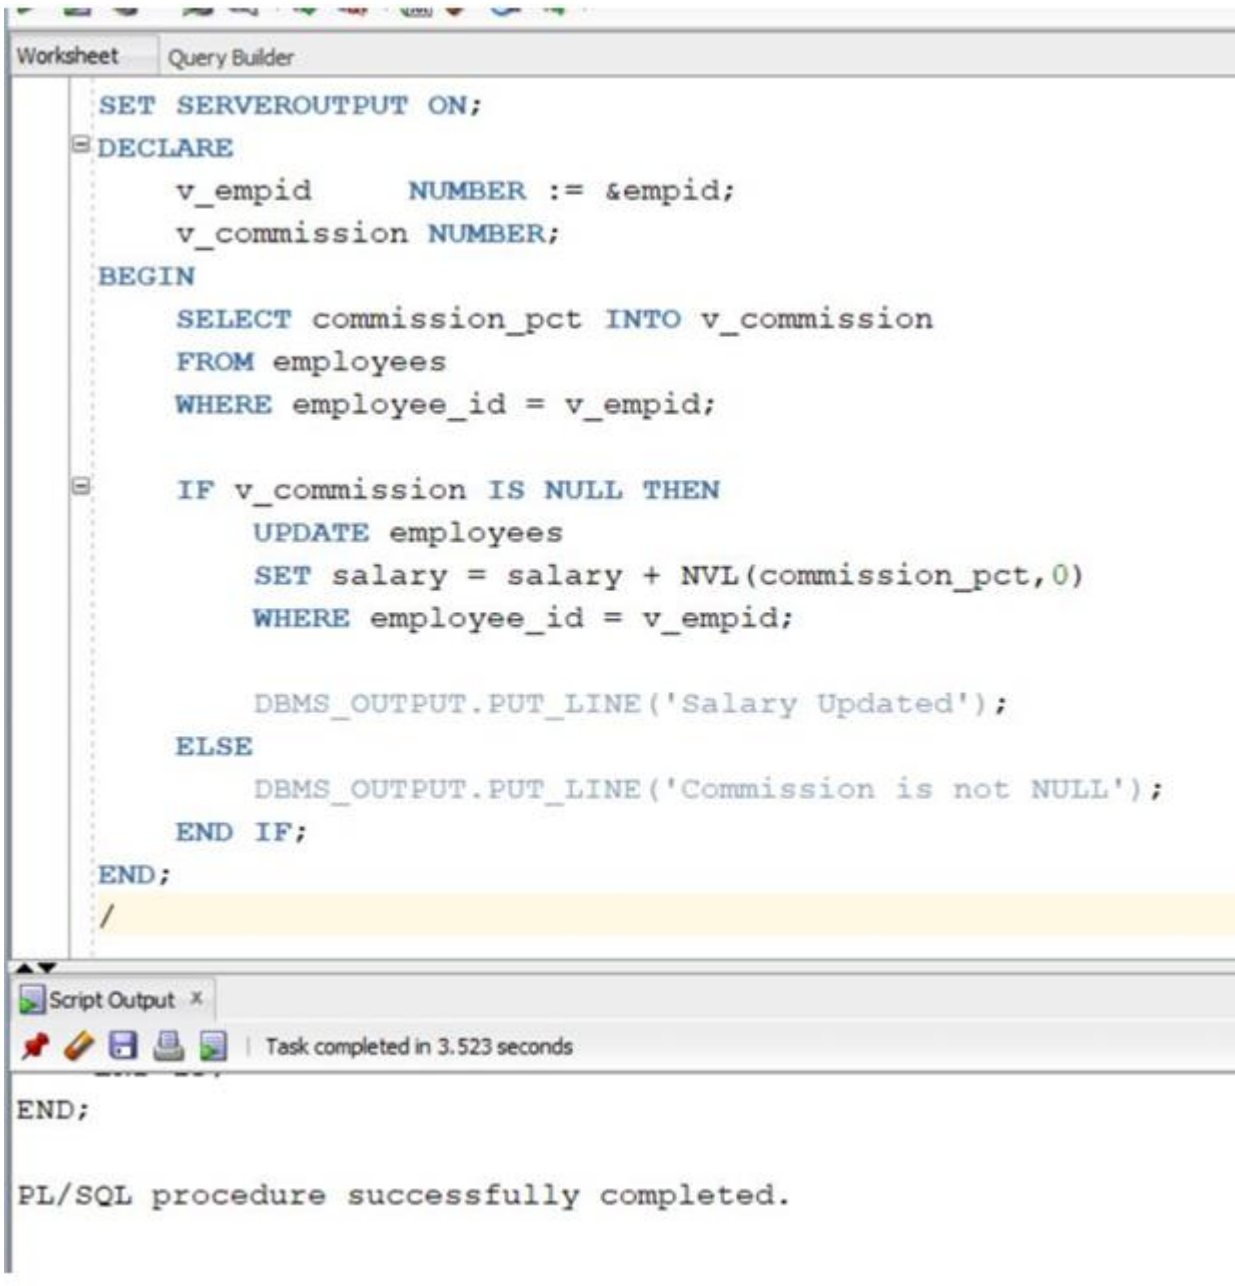

The screenshot shows a SQL query editor window with a 'Worksheet' tab and a 'Query Builder' tab. The main area contains a PL/SQL procedure. The procedure starts with 'SET SERVEROUTPUT ON;', followed by a 'DECLARE' section with two variables: 'v_empid' of type 'NUMBER' assigned to '&empid;', and 'v_commission' of type 'NUMBER;'. The 'BEGIN' section contains a 'SELECT' statement to fetch 'commission_pct' into 'v_commission' from the 'employees' table where 'employee_id' equals 'v_empid'. An 'IF' statement checks if 'v_commission' is NULL. If true, it updates the 'salary' of the employee by adding 'NVL(commission_pct, 0)' and outputs 'Salary Updated'. If false, it outputs 'Commission is not NULL'. The procedure ends with 'END IF;', 'END;', and a forward slash on a highlighted line. Below the editor, a 'Script Output' window shows the message 'Task completed in 3.523 seconds'. At the bottom of the main window, the text 'END;' and 'PL/SQL procedure successfully completed.' is visible.

```
SET SERVEROUTPUT ON;
DECLARE
    v_empid      NUMBER := &empid;
    v_commission NUMBER;
BEGIN
    SELECT commission_pct INTO v_commission
    FROM employees
    WHERE employee_id = v_empid;

    IF v_commission IS NULL THEN
        UPDATE employees
        SET salary = salary + NVL(commission_pct, 0)
        WHERE employee_id = v_empid;

        DBMS_OUTPUT.PUT_LINE('Salary Updated');
    ELSE
        DBMS_OUTPUT.PUT_LINE('Commission is not NULL');
    END IF;
END;
/
```


Script Output x

Task completed in 3.523 seconds

END;

PL/SQL procedure successfully completed.

Task 3

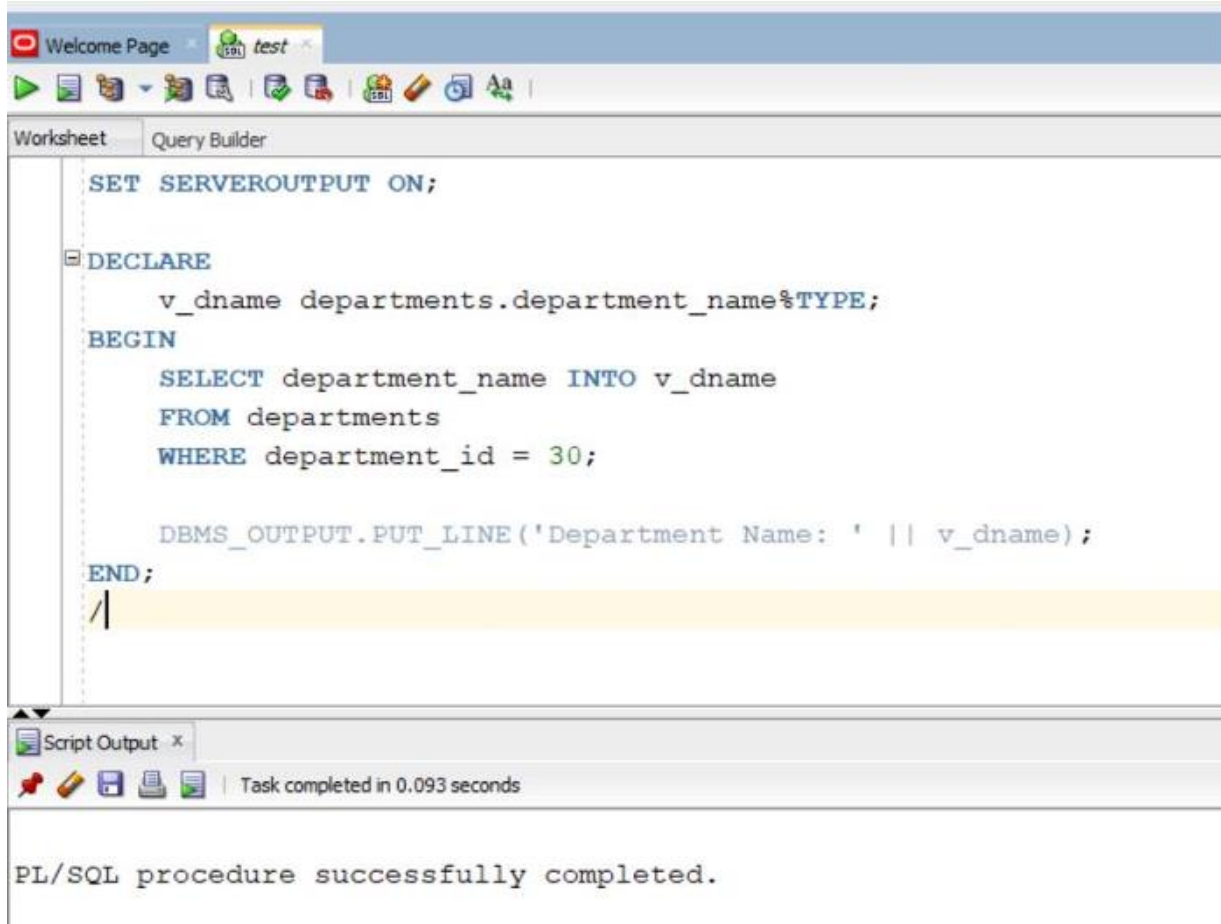

The screenshot displays the Oracle SQL Developer environment. The top toolbar includes icons for running, saving, and editing. The 'Query Builder' tab is active, showing a PL/SQL script. The script defines a variable `v_dname` of type `departments.department_name`, selects the department name for department ID 30, and outputs it using `DBMS_OUTPUT.PUT_LINE`. The script is enclosed in a `DECLARE` block and ends with `END;` and a forward slash. Below the script editor, the 'Script Output' window shows the message 'Task completed in 0.093 seconds' and 'PL/SQL procedure successfully completed.'

```
SET SERVEROUTPUT ON;

DECLARE
    v_dname departments.department_name%TYPE;
BEGIN
    SELECT department_name INTO v_dname
    FROM departments
    WHERE department_id = 30;

    DBMS_OUTPUT.PUT_LINE('Department Name: ' || v_dname);
END;
/
```

Script Output x

Task completed in 0.093 seconds

PL/SQL procedure successfully completed.

Task 4

The screenshot shows the SQL Developer Query Builder interface. The top tab is 'Worksheet'. The main area contains the following PL/SQL code:

```
CREATE OR REPLACE PROCEDURE job_nature(p_deptno NUMBER)
IS
    v_job employees.job_id%TYPE;
BEGIN
    SELECT job_id INTO v_job
    FROM employees
    WHERE department_id = p_deptno AND ROWNUM = 1;

    DBMS_OUTPUT.PUT_LINE('Job Nature: ' || v_job);
END;
```

The code is enclosed in a yellow highlight. Below the code editor, there is a 'Script Output' window showing the message: 'Task completed in 0.373 seconds'.

Procedure JOB_NATURE compiled

Task 5

The screenshot shows the SQL Developer Query Builder interface. The top tab is 'Worksheet'. The main area contains the following PL/SQL code:

```
CREATE OR REPLACE PROCEDURE find_salary(p_deptno NUMBER)
IS
    v_salary employees.salary%TYPE;
BEGIN
    SELECT salary INTO v_salary
    FROM employees
    WHERE department_id = p_deptno AND ROWNUM = 1;

    DBMS_OUTPUT.PUT_LINE('Salary: ' || v_salary);
END;
```

The code is enclosed in a yellow highlight. Below the code editor, there is a 'Script Output' window showing the message: 'Task completed in 0.051 seconds'.

Procedure FIND_SALARY compiled

Task 6

The screenshot shows the SQL Developer interface with the 'Query Builder' tab active. The main window displays the following SQL code:

```
CREATE OR REPLACE PROCEDURE increase_salary(p_empno NUMBER)
IS
BEGIN
    UPDATE employees
    SET salary = salary * 1.10
    WHERE employee_id = p_empno;

    DBMS_OUTPUT.PUT_LINE('Salary Updated Successfully');
END;
/
```

The 'Script Output' window at the bottom shows the message: 'Task completed in 0.088 seconds' and 'Procedure INCREASE_SALARY compiled'.

Task 7

The screenshot shows the SQL Developer interface with the 'Query Builder' tab active. The main window displays the following SQL code:

```
CREATE OR REPLACE PROCEDURE bonus_update(p_deptno NUMBER)
IS
BEGIN
    UPDATE employees
    SET salary = salary + 1000
    WHERE department_id = p_deptno
    AND salary > 5000;

    DBMS_OUTPUT.PUT_LINE('Salaries Updated');
END;
/
```

The 'Script Output' window at the bottom shows the message: 'Task completed in 0.104 seconds' and 'Procedure INCREASE_SALARY compiled'.

Below the script output, the message 'Procedure BONUS_UPDATE compiled' is displayed.
