

Cucumber Report

Feb 15, 2022 8:40:30 AM

Start : Feb 15, 8:40:26.942 AM

End : Feb 15, 8:40:28.544 AM

Duration : 1.602 s

Features




Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 5

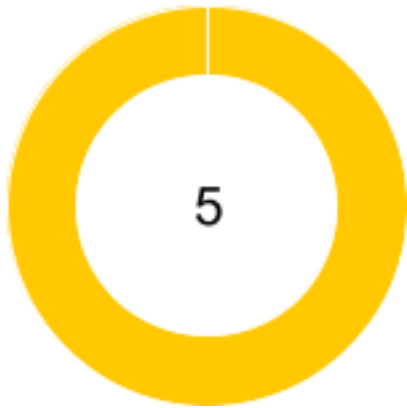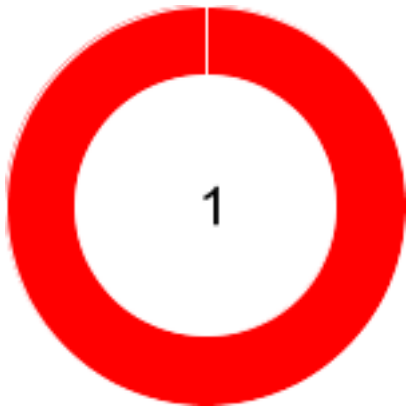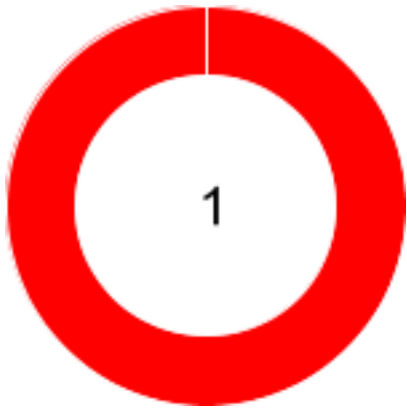





#	Feature Name	T	P	F	S	Duration
1	User should be able to login	1	0	1	0	1.602 s

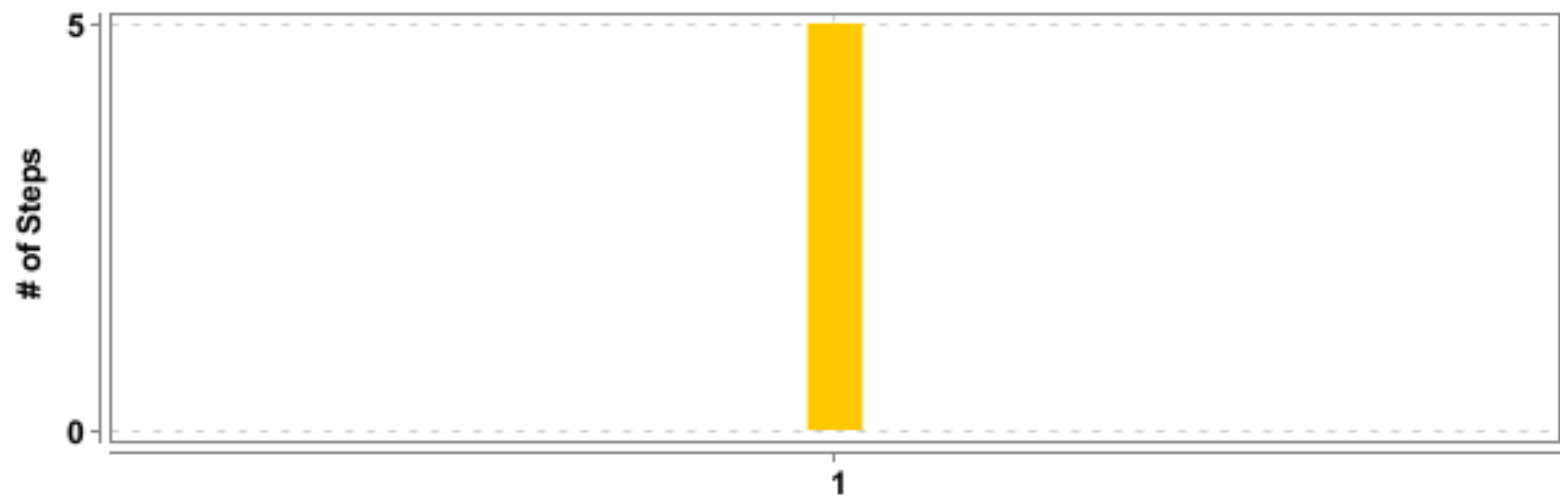



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	User should be able to login	User should login with valid credentials	5	0	0	5	1.590 s

(F)- User should be able to login

FAILED	DURATION - 1.602 s	Scenarios		Steps	
/ 8:40:26.942 AM // 8:40:28.544 AM /		Total - 1		Total - 5	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 5	

(S)- User should login with valid credentials
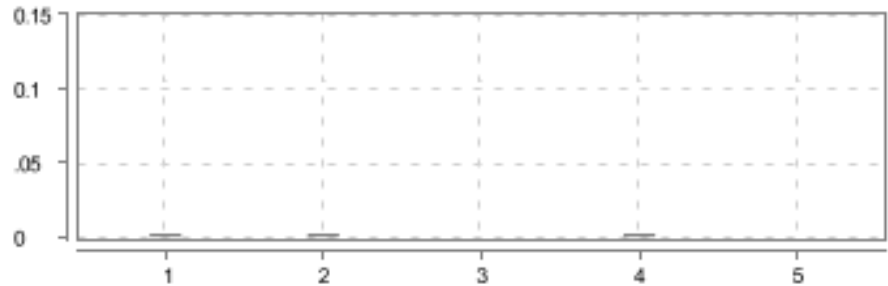
<div>FAILED</div> <div>DURATION - 1.590 s</div>		<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 5</div>	
<div>/ 8:40:26.954 AM // 8:40:28.544 AM /</div>			
<div>User should be able to login</div>			
<div>@Smoke</div>			

#	Step / Hook Details	Status	Duration
	BEFORE - Hooks.Hooks.startBrowser() java.lang.NoClassDefFoundError: org/openqa/selenium/devtools/HasDevTools at java.lang.ClassLoader.defineClass1(Native Method) at java.lang.ClassLoader.defineClass(ClassLoader.java:763) at java.security.SecureClassLoader.defineClass(SecureClassLoader.java:142) at java.net.URLClassLoader.defineClass(URLClassLoader.java:468) at java.net.URLClassLoader.access\$100(URLClassLoader.java:74) at java.net.URLClassLoader\$1.run(URLClassLoader.java:369) at java.net.URLClassLoader\$1.run(URLClassLoader.java:363) at java.security.AccessController.doPrivileged(Native Method) at java.net.URLClassLoader.findClass(URLClassLoader.java:362) at java.lang.ClassLoader.loadClass(ClassLoader.java:424) at sun.misc.Launcher\$AppClassLoader.loadClass(Launcher.java:349) at java.lang.ClassLoader.loadClass(ClassLoader.java:357) at java.lang.ClassLoader.defineClass1(Native Method) at java.lang.ClassLoader.defineClass(ClassLoader.java:763) at java.security.SecureClassLoader.defineClass(SecureClassLoader.java:142) at java.net.URLClassLoader.defineClass(URLClassLoader.java:468) at java.net.URLClassLoader.access\$100(URLClassLoader.java:74)	FAILED	1.542 s

#	Step / Hook Details	Status	Duration
	<p>at java.net.URLClassLoader\$1.run(URLClassLoader.java:369) at java.net.URLClassLoader\$1.run(URLClassLoader.java:363) at java.security.AccessController.doPrivileged(Native Method) at java.net.URLClassLoader.findClass(URLClassLoader.java:362) at java.lang.ClassLoader.loadClass(ClassLoader.java:424) at sun.misc.Launcher\$AppClassLoader.loadClass(Launcher.java:349) at java.lang.ClassLoader.loadClass(ClassLoader.java:357) at factory.BrowserFactory.init_driver(BrowserFactory.java:20) at Hooks.Hooks.startBrowser(Hooks.java:25)</p> <p>Caused by: java.lang.ClassNotFoundException: org.openqa.selenium.devtools.HasDevTools at java.net.URLClassLoader.findClass(URLClassLoader.java:382) at java.lang.ClassLoader.loadClass(ClassLoader.java:424) at sun.misc.Launcher\$AppClassLoader.loadClass(Launcher.java:349) at java.lang.ClassLoader.loadClass(ClassLoader.java:357) at java.lang.ClassLoader.defineClass1(Native Method) at java.lang.ClassLoader.defineClass(ClassLoader.java:763) at java.security.SecureClassLoader.defineClass(SecureClassLoader.java:142) at java.net.URLClassLoader.defineClass(URLClassLoader.java:468) at java.net.URLClassLoader.access\$100(URLClassLoader.java:74) at java.net.URLClassLoader\$1.run(URLClassLoader.java:369) at java.net.URLClassLoader\$1.run(URLClassLoader.java:363) at java.security.AccessController.doPrivileged(Native Method) at java.net.URLClassLoader.findClass(URLClassLoader.java:362) at java.lang.ClassLoader.loadClass(ClassLoader.java:424) at sun.misc.Launcher\$AppClassLoader.loadClass(Launcher.java:349) at java.lang.ClassLoader.loadClass(ClassLoader.java:357) at java.lang.ClassLoader.defineClass1(Native Method) at java.lang.ClassLoader.defineClass(ClassLoader.java:763) at java.security.SecureClassLoader.defineClass(SecureClassLoader.java:142) at java.net.URLClassLoader.defineClass(URLClassLoader.java:468) at java.net.URLClassLoader.access\$100(URLClassLoader.java:74) at java.net.URLClassLoader\$1.run(URLClassLoader.java:369) at java.net.URLClassLoader\$1.run(URLClassLoader.java:363) at java.security.AccessController.doPrivileged(Native Method) at java.net.URLClassLoader.findClass(URLClassLoader.java:362) at java.lang.ClassLoader.loadClass(ClassLoader.java:424) at sun.misc.Launcher\$AppClassLoader.loadClass(Launcher.java:349) at java.lang.ClassLoader.loadClass(ClassLoader.java:357) at factory.BrowserFactory.init_driver(BrowserFactory.java:20) at Hooks.Hooks.startBrowser(Hooks.java:25) at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)</p>		

#	Step / Hook Details	Status	Duration
	at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.lang.reflect.Method.invoke(Method.java:498) at io.cucumber.java.Invoker.invoke(Invoker.java:27) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:61) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:31) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:20) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:64) at io.cucumber.core.runner.TestStep.run(TestStep.java:49) at io.cucumber.core.runner.TestCase.run(TestCase.java:47) at io.cucumber.core.runner.Runner.runPickle(Runner.java:66) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:149) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:83) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:24) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:185) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:83) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:219) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.apache.maven.surefire.junit4.JUnit4Provider.execute(JUnit4Provider.java:364) at org.apache.maven.surefire.junit4.JUnit4Provider.executeWithRerun(JUnit4Provider.java:272) at org.apache.maven.surefire.junit4.JUnit4Provider.executeTestSet(JUnit4Provider.java:237) at org.apache.maven.surefire.junit4.JUnit4Provider.invoke(JUnit4Provider.java:158) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:428) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:162) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:562) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:548)		
1	Given Application is up and running and validated	SKIPPED	0.001 s
2	When user enter username as "Admin"	SKIPPED	0.001 s
3	And user enter password as "admin123"	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
4	And user click on login button	SKIPPED	0.001 s
5	Then user should be able to see dashboard	SKIPPED	0.000 s
	AFTER - Hooks.Hooks.closeBrowser()	FAILED	0.001 s
	java.lang.NullPointerException at Hooks.Hooks.closeBrowser(Hooks.java:31)		