


Histogram Analysis

- ❑ Divide data into buckets and store average (sum) for each bucket
- ❑ Partitioning rules:
 - ❑ Equal-width: equal bucket range
 - ❑ Equal-frequency (or equal-depth)

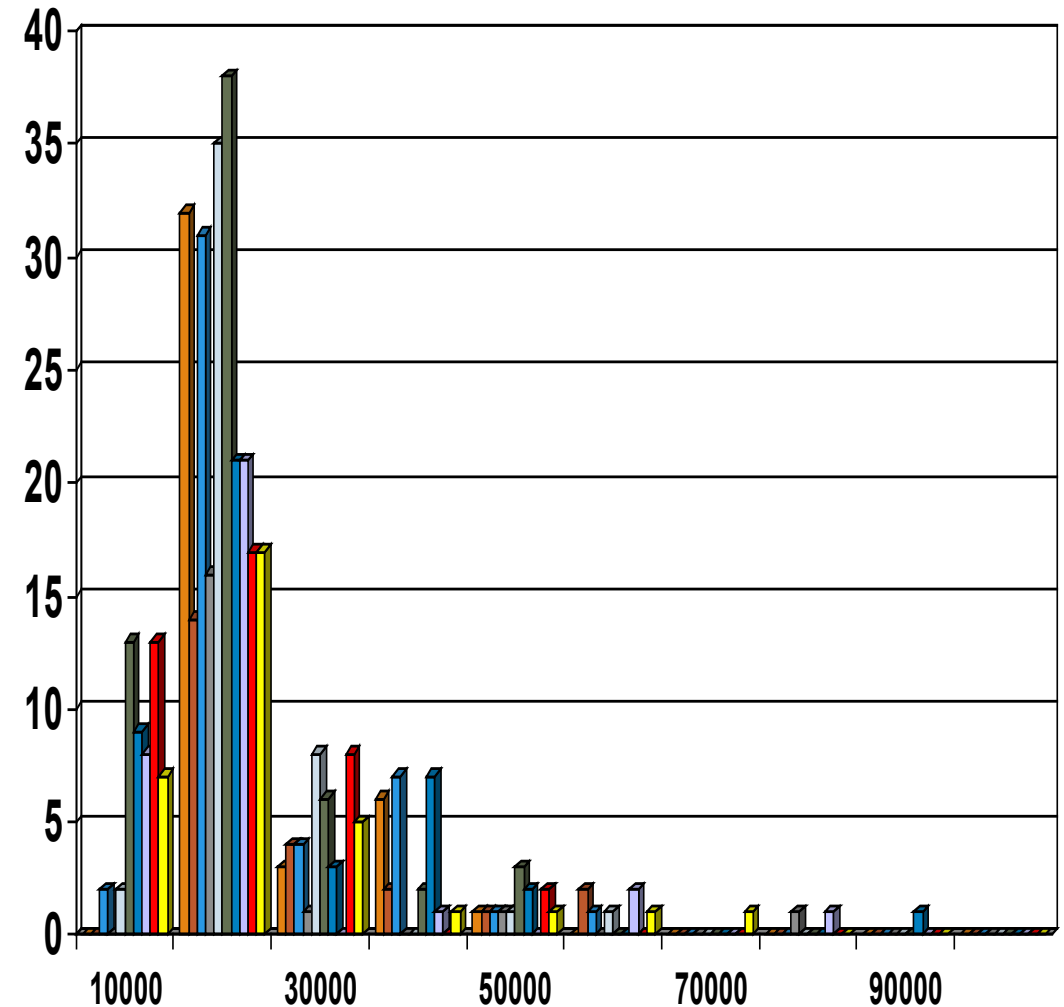

Clustering

- ❑ Partition data set into clusters based on similarity, and store cluster representation (e.g., centroid and diameter) only
- ❑ Can be very effective if data is clustered but not if data is “smeared”
- ❑ Can have hierarchical clustering and be stored in multi-dimensional index tree structures
- ❑ There are many choices of clustering definitions and clustering algorithms
- ❑ Cluster analysis will be studied in depth in Chapter 10

