


Five Nice Ideas...

3. Lazy Propagation of Updates

In a sequence, support two operations:

- Get the value of an element at some index
- Set the value of all elements in a range to a common value v

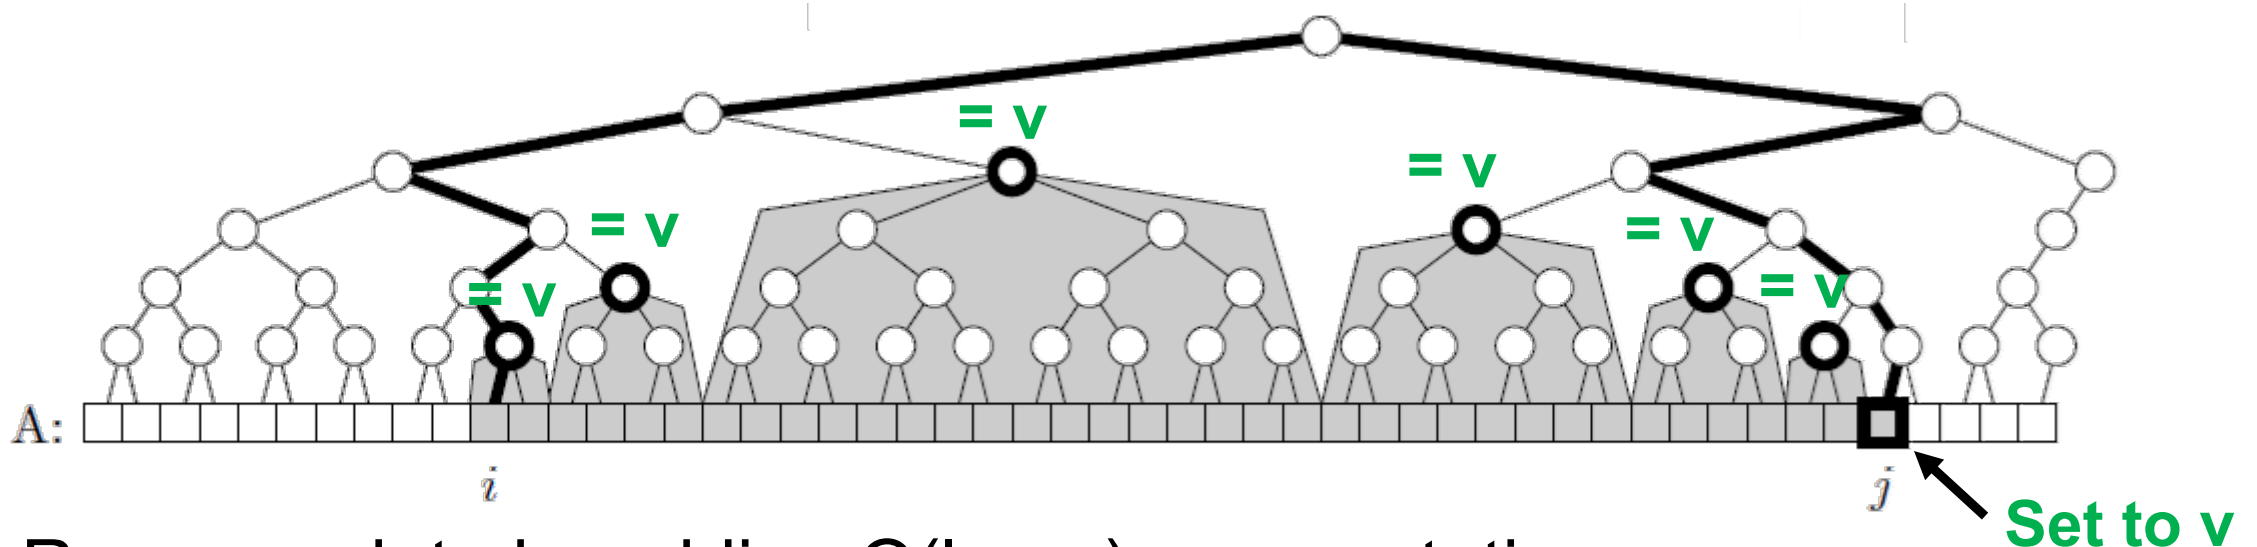

- Range update by adding $O(\log n)$ augmentations.
- However, how do we keep these from conflicting in the future?

Five Nice Ideas...

3. Lazy Propagation of Updates

Annotations?

What Annotations?



- Augmentations that reach the bottom of the tree are actually applied to elements in the underlying array A .
- Same idea applies to sequences stored in a binary search tree...

