


Introduction

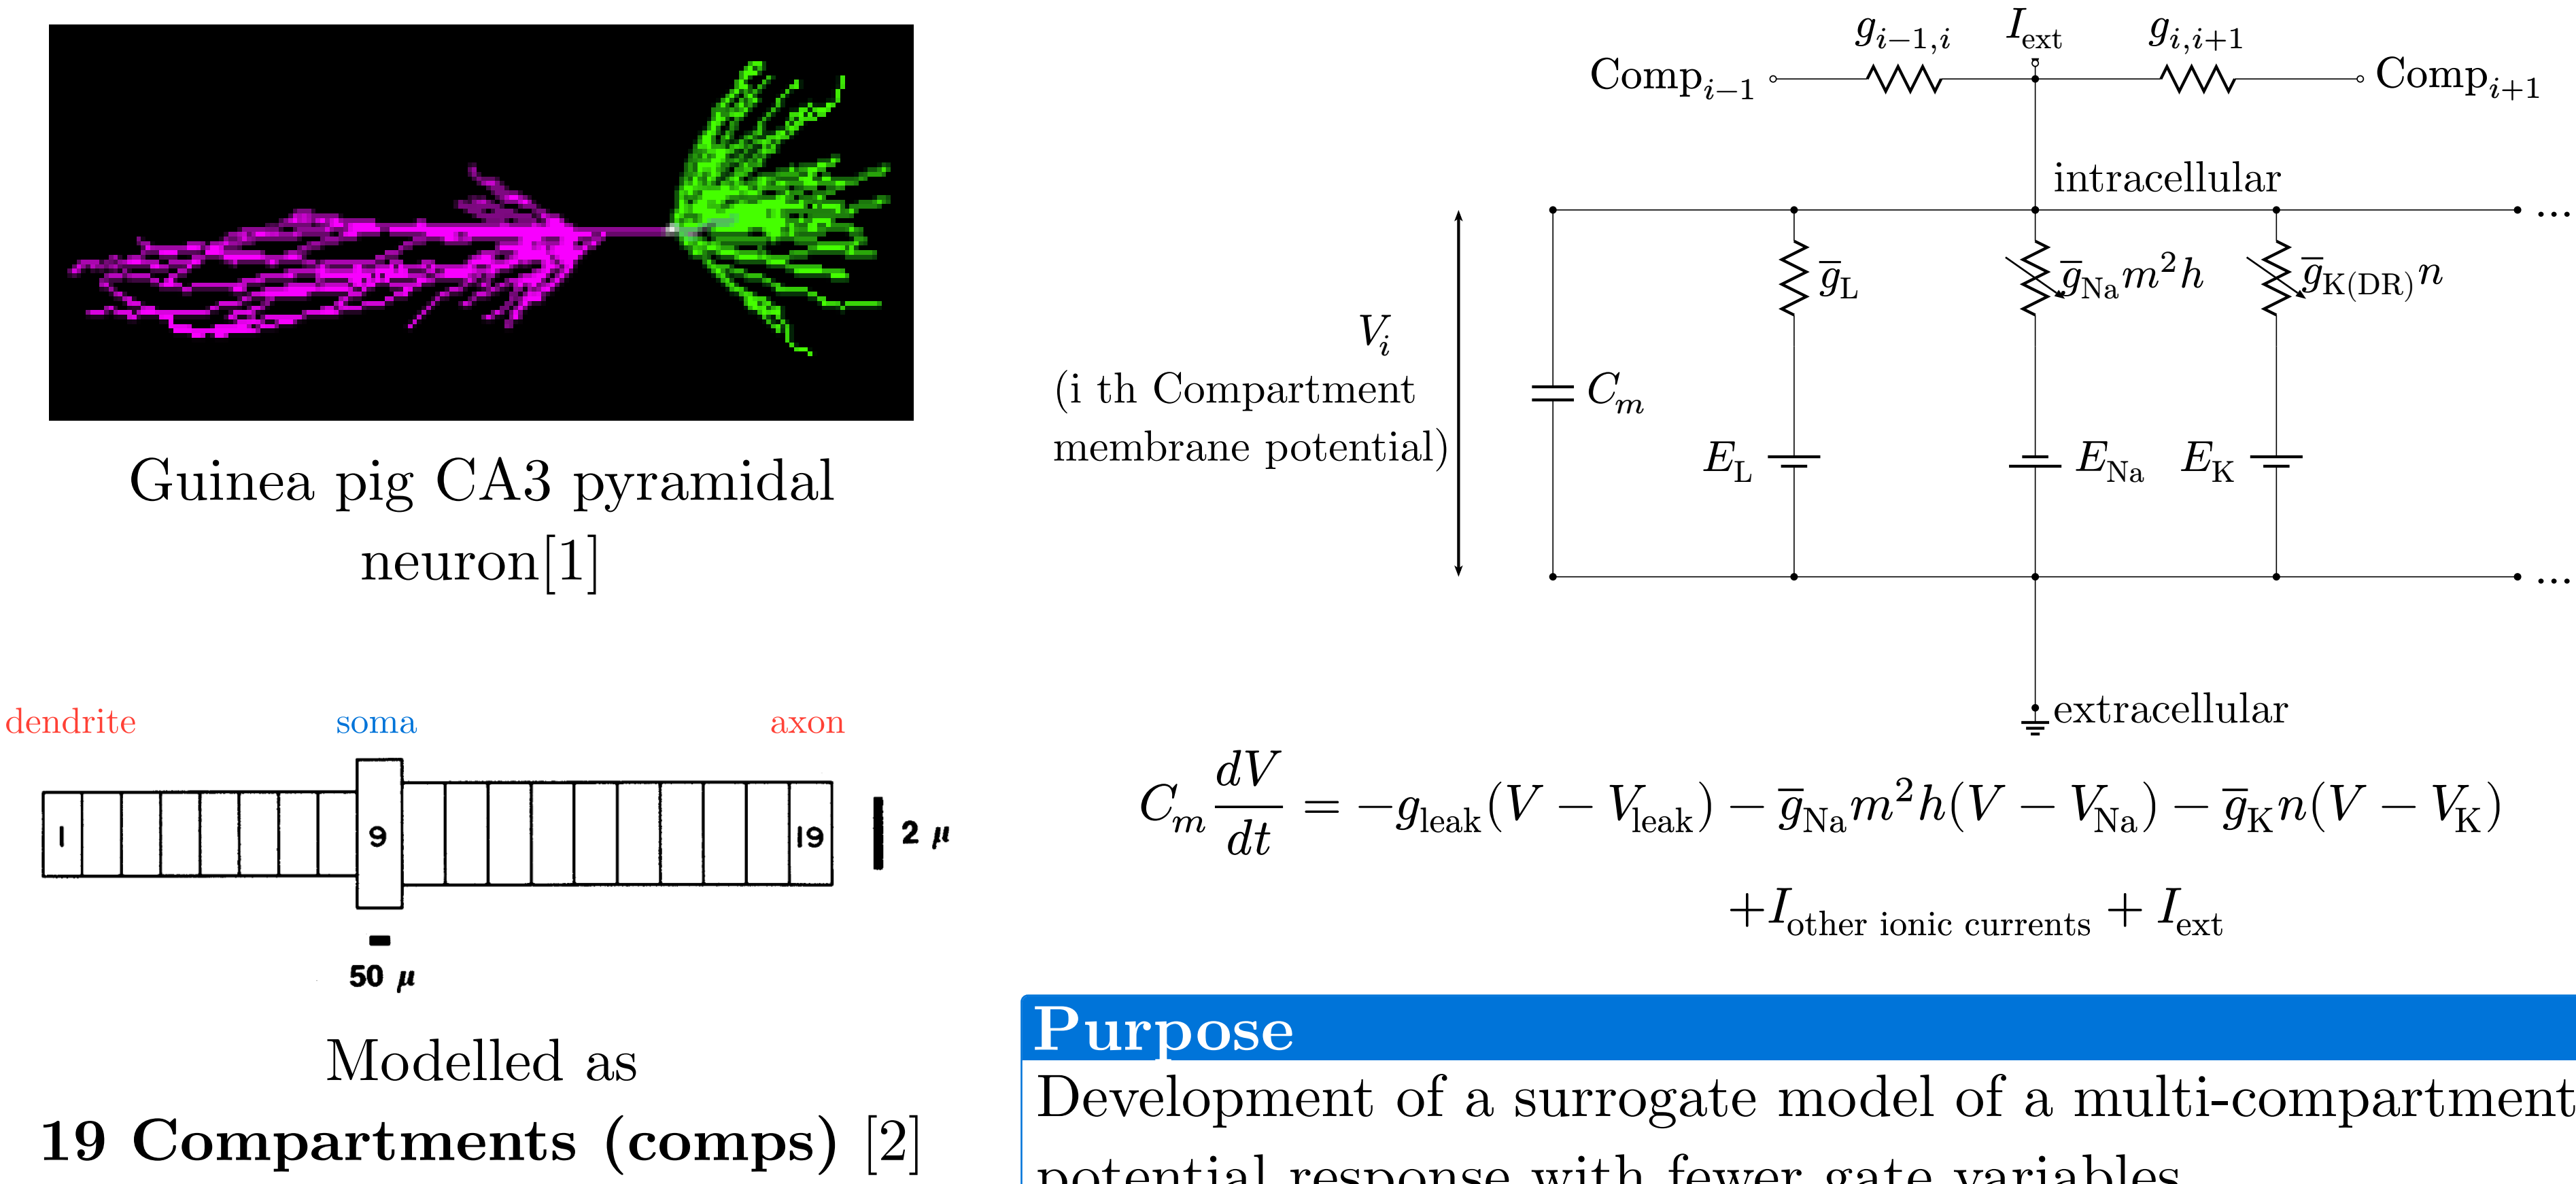


The conductances depend on **gate variables**, which follow ODEs with rate functions α, β :

$$I_{\text{Na}} = \bar{g}_{\text{Na}} m^2 h (V - E_{\text{Na}})$$
$$\frac{dm}{dt} = \alpha_m(V)(1 - m) - \beta_m(V)m$$
$$\alpha_m(V) = 0.32(13.1 - u)/(\exp((13.1 - u)/4) - 1)$$
$$\beta_m(V) = 0.28(u - 40.1)/(\exp((u - 40.1)/5) - 1)$$


→ **11 states (10 gates and V) per comp**
→ **209 states** for 19 comps;
In large scale network simulations, the number of large gate variables becomes a **memory bottleneck**.

Purpose
Development of a surrogate model of a multi-compartment neuron capable of reproducing the membrane potential response with fewer gate variables.

Methods

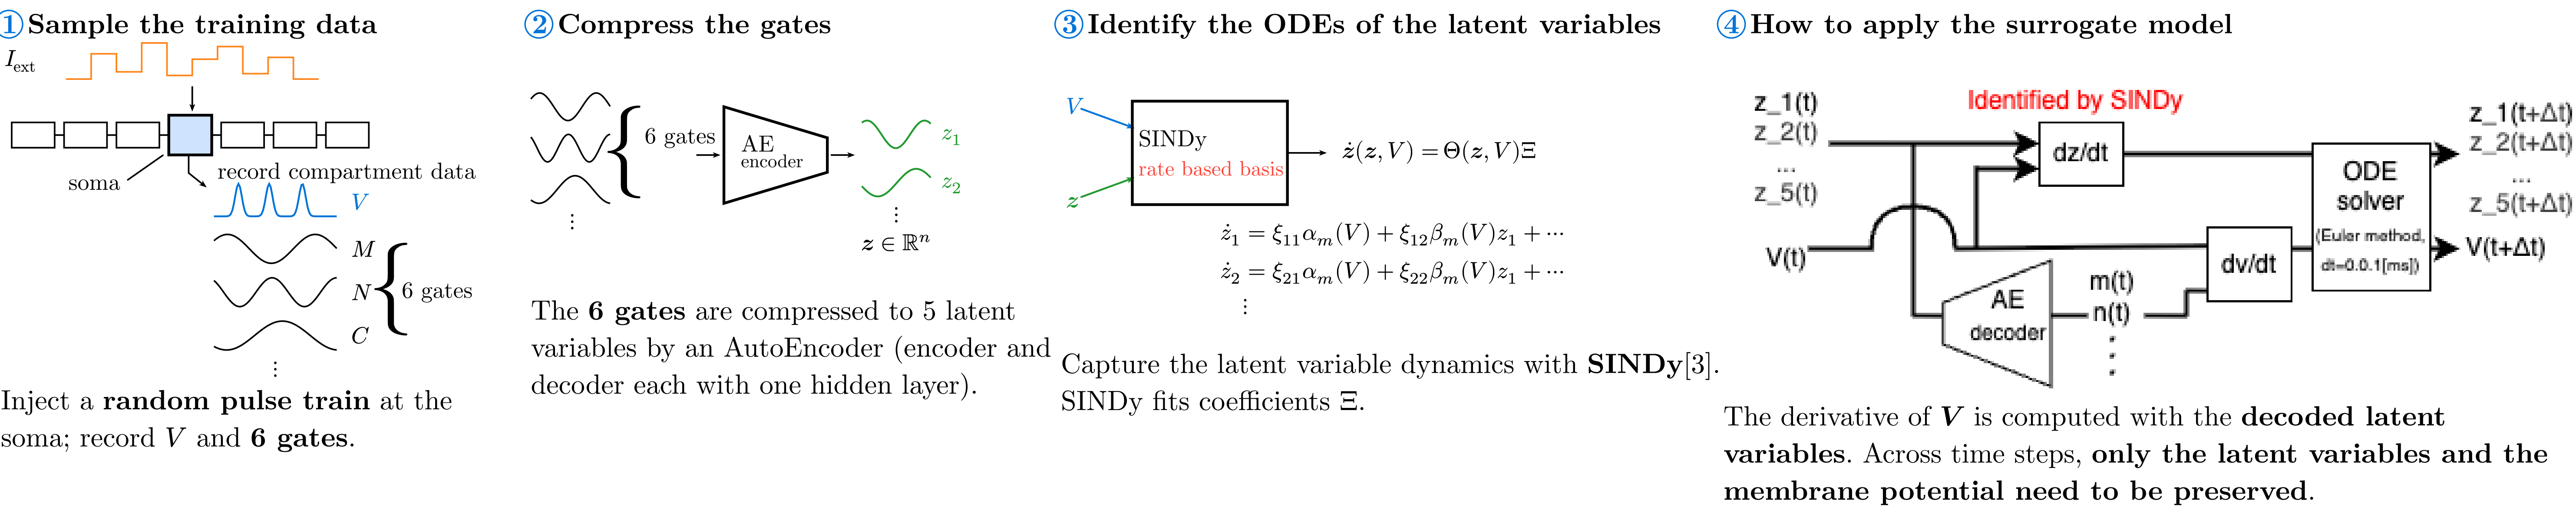

Results and Discussion

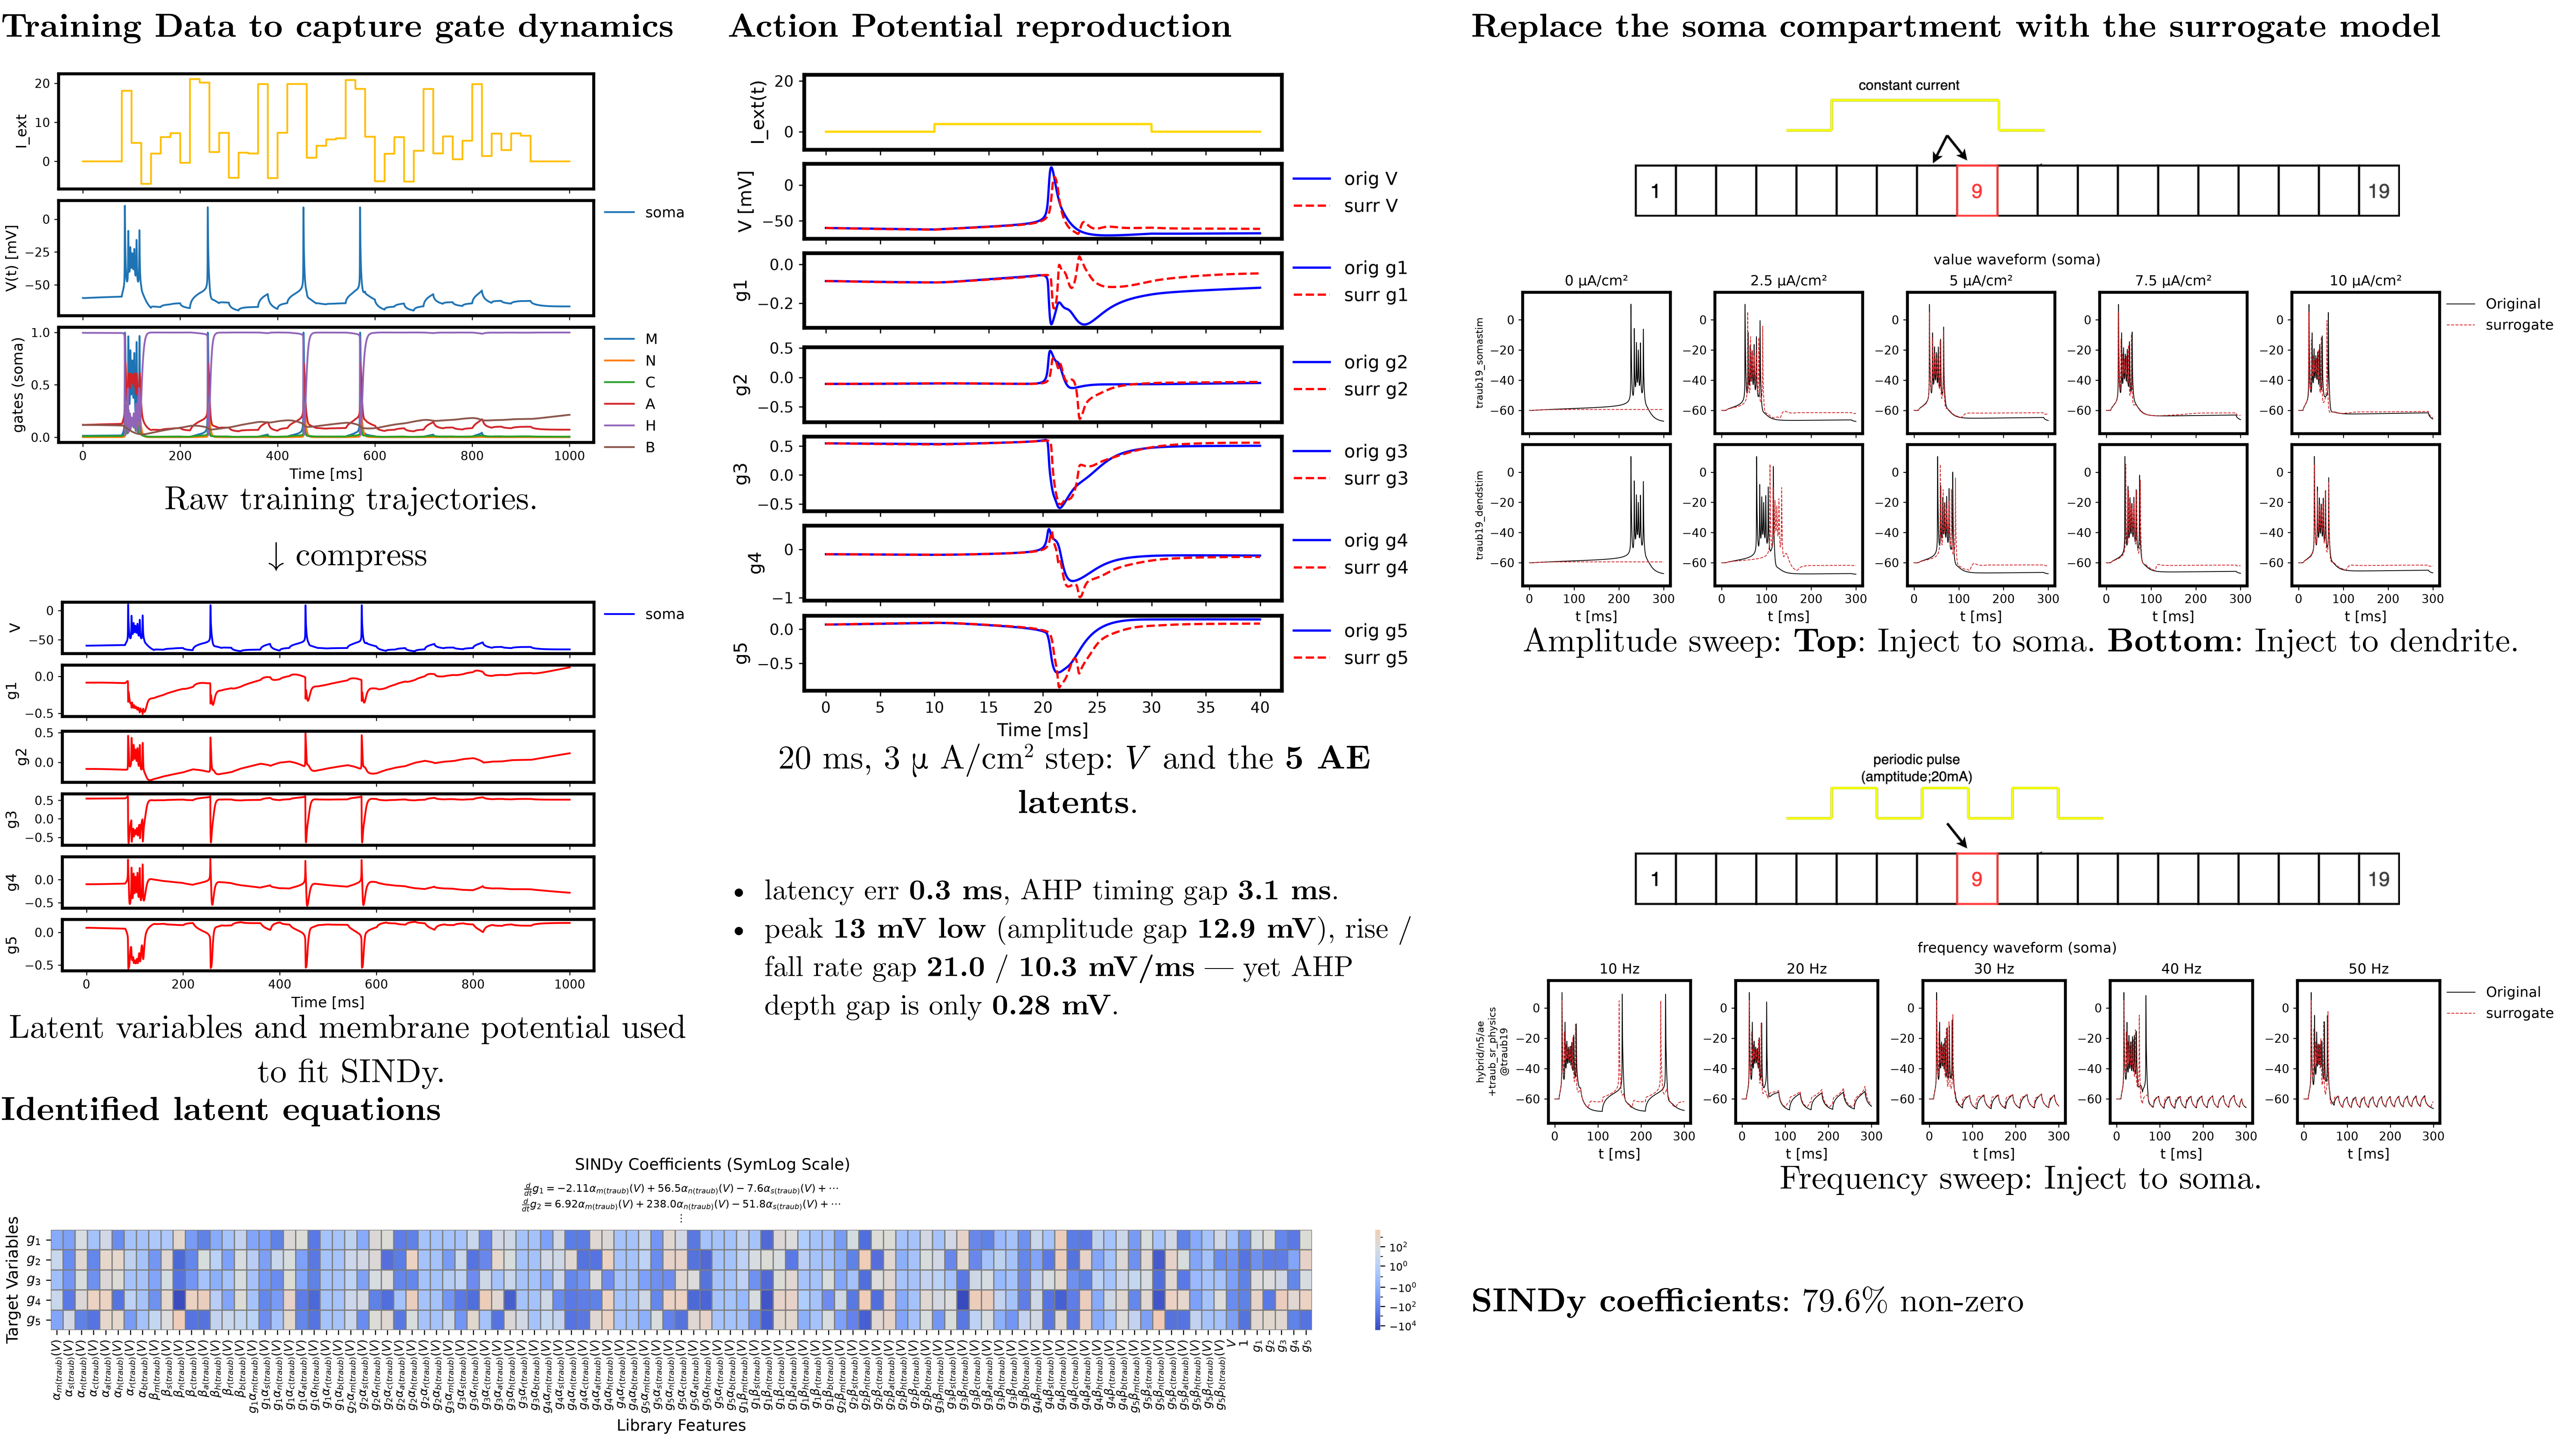

Conclusion

- Latent dynamics preserve **timing**.
- Error concentrates in the **fast, steep transition** — suggests that the **AE encoding (n=5)**, not the SINDy library, fails to preserve it.
- Replaced **all 19 compartments**, no divergence; transfers to **unseen site · frequency**.
- **Core finding**: SINDy succeeds **not because we compressed (n: 6→5)** —⑤shows the **same result uncompressed (n = 6)**, so it is the **coordinate change itself** that makes gate dynamics learnable.
- Cost reduction follows **only if compression matters** — so it remains **unproven**: ξ is still dense (**79.6%** non-zero).

Code — github.com/MunechikaHaruki/SINDyNeuroSurrogate

[1] [Online]. Available: https://neuromorpho.org/neuron_info.jsp?neuron_name=L16a

[2] R. D. Traub, R. K. Wong, R. Miles, and H. Michelson, "A Model of a CA3 Hippocampal Pyramidal Neuron Incorporating Voltage-Clamp Data on Intrinsic Conductances," *Journal of Neurophysiology*, vol. 66, no. 2, pp. 635–650, Aug. 1991, doi: 10.1152/jn.1991.66.2.635.

[3] K. Champion, B. Lusch, J. N. Kutz, and S. L. Brunton, "Data-Driven Discovery of Coordinates and Governing Equations," *Proceedings of the National Academy of Sciences*, vol. 116, no. 45, pp. 22445–22451, Nov. 2019, doi: 10.1073/pnas.1906995116.

→ **Future:** sparsify ξ , push n down, test on other channel models.

Conflicts of Interest — The authors declare no conflicts of interest regarding this manuscript.