



JUNE 12, 2021

HashiCorp Certified: Terraform Associate TA-002-P Exam Dumps Updated V9.02

Candidates will be prepared for HashiCorp Certified: Terraform Associate TA-002-P exam well if they choose DumpsBase TA-002-P exam dumps updated V9.02. The great team have updated the TA-002-P exam dumps with 279 practice exam questions and answers. Come to DumpsBase to get the most valid and latest TA-002-P exam questions, then we ensure that you can pass your exam smoothly.

HashiCorp Certified: Terraform Associate TA-002-P Free Dumps Online

Congratulations - you have completed this exam.

Your answers are shown below:

1. Which option can not be used to keep secrets out of Terraform configuration files?

- A Terraform provider
- Environment variables
- A -var flag
- **secure string**

Question was not answered

Explanation:

Reference: <https://secrethub.io/blog/secret-management-for-terraform/>

2. Terraform can run on Windows or Linux, but it requires a Server version of the Windows operating system.

- True
- **False**


Question was not answered

Explanation:

Reference: <https://cloud.google.com/kubernetes-engine/docs/how-to/creating-a-cluster-windows>

3. You have used Terraform to create an ephemeral development environment in the cloud and are now ready to destroy all the infrastructure described by your Terraform configuration. To be safe, you would like to first see all the infrastructure that will be deleted by Terraform.

Which command should you use to show all of the resources that will be deleted? (Choose two.)

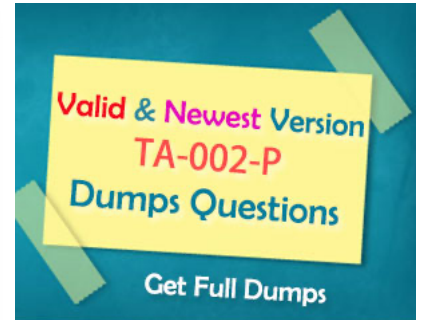

Search this site...

Search

Latest Free Dumps

NSE6_SDW_AD-7.6 Exam Dumps (V8.02)
Available for 2026 – Read NSE6_SDW_AD-7.6
Free Dumps (Part 1, Q1-Q40) First February 10, 2026

New Mule-Con-201 Practice Test (V8.02) with
Real Questions and Answers – Pass Your
Salesforce Certified MuleSoft Catalyst
Consultant Exam 2026 Successfully February
10, 2026

Updated Microsoft AZ-305 Dumps (V21.03)
2026 – Read AZ-305 Free Dumps (Part 1, Q1-
Q40) First to Verify Your Path to Success
February 10, 2026

Try L4M5 Dumps (V12.02) to Prepare 2026 –
We Have L4M5 Free Dumps (Part 1, Q1-Q40)
Online to Help You Check the Quality February
9, 2026

350-801 CLCOR Dumps (V30.03) Updated
2026 – You Can Read 350-801 Free Dumps
(Part 1, Q1-Q40) First February 9, 2026

Updated FCSS_EFW_AD-7.6 Dumps (V9.02)
2026: Good Way to Prepare for the Fortinet
NSE 7 – Enterprise Firewall 7.6 Administrator
Certification Exam February 9, 2026

PCED-30-02 Exam Dumps (V8.02) with
Structured Exam Questions: PCED-30-02 Free
Dumps (Part 1, Q1-Q40) Online February 6,
2026

Elevate Your Preparation with Updated 350-601
DCCOR Dumps (V21.02) – Check 350-601
Free Dumps (Part 1, Q1-Q40) First February 6,

- **Run terraform plan -destroy.**
- This is not possible. You can only show resources that will be created.
- Run terraform state rm *.
- **Run terraform destroy and it will first output all the resources that will be deleted before prompting for approval.**

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/cli/commands/state/rm.html>

4. A Terraform provisioner must be nested inside a resource configuration block.

- **True**
- False

Question was not answered

Explanation:

Most provisioners require access to the remote resource via SSH or WinRM, and expect a nested connection block with details about how to connect.

Reference: <https://www.terraform.io/docs/language/resources/provisioners/connection.html>

5. If you manually destroy infrastructure, what is the best practice reflecting this change in Terraform?

- **Run terraform refresh**
- It will happen automatically
- Manually update the state file
- Run terraform import

Question was not answered

6. What is the name assigned by Terraform to reference this resource?

```
resource "azurerm_resource_group" "dev" {  
  name = "test"  
  location = "westus"  
}
```

- **dev**
- azurerm_resource_group
- azurerm
- test

Question was not answered

7. What command does Terraform require the first time you run it within a configuration directory?

- terraform import
- **terraform init**
- terraform plan
- terraform workspace

Question was not answered

Explanation:

terraform init command is used to initialize a working directory containing Terraform configuration files.

Reference: <https://www.terraform.io/docs/cli/commands/init.html>

2026

Fortinet NSE4_FGT_AD-7.6 Dumps (V10.02)
Come with 60 Practice Questions and Answers:
Aiming to Help You Pass 2026 February 6, 2026

Updated Microsoft MB-310 Dumps (V23.02)
with 345 Q&As: Check the MB-310 Free Dumps
(Part 1, Q1-Q40) First February 5, 2026

Categories

(ISC)² (2)

CAP Certification (1)

HCISPP Certification (1)

A10 Networks (1)

System Administration 4 (1)

AACE (8)

AACE Certification (3)

Professional Level Certifications (5)

AACN (1)

CCRN (1)

AAFM (3)

Chartered Trust and Estate Planner (1)

Chartered Wealth Manager (2)

AAPC (1)

Certified Professional Coder (1)

ABA (4)

CISP Certification (2)

CRCM Certification (1)

ABPMP (1)

BPM Certification (1)

ACAMS (2)

Certified Cryptoasset AFC Specialist (1)

ACE (1)

Personal Trainer (1)

ACFE (16)

Certified Fraud Examiner (16)

ACI (1)

ACI-Financial Markets Association (1)

ACMP Global (1)

Change Management Professional (1)

Acquia (4)

Drupal 10 Certification (3)

8. Only the user that generated a plan may apply it.

- True
- **False**

Question was not answered

Explanation:

The optional -out argument can be used to save the generated plan to a file for later execution with terraform apply, which can be useful when running Terraform in automation.

Reference: <https://learn.hashicorp.com/tutorials/terraform/automate-terraform>

9. You run a local-exec provisioner in a null resource called null_resource.run_script and realize that you need to rerun the script.

Which of the following commands would you use first?

- **terraform taint null_resource.run_script**
- terraform apply -target=null_resource.run_script
- terraform validate null_resource.run_script
- terraform plan -target=null_resource.run_script

Question was not answered

10. Where does the Terraform local backend store its state?

- In the /tmp directory
- In the terraform.tfvars file
- **In the terraform.tfstate file**
- In the user's .terraformrc file

Question was not answered

Explanation:

The local backend stores state on the local filesystem, locks that state using system APIs, and performs operations locally.

Reference: <https://www.terraform.io/docs/language/settings/backends/local.html>

11. Which of the following is not a key principle of infrastructure as code?

- Versioned infrastructure
- **Golden images**
- Idempotence
- Self-describing infrastructure

Question was not answered

Explanation:

Reference: <https://docs.microsoft.com/en-us/azure/devops/learn/what-is-infrastructure-as-code#:~:text=Idempotence%20is%20a%20principle%20of,of%20the%20environment's%20starting%20state.>

12. Where in your Terraform configuration do you specify a state backend?

- **The terraform block**
- The resource block
- The provider block
- The datasource block

Question was not answered

Drupal 8 Certification (1)**ACRP (1)****ACRP Certified Professional (1)****ACSM (2)****ACSM-CEP (2)****ACT (2)****ACT English Test (1)****ACT Mathematics Test (1)****Admission Test (2)****Graduate Management Admission Test (1)****Graduate Record Examinations (1)****AFP (2)****Certified Treasury Professional (2)****AGA (3)****Government Financial Manager (3)****AGRC (1)****Corporate Governance Officer (1)****AHLEI (1)****Certified Hotel Administrator (CHA) (1)****AICPA (3)****AICPA Exam (1)****Public Accountant (1)****AIWMI (1)****Certified Credit Research Analyst (1)****Alcatel Lucent (7)****Alcatel-Lucent Certifications (7)****Alfresco (4)****ACSCA Certification (1)****Alfresco Certification (1)****APSCE Certification (1)****Process Services Administrator (1)****Alibaba Cloud (4)****Alibaba Developer (1)****AliCloud (14)****ACP Certification (1)****Alibaba Cloud Associate (ACA) (8)****Alibaba Cloud Certification Associate (1)****Alibaba Cloud Computing (4)****Amazon (98)**

Explanation:

Backends are configured with a nested backend block within the top-level terraform block.

Reference: <https://www.terraform.io/docs/language/settings/backends/configuration.html>

13. You have declared a variable called `var.list` which is a list of objects that all have an attribute `id`.

Which options will produce a list of the IDs? (Choose two.)

- `{ for o in var.list : o => o.id }`
- `var.list[*].id`
- `[ var.list[*].id ]`
- `[for o in var.list : o.id]`

Question was not answered

14. When using a module block to reference a module stored on the public Terraform Module Registry such as:

```
module "consul" {  
  source = "hashicorp/consul/aws"  
}
```

How do you specify version 1.0.0?

- Modules stored on the public Terraform Module Registry do not support versioning
- Append `?ref=v1.0.0` argument to the source path
- Add version = "1.0.0" attribute to module block
- Nothing C modules stored on the public Terraform Module Registry always default to version 1.0.0

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/language/modules/sources.html>

15. When does terraform apply reflect changes in the cloud environment?

- Immediately
- However long it takes the resource provider to fulfill the request
- After updating the state file
- Based on the value provided to the `-refresh` command line argument
- None of the above

Question was not answered

16. Which provisioner invokes a process on the resource created by Terraform?

- `remote-exec`
- `null-exec`
- `local-exec`
- `file`

Question was not answered

Explanation:

The `remote-exec` provisioner invokes a script on a remote resource after it is created.

Reference: <https://www.terraform.io/docs/language/resources/provisioners/remote-exec.html>

17. What does the default "local" Terraform backend store?

- `tfplan` files

AWS Certification (28)

AWS Certified AI Practitioner (9)

AWS Certified Associate (31)

AWS Certified Data Analytics – Specialty (2)

AWS Certified Database – Specialty (1)

AWS Certified Developer – Associate (1)

AWS Certified Professional (5)

AWS Certified Security – Specialty (1)

AWS Certified Specialty (11)

AWS Certified SysOps Administrator – Associate (1)

Data Engineer Associate (6)

DevOps-Engineer (1)

American College (1)

American College Certification (1)

AMPP (1)

Coatings Inspector Program (1)

Android (4)

Android Certified Application Developer (1)

Android certified Application Engineer (2)

Flutter Application Development (1)

APA (3)

AICP Certification (2)

American Planning Association (1)

APBM (1)

CBM Certifications (1)

APEGS (1)

Professional Practice Exam (1)

API (6)

ICP Programs Certification (2)

Individual Certification Programs (4)

APICS (12)

CLTD Certification (1)

CPIM Certification (7)

CSCP Certification (3)

Supply Chain Professional (1)

APM (6)

APM Project Fundamentals Qualification (PFQ) (5)

Project professionals (1)

- Terraform binary
- Provider plugins
- **State file**

Question was not answered

Explanation:

The local backend stores state on the local filesystem, locks that state using system APIs, and performs operations locally.

Reference: <https://www.terraform.io/docs/language/settings/backends/local.html>

18. You have never used Terraform before and would like to test it out using a shared team account for a cloud provider. The shared team account already contains 15 virtual machines (VM). You develop a Terraform configuration containing one VM, perform terraform apply, and see that your VM was created successfully.

What should you do to delete the newly-created VM with Terraform?

- The Terraform state file contains all 16 VMs in the team account. Execute terraform destroy and select the newly-created V
 - **The Terraform state file only contains the one new V**
 - **Execute terraform destroy.**
 - Delete the Terraform state file and execute Terraform apply.
- Delete the VM using the cloud provider console and terraform apply to apply the changes to the
- Terraform state file.

Question was not answered

19. A provider configuration block is required in every Terraform configuration.

Example:

```
provider "provider_name" {  
  ...  
}
```

- True
- **False**

Question was not answered

Explanation:

Reference: <https://github.com/hashicorp/terraform/issues/17928>

20. What is not processed when running a terraform refresh?

- State file
- **Configuration file**
- Credentials
- Cloud provider

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/cli/commands/refresh.html>

21. Setting the TF_LOG environment variable to DEBUG causes debug messages to be logged into syslog.

- True
- **False**

Question was not answered

APMG-International (13)
Agile Business Analysis (2)
AgilePM (6)
Better Business Cases (2)
Change Management (3)

Appian (12)
Associate Developer (4)
Certified Analyst (1)
Lead Developer (3)
Senior Developer (4)

Apple (9)
Apple Certified iOS Technician (ACiT) 2019 (1)
Apple Certified IT Professional (ACITP) (1)
Apple Certified Support Professional (7)

APSE (1)
Employment Support Professional (1)

Arcitura (6)
Cloud Certified Professional (CCP) (5)
SOA Architect (1)

ARDMS (5)
ARDMS SPI (3)
RDMS (2)

Arista (1)
Arista Certification (1)

Aruba (1)
Aruba ACMP (1)

ASCP Cert (1)
MLT(ASCP) (1)

ASIS (7)
Certified Protection Professional (3)
Physical Security Professional (3)
Professional Certified Investigator (1)

ASQ (10)
ASQ Certification (9)
Quality Improvement Associate (1)

ATD (1)
Talent Development (1)

Atlassian (17)
ACP-OA (2)

Explanation:

Reference: <https://www.terraform.io/docs/internals/debugging.html>

22. Examine the following Terraform configuration, which uses the data source for an AWS AMI.

```
data "aws_ami" "ubuntu" {
  ...
}

resource "aws_instance" "web" {
  ami = _____
  instance_type = "t2.micro"

  tags = {
    Name = "HelloWorld"
  }
}
```

What value should you enter for the ami argument in the AWS instance resource?

- aws_ami.ubuntu
- data.aws_ami.ubuntu
- **data.aws_ami.ubuntu.id**
- aws_ami.ubuntu.id

Question was not answered

Explanation:

```
resource "aws_instance" "web" {
```

```
ami= data.aws_ami.ubuntu.id
```

Reference:

<https://registry.terraform.io/providers/hashicorp/aws/latest/docs/resources/instance>

23. When should you use the force-unlock command?

- You see a status message that you cannot acquire the lock
- You have a high priority change
- **Automatic unlocking failed**
- Your apply failed due to a state lock

Question was not answered

Explanation:

Manually unlock the state for the defined configuration.

Reference: <https://www.terraform.io/docs/cli/commands/force-unlock.html>

24. What information does the public Terraform Module Registry automatically expose about published modules?

- Required input variables
- Optional inputs variables and default values
- Outputs
- **All of the above**
- None of the above

Question was not answered

Jira Administrator (10)

Jira Project Administrator (4)

Jira service management (1)

Auldhouse (1)

MSPF Certification (1)

Autodesk (1)

Autodesk Maya (1)

Automation Anywhere (1)

RPA Certifications (1)

Avaya (98)

ACDS (7)

ACIS (27)

ACSS (38)

Administering Avaya Call Management System (ASAC-0021) (1)

APDS (3)

APSS (7)

Avaya Aura Communication Applications Technical Associate Support (ASTA-7230) (1)

Avaya Aura Communication Manager Administrator (ASAC-0038) (1)

Avaya Aura® System Manager Administrator (ASAC-0037) (1)

Avaya Cloud Office Administrator (ASAC-0030) (1)

Avaya Experience Portal with Proactive Outreach Manager Support (ACSS-3305) (1)

Avaya Experience Portal with Proactive Outreach Manager Technical Associate Support (ASTA-3305) (1)

Avaya IP Office™ Platform Administrator (ASAC-0013) (1)

Avaya IP Office™ Platform Technical Associate Implement (ASTA-7720) (1)

Avaya IP Office™ Platform Technical Associate Support (ASTA-3000) (2)

Avaya Messaging Administrator (ASAC-0033) (1)

Avaya Solutions Administrator Certificate (1)

Avaya Workforce Engagement Technical Associate Support (ASTA-3308) (1)

Avaya-Certification (1)

AXP On-Prem (formerly Avaya Aura CC Elite) Support (ACSS-7492) (1)

AXP On-Prem (formerly Avaya Aura CC Elite) Technical Associate Implement (ASTA-7392)

Reference: <https://www.terraform.io/docs/registry/modules/publish.html>

```
resource "aws_vpc" "main" {
  name = "test"
}
```

- Question was not answered

Reference: <https://docs.aws.amazon.com/cloudformation-cli/latest/userguide/resource-types.html>

Question was not answered

Reference:

Question was not answered

Reference: <https://www.terraform.io/docs/language/settings/backends/index.html>

- Connects to the backend
- Sources any modules and copies the configuration locally
- **Validates all required variables are present**

Technical Architect (2)

Variables and required variables are present.

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/cli/commands/init.html>

29. Which two steps are required to provision new infrastructure in the Terraform workflow? (Choose two.)

- Destroy
- **Apply**
- Import
- **Init**
- Validate

Question was not answered

Explanation:

Reference: <https://www.terraform.io/guides/core-workflow.html>

30. Which of the following is available only in Terraform Enterprise or Cloud workspaces and not in Terraform CLI?

- **Secure variable storage**
- Support for multiple cloud providers
- Dry runs with terraform plan
- Using the workspace as a data source

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/language/providers/configuration.html>

31. Which of the following is not true of Terraform providers?

- Providers can be written by individuals
- Providers can be maintained by a community of users
- Some providers are maintained by HashiCorp
- Major cloud vendors and non-cloud vendors can write, maintain, or collaborate on Terraform providers
- **None of the above**

Question was not answered

Explanation:

Reference: https://jayendrapatil.com/terraform-cheat-sheet/#Terraform_Read_and_write_configuration

32. Terraform variables and outputs that set the "description" argument will store that description in the state file.

- True
- **False**

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/language/values/outputs.html>

33. What features does the hosted service Terraform Cloud provide? (Choose two.)

- Automated infrastructure deployment visualization

Broadcom (54)

AIOps (1)

Broadcom Technical Specialist (2)

Endpoint Security (3)

Endpoint Security Certification (2)

Identity Security (1)

Network Security Certification (5)

Symantec Certified Specialist (SCS) (1)

VCP-NV 2024 (2)

VCP-VCF Architect (9)

VMware vSAN Specialist (v2) (1)

C++ Institute (6)

C++ Certified Associate Programmer (2)

C++ Certified Professional Programmer (4)

CA (1)

CA Unified Infrastructure Management (1)

Camunda (3)

Camunda Certified Professional (3)

CBDCE (1)

Diabetes-Related Certifications (1)

Certinia (2)

PSA Certified (2)

CertiProf (3)

DevOps Essentials Professional Certificate (1)

Lead Cybersecurity Professional Certificate (1)

Remote Work and Virtual Collaboration Certificate (1)

CertNexus (3)

Certified AI Practitioner (2)

Certified IoT Security Practitioner (1)

CFA Institute (14)

ESG Investing Certificate (4)

Level 1 CFA Exam (1)

Level 2 CFA Exam (1)

Level 3 CFA Exam (2)

Sustainable Investing Certificate (6)

Check Point (59)

CCAS (3)

CCCS (3)

CCES (3)

- Automatic backups
- Remote state storage
- A web-based user interface (UI)

Question was not answered

Explanation:

Reference:

<https://www.terraform.io/docs/enterprise/admin/automated-recovery.html>

<https://www.terraform.io/docs/language/state/remote.html>

34. Terraform providers are always installed from the Internet.

- True
- False

Question was not answered

Explanation:

Terraform configurations must declare which providers they require, so that Terraform can install and use them.

Reference: <https://www.terraform.io/docs/language/providers/configuration.html>

35. You should store secret data in the same version control repository as your Terraform configuration.

- True
- False

Question was not answered

Explanation:

Reference: <https://blog.gruntwork.io/a-comprehensive-guide-to-managing-secrets-in-your-terraform-code-1d586955ace1>

36. You have multiple team members collaborating on infrastructure as code (IaC) using Terraform, and want to apply formatting standards for readability.

How can you format Terraform HCL (HashiCorp Configuration Language) code according to standard Terraform style convention?

- Run the terraform fmt command during the code linting phase of your CI/CD process
- Designate one person in each team to review and format everyone's code
- Manually apply two spaces indentation and align equal sign "=" characters in every Terraform file (*.tf)
- Write a shell script to transform Terraform files using tools such as AWK, Python, and sed

Question was not answered

Explanation:

Indent two spaces for each nesting level.

When multiple arguments with single-line values appear on consecutive lines at the same nesting level, align their equals signs.

Reference: <https://www.terraform.io/docs/language/syntax/style.html>

37. In Terraform 0.13 and above, outside of the required_providers block, Terraform configurations always refer to providers by their local names.

- True

CCME (4)

CCMS (3)

CCPA (1)

CCSA (11)

CCSE (17)

CCSM (2)

CCTA (1)

CCTE (7)

CCVS (1)

CheckPoint Certification (1)

CTPS (1)

SandBlast (1)

CII (2)

CII credit level: Certificate (1)

CII credit level: Diploma (1)

CIMA (18)

Certificate in Business Accounting (6)

CIMA certification (3)

CIMA CGMA Professional Qualification (1)

Professional Qualification (9)

CIPS (61)

CIPS Certifications (1)

CIPS Level 3 Advanced Certificate in Procurement and Supply Operations (8)

CIPS Level 4 Diploma in Procurement and Supply (32)

CIPS Level 5 Advanced Diploma in Procurement and Supply (12)

CIPS Level 6 Professional Diploma in Procurement and Supply (8)

Cisco (723)

Account Manager (3)

Additional Online Exams for Validating Knowledge (2)

Advanced Collaboration Architecture Specialization (4)

Advanced Enterprise Networks Architecture Specialization (2)

Advanced Routing and Switching (1)

Advanced Unified Contact Center Enterprise Specialization (1)

Advanced Video Specialization (1)

AppDynamics Certified Associate (4)

- False

Question was not answered

Explanation:

Outside of the required_providers block, Terraform configurations always refer to providers by their local names.

Reference: <https://www.terraform.io/docs/language/providers/requirements.html>

38. The terraform.tfstate file always matches your currently built infrastructure.

- True
- **False**

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/language/state/index.html>

39. If a module uses a local variable, you can expose that value with a terraform output.

- **True**
- False

Question was not answered

Explanation:

Output values are like function return values.

Reference:

<https://www.terraform.io/docs/language/values/locals.html>

<https://www.terraform.io/docs/language/values/outputs.html>

40. What value does the Terraform Cloud/Terraform Enterprise private module registry provide over the public Terraform Module Registry?

- The ability to share modules with public Terraform users and members of Terraform Enterprise
- Organizations
- The ability to tag modules by version or release
- **The ability to restrict modules to members of Terraform Cloud or Enterprise organizations**
- The ability to share modules publicly with any user of Terraform

Question was not answered

Explanation:

Terraform Registry is an index of modules shared publicly using this protocol. This public registry is the easiest way to get started with Terraform and find modules created by others in the community.

Reference: <https://www.terraform.io/docs/language/modules/sources.html>

41. Terraform requires the Go runtime as a prerequisite for installation.

- True
- **False**

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/extend/guides/v1-upgrade-guide.html>

AppDynamics Certified Implementation (2)

CCDA (4)

CCDE (13)

CCDP (10)

CCE (1)

CCEA (4)

CCECE (4)

CCENT (1)

CCIE (15)

CCIE Collaboration (5)

CCIE Data Center (12)

CCIE Security (8)

CCIE Service Provider (6)

CCIE Wireless (2)

CCNA (34)

CCNA Cloud (4)

CCNA Collaboration (9)

CCNA Cyber Ops (8)

CCNA Data Center (7)

CCNA Routing and Switching (10)

CCNA Security (5)

CCNA SP (2)

CCNA Wireless (3)

CCNP (20)

CCNP Cloud (6)

CCNP Collaboration (64)

CCNP Data Center (68)

CCNP Enterprise (112)

CCNP Security (78)

CCNP Service Provider (31)

CCNP Wireless (13)

CCT Collaboration (1)

CCT Data Center (2)

CCT Field Technician (1)

CCT Routing & Switching (4)

Cisco Business Architecture Analyst (5)

Cisco Business Architecture Practitioner (1)

Cisco Business Value Practitioner (1)

Cisco Business Value Specialist (1)

Cisco Certified CyberOps Associate (10)

42. One remote backend configuration always maps to a single remote workspace.

- True
- **False**

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/language/settings/backends/remote.html>

43. terraform init initializes a sample main.tf file in the current directory.

- True
- **False**

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/cli/commands/init.html>

44. CORRECT TEXT

FILL BLANK

You need to specify a dependency manually.

What resource meta-parameter can you use to make sure Terraform respects the dependency?

Type your answer in the field provided. The text field is not case-sensitive and all variations of the correct answer are accepted.

•

45. You have recently started a new job at a retailer as an engineer. As part of this new role, you have been tasked with evaluating multiple outages that occurred during peak shopping time during the holiday season. Your investigation found that the team is manually deploying new compute instances and configuring each compute instance manually. This has led to inconsistent configuration between each compute instance.

How would you solve this using infrastructure as code?

- Implement a ticketing workflow that makes engineers submit a ticket before manually provisioning and configuring a resource
- Implement a checklist that engineers can follow when configuring compute instances
 - Replace the compute instance type with a larger version to reduce the number of required deployments
- **Implement a provisioning pipeline that deploys infrastructure configurations committed to your version control system following code reviews**

Question was not answered

46. Which of the following is not a valid string function in Terraform?

- split
- join
- **slice**
- chomp

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/language/functions/chomp.html>

Cisco Certified CyberOps Professional (6)

Cisco Certified DevNet Associate (7)

Cisco Certified DevNet Professional (17)

Cisco Certified Specialist (5)

Cisco Certified Support Technician (CCST) (10)

CCST Cybersecurity (3)

CCST IT Support (2)

Cisco Channel Partner Data Center (1)

Cisco cloud (1)

Cisco Collaboration SaaS Authorization (1)

Cisco Collaboration Servers and Appliances Role (3)

Cisco Contact Center Enterprise (2)

Cisco Customer Success Manager Specialist (2)

Cisco Environmental Sustainability Specialization (2)

Cisco Meraki Solutions Specialist (3)

Cisco Network Programmability Design and Implementation Specialist (1)

Cisco Online Exams (1)

Cisco Renewals Manager (6)

Cisco Small and Medium Business Engineer Specialization (1)

Cisco Small and Medium Business Sales Specialization (3)

Cisco Specialist (2)

Cisco Specialist Certifications (42)

Cisco Unified Contact Center Enterprise Specialist (3)

CyberOps Associate (10)

ENUAE (2)

Express Collaboration Specialization (6)

Express Security Specialization (2)

Express Specialization (3)

Express Specialization Small Business (3)

Other Cisco Certifications (9)

PreSales Engineer (1)

Systems Engineer (2)

CISI (1)

CISI level 3 Certificate in Wealth & Investment Management (1)

47. How would you reference the "name" value of the second instance of this fictitious resource?

```
resource "aws_instance" "web" {
  count = 2
  name = "terraform-${count.index}"
}
```

- element(aws_instance.web, 2)
- **aws_instance.web[1].name**
- aws_instance.web[1]
- aws_instance.web[2].name
- aws_instance.web.*.name

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/configuration-0-11/interpolation.html>

48. Which of these is the best practice to protect sensitive values in state files?

- Blockchain
- Secure Sockets Layer (SSL)
- **Enhanced remote backends**
- Signed Terraform providers

Question was not answered

Explanation:

Use of remote backends and especially the availability of Terraform Cloud, there are now a variety of backends that will encrypt state at rest and will not store the state in cleartext on machines running.

Reference: <https://www.terraform.io/docs/extend/best-practices/sensitive-state.html>

49. Which of the following is the correct way to pass the value in the variable num_servers into a module with the input servers?

- servers = num_servers
- servers = variable.num_servers
- servers = var(num_servers)
- **servers = var.num_servers**

Question was not answered

50. You have provisioned some virtual machines (VMs) on Google Cloud Platform (GCP) using the gcloud command line tool. However, you are standardizing with Terraform and want to manage these VMs using Terraform instead.

What are the two things you must do to achieve this? (Choose two.)

- Provision new VMs using Terraform with the same VM names
- **Use the terraform import command for the existing VMs**
- **Write Terraform configuration for the existing VMs**
- Run the terraform import-gcp command

Question was not answered

Explanation:

The terraform import command is used to import existing infrastructure. Import existing Google Cloud resources into Terraform with Terraformer.

Reference: <https://www.terraform.io/docs/cli/import/usage.html> <https://cloud.google.com/docs/terraform>

Citrix (34)

CCA-AppDS (5)

CCA-N (3)

CCA-V (9)

CCE-AppDS (1)

CCE-N (1)

CCE-V (5)

CCP-AppDS (2)

CCP-N (4)

CCP-V (6)

CIW (8)

CIW User Interface Designer (1)

CIW Web and Mobile Design Series (4)

CIW Web Development Series (2)

Web Security Series (1)

CloudBees (2)

Jenkins Engineer (2)

Cloudera (1)

Cloudera Certified Associate (CCA) (1)

CMT Association (1)

CMT Program (1)

CNCF (5)

CKA Certification (3)

Cohesity (3)

Cohesity Protection Professional (3)

Confluent (2)

Confluent Certified Administrator (1)

Confluent Certified Developer (1)

Copado (3)

Copado Certifications (1)

Copado Robotic Testing certification (2)

CPA (2)

Certified public accountant (2)

CREST (1)

Penetration Testing (1)

CrowdStrike (18)

CCFR (7)

CrowdStrike Certified Cloud Specialist (CCCS) (3)

CrowdStrike Certified Falcon Administrator

51. Why would you use the terraform taint command?

- When you want to force Terraform to destroy a resource on the next apply
- **When you want to force Terraform to destroy and recreate a resource on the next apply**
- When you want Terraform to ignore a resource on the next apply
- When you want Terraform to destroy all the infrastructure in your workspace

Question was not answered

Explanation:

The terraform taint command manually marks a Terraform-managed resource as tainted, forcing it to be destroyed and recreated on the next apply.

Reference: <https://www.terraform.io/docs/cli/commands/taint.html>

52. Which argument(s) is (are) required when declaring a Terraform variable?

- type
- default
- description
- All of the above
- **None of the above**

Question was not answered

Explanation:

The variable declaration can also include a default argument.

Reference: <https://www.terraform.io/docs/language/values/variables.html>

53. What is one disadvantage of using dynamic blocks in Terraform?

- They cannot be used to loop through a list of values
- Dynamic blocks can construct repeatable nested blocks
- **They make configuration harder to read and understand**
- Terraform will run more slowly

Question was not answered

Explanation:

Reference: <https://github.com/hashicorp/terraform/issues/19291>

54. What command should you run to display all workspaces for the current configuration?

- terraform workspace
- terraform workspace show
- **terraform workspace list**
- terraform show workspace

Question was not answered

Explanation:

terraform workspace list

The command will list all existing workspaces.

Reference: <https://www.terraform.io/docs/cli/commands/workspace/list.html>

55. You have deployed a new webapp with a public IP address on a cloud provider. However, you did not create any outputs for your code.

(CCFA) (2)

CrowdStrike Falcon Certification Program (6)

CSA (8)

Cloud Security Knowledge (6)

Zero Trust (2)

CSI (2)

CSI Certifications (2)

CWAP (5)

CWAP (Wi-Fi Analysis) (1)

CWAP Certifications (1)

CWAP Wi-Fi Analysis Certification (3)

CWNP (27)

CWDP Certifications (6)

CWICP Certification (1)

CWISA Certification (2)

CWNA Certification (4)

CWS Certification (2)

CWSA Certification (1)

CWSP Certification (4)

CWT Certification (2)

CWTS Certification (2)

Cyber AB (4)

CMMC (4)

CyberArk (24)

CyberArk CDE Recertification (3)

CyberArk Certified Delivery Engineer (CDE) (5)

CyberArk Defender (9)

CyberArk Secrets Manager (1)

CyberArk Sentry (6)

DAMA (6)

CDMP Certification (6)

Dassault Systemes (1)

CATIA (1)

Databricks (17)

Data Analyst (3)

Databricks Certification (11)

Generative AI Engineer (1)

Machine Learning Associate (2)

Datadog (2)

What is the best method to quickly find the IP address of the resource you deployed?

- Run terraform output ip_address to view the result
- In a new folder, use the terraform_remote_state data source to load in the state file, then write an output for each resource that you find the state file
- **Run terraform state list to find the name of the resource, then terraform state show to find the attributes including public IP address**
- Run terraform destroy then terraform apply and look for the IP address in stdout

Question was not answered

Explanation:

Reference: <https://www.terraform.io/docs/cli/commands/output.html>

56. terraform validate validates the syntax of Terraform files.

- **True**
- False

Question was not answered

Explanation:

The terraform validate command validates the syntax and arguments of the Terraform configuration files.

Reference: <https://www.terraform.io/docs/cli/code/index.html>

57. How does Terraform handle working with so many providers?

- Terraform ships with all of the plugins embedded in the Terraform binary.
- **Terraform uses a plugin architecture for providers and only installs the provider plugins required by your configuration in the configuration's working directory.**
- Terraform uses a plugin architecture for providers and only installs the provider plugins required by your configuration in a shared, system-wide plugins directory.
- Terraform allows you to select the providers you want to support during the Terraform installation process.

Question was not answered

Explanation:

Terraform is built on a plugin-based architecture. All providers and provisioners that are used in Terraform configurations are plugins, even the core types such as AWS and Heroku. Users of Terraform are able to write new plugins in order to support new functionality in Terraform.

58. How can you ensure that the engineering team who has access to git repo will not create any non-compliant resources that might lead to a security audit failure in future. your team is using Hashicorp Terraform Enterprise Edition.

- Use Terraform OSS Sentinel Lite version, which will save cost, since there is no charge for OSS, but it can still check for most non-compliant rules using Policy-As-Code.
- Implement a review process where every code will be reviewed before merging to the master branch.
- **Since your team is using Hashicorp Terraform Enterprise Edition, enable Sentinel, and write Policy-As-Code rules that will check for non-compliant resource provisioning, and prevent/report them.**
- Create a design /security document (in PDF) and share to the team, and ask them to always follow that document, and never deviate from it.

Question was not answered

Explanation:

<https://www.terraform.io/docs/cloud/sentinel/index.html>

59. Terraform has detailed logs which can be enabled by setting the _____ environmental

Datadog Certification (2)

DELL EMC (280)

Backup Recovery (EMCBA) (1)

Cloud Architect (EMCCA) (7)

Data Scientist (1)

DCA-DPM (2)

DCA-ISM (15)

DCA-Networking (2)

DCE (2)

DCS-IE (22)

DCS-SA (4)

DCS-TA (7)

DECA-CIS (5)

DECA-CSHC (2)

DECA-PowerEdge (3)

DECE-IE (1)

DECS (1)

DECS-IE (3)

Dell Certification (1)

Dell Certified (1)

Dell Client (2)

Dell Cloud (10)

Dell Converged Infrastructure (2)

Dell Data Protection (28)

Dell Data Science (5)

Dell Generative AI (2)

Dell Hyperconverged Infrastructure (11)

Dell Networking (7)

Dell Security (5)

Dell Server (12)

Dell Storage (57)

Elastic Cloud Storage (ECS) (3)

Elastic Cloud Storage (SA) (2)

EMC Certification (12)

EMC Networking (1)

EMC Specialist (3)

EMCCIS (1)

Implementation Engineer (EMCIE) (12)

Isilon Solutions (TA) (1)

Platform Engineer (2)

variable.

- TF_TRACE
- TF_DEBUG
- **TF_LOG**
- TF_INFO

Question was not answered

Explanation:

Terraform has detailed logs that can be enabled by setting the TF_LOG environment variable to any value. This will cause detailed logs to appear on stderr.

You can set TF_LOG to one of the log levels TRACE, DEBUG, INFO, WARN or ERROR to change the verbosity of the logs. TRACE is the most verbose and it is the default if TF_LOG is set to something other than a log level name.

<https://www.terraform.io/docs/internals/debugging.html>

60. True or False: A list(...) contain a number of values of the same type while an object(...) can contain a number of values of different types.

- False
- **True**

Question was not answered

Explanation:

Collection Types

A collection type allows multiple values of one other type to be grouped together as a single value. The type of value within a collection is called its element type. All collection types must have an element type, which is provided as the argument to their constructor. For example, the type list(string) means "list of strings", which is a different type than list(number), a list of numbers. All elements of a collection must always be of the same type.

The three kinds of collection type in the Terraform language are:

* list(...): a sequence of values identified by consecutive whole numbers starting with zero. The keyword list is a shorthand for list(any), which accepts any element type as long as every element is the same type. This is for compatibility with older configurations; for new code, we recommend using the full form.

* map(...): a collection of values where each is identified by a string label. The keyword map is a shorthand for map(any), which accepts any element type as long as every element is the same type. This is for compatibility with older configurations; for new code, we recommend using the full form.

* set(...): a collection of unique values that do not have any secondary identifiers or ordering.
<https://www.terraform.io/docs/configuration/types.html>

Structural Types

A structural type allows multiple values of several distinct types to be grouped together as a single value. Structural types require a schema as an argument, to specify which types are allowed for which elements.

The two kinds of structural type in the Terraform language are:

* object(...): a collection of named attributes that each have their own type. The schema for object types is { <KEY> = <TYPE>, <KEY> = <TYPE>, ... } -- a pair of curly braces containing a comma-separated series of <KEY> = <TYPE> pairs. Values that match the object type must contain all of the specified keys, and the value for each key must match its specified type. (Values with additional keys can still match an object type, but the extra attributes are discarded

during type conversion.)

PowerProtect Cyber Recovery (DC) (3)

Product/Technology Specific (1)

Storage Administrator (EMCSA) (1)

Technology Architect (8)

Technology Foundations (4)

VMAX3 Solutions (SA) (4)

Devops Institute (1)

Docker (5)

Docker Certified (5)

DSCI (5)

DSCI Certifications (5)

DumpsBase Exam News (31)

EC-Council (31)

Application Security (1)

Blockchain Fintech (1)

CASE Jave (1)

CCISO Certification (1)

CEH v13 (1)

Certified Cloud Security Engineer (CCSE) (2)

Certified DevSecOps Engineer (3)

Certified Ethical Hacker (4)

Certified Network Defender (CND) (2)

CHFI (1)

CSA Certifications (1)

CSCU Certification (1)

CTIA (2)

Cyber Technician (CCT) (5)

EC-Council Certified Security Specialist (ECSS) (1)

ECES (1)

EISM (1)

Network Defense Essentials (NDE) (1)

Network Security (1)

ECDL (1)

EnterpriseDB (1)

PostgreSQL (1)

Ericsson (1)

Ericsson Certified Associate (1)

Esri (9)

* tuple(...): a sequence of elements identified by consecutive whole numbers starting with zero, where each element has its own type.

The schema for tuple types is [<TYPE>, <TYPE>, ...] -- a pair of square brackets containing a comma-separated series of types. Values that match the tuple type must have exactly the same number of

elements (no

more and no fewer), and the value in each position must match the specified type for that position. For example: an object type of object({ name=string, age=number }) would match a value like the following:

```
{
  name = "John"

  age = 52
}
```

Also, an object type of object({ id=string, cidr_block=string }) would match the object produced by a reference to an aws_vpc resource, like aws_vpc.example_vpc; although the resource has additional attributes, they would be discarded during type conversion. Finally, a tuple type of tuple([string, number, bool]) would match a value like the following: ["a", 15, true]

<https://www.terraform.io/docs/configuration/types.html>

61. Which of the following best describes the default local backend?

- The local backend is where Terraform Enterprise stores logs to be processed by an log collector.
- The local backend stores state on the local filesystem, locks the state using system APIs, and performs operations locally.
- The local backend is the directory where resources deployed by Terraform have direct access to in order to update their current state.
- The local backend is how Terraform connects to public cloud services, such as AWS, Azure, or GC

Question was not answered

Explanation:

The local backend stores state on the local filesystem, locks that state using system APIs, and performs operations locally.

```
terraform {
  backend "local" {
    path = "relative/path/to/terraform.tfstate"
  }
}
```

<https://www.terraform.io/docs/backends/types/local.html>

62. Workspaces in Terraform provides similar functionality in the open-source, Terraform Cloud, and Enterprise versions of Terraform.

- True
- False

Question was not answered

Explanation:

<https://www.terraform.io/docs/cloud/migrate/workspaces.html>

Workspaces, managed with the terraform workspace command, aren't the same thing as Terraform Cloud's workspaces. Terraform Cloud workspaces act more like completely separate working

ArcGIS Enterprise (1)

Associate Level (1)

Desktop Certifications (3)

Technical Certification (4)

EXIN (19)

Data Centre Professional (1)

EPI Data Centre (2)

EPI IT Management (1)

EXIN BCS SIAM™ (1)

EXIN Blockchain (1)

Exin Certification (2)

EXIN DevOps Foundation (1)

EXIN Foundation (1)

EXIN Green IT (2)

EXIN Information Security Management
ISO/IEC 27001 (1)

EXIN TMap® Suite (1)

ISO Certification (1)

ITSM (1)

Privacy & Data Protection Foundation (1)

SIAM Professional (1)

F5 (7)

BIG-IP ASM (1)

F5 BIG-IP Administrator (1)

F5-CA (4)

LTM Specialist (1)

Financial Industry Regulatory Authority (3)

FINRA Certification (1)

GS Certification (1)

NASAA Certification (1)

FINRA (1)

General Securities Representative (1)

Forescout (1)

Forescout Certified Professional (1)

Fortinet (218)

FCP – FortiManager Administrator (1)

FCP in Secure Networking (1)

FCP in Security Operations (13)

FCSS in Cloud Security (1)

FCSS In Network Security (15)

directories; CLI workspaces are just alternate state files.

63. You want to get involved in the development of Terraform. As this is an open source project, you would like to contribute a fix for an open issue of Terraform .

What programming language will need to use to write the fix?

- It depends on which command issue related to.
- Python
- **Go**
- Java

Question was not answered

Explanation:

Basic programming knowledge. Terraform and Terraform Plugins are written in the Go programming language, but even if you've never written a line of Go before, you're still welcome to take a dive into the code and submit patches. The community is happy to assist with code reviews and offer guidance specific to Go.

64. terraform state subcommands such as list are read-only commands, do read-only commands create state backup files?

- Yes
- **No**

Question was not answered

Explanation:

Subcommands that are read-only (such as list) do not write any backup files since they aren't modifying the state.

All terraform state subcommands that modify the state write backup files. The path of these backup file can be controlled with -backup.

<https://www.terraform.io/docs/commands/state/index.html#backups>

65. What is the purpose of using the local-exec provisioner? (Select Two)

- **To invoke a local executable**
- Executes a command on the resource to invoke an update to the Terraform state.
- **To execute one or more commands on the machine running Terraform**
- Ensures that the resource is only executed in the local infrastructure where Terraform is deployed.

Question was not answered

Explanation:

The local-exec provisioner invokes a local executable after a resource is created. This invokes a process on the machine running Terraform, not on the resource.

Note that even though the resource will be fully created when the provisioner is run, there is no guarantee that it will be in an operable state - for example system services such as sshd may not be started yet on compute resources.

Example usage

```
resource "aws_instance" "web" {
# ...

provisioner "local-exec" {

command = "echo ${aws_instance.web.private_ip} >> private_ips.txt"
```

FCSS in OT Security (6)

FCSS in SASE (11)

FCSS in Secure Networking (2)

FCSS in Security Operations (6)

Fortinet Certification (2)

Fortinet Certified Expert (FCX) Cybersecurity (2)

Fortinet Certified Professional (FCP) (42)

FCP in Network Security (30)

FCP in Public Cloud Security (14)

Fortinet Certified Solution Specialist (FCSS) in Network Security (10)

Fortinet Certified Solution Specialist (FCSS) in Public Cloud Security (5)

Fortinet Certified Solution Specialist (FCSS) in Secure Access Service Edge (SASE) (1)

Fortinet Certified Solution Specialist (FCSS) in Zero Trust Access (ZTA) (1)

Network Security Expert Program (4)

NSE 4 (10)

NSE 5 (31)

NSE 5 Network Security Analyst (7)

NSE 6 Network Security Specialist (13)

NSE 7 (18)

NSE 7 Network Security Architect (25)

NSE4 (17)

NSE6 (10)

NSE8 (6)

FSMTB (2)

Massage Therapy Licensure (2)

GAQM (20)

Business & Process Management Certifications (1)

Certified Software Tester Intermediate (2)

CPEH Certification (1)

CSTIL Certification (1)

GAQM certification (3)

GAQM: Data Centre (1)

GAQM: Date Centre (2)

GAQM: ISO (3)

GAQM: Lean Six Sigma (3)

GAQM: Management (2)

```
}
```

```
}
```

Note: Provisioners should only be used as a last resort. For most common situations there are better alternatives.

<https://www.terraform.io/docs/provisioners/local-exec.html>

66. Refer to the below code where developer is outputting the value of the database password but has used sensitive parameter to hide the output value in the CLI.

```
output "db_password" { value = aws_db_instance.db.password description = "The password for logging in to the database." sensitive = true}
```

Since sensitive is set to true, the value associated with db password will not be present in state file as plain-text?

- False
- True

Question was not answered

Explanation:

Sensitive output values are still recorded in the state, and so will be visible to anyone who is able to access the state data.

67. Matt wants to import a manually created EC2 instance into terraform so that he can manage the EC2 instance through terraform going forward. He has written the configuration file of the EC2 instance before importing it to Terraform.

Following is the code:

```
resource "aws_instance" "matt_ec2" { ami = "ami-bg2640de" instance_type = "t2.micro" vpc_security_group_ids = ["sg-6ae7d613", "sg-53370035"] key_name = "mysecret" subnet_id = "subnet-9e3cabc5" }
```

The instance id of that EC2 instance is i-0260835eb7e9bd40 How he can import data of EC2 to state file?

- terraform import aws_instance.id = i-0260835eb7e9bd40
- terraform import i-0260835eb7e9bd40
- terraform import aws_instance.i-0260835eb7e9bd40
- terraform import aws_instance.matt_ec2 i-0260835eb7e9bd40

Question was not answered

Explanation:

<https://www.terraform.io/docs/import/usage.html>

68. Which of the following best describes a Terraform provider?

- A plugin that Terraform uses to translate the API interactions with the service or provider.
- Serves as a parameter for a Terraform module that allows a module to be customized. Describes an infrastructure object, such as a virtual network, compute instance, or other components.
- A container for multiple resources that are used together.

Question was not answered

Explanation:

A provider is responsible for understanding API interactions and exposing resources. Providers generally are an IaaS (e.g. Alibaba Cloud, AWS, GCP, Microsoft Azure, OpenStack), PaaS (e.g.

GAQM: Scrum / Agile (1)

GARP (8)

Financial Risk and Regulation (5)

GARP Certification (3)

Genesys (18)

GCP-GC (6)

Genesys Certification (3)

Genesys Cloud CX (8)

PureConnect: Interaction Center Core Engineer Certification (1)

GIAC (15)

Critical Controls (1)

Cyber Security Certification (5)

Digital Forensics (1)

GIAC Cloud Security Architecture and Design (1)

GIAC Information Security (4)

GIAC Python Coder (1)

Industrial Control Systems Security (1)

Practitioner Certification (1)

GitHub (5)

GitHub Certification (5)

GRI (1)

GRI Sustainability Professionals (1)

H3C (7)

H3CNE (2)

H3CNE-Cloud (1)

H3CSE-Routing & Switching (4)

HashiCorp (16)

HashiCorp Networking Automation (1)

Terraform Associate (11)

Vault Associate (4)

HCL Software Academy (2)

HCLSoftware Certified Administrator-HWA10.2 (1)

HCLSoftware U Certified Professional (1)

Hitachi (21)

Basics and Fundamental (1)

Hitachi Vantara Certified Expert (3)

Hitachi Vantara Certified Specialist (2)

Hitachi Vantara Qualified Associate (1)

Heroku), or SaaS services (e.g. Terraform Cloud, DNSimple, Cloudflare).

<https://www.terraform.io/docs/providers/index.html>

69. Which of the following type of variable allows multiple values of several distinct types to be grouped together as a single value?

- Map
- **Object**
- Tuple
- List

Question was not answered

Explanation:

Structural type of variable allows multiple values of several distinct types to be grouped together as a single value. They require a schema as an argument, to specify which types are allowed for which elements.

<https://www.terraform.io/docs/configuration/types.html>

70. Which of the below terraform commands do not run terraform refresh implicitly before taking actual action of the command?

- terraform apply
- terraform destroy
- **terraform init**
- **terraform import**
- terraform plan

Question was not answered

Explanation:

<https://www.terraform.io/docs/commands/refresh.html>

71. When TF_LOG_PATH is set, TF_LOG must be set in order for any logging to be enabled.

- False
- **True**

Question was not answered

Explanation:

TF_LOG_PATH specifies where the log should persist its output to. Note that even when TF_LOG_PATH is set, TF_LOG must be set in order for any logging to be enabled.

For example, to always write the log to the directory you're currently running terraform from:

```
export TF_LOG_PATH=./terraform.log
```

```
export TF_LOG=TRACE
```

72. John wants to use two different regions to deploy two different EC2 instances.

He has specified two provider blocks in his providers.tf file.

```
provider "aws" { region = "us-east-1" }
```

```
provider "aws" { region = "us-west-2" }
```

When he run terraform plan he encountered an error .

Hitachi Vantara Qualified Professional (11)

Installation and Support (2)

Performance Architect (1)

HITRUST (2)

CSF Practitioner (2)

Hortonworks (1)

HCAHD (1)

HP (196)

ACA Campus Access Associate (6)

ACP – Data Center (2)

Aruba ACNSA (4)

Aruba ACNT (1)

Aruba Certified ClearPass Associate (ACCA) (2)

Aruba Certified ClearPass Expert (ACCX) (1)

Aruba Certified ClearPass Professional (ACCP) (2)

Aruba Certified ClearPass Professional (ACCP) V6.5 (2)

Aruba Certified Design Associate (ACDA) (1)

Aruba Certified Design Expert (ACDX) V8 (3)

Aruba Certified Design Professional (ACDP) (1)

Aruba Certified Edge Professional (ACEP) (1)

Aruba Certified Mobility Associate (ACMA) (5)

Aruba Certified Mobility Expert (ACMX) (8)

Aruba Certified Mobility Professional (ACMP) V6.4 (4)

Aruba Certified Professional – Campus Access (10)

Aruba Certified Switching Associate (ACSA) V1 (8)

Aruba Certified Switching Expert (1)

Aruba Certified Switching Professional (ACSP) (3)

Aruba Certified Switching Professional (ACSP) V1 (7)

HP ACEAP (1)

HP ASE (3)

HP ATP (1)

HP Certification (7)

HP Certified –PS Lifecycle Services for Workforce Computing (sales) [2025] (1)

HP ExpertONE Certification (3)

How to fix this?

- Use another provider version
- **Use alias for region = "us-west-2"**
- Use default keyword with region = "us-east-1"
- It can not be fixed

Question was not answered

73. Which of the following command can be used to view the specified version constraints for all providers used in the current configuration.

- **terraform providers**
- terraform state show
- terraform provider
- terraform plan

Question was not answered

Explanation:

Use the terraform providers command to view the specified version constraints for all providers used in the current configuration.

<https://www.terraform.io/docs/configuration/providers.html>

74. Terraform must track metadata such as resource dependencies. Where is this data stored?

- workspace
- backend
- **state file**
- metadata store

Question was not answered

Explanation:

Terraform typically uses the configuration to determine dependency order. However, when you delete a resource from a Terraform configuration, Terraform must know how to delete that resource. Terraform can see that a mapping exists for a resource not in your configuration and plan to destroy. However, since the configuration no longer exists, the order cannot be determined from the configuration alone.

To ensure correct operation, Terraform retains a copy of the most recent set of dependencies within the state. Now Terraform can still determine the correct order for destruction from the state when you delete one or more items from the configuration.

<https://www.terraform.io/docs/state/purpose.html#metadata>

75. Which Terraform command will force a marked resource to be destroyed and recreated on the next apply?

- terraform fmt
- terraform destroy
- **terraform taint**
- terraform refresh

Question was not answered

Explanation:

The terraform taint command manually marks a Terraform-managed resource as tainted, forcing it to be destroyed and recreated on the next apply.

This command will not modify infrastructure, but does modify the state file in order to mark a resource

as tainted. Once a resource is marked as tainted, the next plan will show that the resource will be destroyed and recreated and the next apply will implement this change. Forcing the recreation of a resource is useful when you want a certain side effect of recreation that is not visible in the attributes of a resource. For example: re-running provisioners will cause the node to be different or rebooting the

HP Product Certified (1)

HP Sales (2)

HP Sales Certified (10)

HP Scanjet N9120 (1)

HPE Aruba Certified Network Architect – Campus Access (1)

HPE ASE (24)

HPE ASE – Compute Solutions (2)

HPE ASE – HPE GreenLake Administrator (1)

HPE ATP (8)

HPE ATP – Hybrid IT Solutions V2 (1)

HPE GreenLake (1)

HPE Master ASE (6)

HPE Product Certified (3)

HPE Product Certified – AI and Machine Learning [2022] (2)

HPE Product Certified – Aruba Data Center Network Specialist (2)

HPE Product Certified – Containers [2021] (1)

HPE Product Certified – HPE OpsRamp (1)

HPE Product Certified – OneView [2022] (7)

HPE Sales Certified (16)

HPE Sales Certified – Edge-to-Cloud [2021] (3)

HPE Solution Certified – Data Protection (1)

HPE Storage Solutions (1)

HPE Support Services (1)

HPE Technical Certification (8)

Hybrid Cloud (5)

HPE (70)

ACP – Network Security (2)

ACX – Campus Access Switching (2)

Aruba Certified Switching Associate (ACSA) (1)

HPE Advanced Product Certified – ClearPass (3)

HPE Advanced Product Certified – Comware (1)

HPE Advanced Product Certified – CX 10000 (1)

HPE Advanced Product Certified – HPE Morpheus Enterprise Software Administrator (1)

machine from a base image will cause new startup scripts to run.

Note that tainting a resource for recreation may affect resources that depend on the newly tainted resource. For example, a DNS resource that uses the IP address of a server may need to be modified to reflect the potentially new IP address of a tainted server. The plan command will show this if this is the case.

<https://www.terraform.io/docs/commands/taint.html>

76. terraform refresh will update the state file?

- True
- False

Question was not answered

Explanation:

The terraform refresh command is used to reconcile the state Terraform knows about (via its state file) with the real-world infrastructure. This can be used to detect any drift from the last-known state, and to update the state file.

This does not modify infrastructure, but does modify the state file. If the state is changed, this may cause changes to occur during the next plan or apply.

77. In regards to deploying resources in multi-cloud environments, what are some of the benefits of using Terraform rather than a provider's native tooling? (select three)

- Terraform can help businesses deploy applications on multiple clouds and on-premises infrastructure.
- Terraform is not cloud-agnostic and can be used to deploy resources across a single public cloud.
- Terraform simplifies management and orchestration, helping operators build large-scale, multi-cloud infrastructure.
- Terraform can manage cross-cloud dependencies.

Question was not answered

Explanation:

Terraform is cloud-agnostic and allows a single configuration to be used to manage multiple providers, and to even handle cross-cloud dependencies. This simplifies management and orchestration, helping operators build large-scale multi-cloud infrastructures.

<https://www.terraform.io/intro/use-cases.html>

78. What is the default backend for Terraform?

- consul
- gcs
- local
- etcd

Question was not answered

Explanation:

By default, Terraform uses the "local" backend, which is the normal behavior of Terraform you're used to.

<https://www.terraform.io/docs/backends/index.html>

79. }

What of the following approaches needs to be followed in order to select image-4589?

- var.images["us-west-1"]
- var.images[3]

HPE Advanced Product Certified – HPE Morpheus Enterprise Software Automation Specialist (2)

HPE Aruba Certified Network Architect – Data Center (1)

HPE Aruba Networking Certified Associate – Network Security (1)

HPE Aruba Networking Certified Associate – Switching (4)

HPE Aruba Networking Certified Expert – Campus Access Switching (2)

HPE Aruba Networking Certified Expert – Network Security (1)

HPE Aruba Networking Certified Expert – Switching (1)

HPE Aruba Networking Certified Professional – Switching (9)

HPE ASE – Compute Solutions (1)

HPE ASE – Storage Solutions (1)

HPE ATP – Hybrid Cloud (2)

HPE GreenLake Cloud Services (1)

HPE Master ASE – Compute Architect (3)

HPE Master ASE – Compute Integrator Solutions (5)

HPE Master ASE – Edge-to-Cloud Architect (1)

HPE Master ASE – Storage Architect (1)

HPE Master ASE – Storage Integrator Solutions (2)

HPE Master ASE – Storage Solutions (1)

HPE Product Certified – AI and Machine Learning (1)

HPE Product Certified – HPE Ezmeral Data Fabric (2)

HPE Product Certified—OneView (1)

HPE Sales Certified – AI and As-a-Service Solutions [2025] (1)

HPE Sales Certified – HPE Aruba Networking Solutions (1)

HPE Solution Certified – HPE GreenLake (1)

HPE Solution Certified – Microsoft (1)

HPE Solution Certified – Private Cloud AI (1)

HPE Solution Certified – Sovereign Cloud (1)

HPE Solution Certified – Virtual Desktop Infrastructure (1)

HPE Solution Certified – VMware (1)

HPE Solution Certified – SAP HANA (1)

- var.images[2]
- lookup(var.images["us-west-1"])

Question was not answered

80. Which of the following represents a feature of Terraform Cloud that is NOT free to customers?

- Roles and Team Management
- WorkSpace Management
- **Private Module Registry**
- VCS Integration

Question was not answered

Explanation:

Role Based Access Controls (RBAC) for controlling permissions for who has access to what configurations within an organization and it is not free to customers.

<https://www.hashicorp.com/products/terraform/pricing/>

81. Terraform init can indeed be run only a few times, because, every time terraform init will initialize the project, and download all plugins from the internet repository, regardless of whether they were present or not, and this increases the waiting time

- True
- **False**

Question was not answered

Explanation:

Re-running init with modules already installed will install the sources for any modules that were added to configuration since the last init, but will not change any already-installed modules. Use -upgrade to override this behavior, updating all modules to the latest available source code.

<https://www.terraform.io/docs/commands/init.html>

82. Terraform import command can import resources into modules as well directly into the root of your state.

- **True**
- False

Question was not answered

Explanation:

Import will find the existing resource from ID and import it into your Terraform state at the given ADDRESS. ADDRESS must be a valid resource address. Because any resource address is valid, the import command can import resources into modules as well directly into the root of your state. Terraform is able to import existing infrastructure. This allows us take resources we've created by some other means (i.e. via console) and bring it under Terraform management. This is a great way to slowly transition infrastructure to Terraform. The terraform import command is used to import existing infrastructure. To import a resource, first write a resource block for it in our configuration, establishing the name by which it will be known to Terraform.

For example:

```
resource "aws_instance" "import_example" {
# ...instance configuration...
}
```

Now terraform import can be run to attach an existing instance to this resource configuration: \$ terraform import aws_instance.import_example i-03efafa258104165f aws_instance.import_example:

HRCI (2)

HRCI Certifications (2)

HRPA (2)

Certified Human Resources Professional (2)

Huawei (329)

HCDA – OWS Developer (1)

HCIA (2)

HCIA-5G (6)

HCIA-5G-Core (1)

HCIA-5G-RAN (1)

HCIA-Access (2)

HCIA-AI (5)

HCIA-Big Data (4)

HCIA-Cloud Computing (9)

HCIA-Cloud Service (7)

HCIA-Collaboration (2)

HCIA-Computing (1)

HCIA-Data Center (1)

HCIA-Data Center Facility (2)

HCIA-Datcom (3)

HCIA-Intelligent Computing (3)

HCIA-Intelligent Vision (1)

HCIA-IoT (1)

HCIA-Kunpeng Computing (1)

HCIA-SDN (1)

HCIA-Security (5)

HCIA-Storage (6)

HCIA-Transmission (1)

HCIA-Video Conference (2)

HCIA-WLAN (3)

HCIE-5G Radio (2)

HCIE-5G-Radio (1)

HCIE-Carrier IP (Written) (1)

HCIE-Cloud (3)

HCIE-Cloud Computing (1)

HCIE-Cloud DataCenter Operations (1)

HCIE-Cloud Service Solutions Architect (2)

HCIE-Collaboration (3)

HCIE-Data Center (4)

HCIE-Datcom (4)

Importing from ID "i-03efafa258104165f"...

aws_instance.import_example: Import complete!

Imported aws_instance (ID: i-03efafa258104165f)

aws_instance.import_example: Refreshing state... (ID: i-03efafa258104165f) Import successful! The resources that were imported are shown above. These resources are now in your Terraform state and will henceforth be managed by Terraform. This command locates the AWS instance with ID i-03efafa258104165f (which has been created outside Terraform) and attaches its existing settings, as described by the EC2 API, to the name aws_instance.import_example in the Terraform state.

As a result of the above command, the resource is recorded in the state file. We can now run terraform plan to see how the configuration compares to the imported resource, and make any adjustments to the configuration to align with the current (or desired) state of the imported object.

<https://www.terraform.io/docs/commands/import.html>

83. Environment variables can be used to set variables. The environment variables must be in the format "____" <variablename>. Select the correct prefix string from the following list.

- TF_CLI_ARGS
- TF_VAR
- **TF_VAR**
- TF_VAR_ENV

Question was not answered

Explanation:

Environment variables can be used to set variables. The environment variables must be in the format TF_VAR_name and this will be checked last for a value. For example: export TF_VAR_region=us-west-1

export TF_VAR_ami=ami-049d8641

export TF_VAR_alist=[1,2,3]

export TF_VAR_omap='{ foo = "bar", baz = "qux" }'

<https://www.terraform.io/docs/commands/environment-variables.html>

84. ABC Enterprise has recently tied up with multiple small organizations for exchanging database information. Due to this, the firewall rules are increasing and are more than 100 rules. This is leading firewall configuration file that is difficult to manage .

What is the way this type of configuration can be managed easily?

- Terraform Backends
- Terraform Functions
- **Dynamic Blocks**
- Terraform Expression

Question was not answered

85. The Terraform language does not support user-defined functions, and so only the functions built in to the language are available for use.

- False
- **True**

Question was not answered

Explanation:

<https://www.terraform.io/docs/configuration/functions.html>

86. When using remote state, state is only ever held in memory when used by Terraform.

HCIE-Enterprise Communication (2)

HCIE-Intelligent Computing (1)

HCIE-Kunpeng Computing (1)

HCIE-R&S (7)

HCIE-Security (1)

HCIE-Storage (5)

HCIE-Transmission (2)

HCIE-WLAN (1)

HCIP-5G-Core (1)

HCIP-5G-RAN (2)

HCIP-5G-RNP&RNO (3)

HCIP-Access (4)

HCIP-AI-EI (1)

HCIP-Big Data Developer (1)

HCIP-Carrier IP (2)

HCIP-Cloud Computing (6)

HCIP-Cloud Service Solutions Architect (5)

HCIP-Collaboration (2)

HCIP-Data Center Network (1)

HCIP-Datacom (11)

HCIP-Datacom-Campus Network Planning and Deployment (1)

HCIP-DCF-BFDO (3)

HCIP-HarmonyOS (1)

HCIP-Intelligent Computing (1)

HCIP-Intelligent Vision (1)

HCIP-Kunpeng Computing (1)

HCIP-LTE (1)

HCIP-Routing&Switching (7)

HCIP-Security (5)

HCIP-Storage (6)

HCIP-Transmission (5)

HCIP-Video Conference (2)

HCIP-WLAN (6)

HCNA (5)

HCNA-Big Data (1)

HCNA-CC (1)

HCNA-Cloud (4)

HCNA-Cloud Service (1)

HCNA-DCF (1)

- False
- **True**

Question was not answered

87. Which one of the following will run echo 0 and echo 1 on a newly created host?

```
provisioner "local-exec" { command = "echo 0"
  command = "echo 1"
}
provisioner "remote-exec" {
  inline = [
    echo 0,
    echo 1
  ]
}
provisioner "remote-exec" {
  command = "${echo 0}"
  command = "${echo 1}"
}
provisioner "remote-exec" {
  inline = [
    "echo 0",
    "echo 1"
  ]
}
```

Question was not answered

Explanation:

remote-exec Provisioner

Example usage

```
resource "aws_instance" "web" {

# ...

provisioner "remote-exec" {

  inline = [

    "puppet apply",

    "consul join ${aws_instance.web.private_ip}",

  ]

}
```

88. If you enable TF_LOG = DEBUG, the log will be stored in syslog.log file in the current directory.

- **False**
- True

Question was not answered

Explanation:

<https://www.terraform.io/docs/internals/debugging.html>

89. What allows you to conveniently switch between multiple instances of a single configuration within its single backend?

- Local backends
- Providers
- Remote backends

HCNA-HNTD (2)

HCNA-IoT (1)

HCNA-LTE (2)

HCNA-LTE RNP & RNO (1)

HCNA-Security (1)

HCNA-Storage (2)

HCNA-Transmission (3)

HCNA-UC (2)

HCNA-VC (2)

HCNA-WLAN (1)

HCNP (9)

HCNP-Access Network (2)

HCNP-Big Data Developer (1)

HCNP-CC (1)

HCNP-Cloud (5)

HCNP-DCF-BFDO (2)

HCNP-LTE (2)

HCNP-LTE RNP (2)

HCNP-LTE RNP & RNO (2)

HCNP-R&S (11)

HCNP-Security (7)

HCNP-Storage (6)

HCNP-Transmission (1)

HCNP-UC (2)

HCNP-VC (2)

HCNP-WLAN (3)

HCPA-ECC (1)

HCPA-Storage (2)

HCPP-Storage (1)

HCS-5G RAN (1)

HCS-Field-IVS (1)

HCS-Field-Server (2)

HCS-Field-Smart PV Controller (1)

HCS-Field-WLAN (1)

HCS-Microwave Hardware Installation (1)

HCS-Pre-Sale-IVS (1)

HCS-Pre-sales (2)

HCS-Pre-sales-Cloud (2)

HCS-Pre-Sales-IP Network(Datacom) (5)

- **Workspaces**

Question was not answered

Explanation:

Named workspaces allow conveniently switching between multiple instances of a single configuration within its single backend. ... A common use for multiple workspaces is to create a parallel, distinct copy of a set of infrastructure in order to test a set of changes before modifying the main production infrastructure.

Workspaces, allowing multiple states to be associated with a single configuration. The configuration still has only one backend, but multiple distinct instances of that configuration to be deployed without configuring a new backend or changing authentication credentials.

<https://www.terraform.io/docs/state/workspaces.html>

90. What is the command you can use to set an environment variable named "var1" of type String?

- export TF_VAR_VAR1
- set TF_VAR_var1
- variable "var1" { type = "string" }
- **export TF_VAR_var1**

Question was not answered

Explanation:

The environment variable must be in the format TF_VAR_name, so for the Question: TF_

VAR_var1 is the correct choice.

https://www.terraform.io/docs/commands/environment-variables.html#tf_var_name

HashiCorp Terraform
Associate TA-002-P Exam
Can Be Finished With
Updated Dumps

HashiCorp Certified: Vault
Associate VA-002-P Exam
Dumps

Tags: [TA-002-P](#), [TA-002-P dumps](#), [TA-002-P dumps questions](#), [TA-002-P exam dumps](#), [TA-002-P exam questions](#), [TA-002-P free dumps](#)

Related Posts

HashiCorp
TA-003-P
Dumps
(V10.02) –
Updated
Version Is
Designed to
Help You
Achieve
HashiCorp
Certified:
Terraform
Associate
(003) Exam
Success

Pass the
HashiCorp
Certified:
Consul
Associate
Exam with
Confidence
Using Our
Latest Consul
Associate
Exam
Questions

[Updated
Dumps 2024]
HashiCorp
VA-002-P
Exam Dumps
V10.03 for
Your
HashiCorp
Certified:
Vault
Associate
Exam
Preparations

About The Author

Dumps

From our dumpsbase platform you could search what exams you need then test or practice online by

HCS-Pre-sales-IP(Security) (1)

HCS-Pre-sales-Server (2)

HCS-Pre-sales-TP&VC (1)

HCS-Wireless Hardware Installation(Written)
(1)

HCS-Wireless Hardware Installation(Written)
(1)

HCSA-Field-5G RAN (1)

HCSA-Presales-Access (3)

HCSA-Presales-Computing (1)

HCSA-Presales-Intelligent Collaboration (1)

HCSA-Presales-IP Network (1)

HCSA-Presales-Service (2)

HCSA-Presales-Storage (3)

HCSA-Presales-Transmission & Access (2)

HCSA-Sales-IP Network (1)

HCSA-Sales-Transmission & Access (1)

HCSP-Presales-Access (1)

HCSP-Presales-Campus Network (2)

HCSP-Presales-Data Center Facility (Power)
(1)

HCSP-Presales-Data Center Network
Planning and Design (2)

HCSP-Presales-Service (1)

HCSP-Presales-Storage (3)

HCSP-Presales-Transmission (1)

Huawei Data Center Facility (1)

Huawei Specialist Certification (9)

Huawei-Pre-uc (1)

IAAP (2)

IAAP-CPACC (2)

IAPP (29)

Certified Information Privacy Professional (6)

CIPM Certification (9)

CIPP/E Certification (10)

CIPT Certification (4)

IASSC (2)

Lean Six Sigma Black Belt (1)

Lean Six Sigma Green Belt (1)

ICDL (1)

ICF (2)