

# Cucumber Report

27 Oca 2024 22:05:07

Start : Oca 27, 10:05:05.047 ÖS

End : Oca 27, 10:05:05.665 ÖS

Duration : 0.618 s

Features

Scenarios

Steps

PASSED - 1  
FAILED - 0  
SKIPPED - 0

PASSED - 2  
FAILED - 0  
SKIPPED - 0

PASSED - 8  
FAILED - 0  
SKIPPED - 0



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Login</u>	0.618 s	2	2	0	0	8	8	0	0

<b>TAG</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>
@login	1	1	0	0	1	1	0	0
@signup	1	1	0	0	1	1	0	0



#	Feature Name	T	P	F	S	Duration
1	Login	2	2	0	0	0.618 s

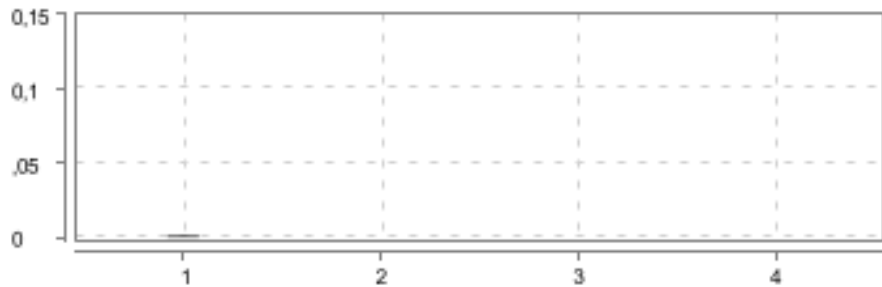



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Login</u>	<u>Login with user defined in yaml file</u>	4	4	0	0	0.507 s
2		<u>Sign up</u>	4	4	0	0	0.021 s

## Login

<div>PASSED</div>	<div>DURATION - 0.618 s</div>	<div>Scenarios</div> <div>Total - 2</div> <div>Pass - 2</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div><div></div><div>2</div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 8</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div><div></div><div>8</div></div>
<div>/ 10:05:05.047 ÖS // 10:05:05.665 ÖS /</div>					

## Login with user defined in yaml file

<div>PASSED</div>	<div>DURATION - 0.507 s</div>		<div>Steps</div> <div>Total - 4</div> <div>Pass - 4</div> <div>Fail - 0</div> <div>Skip - 0</div>	
/ 10:05:05.050 ÖS // 10:05:05.557 ÖS /				
Login				
@login				

#	Step / Hook Details	Status	Duration
	BEFORE - com.guidersoft.stepdefs.Hooks.beforeScenario()	PASSED	0.000 s
1	Given user on homepage	PASSED	0.001 s
	AFTER_STEP - com.guidersoft.stepdefs.Hooks.afterStep(io.cucumber.java.Scenario)	PASSED	0.000 s
2	When user clicks LOGIN on menu with Enum	PASSED	0.000 s
	AFTER_STEP - com.guidersoft.stepdefs.Hooks.afterStep(io.cucumber.java.Scenario)	PASSED	0.000 s
3	And user login as "user"	PASSED	0.000 s
	AFTER_STEP - com.guidersoft.stepdefs.Hooks.afterStep(io.cucumber.java.Scenario)	PASSED	0.000 s
4	Then login should be successful	PASSED	0.000 s
	AFTER_STEP - com.guidersoft.stepdefs.Hooks.afterStep(io.cucumber.java.Scenario)	PASSED	0.000 s

## Sign up

<b>PASSED</b>	DURATION - 0.021 s		<b>Steps</b> Total - 4 Pass - 4 Fail - 0 Skip - 0	
/ 10:05:05.644 ÖS // 10:05:05.665 ÖS /				
Login				
@signup				

#	Step / Hook Details	Status	Duration				
	BEFORE - com.guidersoft.stepdefs.Hooks.beforeScenario()	PASSED	0.000 s				
1	Given user on homepage	PASSED	0.000 s				
	AFTER_STEP - com.guidersoft.stepdefs.Hooks.afterStep(io.cucumber.java.Scenario)	PASSED	0.000 s				
2	When user clicks SIGNUP on menu with Enum	PASSED	0.000 s				
	AFTER_STEP - com.guidersoft.stepdefs.Hooks.afterStep(io.cucumber.java.Scenario)	PASSED	0.000 s				
3	And user fills the New User Signup form as follows	PASSED	0.002 s				
	<table><tr><td>name</td><td>newUser1</td></tr><tr><td>email</td><td>newuser123@user.com</td></tr></table>			name	newUser1	email	newuser123@user.com
name	newUser1						
email	newuser123@user.com						
	AFTER_STEP - com.guidersoft.stepdefs.Hooks.afterStep(io.cucumber.java.Scenario)	PASSED	0.000 s				
4	Then login should be successful	PASSED	0.000 s				
	AFTER_STEP - com.guidersoft.stepdefs.Hooks.afterStep(io.cucumber.java.Scenario)	PASSED	0.000 s				