



Kubernetes Security



CLARUSWAY©
WAY TO REINVENT YOURSELF

Table of Contents



- ▶ Core Concepts
- ▶ Authentication
- ▶ Authorization

CLARUSWAY©
WAY TO REINVENT YOURSELF




1

Core Concepts



Core Concepts

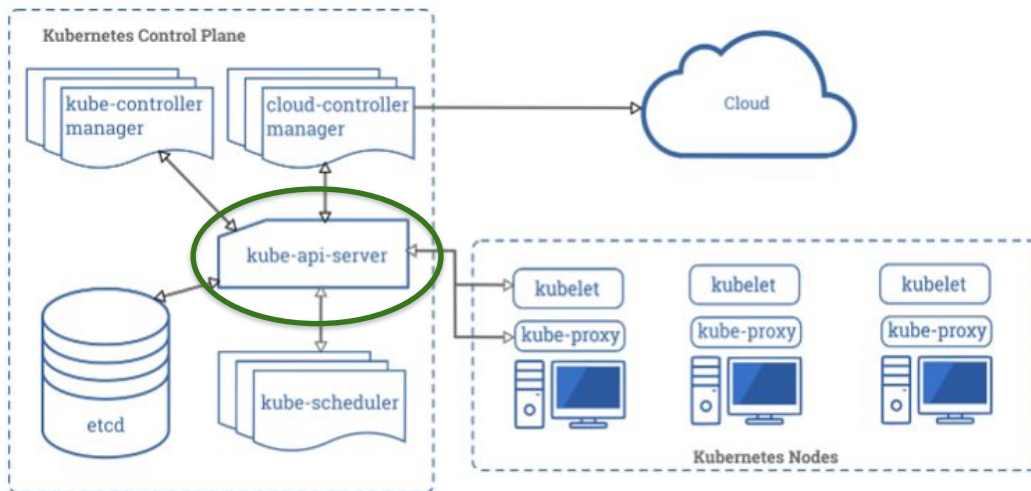



Core Concepts

kube-apiserver:

- Provides a forward facing REST interface into the kubernetes control plane and datastore.
- All clients and other applications interact with kubernetes strictly through the API Server.
- Acts as the gatekeeper to the cluster by handling **authentication** and **authorization**, request validation, mutation, and admission control in addition to being the front-end to the backing datastore.




Core Concepts


Who can Access?

-----> KUBE_API_SERVER

What can they do?



Core Concepts



Who can Access? -----> **Authentication**

What can they do? -----> **Authorization**

CLARUSWAY©
WAY TO REINVENT YOURSELF

7



2 Authentication

CLARUSWAY©
WAY TO REINVENT YOURSELF



Authentication

Who can Access?



KUBE_API_SERVER



Authentication

Who can Access?



User




Service Accounts

- **User accounts** are for humans. **Service accounts** are for **processes**, which run in pods.
- **User accounts** are intended to be **global**. Names must be unique across all namespaces of a cluster.
- Service accounts are namespaced.



► Authentication

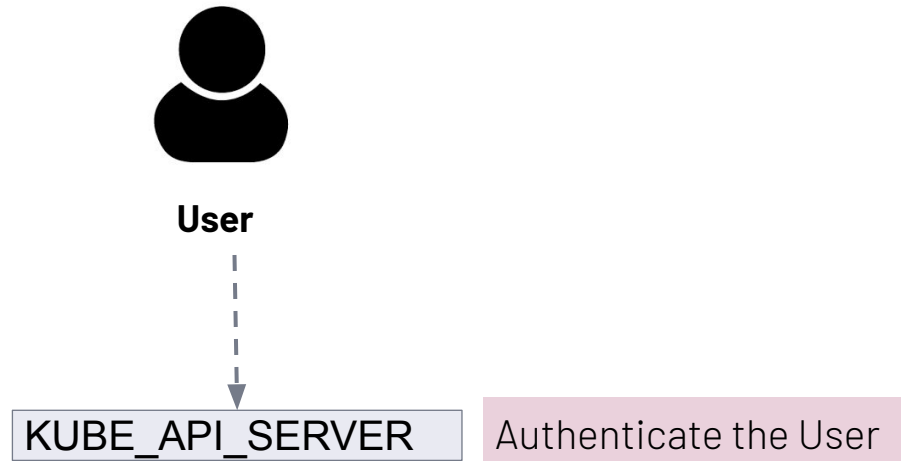

► Authentication Strategies


client certificates



Static Token File



Identity Services

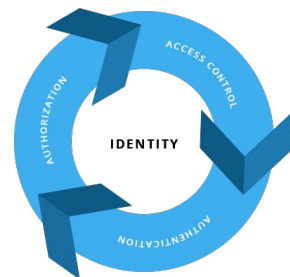



3

Authorization



Authorization

What can they do?



KUBE_API_SERVER



Authorization Modes

Node

ABAC


RBAC

Webhook



Node


Node authorization is a special-purpose authorization mode that specifically authorizes API requests made by kubelets.

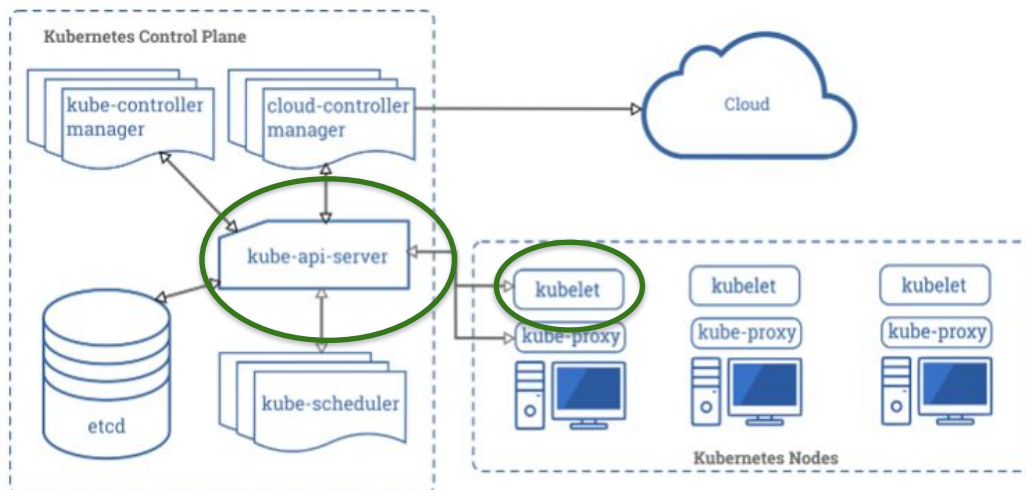




ABAC

Attribute-based access control (ABAC) defines an access control paradigm whereby access rights are granted to users through the use of policies which combine attributes together.

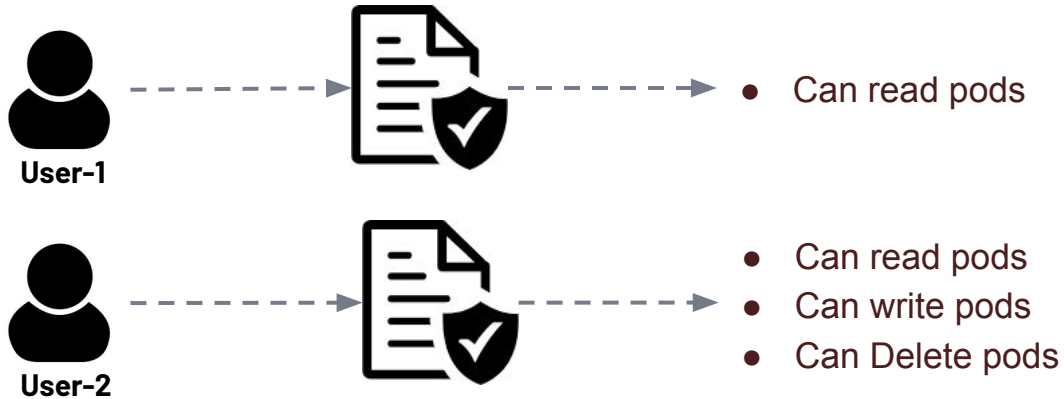

RBAC

Role-based access control (RBAC) is a method of regulating access to computer or network resources based on the roles of individual users within your organization.

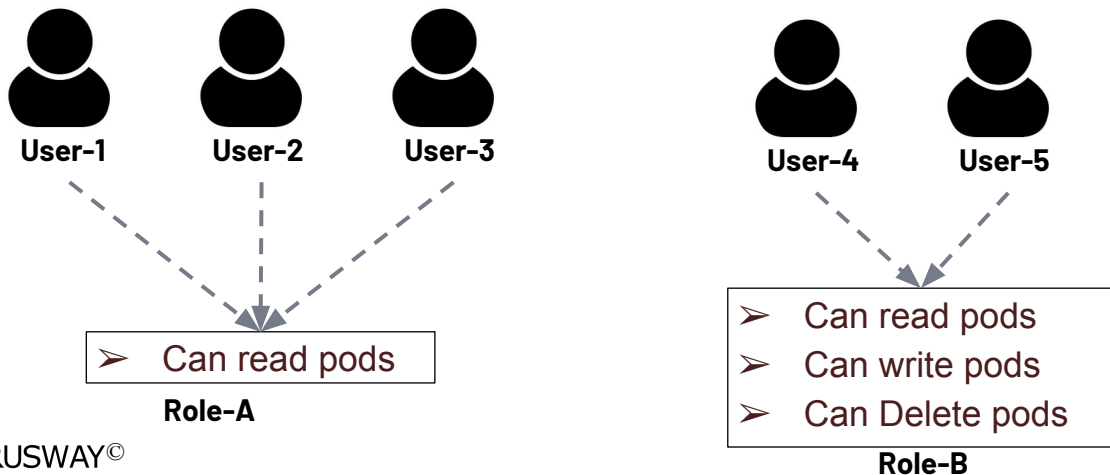



▶ Role and ClusterRole

RBAC Role or ClusterRole contains rules that represent a set of permissions.

- A **Role** always sets permissions within a **particular namespace**; when you create a Role, you have to specify the namespace it belongs in.
- **ClusterRole**, by contrast, is a **non-namespaced** resource.



▶ RoleBinding and ClusterRoleBinding

- A **role binding** grants the permissions defined in a role to a user or set of users.
- A **RoleBinding** grants permissions within a specific namespace whereas a **ClusterRoleBinding** grants that access cluster-wide.



Webhook

A **WebHook** is an HTTP callback: an HTTP POST that occurs when something happens; a simple event-notification via HTTP POST. A web application implementing WebHooks will POST a message to a URL when certain things happen.

When specified, mode Webhook causes Kubernetes to query an outside REST service when determining user privileges.



THANKS!

Any questions?





▶ API Groups

API groups make it easier to extend the Kubernetes API. The API group is specified in a REST path and in the `apiVersion` field of a serialized object.

There are several API groups in Kubernetes:

- The core (also called legacy) group is found at REST path `/api/v1`. The core group is not specified as part of the `apiVersion` field, for example, `apiVersion: v1`.
- The named groups are at REST path `/apis/$GROUP_NAME/$VERSION` and use `apiVersion: $GROUP_NAME/$VERSION` (for example, `apiVersion: batch/v1`).



▶ API Groups

- Kubernetes API is grouped into multiple such groups based on their purpose. Such as one for `apis`, one for `healthz`, `metrics` and `logs` etc.
- The version API is for viewing the version of the cluster.
- `metrics` and `healthz` api are used to monitor the health of the cluster.

`/api`

`/apis`

`/logs`

`/healthz`

`/metrics`

`/version`




▶ API Groups

- **api** and **apis** are responsible for the cluster of functionality.
- These APIs are categorized into two groups. The core group and the named group.
- The core group is where all core functionality exists. Such as namespaces, pods, replication controllers, events, endpoints, nodes, bindings, Persistent volumes, persistent volume claims, configmaps, secrets, services etc.




▶ API Groups

- `kubect proxy --port=8080 &`
- `curl localhost:8080`
- `curl localhost:8080/version` → `kubect version`
- `curl localhost:8080/api/v1/pods`



API Groups



core

/api

/api/v1

/api/v1/pod

/api/v1/nodes


/api/v1/secrets


/api/v1/configmaps

...


CLARUSWAY©

WAY TO REINVENT YOURSELF





API Groups



- The named group apis are for the newer features.

named

/apis

/apis/apps


/apis/extensions

/apis/networking.k8s.io

...

CLARUSWAY©

WAY TO REINVENT YOURSELF





▶ API Groups

Each resource has a set of actions associated with them.

/apis/apps/v1/deployments

list

get

create

delete

update

watch