

CSC 447: Parallel Programming for Multi-Core and Cluster Systems

Shared Parallel Programming Using OpenMP

Instructor: Haïdar M. Harmanani

Spring 2021



Why OpenMP?

- Thread libraries are hard to use
 - Pthreads have many library calls for initialization, synchronization, thread creation, condition variables, etc.
 - Programmer must code with multiple threads in mind
- Synchronization between threads introduces a new dimension of program correctness

Why OpenMP?

- OpenMP is a parallel programming model for Shared-Memory machines
 - All threads have access to a shared main memory
 - Each thread may have private data.
- Parallelism is expressed explicitly by the programmer.
- Using the *worksharing* constructs, the work can be distributed among the threads of a team.

Why OpenMP?

```
int main() {  
    printf( "Hello, World!\n" );  
    return 0;  
}
```

Why OpenMP ? Hello World Pthread Version

```
int main() {
    pthread_attr_t attr;
    pthread_t threads[16];
    int tn;

    pthread_attr_init(&attr);

    for(tn=0; tn<16; tn++) {
        pthread_create(&threads[tn], &attr, SayHello, NULL);
    }

    for (tn=0; tn<16 ; tn++) {
        pthread_join(threads[tn], NULL);
    }
    return 0;
}

void* SayHello(void *foo) {
    printf( "Hello, world!\n" );
    return NULL;
}
```


Why OpenMP ? Hello World Pthread Version

```
int main()
{
    omp_set_num_threads(16);

    // Do this part in parallel
    #pragma omp parallel
    {
        printf( "Hello, World!\n" );
    }


    return 0;
}
```

OpenMP: Solution Stack

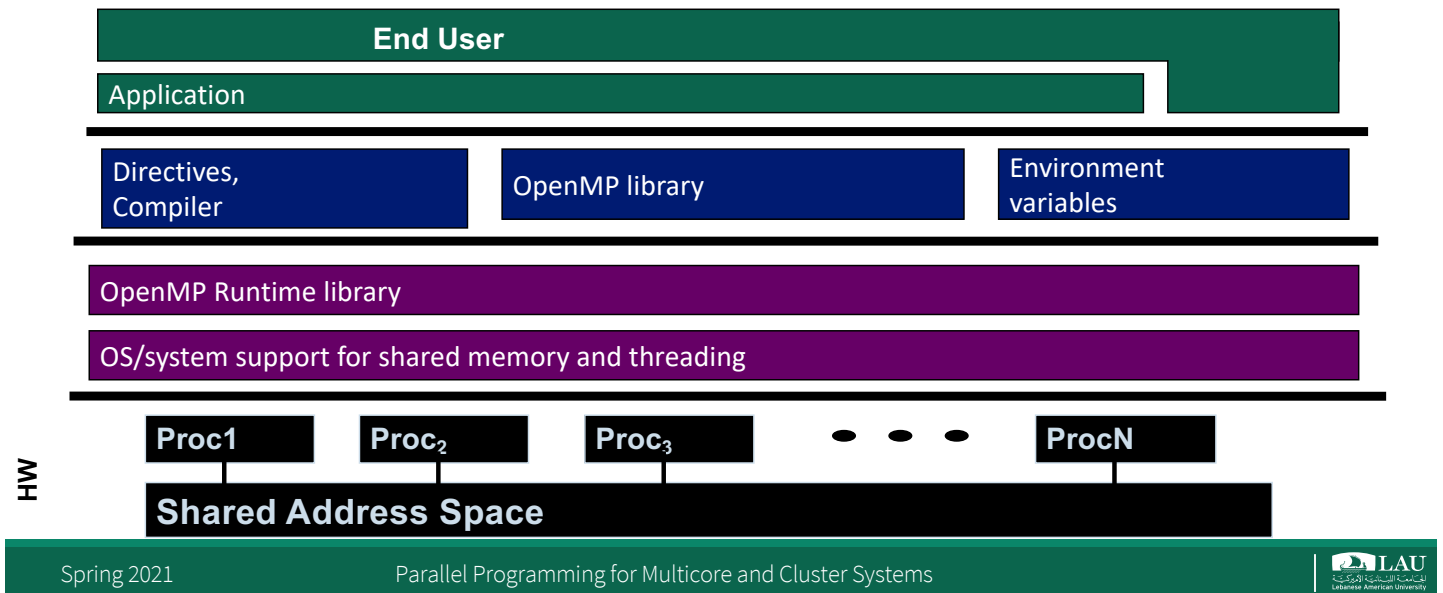


OpenMP Execution Model

- OpenMP uses a fork join methodology to implement parallelism
 - Master thread spawns a team of threads as needed
- Parallel directive creates a team of threads with a specified block of code executed by the multiple threads in parallel.
 - The exact number of threads in the team determined by one of several ways.

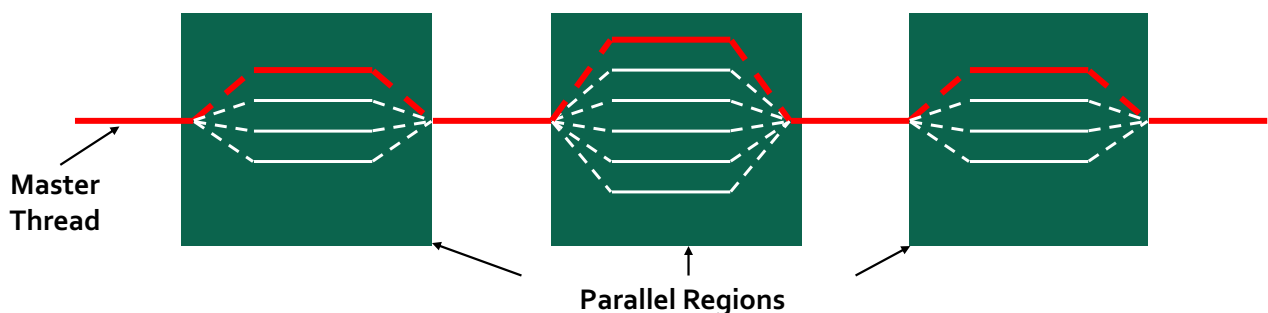

OpenMP Execution Model

- Worker threads are spawned at Parallel Regions, together with the Master they form the Team of threads.
- In between Parallel Regions the Worker threads are put to sleep.
- The OpenMP Runtime takes care of all thread management work

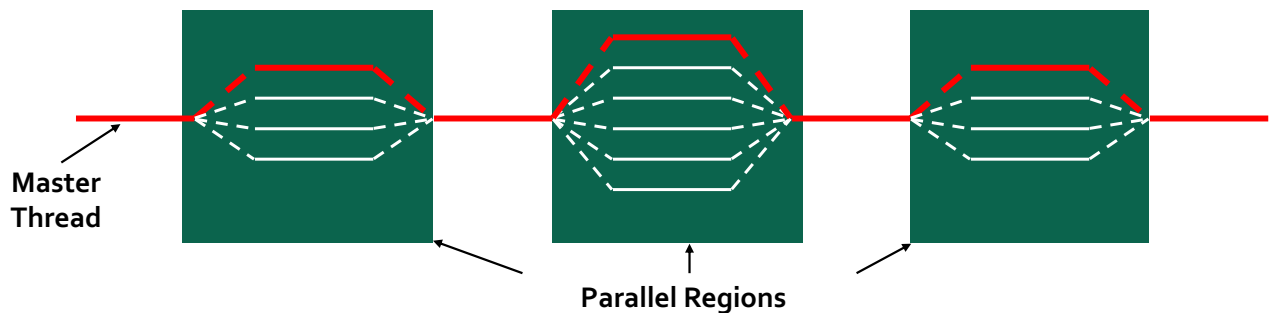

Getting Started with OpenMP

OpenMP Syntax

- OpenMP constructs are compiler directives or pragmas
 - For C and C++, the pragmas take the form:

```
#pragma omp directive-name [clause[ [,] clause] ... ] new-line
```

Hello Worlds

```
#include <stdio.h>
#include <omp.h>
```

```
int main() {
    #pragma omp parallel
    {
        int i;
        int ID = omp_get_thread_num();

        printf("Hello World\n");
        for(i=0;i<6;i++)
            printf("Iter:%d, %d\n",i, ID);
    }
    printf("GoodBye World\n");
}
```

Switches for compiling and linking:

gcc -fopenmp filename

Begin Parallel region

Runtime library function to return a thread ID.

End Parallel region

#pragma omp parallel

- This pragma will execute in parallel what's next : next line, next loop, next block of code between brackets.
- But the parallel keyword alone won't distribute the workload on different threads. For that we'll see the constructs for, task, section.
- parallel will execute the same thing several times in parallel.

#pragma omp parallel

- ```
printf("before\n");
#pragma omp parallel
printf("parallel\n");
printf("after\n");
```
- If you compile as usual (without the -openmp flag), will return :  

```
before
parallel
after
```
- A pragma is not regular code and require a special flag to be used by the compiler.

# #pragma omp parallel

- ```
printf("before\n");  
#pragma omp parallel  
printf("parallel\n");  
printf("after\n");
```
- If compile with the -openmp flag, will return on a quad-core machine:

```
before  
parallel  
parallel  
parallel  
parallel  
after
```

#pragma omp parallel

- ```
#pragma omp parallel
{
 printf("start ");
 printf("end ");
}
```

Will return on a dual-core machine:

```
start start end end
or (depending on various conditions)
start end start end
```

- Parallel execution does NOT implicate anything about the order of execution.



# Structured Blocks

- Most OpenMP constructs apply to structured blocks
  - Exactly one entry point at the top
  - Exactly one exit point at the bottom
  - Branching in or out is not allowed
  - Terminating the program is allowed (abort / exit)

## OMP Parallel Regions

# Structured Blocks

- A parallel region consists of a structured block of code
- A structured block of code is a code fragment with a single point of entry into the block at the top of the block, and one exit to the block at the bottom – AND no breaks out of the block.

## Structured Blocks: Example

- Create threads in OpenMP using the “omp parallel” pragma.

```
#pragma omp parallel
{
 int id = omp_get_thread_num();
more: res[id] = do_big_job (id);

 if (conv (res[id]) goto more;
}
printf (“All done\n”);
```

**A structured block**

```
if (go_now()) goto more;
#pragma omp parallel
{
 int id = omp_get_thread_num();
more: res[id] = do_big_job(id);
 if (conv (res[id]) goto done;
 goto more;
}
done: if (!really_done()) goto more;
```

**Not a structured block**

# OpenMP: Parallel Regions

- Example: create a 4 parallel thread regions


Each thread redundantly executes the code within the structured block

```
double A[1000];
omp_set_num_threads(4);
#pragma omp parallel
{
 int ID = omp_thread_num();
 pooh(ID,A);
}
```

Each thread calls pooh(ID) for ID = 0 to 3

# OpenMP: Parallel Regions

Each thread executes the same code redundantly.

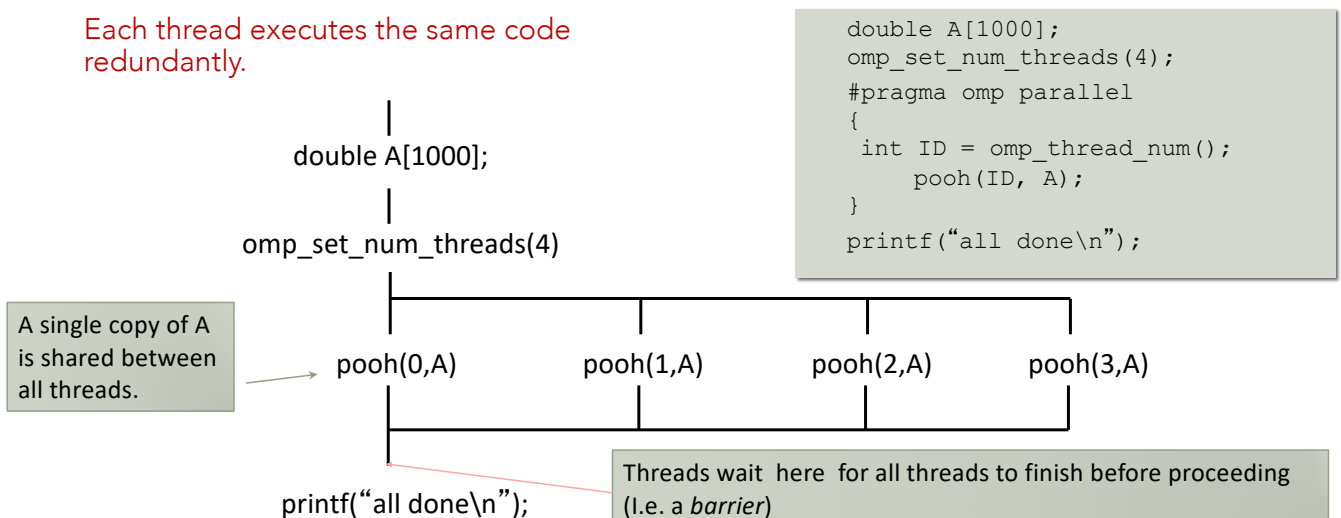

# single, master and wait clauses

## #pragma omp single

- **single** will execute the next block of code once by the first available thread.

```
▪ #pragma omp parallel
{
 printf("start ");
 #pragma omp single
 printf("end ");
}
```

Will return on a dual-core machine:

```
start start end
```

## #pragma omp master


- single will execute the next block of code once by the **master** thread.
- ```
#pragma omp parallel
{
    printf("start ");
    #pragma omp master
    printf("end ");
}
```

Will return on a dual-core machine:

```
start start end
```

#pragma omp master

- Master thread has ID 0
 - Only thread that exists in sequential regions
 - Depending on implementation, may have special purpose inside parallel regions
 - Some special directives affect only the master thread (like master)

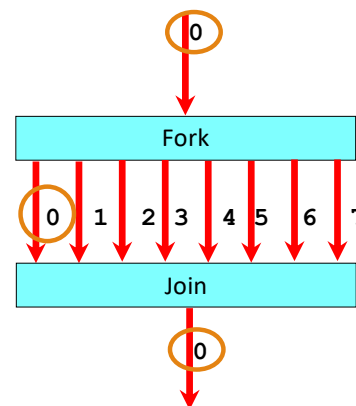

#pragma omp ... nowait

- **nowait** will prevent the join phase at the end of a parallel region (an implicit barrier) from blocking execution.
- `#pragma omp parallel for nowait`

```
for (int i=0;i<n;i++) {  
    printf("i");  
}  
#pragma omp parallel for  
for (int j=0;j<m;j++) {  
    printf("j");  
}  
Could print iiiiijjijjjjjjjjjjj
```



for
worksharing construct
data decomposition

for worksharing construct

- The `omp parallel for` construct starts a parallel region by creating an optimal number of threads and maintaining a queue of iterations to execute and distribute them to the threads as needed.
- When all the iterations are executed, the parallel region will end and the code will go back to serial execution.

```
#pragma omp parallel for
for (i=0 ; i<N ; i++) {
    printf("loop %d\n",i);
}
```

for worksharing construct

- `parallel for` is a simple and flexible way to implement data decomposition:
 - Keep a simple loop structure
 - All the queue management is done automatically
 - Worksharing is handled automatically
- Iterations will not execute in a specific order or show the same behavior on different software or hardware environments
- If some variables are defined before the parallel region, they are **shared** between threads.
 - Sharing to read is safe but sharing and writing leads to parallel bugs. We'll see how to share variables safely.

task worksharing construct flexible task decomposition

#pragma omp task

- Allows parallelization of irregular problems
- unbounded loops
- recursive algorithms
- producer/consumer
- A task is composed of :
 - Code to execute
 - Data environment
 - Internal control variables (ICV)

#pragma omp task

```
#pragma omp parallel
{
    #pragma omp single private(p)
    {
        while (p) {
            #pragma omp task
            processwork(p);
            p = p->next; # not in the task
        }
    } # end of the single region
} # end of the parallel region
```

synchronizations

- Tasks are guaranteed to be complete :
- At thread or task barriers
- At the directive :
 #pragma omp barrier
- At the directive :
 #pragma omp taskwait

barrier

```
#pragma omp parallel
{
    #pragma omp task
    foo();
    #pragma omp barrier

    #pragma omp single
    {
        #pragma omp task
        bar();
    }
}
```

task : Multiple foo() tasks created, one for each thread in the parallel region.


barrier : All foo() tasks are guaranteed to be completed here.

task-single : one bar() task is created because there is only 1 thread running with the **single** keyword.

Sharing Variables in OpenMP

OpenMP Shared-Memory Model

- OpenMP worker threads and the master thread share the same process and variables.
- If variable scope includes the parallel region, it is shared by default
 - All the threads will read and write to the same memory location.

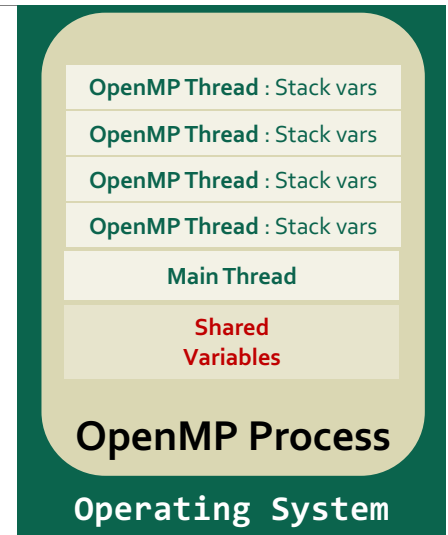

Scoping Rules

- Not everything is shared...
 - Examples of implicitly determined private variables:
 - Stack (local) variables in functions called from parallel regions are PRIVATE
 - Automatic variables **within** a statement block are PRIVATE
 - Loop **iteration variables** are private
 - Implicitly **declared private** variables within tasks will be treated as `firstprivate`
- Shared clause can be used to make items explicitly shared
 - Global variables are shared by default among tasks
 - File scope variables, namespace scope variables, static variables, variables with const-qualified type having no mutable member are shared, Static variables which are declared in a scope inside the construct are shared

Global Data

- Global data are shared and require special care
- A problem may arise in case multiple threads access the same memory section simultaneously:
 - Read-only data is no problem
 - Updates have to be checked for race conditions
 - It is the programmer's responsibility to deal with this situation
- In general one can do the following:
 - Split the global data into a part that is accessed in serial parts only and a part that is accessed in parallel
 - Manually create thread private copies of the latter
 - Use the thread ID to access these private copies

Shared by default

```
float x, y;  
int i;  
#pragma omp parallel for  
for(i=0; i<N; i++) {  
    x = a[i]; y = b[i];  
    c[i] = x + y;  
}
```

- This code is executing correctly in serial but may give a different results in parallel. Why?

Problem 1 : Race condition

- A race condition is **nondeterministic behavior** caused by the times at which two or more threads access a **shared variable**.
- Let's suppose we have 2 threads executing :
`x = a[i]; y = b[i];`
`c[i] = x + y;`
- If a thread can execute the two lines without having the other thread changing variables x and y, good
 - **Not guaranteed.**
- If the two threads have a mixed execution, the result c will be **wrong**.
- Race conditions may or may not be visible depending on various experimental conditions (number of cores, other software running, luck, ...)

Problem 2 : Corruption

- Independently from race conditions, writing to the same object or memory location from different threads without protection is risky.
 - Example : Different threads write to the serial output (console) at the same time.
 - If you are lucky, messages will intercalate nicely.
 - If you are not, the output may become garbled as bits of information representing the output text will be mixed together.

Problem 3 : Initialization

- If you use local copies instead of global variables to prevent race conditions and corruption, the last problem is initialization.
- Local variables created by the OpenMP layer may or may not be initialized, or initialized differently

Solutions

- Recode to prevent sharing
 - Explicit declarations using data scope clauses
 - Synchronization (more about this one later)

Data Scope Clauses

- **shared**
 - Declares variables in its list to be shared among all threads in the team
- **private**
 - Reproduce the variable for each task
 - Variables are un-initialized;
 - Any value external to the parallel region is undefined
- **firstprivate**
 - Combines the behavior of the **private** clause with automatic initialization of the variables in its list
- **lastprivate**
 - Combines the behavior of the **private** clause with a copy from the last loop iteration or section to the original variable object
- More about data scope clauses later
 - Reduction, **copyin** and **copyprivate**

Solution 1: Explicitly Change the Scope

```
float x, y;  
int i;  
#pragma omp parallel for  
for(i=0; i<N; i++) {  
    x = a[i]; y = b[i];  
    c[i] = x + y;  
}
```

Before : variables defined with global scope from the master thread, shared between threads.

```
int i;  
#pragma omp parallel for  
for(i=0; i<N; i++) {  
    float x, y;  
    x = a[i]; y = b[i];  
    c[i] = x + y;  
}
```

After : local variables defined locally. Nothing shared.

Efficient and safe.

Solution 2: forcing serial execution of the critical block

```
float x, y;
int i;
#pragma omp parallel for
for(i=0; i<N; i++) {
    x = a[i]; y = b[i];
    c[i] = x + y;
}
```

Before : variables defined with global scope from the master thread, shared between threads.

```
float x, y;
int i;
#pragma omp parallel for
for(i=0; i<N; i++) {
    #pragma omp critical
    x = a[i]; y = b[i]; c[i] = x + y;
}
```

After : same thing, but serial execution forced.

Safe but not scaling.

Solution 3: atomic

- Instead of protecting an entire block of code, is it enough to protect write accesses to a single shared variable only ?
- If yes, use atomic it will be a lot faster than critical :
 - atomic is like a mini critical section for a variable.

```
#pragma omp parallel for shared(sum)
for(i=0; i<N; i++) {
    #pragma omp atomic
    sum += a[i] * b[i];
}
```


Solution 4: Changing the Scope Using the private Clause

```
float x, y;
int i;
#pragma omp parallel for
for(i=0; i<N; i++) {
    x = a[i]; y = b[i];
    c[i] = x + y;
}
```

Before : global variables shared between threads.

```
float x, y;
int i;
#pragma omp parallel for private (x,y)
for(i=0; i<N; i++) {
    x = a[i]; y = b[i];
    c[i] = x + y;
}
```

After : local copies of global variables.

Nothing shared.

Efficient and safe.

Solution 4: Changing the Scope Using the private Clause

- The private clause reproduces the variable for each task
 - Variables are un-initialized;
 - C++ object is default constructed
 - Any value external to the parallel region is undefined

```
void* work(float* c, int N) {
    float x, y;
    int i;

    #pragma omp parallel for private(x,y)
    for(i=0; i<N; i++) {
        x = a[i]; y = b[i];
        c[i] = x + y;
    }
}
```