

Prints

.listarApi

The screenshot shows a REST client interface with a dark theme. At the top, the URL bar displays `http://127.0.0.1:8000/api/producoes`. Below the URL bar, the HTTP method is set to `GET`. The interface includes tabs for `Params`, `Authorization`, `Headers (7)`, `Body`, `Scripts`, and `Settings`. The `Params` tab is currently selected, showing a section for `Query Params` with a table containing two rows, each with a `Key` column.


Key
Key

.addApi

The screenshot shows a REST client interface with a dark theme. The URL bar displays `http://127.0.0.1:8000/api/producao/add`. The HTTP method is set to `POST`. The interface includes tabs for `Params`, `Authorization`, `Headers (9)`, `Body`, `Scripts`, and `Settings`. The `Body` tab is currently selected, showing a dropdown menu with options: `none`, `form-data`, `x-www-form-urlencoded`, `raw` (selected), `binary`, `GraphQL`, and `JSON`. The `raw` option is selected, and the body content is a JSON object:

```
1 {  
2   .... "nomeProduto": "Barra",  
3   .... "materia": "Ferro",  
4   .... "dataFabricacao": "2026-06-09",  
5   .... "quantidade": 10,  
6   .... "preco": 25  
7 }  
8
```

.updateApi

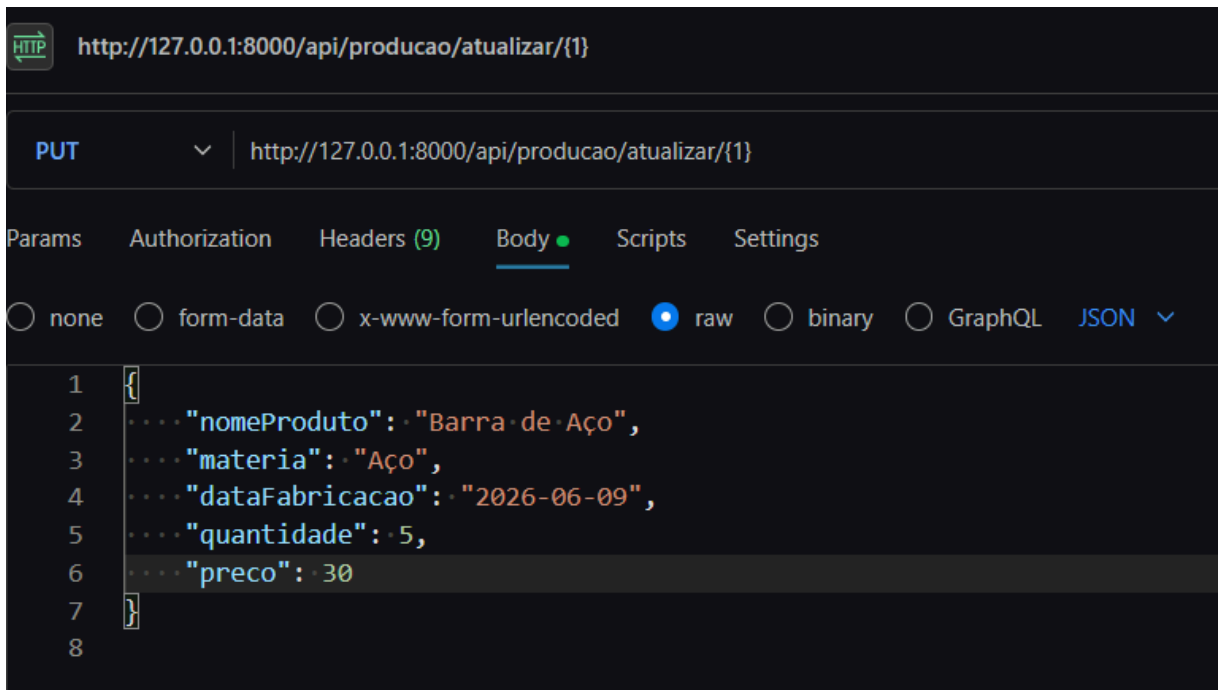

.deletarApi

