

Paging the Experts: A Reproducible Characterization of Flash-Backed MoE Inference on iPhone

Musa Shams

Independent Researcher

ORCID: 0009-0005-1015-5342

Abstract

Sparse activation reduces mixture-of-experts computation without eliminating the need to store all experts. We present Routide, a Swift/MLX runtime that executes the text path of a pinned public Qwen3.6-35B-A3B quantized checkpoint while keeping expert weights in iPhone storage and a byte-budgeted subset in memory. We characterize cache-policy sensitivity, numerical comparison boundaries, and measurement limits. Across five recorded 128-token workloads, fixed-route replay gives 0.00% demand hits with a 512 MiB LRU cache, 18.80% with seeded random eviction at the same budget, and 38.58% with 576 MiB LRU. The apparent capacity cliff is therefore a policy/workload interaction, not a universal memory requirement. Same-runtime Mac controls preserve generated sequences across eviction and asynchronous prefetch, including 2,560 exact token comparisons and 10,334 speculative loads. In contrast, complete resident-Python versus recorded-phone sequences disagree on all five tested cases, precluding a general numerical equivalence claim. Two separately scoped iOS 27 memory protocols observe sampled process-footprint peaks of 1.87-2.32 GiB on short prompts and 2.39-2.73 GiB on one longer prompt. We retain a thermal stopping event, negative timing comparisons, and a single qualified whole-device power estimate. These results establish bounded feasibility and identify limitations that a deployment claim must not hide.

1 Introduction

An MoE model can have a modest active computation graph per token while its full weight set remains too large for a phone’s memory. Quantization reduces this gap but does not close it for every model/device combination. Storage-backed execution is consequently a systems problem involving layout, cache admission and eviction, I/O scheduling, framework arithmetic, and measurement semantics. A demonstration that emits text does not by itself establish efficient execution, numerical equivalence, or improved task quality.

Routide uses a publicly identified checkpoint: `mlx-community/Qwen3.6-35B-A3B-4bit`, revision `38740b847e4cb78f352aba30aa41c76e08e6eb46` [1]. The model’s nominal description is approximately 35 billion total parameters and 3 billion active parameters per token. We do not treat those rounded architectural labels as measured memory requirements. Instead, we inventory actual tensors, count expert payload bytes, and separately sample process memory.

We make three contributions:

1. **An inspectable storage-to-execution path.** A bounded-memory packer, aligned per-expert layout, Swift positional reader, byte-budgeted cache, quantized MLX executor, and on-device benchmark capture form a complete implementation for this checkpoint’s text path.

2. **A cache-policy characterization with informative negative results.** Replays explain why naive LRU thrashes at one budget, demonstrate that the behavior is not inevitable, and expose resident-prefetch checks as a source of cache pollution even when no speculative read occurs.
3. **Separated correctness and measurement claims.** We distinguish same-runtime cache transparency from cross-runtime sequence equivalence, logical expert traffic from physical storage traffic, and sampled process footprint from MLX allocator counters. A stopped phone campaign and its separately declared continuation remain separate evidence.

We do not claim the first phone LLM runtime, state-of-the-art throughput, quality parity with a resident model, or prefetch energy savings. The experiments support a narrower but reproducible characterization.

2 Background and related work

Flash-backed inference. *LLM in a flash* studies models larger than available DRAM and emphasizes reducing transferred data and using larger contiguous reads. Its windowing and row-column bundling exploit activation sparsity [2]. Routide follows the storage-aware motivation but pages explicitly routed, quantized MoE experts rather than introducing a learned neuron-sparsity predictor or modifying activation functions. We do not reproduce that paper’s physical-storage bandwidth experiments or compare its reported speed directly with our phone timings.

Phone-oriented sparse execution. PowerInfer-2 combines neuron-granularity caching, heterogeneous execution, and fine-grained I/O/computation pipelining on smartphones [3]. Its model and hardware choices differ from ours. Routide’s scope is a fixed public checkpoint on Apple hardware, including byte-accounting and numerical controls; it does not implement PowerInfer-2’s planner or establish superiority over it.

MoE offloading. Fiddler reduces CPU-GPU data movement by orchestrating expert execution across those processors [4]. Its discrete CPU/GPU memory hierarchy differs from iPhone unified memory plus storage. Both settings illustrate why total parameter size, active arithmetic, and data movement must be considered separately.

Runtime and cache references. Routide builds on Apple’s MLX Swift ecosystem and the LLMEval application example [5]. Farthest-next-use replacement is a classical offline paging reference [6]. Here we distinguish a feasible pin-constrained schedule from a relaxed, unpinned equal-block oracle. Neither can serve as an online predictor without access to future routing.

3 System design

3.1 Checkpoint and storage inventory

We use binary MiB/GiB ($2^{20}/2^{30}$ bytes) and decimal GB (10^9 bytes).

The pinned checkpoint identifies its architecture as `qwen3_5_moe`. The text path has 40 layers, 256 routed experts per layer, and top-eight expert selection. Ten layers use full attention and 30 use recurrent gated-delta attention. The checkpoint is primarily affine INT4 with group size 64, with higher-precision router-related overrides and BF16 quantization metadata; “4-bit” does not mean every stored scalar is four bits.

Quantity	Bytes	Interpretation
Checkpoint tensor payload	20,401,929,952	Includes the vision tower
Text-only resident-reference parameters	19,508,787,456	Retained language tensors, not process RAM
Excluded vision tensors	893,142,496	Explicitly excluded by the text loader
Routed-expert payload	18,119,393,280	All layers and experts
Non-expert checkpoint payload	2,282,536,672	Not an always-resident runtime set
Complete packed files	20,403,825,982	Includes manifest and alignment
One routed-expert payload	1,769,472	1.6875 MiB; 27 aligned 64 KiB units

The fully resident Python text loader retains 1,757 tensors and deliberately excludes 333 vision tensors. We verify retained names, shapes, types, and byte counts, not merely a smaller-than-expected total. The inventory difference is not evidence that language-model weights were discarded.

The pack comprises `manifest.json`, `resident.bin`, and one expert file per layer. Each expert block stores its gate, up, and down projections together with scales and biases; blocks start on 64 KiB boundaries. The format name `resident.bin` means the **non-routed partition of the checkpoint**, not a promise to load every byte into RAM. The text runtime loads the required attention, normalization, router, shared-expert, and output-head tensors, does not execute the vision tower, and streams the requested quantized input embedding row. Thus, packed-file size, text parameter size, and measured process footprint are different quantities.

3.2 Demand execution and cache semantics

The range reader uses positional reads rather than mapping the full model. The cache is keyed by (`layer`, `expert`) and budgets expert payload bytes. Entries are pinned while a layer evaluates them; entries selected earlier in the same route remain protected until that layer’s operation completes. Weights remain packed quantized arrays during projection, rather than being expanded into a full FP16 expert copy. Activations, quantization metadata, framework allocations, staging data, attention state, and OS behavior still contribute to memory beyond the expert payload budget.

For a single forward, 40 layers each request eight distinct routed experts: 320 requests and 540 MiB of expert payload **if all miss**. This is an over-the-forward working set, not 540 MiB of simultaneously pinned experts. The byte budget and pin lifetime are modeled in the simulator. Bypass accounting exists for infeasible admissions; the reported replay grid has zero oversized-expert or pinned-working-set bypasses.

Route performs serial, single-token prefill and greedy generation. If a request has `P` prepared prompt tokens and `G` sampled output tokens, with at least one output, it performs $P + G - 1$ forwards. It computes final logits for each serial input token; batched prefill is not implemented. Reported TTFT therefore characterizes this implementation, not an optimized batched-prefill baseline.

3.3 Prefetch as a separate, optional policy

The tested confidence-gated predictor selects the preceding step’s highest-weight expert **in the same layer**, if its normalized selected-expert weight is at least 0.20. It schedules a nonblocking request before that layer’s attention computation during prefill only. This is not a learned predictor

of the next layer. Actual router selection and expert arithmetic are unchanged. The default remains **576 MiB / LRU / None**.

The original resident-hit behavior refreshed recency when a prediction was already cached. The separate preserve-resident policy records the probe without changing recency, frequency, pins, or access clock. Missing experts use the same asynchronous load and accounting path. A policy can therefore have many prediction checks but no new I/O; this distinction is essential when interpreting apparent prefetch benefits.

4 Experimental methodology

4.1 Evidence cohorts and scope

The unit of evidence is the recorded protocol/build, not an interchangeable “Route run.” We retain different operating systems, runtime versions, instrumentation, prompts, and generation caps rather than pooling them.

Cohort	Workload and purpose	Platform	Scope
Initial capacity study	One-character prompt (.); 23 prepared tokens, 8 outputs; five cold/warm repetitions per budget	iPhone 17 Pro Max, iOS 26.5.2	Narrow LRU calibration
Held-out routes	Five original -001 prompts, 128 outputs each	Same phone, iOS 26.6.1	Measured routes; offline policy/prefetch replay
Counting diagnostics	Six balanced 128-token pairs; separately, four 512-token ABBA runs	Same phone, iOS 26.6.1	Exploratory timing, traffic, sustained feasibility
Resident reference	Exact phone input IDs; five -001 cases	M1 Ultra, 128 GiB, macOS 26.6.2; Python MLX 0.31.2	Cross-runtime diagnostic, not speed
Same-runtime controls	Five -001 cases; five additional -003 cases	Actual Swift model on the same high-memory Mac	Eviction/prefetch transparency
Process-memory parent	Three -001 prompts, two budget pairs each; stopped on request 12	Phone, iOS 27.0; executable 9da46f6e...	Twelve retained rows, eleven fully valid
Longer-context follow-up	One fixed longer prompt, one request per budget	Phone, iOS 27.0; executable fb4a9a64...	Separate two-request memory-only protocol
Power case study	One profiler-recorded 512-token counting request	Phone, iOS 26.6.1	Whole-device source-window estimate

The five -001 prompts cover conversation, code, mathematics, reasoning, and expository text. They differ from the -002 prompts used in an earlier live timing suite and the counting workload used to choose the confidence threshold. The -003 prompts provide an additional fixed set for the final Mac correctness matrix. These are small designed workloads, not independent samples from a representative production distribution or scored quality tests.

The cache-policy sensitivity grid was frozen **after the route captures were available but before replaying the new grid**. It contains 448, 512, 576, 640, 768, and 1,024 MiB budgets, six pin-constrained policies, and an additional relaxed oracle. Random uses all five declared seeds, 0-4.

The 300 pinned replays and 30 relaxed bounds are correlated counterfactuals over five traces, not 330 independent model runs.

4.2 Counters, timestamps, and statistics

`expertBytesRead` counts logical packed **expert** payload delivered by the reader. It does not count resident-model preparation or per-token embedding row reads, and is not a measurement of physical NAND traffic, storage-device wear, or all system I/O. With no speculation it equals demand misses times the expert payload size. With speculation, new speculative loads contribute their bytes; demand joins and useful/wasted classifications are retained separately. A cold expert cache does not imply a cold filesystem cache.

We report measured elapsed, TTFT, and decode throughput in their saved scopes. Paged decode throughput uses the post-first-token interval; request timing also records metric/prefetch drain. Model/tokenizer preparation is included when it occurs inside a request. Automated preloads and warm-ups must not be mistaken for measured model-load time. Precise device Unix timestamps are cross-checked against a monotonic duration. Copy/export timestamps are never substituted for request boundaries.

For policy replay, hit rates are request-weighted across all five prompts; cache state continues from prefill into decode. Random results use the mean and range of the five full-suite seeds, **not confidence intervals**. For the small live paired study we retain every pair, including an opposite direction and the pair containing the thermal violation. We report descriptive quantities, not p-values or population-level confidence claims.

4.3 Memory and environmental observation

Schema-12 phone benchmarks sample `TASK_VM_INFO.resident_size` and `phys_footprint` on a separate serial queue every 250 ms, with start/end attempts and an actual maximum successful-sample gap. They also record process dirty-limit headroom from `os_proc_available_memory`, received memory warnings, and observed scene interruptions. Failed readings remain explicit; missing readings are not zero memory.

Physical footprint, RSS, and MLX allocation counters are different metrics and must not be summed. Our maxima are **observed sample maxima**, not continuous kernel high-water marks. Headroom is not system free RAM and does not guarantee protection from jetsam. A missing warning is not evidence of no system-wide memory pressure.

The phone runner uses a two-second stable-nominal gate with a five-minute wait limit. It keeps the display from automatic idle locking during work. Manual locking, background suspension, auto-brightness, and thermal dimming remain possible. Four-level thermal labels do not prove identical clock frequencies or temperatures. The final memory protocol stops on any non-nominal observed state, warning, interruption, or validation failure; it does not retry or replace rows automatically.

4.4 AI-assisted review and editing

GitHub Copilot and ChatGPT were used in a limited advisory role to review selected system-design details and to assist with manuscript cleanup. Research and experimental decisions remained human-controlled, and suggestions were manually reviewed. AI tools did not autonomously execute experiments, select or discard runs, generate measured data, or determine reported conclusions. All numerical claims are derived from the versioned evidence and deterministic validation scripts described in this paper.

5 Results

5.1 The LRU capacity cliff is not a universal RAM threshold

The initial short-prompt calibration found substantially fewer reads and shorter elapsed time when moving from 512 to 576 MiB LRU. The cold-cache medians, each over five repetitions, are retained here to show the narrow basis for the current default:

Budget (MiB)	Cold median elapsed (s)	Cold median decode (tokens/s)	Cold logical reads (GB)
512	13.585	2.246	16.987
576	10.810	3.052	9.709
640	11.185	2.957	9.709
768	11.289	2.949	9.564
1024	11.137	3.173	8.025

This result is not a broad optimal-budget finding. On the five later 128-token route captures, the fixed-policy replay gives:

Policy	512 MiB hits (%)	576 MiB hits (%)	1,024 MiB hits (%)
LRU	0.00	38.58	47.59
FIFO	0.00	25.66	40.38
LFU (per residency)	0.00	1.82	7.84
Recency-frequency hybrid	0.00	14.65	49.83
Random (five-seed mean)	18.80	21.80	37.47
Pinned farthest-next-use	54.49	56.93	68.23
Relaxed unpinned oracle	54.73	57.13	68.31

Figure 1. Every declared budget is shown. The random band is the observed seed range, not a confidence interval. The pinned farthest-next-use curve is a feasible future-aware schedule, not a proven optimum under route pins. The relaxed unpinned oracle is a lower miss bound under equal-size, mandatory-admission paging, not an online speed prediction.

The minimum observed distinct-expert reuse distance is 312 on every trace. At 512 MiB, only 303 whole expert payloads fit; at 576 MiB, 341 fit. An expert revisited in a later forward has been separated from its last use by experts from the other 39 layers. The independently computed reuse histogram predicts every recorded LRU hit count. At least 313 entries would be needed for any observed LRU reuse on these traces; this is a necessary access-pattern condition, not a new measured budget or a whole-process memory requirement.

Seeded random nevertheless attains 18.80% mean hits at 512 MiB, with an observed 18.65-18.93% seed range. Zero reuse is therefore not unavoidable at that capacity. Policy rankings also change with capacity: the tested hybrid exceeds LRU at 1,024 MiB. LFU here resets frequency on eviction; poor performance is not a conclusion about every frequency-based policy. None of these offline alternatives has a corresponding live phone speed or energy advantage established by this sweep.

5.2 Prediction accuracy does not imply useful prefetch

The frozen prefill confidence-0.20 rule predicts an expert present in the next step’s selected set on 5,359/8,741 eligible held-out predictions (61.31%). At 512 MiB, the held-out fixed-route replay adds approximately 1.14% logical expert bytes. At 576 MiB, the resident-refresh variant adds 1,120

Cache-policy sensitivity on five recorded iPhone traces

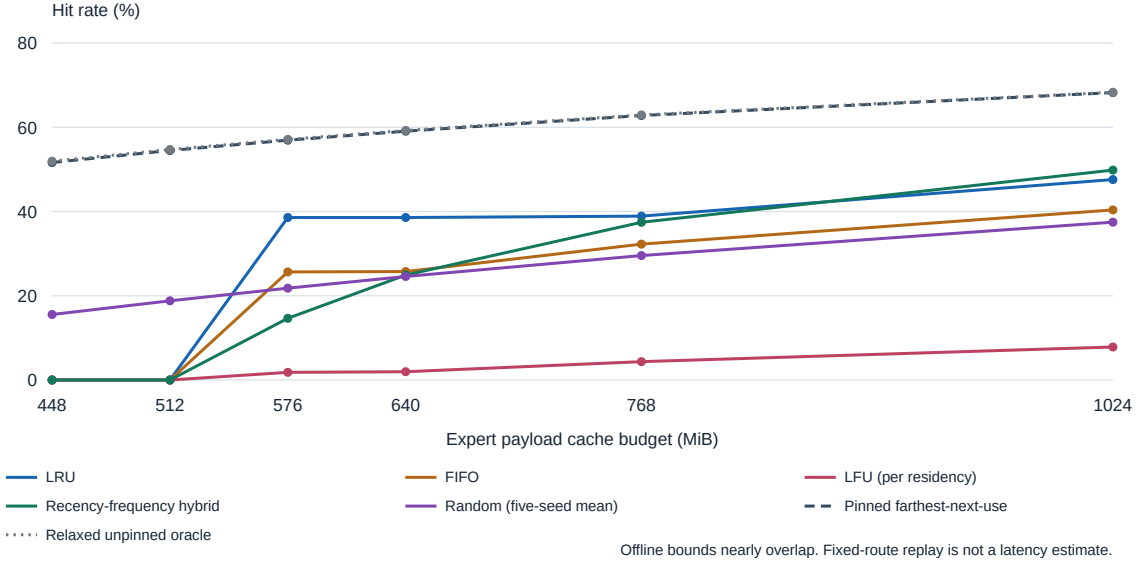


Figure 1: Hit rate by payload cache budget; online policies and offline references.

demand misses and 57 speculative loads, whereas the preserve-resident variant issues no new loads and exactly reproduces the no-prefetch demand counters on all five prompts.

The corresponding 576 MiB live counting diagnostic made 1,491 prediction checks per candidate run, all already resident, yet lost 74 demand hits through recency changes. Offline replay reproduced the additional 130,940,928 bytes. This is cache pollution caused by a lookup side effect, not a failed speculative transfer. Zero speculative I/O means an observed timing difference in that condition cannot demonstrate latency hidden by overlapping new expert reads.

The additional -003 same-runtime Mac matrix exercised actual asynchronous loads while checking outputs against a demand-filled 20 GiB zero-eviction reference:

Expert budget (MiB)	Prefetch	Exact sequences	Token comparisons	New speculative loads	Logical reads (GB)
512	none	5/5	640	0	556.605
576	none	5/5	640	0	348.807
512	preserve-resident, prefill 0.20	5/5	640	10,334	563.879
576	preserve-resident, prefill 0.20	5/5	640	0	348.807

The 512 MiB prefetch condition produced 10,334 loads: 6,223 useful and 4,111 wasted blocks, with 1.307% more logical reads than demand-only execution. At 576 MiB all those predictions were resident checks and demand counters matched the control. This is useful coverage of output transparency, not a measured phone speedup. No demand-to-in-flight-prefetch joins were observed in this matrix, so it does not cover every asynchronous schedule.

5.3 Cache transparency is not cross-runtime equivalence

A prior same-executable Swift control compared 576 MiB against a 20 GiB demand-filled cache on five -001 prompts: all 640 output tokens matched, despite 183,699 evictions in the smaller cache and none in the larger one. The -003 matrix adds 20 exact 128-token comparisons, or 2,560 token comparisons, covering bounded demand caches and active prefetch. Across the two designs this is ten distinct fixed prompts, not an exhaustive correctness proof. The large-cache reference is not a preloaded upstream resident model.

The resident-Python comparison is a different experiment. It reuses exact prepared phone inputs, serial prefill, and greedy selection under pinned MLX/MLX-Metal 0.31.2. No complete 128-token sequence matches the archived phone output:

Prompt	First different output position (1-based)	Fixed-history next-token matches
conversation-001	3	123/128
code-001	83	127/128
mathematics-001	73	126/128
reasoning-001	2	127/128
expository-001	1	121/128

Feeding back the recorded phone history yields 624/640 matching next-token predictions (97.5%). This is **conditional next-token agreement**, not free-generation accuracy, task quality, or evidence that only a comparable fraction of a free-running response is wrong. The official upstream generator reproduces the custom resident loop’s outputs, ruling out that loop as the source of the observed sequence discrepancy.

A raw-token-0 diagnostic further shows that changing only Python `mlx/mlx-metal` from 0.32.2 to the supported minimum 0.31.2 changes the greedy token from 951 to 198 and recovers the saved phone fingerprints; reversion restores the original result. The unsupported 0.31.1 Python control was blocked before inference, not forced into execution. Fingerprint agreement is at the recorded field precision, not full-vector equivalence. A subsequent two-token state probe localized an arithmetic difference and recovered several complete tensors with an opt-in native convolution, but whole-model native modes still did not establish sequence equivalence. The phone arithmetic defaults were not promoted on the basis of a component-level match.

5.4 Sustained execution and timing variation

The four manually sequenced 512-token counting runs all reached their cap with nominal app-sampled peak and final thermals:

Order	Policy	Elapsed (s)	Decode (tokens/s)	Logical reads (GB)	Peak thermal
A1	None	314.105	1.795	319.354	nominal
B1	Prefill 0.20	272.711	2.085	320.297	nominal
B2	Prefill 0.20	301.553	1.864	320.297	nominal
A2	None	304.148	1.852	319.354	nominal

The two identically configured candidate runs differ by 10.58% elapsed time. Nominal thermal labels therefore do not remove temporal performance variation. The larger apparent win in the first pair does not establish a stable policy effect. These records show sustained-generation feasibility on

one workload; their older MLX peaks are not process-footprint measurements, and lifecycle counts were not present in that single-run schema.

The later iOS 27 cache-budget campaign preserves the following paired elapsed comparisons, including its stopping row:

Prompt / pair	512 MiB elapsed (s)	576 MiB elapsed (s)	576 vs 512 change (%)	Read reduction (%)	Both nominal?
conversation-001 / 1	83.782	74.811	-10.71	40.10	yes
conversation-001 / 2	75.045	62.730	-16.41	40.10	yes
code-001 / 1	84.173	70.838	-15.84	38.16	yes
code-001 / 2	76.458	81.946	+7.18	38.16	yes
mathematics- 001 / 1	89.128	82.120	-7.86	39.01	yes
mathematics- 001 / 2	86.120	76.707	-10.93	39.01	NO; retained stop row

Elapsed here follows the saved generation scope and excludes separately recorded drain. The second fully nominal code pair is slower at 576 MiB, despite lower logical reads. The second mathematics pair includes a fair-thermal run and is **not a valid nominal comparison**. We keep it visible rather than discard it or quietly replace it.

5.5 Sampled process memory and a retained thermal stop

The predeclared parent protocol called for 14 load-inclusive requests. Twelve completed their 128-token generations; the first eleven passed all conditions. Request 12 finished with fair final/peak thermal state, triggering the required stop. All twelve outputs and memory reports remain saved. This was neither a crash nor a memory-warning event, and the thermal label alone does not prove throttling.

After inspecting that stop, we separately declared only the two previously unexecuted longer-context requests. They retain the same text, eight context repetitions, 256-512 prepared-token bounds, 32-token cap, and 576-then-512 MiB order. Both actually used 340 prepared tokens and produced identical 32-token outputs, including the sampled end token. Both passed every original condition. They do not amend the failed parent into a completed nominal 14-run study.

Cohort / cache budget	Prompt/output tokens	Requests	Sampled footprint peaks (GiB)	Peak thermals
Stopped parent / 512 and 576 MiB	49-69/128	12	1.87-2.32	11 nominal; 1 fair (stop)
Separate follow-up / 576 MiB	340/32	1	2.39	nominal
Separate follow-up / 512 MiB	340/32	1	2.73	nominal

Appendix B retains every request’s baseline, footprint peak, RSS peak, budget, and thermal status; no stopping row is removed from that record.

Figure 2. Bars are sampled per-request physical-footprint peaks; dots are start readings. The parent and follow-up have different executable digests. Within each process, model recreation does

Sampled process footprint: retain the stopped row and separate follow-up

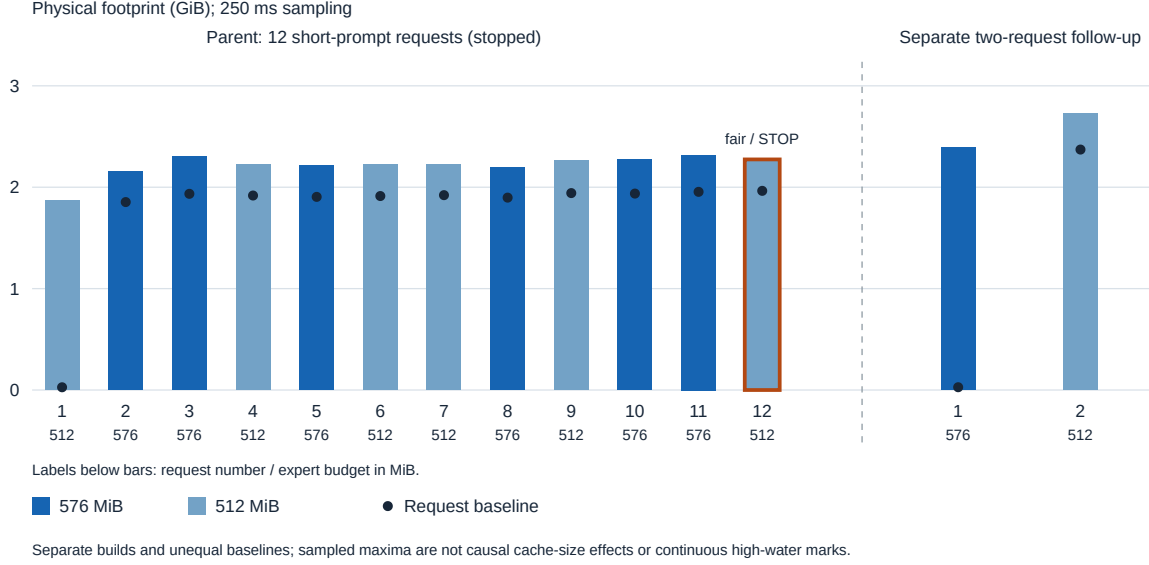


Figure 2: All sampled process-footprint peaks and start readings, with the parent stopping row retained and the follow-up separated.

not empty allocator or filesystem caches. In particular, the second longer-context request’s much larger starting footprint makes a causal cache-size memory comparison invalid.

The parent contains 3,793 successful memory samples and the follow-up 1,647, with no sampling failures, received memory warnings, or observed scene interruptions. The largest successful-sample gap across both is 0.255136 seconds. Short-prompt sampled footprint peaks span 1.87-2.32 GiB. The fixed longer prompt reaches 2.39 GiB in the first request and 2.73 GiB in the second. These observations address the prior absence of whole-process measurements for the tested workloads. They do not establish a context-length scaling curve or a device-wide memory bound.

5.6 A qualified whole-device power case study

One standalone iOS Performance Trace recording contains a complete 512-token counting request under the confidence-gated prefetch policy. The request-plus-drain wall-clock window is 263.382 seconds. Reconstructing original SystemMetrics Begin-End intervals gives nearly complete coverage, no observed charging overlap, a duration-weighted 26.505 battery-percent/hour rate, and a 1.939-percentage-point **source-window rate-time estimate**.

This is the integral of a recorded whole-device estimator over the aligned window. It is not app-only watts or joules, a direct battery-gauge delta, or calibrated energy per token. Display brightness varied from 22% to 44%, the source estimator is not independently calibrated here, and there is no matched no-prefetch power control. The recording supports a narrowly described power case study, not an energy-saving claim. The underlying profiling archive is withheld from the source tree because it may contain unrelated device metadata; the scoped derived record is retained.

6 Discussion and threats to validity

Feasibility is not optimality. The implementation executes a large quantized checkpoint’s text path on a physical phone, but that does not make it the best use of the device’s memory, storage, latency budget, or battery. There is no completed matched study establishing superiority over smaller resident 4B/8B models.

Serial prefill is a major implementation boundary. Prompt tokens are processed one at a time with full output-head evaluation. This shapes TTFT, reuse, and expert traffic. The measured 340-token prompt is longer than the short prompts in these protocols, not “long context” in the sense of thousands of tokens. Batched prefill or a different prompt mix could change both cache ranking and latency.

Memory and I/O scopes are limited. Expert payload budgets exclude other allocations. Process footprint is sampled, not a complete record of all instantaneous allocations or system filesystem caches. Logical expert reads omit other runtime reads and do not expose physical flash behavior. We cannot infer NAND bandwidth or storage endurance from the large logical totals.

Correctness depends on the comparison boundary. The most defensible transparency claim holds the Swift runtime, arithmetic, and hardware fixed while varying cache behavior. Cross-framework and cross-device sequence equivalence remains unestablished. Prediction precision and conditional token agreement are not task-quality metrics. No lossy routing modification or quality benefit is evaluated.

Small, correlated workloads. Five replay traces, five additional Mac prompts, and one phone provide mechanisms and counterexamples, not population estimates. Multiple seeds and budgets reuse the same traces. Greedy generation improves repeatability but does not cover sampling-based decoding, concurrent users, batching, all context lengths, or background application conditions.

Failure and scheduling coverage is incomplete. The cache and sampler have focused contract tests, but the final live prefetch matrix observed no demand joins or expert-load failures. It cannot establish behavior under every cancellation, I/O failure, scheduling race, or memory-pressure path. A received-warning count of zero does not establish the absence of every possible termination risk.

Evolving instrumentation. Device OS versions, compilers, dependency versions, and export schemas changed across this multi-stage study. We do not pool timings across these changes. Older output exports cannot acquire missing provenance retrospectively: a balanced-export bug could attach the warm-up generation object to measured schema-6 rows. We do not use those legacy output objects as independent token-equivalence evidence; the later raw same-runtime matrices and schema-12 captures provide the stronger comparisons.

Reproducibility and artifact scope. The checkpoint, pinned dependencies, format, protocols, evidence hashes, and source snapshots are versioned in the research archive. The public runtime, analysis code, and paper-facing artifact are available in the Routide GitHub repository. The public preprint source contains the manuscript and figures needed to reproduce this document, while licensed model weights and private profiling archives remain outside the paper package. Full system reproduction additionally requires the runtime, packing workflow, model weights under their applicable license, and suitable Apple hardware.

7 Conclusion

Routide demonstrates and characterizes storage-backed execution of a pinned large MoE checkpoint on an iPhone. Its evidence supports more than a text-generation demo but less than a universal

efficiency claim. The cache cliff is policy-dependent; resident-prefetch checks can damage reuse without doing useful I/O; exact same-runtime cache transparency does not imply cross-runtime sequence equivalence; and process-memory measurements require their own scopes rather than relabeled allocator counters. Preserving negative pairs, a thermal stop, and a separately declared successful continuation makes these distinctions testable. These findings motivate independent reproduction and careful comparison boundaries rather than repeated benchmarks selected for favorable timing.

References

- [1] MLX Community. *Qwen3.6-35B-A3B-4bit*. Pinned model repository. Upstream model: Qwen/Qwen3.6-35B-A3B. The retrieved community model card declares Apache-2.0; retain the applicable upstream license when distributing weights.
- [2] Keivan Alizadeh et al. *LLM in a flash: Efficient Large Language Model Inference with Limited Memory*. arXiv:2312.11514, 2023; revised 2024. Abstract and version history; version 3.
- [3] Zhenliang Xue, Yixin Song, Zeyu Mi, Xinrui Zheng, Yubin Xia, and Haibo Chen. *PowerInfer-2: Fast Large Language Model Inference on a Smartphone*. arXiv:2406.06282, 2024, version 3. Paper.
- [4] Keisuke Kamahori, Yile Gu, Kan Zhu, and Baris Kasikci. *Fiddler: CPU-GPU Orchestration for Fast Inference of Mixture-of-Experts Models*. arXiv:2402.07033, 2024; version 3 revised 2025. Paper.
- [5] MLX contributors. MLX Swift and MLX Swift examples. Routide derives from the latter pinned example revision; MIT license and upstream acknowledgments are retained.
- [6] L. A. Belady. *A study of replacement algorithms for a virtual-storage computer*. IBM Systems Journal, 5(2), 78-101, 1966. DOI.

A Claim boundaries

Statement supported here	Stronger statement not established
Text generation from the pinned flash-paged model on one iPhone	Universal device/model feasibility or state-of-the-art speed
Policy-dependent hits on five recorded traces	An unavoidable minimum RAM threshold or globally optimal 576 MiB budget
Exact tested outputs with the same Swift implementation under cache changes	General cross-framework or cross-device numerical equivalence
A fixed predictor’s selected-set overlap and read accounting	General latency hiding or energy savings
Sampled process footprint on separately identified protocols	Continuous device-wide memory maxima or context-length scaling
One whole-device power-estimator integral	Calibrated joules/token or app-only energy benefit
A separate successful longer-prompt pair after a retained stop	A completed nominal 14-request parent campaign
Structured prompts and captured text	Scored task-quality parity or superiority to smaller resident models

These boundaries define the claims supported by the present evidence. Stronger claims require additional experiments or independent reproduction.

B Per-request process-memory observations

Every completed observation is retained below. The parent study stopped after its twelfth request; the two follow-up rows belong to a separately declared protocol and a different executable. Footprint and RSS columns are separate sampled maxima, not additive memory components.

Protocol/run	Cache (MiB)	Prompt/output tokens	Start footprint (GiB)	Peak footprint (GiB)	Peak RSS (GiB)	Peak thermal
Parent/1	512	49/128	0.027	1.874	1.770	nominal
Parent/2	576	49/128	1.854	2.152	2.070	nominal
Parent/3	576	49/128	1.935	2.305	2.104	nominal
Parent/4	512	49/128	1.918	2.226	2.102	nominal
Parent/5	576	52/128	1.905	2.212	2.100	nominal
Parent/6	512	52/128	1.913	2.221	2.102	nominal
Parent/7	512	52/128	1.922	2.226	2.108	nominal
Parent/8	576	52/128	1.897	2.193	2.094	nominal
Parent/9	512	69/128	1.942	2.263	2.089	nominal
Parent/10	576	69/128	1.937	2.271	2.115	nominal
Parent/11	576	69/128	1.954	2.318	2.117	nominal
Parent/12	512	69/128	1.964	2.274	2.118	fair; STOP
Follow-up/1	576	340/32	0.028	2.390	1.815	nominal
Follow-up/2	512	340/32	2.371	2.729	2.104	nominal