

COPYRIGHT OFFICE DEPOSIT — IDENTIFYING MATERIAL

Pathoro Public Alpha v0.44

Author / Claimant: Ruben Mussafi

Year of Creation / Publication: 2026

© 2026 Ruben Mussafi. All rights reserved.

pathoro.co · pathoro-mvp.vercel.app

Version / commit: 974c874 — “Add public alpha legal guardrails”

Nature of the Work

Pathoro is a web-based software application (computer program, deployed as a Next.js / TypeScript / React application with a Supabase-backed data layer) that helps a user orient toward a goal, explore a mapped set of possible paths and milestones toward that goal, and locate real-world, source-backed access points (classes, apprenticeships, openings, and similar opportunities) relevant to that goal. It includes an original goal-orientation flow, an original branching “trail map” path-visualization and scoring system, an original set of curated path/branch content and starter trail notes, a moderated community trail-marker system, and an AI-assisted opportunity-scouting layer with original classification, labeling, and trust/fit-estimate logic.

This deposit consists of: (1) this title page, (2) an AI-assistance disclosure note, (3) identifying source-code material consisting of the first 25 and last 25 printed pages of a representative, curated selection of the application’s original source files (see file list on the first source-code page), and (4) an optional appendix of screenshots and original Pathoro copy. No environment files, API keys, service-role keys, admin tokens, passwords, or other private credentials are included in this deposit.

AI Assistance Disclosure

This work contains human-authored selection, coordination, arrangement, product design, prompts, editing, and revisions, with portions of software code and text assisted by generative AI tools. The claim is limited to the copyrightable human-authored expression, selection, coordination, arrangement, and modifications, and excludes uncopyrightable ideas, systems, methods, and AI-generated material to the extent required by law.

Prepared for: U.S. Copyright Office eCO electronic filing — software / computer program deposit

Repository: pathoro-mvp (private GitHub repository)

Deployment: <https://pathoro-mvp.vercel.app>

Commit deposited: 974c874

Note on Source-Code Excerpt (First 25 / Last 25 Pages)

The application's full original source code spans many more files and pages than is practical or required for identifying-material purposes. In keeping with U.S. Copyright Office practice for source-code deposits exceeding 50 printed pages, this deposit includes the **first 25** and **last 25** printed pages of a single, continuous, representative source-code listing (236 pages total across 41 original application files), with the intervening pages omitted below.

Pages 1–25 (included) span, in order: the root app layout and entry page; the route-planning, trail-map, and opportunity detail/candidate pages; the About, Privacy, Terms, and Contact pages; and the admin hub page (through its middle).

Pages 26–211 (omitted from this excerpt) span, in order: the remainder of the admin hub page; the admin trail-marker and feedback review pages; the trail-marker, feedback, scout-request, opportunity, and path-guide-request API routes; the curated trail-map path/branch data and dynamic trail-map generator; the AI opportunity-scout search/classification logic (`lib/tavily.ts`); and the trail-map scoring logic, continuing into the beginning of the shared UI component listing.

Pages 212–236 (included) span, in order: the remainder of the opportunity detail card component; the trail-marker composer and feedback form components; and the opportunity-narrative, scout-fit, trust-label, trail-marker-schema, and opportunity-schema data-model/business-logic modules.

The complete 41-file, 236-page source listing (and the full private repository) is available upon request from the claimant.

app/layout.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 33 lines

```
1 import type { Metadata } from "next";
2 import { Inter, Lora } from "next/font/google";
3 import "./globals.css";
4
5 const inter = Inter({
6   variable: "--font-body",
7   subsets: ["latin"],
8 });
9
10 const lora = Lora({
11   variable: "--font-display",
12   subsets: ["latin"],
13 });
14
15 export const metadata: Metadata = {
16   title: "Pathoro – Find your way.",
17   description:
18     "The living landscape that helps you discover, plan, and take real steps toward what's next.",
19 };
20
21 export default function RootLayout({
22   children,
23 }: Readonly<{
24   children: React.ReactNode;
25 }>) {
26   return (
27     <html lang="en" className={` ${inter.variable} ${lora.variable} h-full`} >
28       <body className="min-h-full bg-cream font-sans text-ink antialiased">
29         {children}
30       </body>
31     </html>
32   );
33 }
```

app/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 33 lines

```

1 import { PageHeader } from "@components/PageHeader";
2 import { StepperNav } from "@components/StepperNav";
3 import { WelcomeCard } from "@components/WelcomeCard";
4 import { OrientationCard } from "@components/OrientationCard";
5 import { LandscapeCard } from "@components/LandscapeCard";
6 import { TopoLines } from "@components/TopoLines";
7 import { SiteFooter } from "@components/SiteFooter";
8
9 export default function Home() {
10   return (
11     <div className="relative min-h-screen">
12       <TopoLines
13         className="pointer-events-none absolute inset-0 h-full w-full text-ink"
14         count={20}
15         opacityRange={[0.015, 0.035]}
16       />
17       <div className="relative border-b border-line/70">
18         <PageHeader />
19       </div>
20       <div className="relative border-b border-line/70">
21         <StepperNav />
22       </div>
23
24       <main className="relative mx-auto grid w-full max-w-[1500px] grid-cols-1 items-start gap-6 px-6
py-6 sm:px-10 lg:grid-cols-[320px_320px_1fr]">
25         <WelcomeCard />
26         <OrientationCard />
27         <LandscapeCard />
28       </main>
29
30       <SiteFooter />
31     </div>
32   );
33 }

```

app/route-planning/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 27 lines

```

1 import { RoutePlanningHeaderWithGoal } from "@components/route/RoutePlanningHeaderWithGoal";
2 import { PathSidebar } from "@components/route/PathSidebar";
3 import { RoutePlanningBody } from "@components/route/RoutePlanningBody";
4 import { TopoLines } from "@components/TopoLines";
5 import { SiteFooter } from "@components/SiteFooter";
6
7 export default function RoutePlanningPage() {
8   return (
9     <div className="relative min-h-screen">
10       <TopoLines
11         className="pointer-events-none absolute inset-0 h-full w-full text-ink"
12         count={20}
13         opacityRange={[0.015, 0.035]}
14       />
15       <div className="relative border-b border-line/70">
16         <RoutePlanningHeaderWithGoal />
17       </div>
18
19       <main className="relative mx-auto grid w-full max-w-[1500px] grid-cols-1 items-start gap-6 px-6
20         py-6 sm:px-10 lg:grid-cols-[280px_minmax(0,1fr)]">
21         <PathSidebar />
22         <RoutePlanningBody />
23       </main>
24
25       <SiteFooter />
26     </div>
27   );
28 }

```

app/trail-map/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 224 lines

```

1  "use client";
2
3  import { useEffect, useState } from "react";
4  import { Bookmark, ChevronDown, ListFilter, Map, SlidersHorizontal, Wand2 } from "lucide-react";
5  import { RoutePlanningHeader } from "@components/route/RoutePlanningHeader";
6  import { TrailMapMilestoneSidebar } from "@components/trailmap/TrailMapMilestoneSidebar";
7  import { TrailMapBranchDiagram } from "@components/trailmap/TrailMapBranchDiagram";
8  import { TrailMapDetailSidebar } from "@components/trailmap/TrailMapDetailSidebar";
9  import { TrailMapNotesPanel } from "@components/trailmap/TrailMapNotesPanel";
10 import { PathGuideCard } from "@components/trailmap/PathGuideCard";
11 import { RoleDialogueCard } from "@components/trailmap/RoleDialogueCard";
12 import { MapConfidenceNotice } from "@components/trailmap/MapConfidenceNotice";
13 import { TrailMapComparison } from "@components/trailmap/TrailMapComparison";
14 import { TrailMapGoalSelector } from "@components/trailmap/TrailMapGoalSelector";
15 import { TrailMapGoalSearch } from "@components/trailmap/TrailMapGoalSearch";
16 import { TrailMapGenericShell } from "@components/trailmap/TrailMapGenericShell";
17 import { TrailMapLegend } from "@components/trailmap/TrailMapLegend";
18 import { SiteFooter } from "@components/SiteFooter";
19 import { trailMapGoals, getTrailMapGoal, type TrailMapGoal, type TrailMapGoalId } from
    "@lib/trailMapData";
20 import { mapGoalToTrailMapGoal } from "@lib/goalSpecificity";
21 import { normalizeTrailMapGoal } from "@lib/trailMapNormalize";
22
23 /** Only the original, broadest-appeal goals show as chips – the row stays
24  * short and elegant rather than growing with every new goal added.
25  * Newer/more specific goals (skilled trades, etc.) stay fully working via
26  * direct ?goal= links and the search box, without cluttering this row. */
27 const EXAMPLE_CHIP_GOAL_IDS: TrailMapGoalId[] = [
28   "therapist",
29   "vegetarian",
30   "resale",
31   "nurse",
32   "lawyer",
33   "doctor",
34   "engineer",
35   "school-admin",
36 ];
37
38 export default function TrailMapPage() {
39   const [goalId, setGoalId] = useState<TrailMapGoalId>(trailMapGoals[0].id as TrailMapGoalId);
40   // Set only when a search/goal param doesn't match a curated template –
41   // a generated draft (lib/trailMapGenerator.ts) takes over as the
42   // active goal instead of the old empty generic shell.
43   const [generatedGoal, setGeneratedGoal] = useState<TrailMapGoal | null>(null);
44   const [isGenerating, setIsGenerating] = useState(false);
45   // Only set if generation itself fails (network/API error) – the true
46   // last-resort fallback, not the everyday "no template" path anymore.
47   const [genError, setGenError] = useState<string | null>(null);
48
49   // Every goal – curated or generated – is normalized right before use,
50   // so a malformed field (most notably a LucideIcon mangled by the
51   // generate API's JSON response) can never crash the render tree.

```

```

52  const activeGoal: TrailMapGoal = normalizeTrailMapGoal(generatedGoal ?? getTrailMapGoal(goalId));
53  const [branchId, setBranchId] = useState(activeGoal.defaultBranchId);
54
55  const selectedBranch = activeGoal.branches.find((b) => b.id === branchId) ??
  activeGoal.branches[0];
56
57  async function generateAndSetGoal(text: string) {
58    setIsGenerating(true);
59    setGenError(null);
60    try {
61      const res = await fetch("/api/trail-map/generate", {
62        method: "POST",
63        headers: { "Content-Type": "application/json" },
64        body: JSON.stringify({ goalText: text }),
65      });
66      const data = await res.json();
67      if (!data.ok) throw new Error(data.error ?? "Failed to generate a starter map.");
68      const normalized = normalizeTrailMapGoal(data.goal as TrailMapGoal);
69      setGeneratedGoal(normalized);
70      setBranchId(normalized.defaultBranchId);
71    } catch {
72      setGenError(text);
73    } finally {
74      setIsGenerating(false);
75    }
76  }
77
78  // Read ?goal= after mount (not during render) so the server-rendered and
79  // first client render stay in sync – a matching request-scout param
80  // means /route-planning is linking here for a specific goal.
81  useEffect(() => {
82    const requested = new URLSearchParams(window.location.search).get("goal");
83    Promise.resolve(requested).then((req) => {
84      if (!req) return;
85      const direct = trailMapGoals.find((g) => g.id === req);
86      if (direct) {
87        setGoalId(direct.id as TrailMapGoalId);
88        setBranchId(getTrailMapGoal(direct.id as TrailMapGoalId).defaultBranchId);
89        return;
90      }
91      const mapped = mapGoalToTrailMapGoal(req);
92      if (mapped) {
93        setGoalId(mapped);
94        setBranchId(getTrailMapGoal(mapped).defaultBranchId);
95      } else {
96        generateAndSetGoal(req);
97      }
98    });
99  }, []);
100
101  function handleSelectGoal(id: TrailMapGoalId) {
102    setGeneratedGoal(null);
103    setGenError(null);
104    setGoalId(id);
105    setBranchId(getTrailMapGoal(id).defaultBranchId);

```

```

106 }
107
108 function handleGoalSearch(text: string) {
109   const matched = mapGoalToTrailMapGoal(text);
110   if (matched) {
111     handleSelectGoal(matched);
112   } else {
113     setGeneratedGoal(null);
114     generateAndSetGoal(text);
115   }
116 }
117
118 return (
119   <div className="min-h-screen bg-cream">
120     <div className="border-b border-line/70">
121       <RoutePlanningHeader
122         mode="trail"
123         compassHref={` /route-planning?goal=${encodeURIComponent(activeGoal.pathTitle)} `}
124       />
125     </div>
126
127     <main className="mx-auto w-full max-w-[1500px] px-6 py-6 sm:px-10">
128       <TrailMapGoalSearch onSubmit={handleGoalSearch} />
129
130       <div className="mt-4">
131         <TrailMapGoalSelector
132           goals={trailMapGoals.filter((g) => EXAMPLE_CHIP_GOAL_IDS.includes(g.id as
TrailMapGoalId))}
133           selectedGoalId={generatedGoal ? null : goalId}
134           onSelect={handleSelectGoal}
135         />
136       </div>
137
138       <div className="mt-4 flex items-start gap-2.5 rounded-2xl border border-line/70 bg-cream-
field px-4 py-3">
139         <Map className="mt-0.5 h-3.5 w-3.5 shrink-0 text-green" strokeWidth={1.75} />
140         <p className="text-[11.5px] leading-relaxed text-ink-soft">
141           Pathoro maps the path, compares branches, scouts access
142           points, and connects you to people ahead.
143         </p>
144       </div>
145
146       {isGenerating ? (
147         <div className="shadow-card mt-6 flex flex-col items-center gap-2 rounded-[26px] border
border-line/70 bg-cream-card px-6 py-10 text-center">
148           <Wand2 className="h-5 w-5 text-green" strokeWidth={1.75} />
149           <p className="text-[13.5px] font-medium text-ink">Generating a starter map...</p>
150           <p className="max-w-[360px] text-[12px] leading-relaxed text-ink-faint">
151             Pathoro doesn't have a template for this path yet, so it's drafting one
from your goal.
152           </p>
153         </div>
154       ) : genError ? (
155         <TrailMapGenericShell goalText={genError} />
156       ) : (

```

```

157     <div className="mt-5 grid grid-cols-1 items-start gap-6 lg:grid-cols-
[260px_minmax(0,1fr)_320px]">
158         <TrailMapMilestoneSidebar goal={activeGoal} />
159
160         <div className="flex min-w-0 flex-col">
161             <div className="flex items-start justify-between gap-3">
162                 <div className="flex items-center gap-2">
163                     <h1 className="font-serif text-[26px] leading-tight text-ink">
{activeGoal.pathTitle}</h1>
164                     <button
165                         type="button"
166                         className="flex h-7 w-7 shrink-0 items-center justify-center rounded-full border
border-line/70 text-ink-faint transition hover:border-ink-faint/40 hover:text-ink"
167                         aria-label="Save this path"
168                     >
169                         <Bookmark className="h-3.5 w-3.5" strokeWidth={1.75} />
170                     </button>
171                 </div>
172                 <div className="flex shrink-0 items-center gap-2">
173                     <button
174                         type="button"
175                         className="flex items-center gap-1.5 rounded-full border border-line/70 bg-cream-
card px-3 py-1.5 text-[11.5px] font-medium text-ink-soft transition hover:border-ink-faint/40"
176                     >
177                         <ListFilter className="h-3.5 w-3.5" strokeWidth={1.75} />
178                         Legend
179                     </button>
180                     <button
181                         type="button"
182                         className="flex items-center gap-1.5 rounded-full border border-line/70 bg-cream-
card px-3 py-1.5 text-[11.5px] font-medium text-ink-soft transition hover:border-ink-faint/40"
183                     >
184                         <SlidersHorizontal className="h-3.5 w-3.5" strokeWidth={1.75} />
185                         Filter
186                         <ChevronDown className="h-3 w-3" strokeWidth={2} />
187                     </button>
188                 </div>
189             </div>
190             <p className="mt-1.5 max-w-[560px] text-[13px] leading-relaxed text-ink-soft">
{activeGoal.subtitle}
191             </p>
192
193             <MapConfidenceNotice goal={activeGoal} branch={selectedBranch} />
194
195             <div className="mt-4">
196                 <TrailMapBranchDiagram goal={activeGoal} selectedBranchId={branchId} onSelect=
{setBranchId} />
197             </div>
198
199             <TrailMapComparison goal={activeGoal} selectedBranchId={branchId} onSelect=
{setBranchId} />
200
201             <TrailMapLegend />
202         </div>
203
204     </div>
205     <div className="flex flex-col gap-4">

```

```
206         <TrailMapDetailSidebar branch={selectedBranch} />
207         <RoleDialogueCard />
208         <PathGuideCard goal={activeGoal} branch={selectedBranch} />
209         <TrailMapNotesPanel
210             goal={activeGoal.id}
211             branch={selectedBranch}
212             notes={activeGoal.notes}
213             notesTotal={activeGoal.notesTotal}
214             notesAreExamples={activeGoal.notesAreExamples}
215         />
216     </div>
217 </div>
218 )}
219 </main>
220
221     <SiteFooter />
222 </div>
223 );
224 }
```

app/opportunity/[id]/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 206 lines

```

1  "use client";
2
3  import { useEffect, useState } from "react";
4  import Link from "next/link";
5  import { useParams } from "next/navigation";
6  import { ArrowLeft, MapPin } from "lucide-react";
7  import { TopoLines } from "@components/TopoLines";
8  import { RoutePlanningHeader } from "@components/route/RoutePlanningHeader";
9  import { TrailMarkersSection } from "@components/route/TrailMarkersSection";
10 import { OpportunityJourneySidebar } from "@components/opportunity/OpportunityJourneySidebar";
11 import { OpportunityDetailCard } from "@components/opportunity/OpportunityDetailCard";
12 import { OpportunityGuidancePanel } from "@components/opportunity/OpportunityGuidancePanel";
13 import { CommunityChecksSection } from "@components/opportunity/CommunityChecksSection";
14 import { SiteFooter } from "@components/SiteFooter";
15 import { routes } from "@lib/routes";
16 import { routeOpportunities } from "@lib/opportunities";
17 import { useReviewedOpportunities } from "@lib/useReviewedOpportunities";
18 import type { Opportunity } from "@lib/opportunitySchema";
19 import { getRelatedGoalText } from "@lib/opportunityNarrative";
20 import { computeTrustLabel } from "@lib/trustLabels";
21 import { mapGoalToTrailMapGoal } from "@lib/goalSpecificity";
22 import { useScrollToOpportunityContent } from "@lib/useScrollToOpportunityContent";
23
24 /**
25  * Dynamic opportunity detail page – renders any opportunity by id/slug
26  * from Supabase (falling back to seed data, then a local dev fallback),
27  * not just /opportunity/plant-based-cooking-class. The rich three-column
28  * layout (journey sidebar, detail card, guidance panel – v0.34 Part 5)
29  * is fully data-driven from whichever Opportunity resolves, and every
30  * cross-page link carries the opportunity's related goal (pathItSupports)
31  * so Route Planning and the Trail Map pick up the right context.
32  */
33 export default function OpportunityDetailPage() {
34   const params = useParams<{ id: string }>();
35   // Keyed by id so React remounts (and resets fetch state) on navigation
36   // between two different opportunity detail pages, instead of needing to
37   // reset state imperatively inside an effect.
38   return <OpportunityDetailContent key={params.id} id={params.id} />;
39 }
40
41 function OpportunityDetailContent({ id }: { id: string }) {
42   const { reviewed } = useReviewedOpportunities();
43   const [dbOpportunity, setDbOpportunity] = useState<Opportunity | null>(null);
44   const [dbLoading, setDbLoading] = useState(true);
45
46   // See lib/useScrollToOpportunityContent.ts – landing here mid-scroll
47   // (e.g. from a Link deep in Best Next Route's action block) could
48   // otherwise leave the browser stranded partway down a smooth-scroll
49   // animation instead of at the top. Re-runs once dbLoading flips false,
50   // since the fetched opportunity replaces a much shorter loading state
51   // and can otherwise leave the reset fighting a pre-data layout.
52   useScrollToOpportunityContent(dbLoading);

```

```

53
54   useEffect(() => {
55     let cancelled = false;
56
57     fetch(`/api/opportunities/${id}`)
58       .then((res) => res.json())
59       .then((data: { ok: true; opportunity: Opportunity } | { ok: false; error: string }) => {
60         if (cancelled) return;
61         setDbOpportunity(data.ok ? data.opportunity : null);
62       })
63       .catch(() => {
64         if (!cancelled) setDbOpportunity(null);
65       })
66       .finally(() => {
67         if (!cancelled) setDbLoading(false);
68       });
69
70     return () => {
71       cancelled = true;
72     };
73   }, [id]);
74
75   const seedOpportunity = routeOpportunities.find((o) => o.id === id);
76   const localOpportunity = reviewed.find((o) => o.id === id);
77
78   // Priority: database (live) -> seed data -> localStorage dev fallback.
79   // Wait for the database fetch to settle before falling through, so a
80   // slow network doesn't briefly flash "not found" for a real DB opportunity.
81   const opportunity = dbOpportunity ?? seedOpportunity ?? (dbLoading ? undefined : localOpportunity);
82   const stillResolving = dbLoading && !seedOpportunity;
83   const route = opportunity ? routes.find((r) => r.id === opportunity.routeId) : null;
84   const trustLabel = opportunity ? computeTrustLabel(opportunity) : null;
85
86   const relatedGoal = opportunity ? getRelatedGoalText(opportunity) : "";
87   const routePlanningHref = relatedGoal ? `/route-planning?goal=${encodeURIComponent(relatedGoal)}` :
88   "/route-planning";
89   const trailMapGoalId = relatedGoal ? mapGoalToTrailMapGoal(relatedGoal) : null;
90   const trailHref = trailMapGoalId
91     ? `/trail-map?goal=${encodeURIComponent(trailMapGoalId)}`
92     : relatedGoal
93     ? `/trail-map?goal=${encodeURIComponent(relatedGoal)}`
94     : "/trail-map";
95   const scoutHref = `${routePlanningHref}#scout-request`;
96
97   const relatedOpenings = opportunity
98     ? routeOpportunities
99       .filter((o) => o.routeId === opportunity.routeId && o.id !== opportunity.id)
100       .slice(0, 3)
101   : [];
102
103   return (
104     <div className="relative min-h-screen">
105       <TopoLines
106         className="pointer-events-none absolute inset-0 h-full w-full text-ink"
107         count={20}

```

```

107     opacityRange={[0.015, 0.035]}
108   />
109   <div className="relative border-b border-line/70">
110     <RoutePlanningHeader mode="compass" compassHref={routePlanningHref} trailHref={trailHref} />
111   </div>
112
113   <main className="relative mx-auto w-full max-w-[1500px] px-6 py-6 sm:px-10">
114     <Link
115       href="/route-planning"
116       className="flex w-fit items-center gap-1.5 text-[13px] font-medium text-ink-soft outline-
none transition hover:text-ink focus-visible:ring-2 focus-visible:ring-green/50"
117     >
118       <ArrowLeft className="h-3.5 w-3.5" />
119       Back to route planning
120     </Link>
121
122     <div id="opportunity-content" />
123
124     {stillResolving ? (
125       <div className="shadow-card mt-4 flex flex-col rounded-[26px] border border-line/70 bg-
cream-card px-6 py-6">
126         <p className="text-[13px] text-ink-faint">Loading opportunity...</p>
127       </div>
128     ) : opportunity && trustLabel ? (
129       <>
130         <div className="mt-4 flex items-start gap-2.5 rounded-2xl border border-line/70 bg-cream-
field px-4 py-3">
131           <MapPin className="mt-0.5 h-3.5 w-3.5 shrink-0 text-green" strokeWidth={1.75} />
132           <p className="text-[11.5px] leading-relaxed text-ink-soft">
133             Pathoro doesn't just list this – it helps you tell whether
134             it's real, reachable from where you are, and worth your time.
135           </p>
136         </div>
137
138         <div className="mt-5 grid grid-cols-1 items-start gap-6 lg:grid-cols-
[260px_minmax(0,1fr)_320px]">
139           <OpportunityJourneySidebar
140             relatedGoal={relatedGoal}
141             route={route}
142             trailHref={trailHref}
143             routePlanningHref={routePlanningHref}
144           />
145
146           <div className="flex min-w-0 flex-col gap-6">
147             <OpportunityDetailCard
148               opportunity={opportunity}
149               route={route}
150               trustLabel={trustLabel}
151               relatedOpenings={relatedOpenings}
152               scoutHref={scoutHref}
153             />
154             <TrailMarkersSection
155               contextType="opportunity"
156               opportunityId={opportunity.id}
157               routeId={opportunity.routeId}
158               goal={relatedGoal}

```

```

159         />
160         <CommunityChecksSection
161             contextType="opportunity"
162             opportunityId={opportunity.id}
163             routeId={opportunity.routeId}
164             goal={relatedGoal}
165         />
166     </div>
167
168     <OpportunityGuidancePanel
169         opportunity={opportunity}
170         route={route}
171         routePlanningHref={routePlanningHref}
172         trailHref={trailHref}
173     />
174 </div>
175
176 <p className="mt-4 text-[11px] text-ink-faint">
177     {dbOpportunity
178         ? "Saved to the database."
179         : seedOpportunity
180         ? "Example opportunity – illustrative, not a live database record."
181         : "This access point isn't saved to Pathoro's database yet – it's stored locally in
this browser."}
182 </p>
183 </>
184 ) : (
185     <div className="shadow-card mt-4 flex flex-col rounded-[26px] border border-line/70 bg-
cream-card px-6 py-6">
186         <h1 className="font-serif text-[19px] leading-tight text-ink">
187             Opportunity not found
188         </h1>
189         <p className="mt-2 text-[13px] leading-relaxed text-ink-soft">
190             This opportunity was saved locally in another browser/session,
191             never existed, or is no longer available.
192         </p>
193         <Link
194             href="/route-planning"
195             className="mt-5 flex items-center justify-center gap-2 rounded-full bg-green py-2.5
text-[13.5px] font-medium text-cream shadow-sm outline-none transition hover:bg-green-dark focus-
visible:ring-2 focus-visible:ring-green/50"
196         >
197             Back to route planning
198         </Link>
199     </div>
200 )}
201 </main>
202
203 <SiteFooter />
204 </div>
205 );
206 }

```

app/opportunity/candidate/[id]/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 234 lines

```

1  "use client";
2
3  import { useEffect, useState } from "react";
4  import Link from "next/link";
5  import { useParams, useSearchParams } from "next/navigation";
6  import { ArrowLeft, ExternalLink, TriangleAlert } from "lucide-react";
7  import { TopoLines } from "@components/TopoLines";
8  import { RoutePlanningHeader } from "@components/route/RoutePlanningHeader";
9  import { TakeOpportunityModal } from "@components/opportunity/TakeOpportunityModal";
10 import { FindSomeoneAheadCard } from "@components/opportunity/FindSomeoneAheadCard";
11 import { TrailMarkersSection } from "@components/route/TrailMarkersSection";
12 import { CommunityChecksSection } from "@components/opportunity/CommunityChecksSection";
13 import { SiteFooter } from "@components/SiteFooter";
14 import { routes } from "@lib/routes";
15 import { TRUST_LABEL_CLASS, CANDIDATE_TRUST_LABEL } from "@lib/trustLabels";
16 import { GOAL_FIT_BADGE_CLASS, GOAL_FIT_COPY, GOAL_FIT_LABELS, computeGoalFit } from
    "@lib/goalFitLabel";
17 import type { ScoutCandidateRecord } from "@lib/scoutCandidatesDb";
18 import { useScrollToOpportunityContent } from "@lib/useScrollToOpportunityContent";
19
20 /**
21  * Detail page for a not-yet-promoted scout candidate – the "Take this
22  * opportunity" destination for BestNextRouteCard's real (source-backed)
23  * results, so a real candidate gets a real internal page instead of only
24  * an external link or a card fragment (see v0.38 "Surface real
25  * opportunity results"). Once an admin promotes a candidate it becomes a
26  * real Opportunity and gets its own /opportunity/[id] page instead – this
27  * route is only ever for the unreviewed, pre-promotion state.
28  */
29 export default function CandidateDetailPage() {
30   const params = useParams<{ id: string }>();
31   return <CandidateDetailContent key={params.id} id={params.id} />;
32 }
33
34 type CandidateResponse =
35   | { ok: true; candidate: ScoutCandidateRecord; routeId: string; pathGoal: string; city: string }
36   | { ok: false; error: string };
37
38 function CandidateDetailContent({ id }: { id: string }) {
39   const searchParams = useSearchParams();
40   const [data, setData] = useState<CandidateResponse | null>(null);
41   const [loading, setLoading] = useState(true);
42   const [takeOpen, setTakeOpen] = useState(searchParams.get("openTake") === "1");
43
44   // See lib/useScrollToOpportunityContent.ts / the matching comment in
45   // app/opportunity/[id]/page.tsx.
46   useScrollToOpportunityContent(loading);
47
48   useEffect(() => {
49     let cancelled = false;
50     fetch(`/api/scout-candidates/${id}`)
51       .then((res) => res.json())

```

```

52     .then((result: CandidateResponse) => {
53         if (!cancelled) setData(result);
54     })
55     .catch(() => {
56         if (!cancelled) setData({ ok: false, error: "Something went wrong." });
57     })
58     .finally(() => {
59         if (!cancelled) setLoading(false);
60     });
61     return () => {
62         cancelled = true;
63     };
64 }, [id]);
65
66 const route = data?.ok ? routes.find((r) => r.id === data.routeId) : undefined;
67 const scoutHref = data?.ok
68     ? `/route-planning?goal=${encodeURIComponent(data.pathGoal)}#scout-request`
69     : "/route-planning#scout-request";
70 const goalFit = data?.ok && data.pathGoal ? computeGoalFit(data.candidate, data.pathGoal) : null;
71
72 return (
73     <div className="relative min-h-screen overflow-hidden bg-cream">
74         <TopoLines
75             className="pointer-events-none absolute inset-0 h-full w-full text-ink"
76             count={20}
77             opacityRange={[0.015, 0.035]}
78         />
79         <div className="relative">
80             <RoutePlanningHeader />
81             <main className="mx-auto max-w-[720px] px-6 pb-16 sm:px-10">
82                 <Link
83                     href={data?.ok ? `/route-planning?goal=${encodeURIComponent(data.pathGoal)}` : "/route-
84 planning"}
85                     className="flex w-fit items-center gap-1.5 text-[12.5px] font-medium text-ink-soft
86 outline-none transition hover:text-ink focus-visible:ring-2 focus-visible:ring-green/50"
87                 >
88                     <ArrowLeft className="h-3.5 w-3.5" />
89                     Back to route planning
90                 </Link>
91
92                 <div id="opportunity-content" />
93
94                 {loading && (
95                     <p className="mt-8 text-[13px] text-ink-faint">Loading this candidate...</p>
96                 )}
97
98                 {!loading && (!data || !data.ok) && (
99                     <div className="shadow-card mt-6 rounded-[26px] border border-line/70 bg-cream-card px-5
100 py-6">
101                         <p className="text-[14px] font-semibold text-ink">This candidate isn't available
102 anymore.</p>
103                         <p className="mt-1.5 text-[12.5px] leading-relaxed text-ink-soft">
104                             It may have been reviewed and removed, or the link is out of date.
105                         </p>
106                         <Link
107                             href="/route-planning"

```

```

104         className="mt-3.5 flex w-fit items-center gap-1.5 rounded-full bg-green px-4 py-2
text-[12.5px] font-medium text-cream shadow-sm transition hover:bg-green-dark"
105     >
106         Back to route planning
107     </Link>
108 </div>
109 }}
110
111     {!loading && data?.ok && (
112         <div className="mt-6 flex flex-col gap-5">
113             <div className="shadow-card flex flex-col rounded-[26px] border border-line/70 bg-
cream-card px-5 py-6">
114                 <div className="flex flex-wrap items-center gap-1.5">
115                     <span
116                         className={`rounded-full border px-2.5 py-0.5 text-[10.5px] font-medium
${TRUST_LABEL_CLASS[CANDIDATE_TRUST_LABEL]}`}
117                     >
118                         {CANDIDATE_TRUST_LABEL}
119                     </span>
120                     {goalFit && (
121                         <span className={`rounded-full px-2.5 py-0.5 text-[10.5px] font-medium
${GOAL_FIT_BADGE_CLASS[goalFit]}`}>
122                             {GOAL_FIT_LABELS[goalFit]}
123                         </span>
124                     )}
125                     {data.candidate.opportunityType && (
126                         <span className="rounded-full border border-line/70 px-2.5 py-0.5 text-[10.5px]
font-medium text-ink-faint">
127                             {data.candidate.opportunityType}
128                         </span>
129                     )}
130                 </div>
131                 {goalFit && (goalFit === "adjacent" || goalFit === "weak") && (
132                     <p className="mt-2 text-[11.5px] leading-relaxed text-ink-faint">
133                         <span className="font-semibold text-ink-soft">{GOAL_FIT_LABELS[goalFit]} -
</span>
134                             {GOAL_FIT_COPY[goalFit]}
135                         </p>
136                     )}
137
138                 <h1 className="mt-3 font-serif text-[22px] leading-tight text-ink">
139                     {data.candidate.title}
140                 </h1>
141                 <p className="mt-1 text-[12.5px] text-ink-faint">
142                     {data.candidate.sourceName}
143                     {route ? ` · ${route.title}` : ""}
144                     {data.pathGoal ? ` · ${data.pathGoal}` : ""}
145                 </p>
146
147                 {data.candidate.snippet && (
148                     <p className="mt-3 text-[13px] leading-relaxed text-ink-soft">
149                         {data.candidate.snippet}
150                     </p>
151                 )}
152
153                 {data.candidate.whyThisMayFit && (

```

```

154         <p className="mt-3 text-[12px] leading-relaxed text-ink-faint">
155             <span className="font-semibold text-ink-soft">Why Pathoro thinks this fits -
</span>
156             {data.candidate.whyThisMayFit}
157         </p>
158     )}
159
160     <div className="mt-3.5 flex items-start gap-2 rounded-2xl border border-amber-400/40
bg-amber-400/10 px-3.5 py-3 text-amber-800">
161         <TriangleAlert className="mt-0.5 h-3.5 w-3.5 shrink-0" strokeWidth={1.75} />
162         <p className="text-[11.5px] leading-relaxed">
163             Pathoro found this from a real source but hasn't reviewed it. Review the
164             source before acting on it.
165         </p>
166     </div>
167
168     <div className="mt-4 flex flex-wrap items-center gap-3">
169         <button
170             type="button"
171             onClick={() => setTakeOpen(true)}
172             className="flex items-center justify-center gap-1.5 rounded-full bg-green px-5
py-2.5 text-[13.5px] font-semibold text-cream shadow-sm outline-none transition hover:bg-green-dark
focus-visible:ring-2 focus-visible:ring-green/50"
173         >
174             Take this opportunity
175         </button>
176         <a
177             href={data.candidate.url}
178             target="_blank"
179             rel="noreferrer"
180             className="flex items-center gap-1.5 text-[12.5px] font-medium text-ink-soft
underline-offset-2 outline-none transition hover:text-ink hover:underline focus-visible:ring-2 focus-
visible:ring-green/50"
181         >
182             View source
183         <ExternalLink className="h-3.5 w-3.5" strokeWidth={2} />
184     </a>
185     <Link
186         href={scoutHref}
187         className="text-[12.5px] font-medium text-ink-soft underline-offset-2 outline-
none transition hover:text-ink hover:underline focus-visible:ring-2 focus-visible:ring-green/50"
188     >
189         Scout similar access points
190     </Link>
191 </div>
192 </div>
193
194 <FindSomeoneAheadCard
195     opportunityId={data.candidate.id}
196     opportunityTitle={data.candidate.title}
197     opportunityType={data.candidate.opportunityType}
198 />
199
200 <TrailMarkersSection
201     contextType="candidate_opportunity"
202     candidateId={data.candidate.id}

```

```

203         routeId={data.routeId}
204         goal={data.pathGoal}
205     />
206     <CommunityChecksSection
207         contextType="candidate_opportunity"
208         candidateId={data.candidate.id}
209         routeId={data.routeId}
210         goal={data.pathGoal}
211     />
212 </div>
213 }}
214 </main>
215 <SiteFooter />
216 </div>
217
218 {takeOpen && data?.ok && (
219     <TakeOpportunityModal
220         opportunityId={data.candidate.id}
221         opportunitySlug={data.candidate.id}
222         opportunityTitle={data.candidate.title}
223         goal={data.pathGoal}
224         routeId={data.routeId}
225         routeTitle={route?.title ?? ""}
226         sourceUrl={data.candidate.url}
227         trustLabel={CANDIDATE_TRUST_LABEL}
228         opportunityType={data.candidate.opportunityType}
229         onClose={() => setTakeOpen(false)}
230     />
231 }}
232 </div>
233 );
234 }

```

app/about/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 36 lines

```

1 import { LegalPageLayout } from "@components/legal/LegalPageLayout";
2
3 export default function AboutPage() {
4   return (
5     <LegalPageLayout title="What is Pathoro?">
6       <p>
7         Pathoro helps you figure out a real next step toward something you
8         want – a career, a habit, a business – and then helps you find an
9         actual place to take that step: a class, an apprenticeship, an
10        info session, a person who&rsquo;s already done it.
11      </p>
12      <p>
13        It combines three things: a map of the path itself (what usually
14        comes first, what branches exist, what a realistic timeline looks
15        like), Pathoro&rsquo;s own scouting for source-backed access points
16        on the open web, and trail notes – short signs left by people who
17        walked the path before you, plus Pathoro&rsquo;s own starter notes
18        where real community notes haven&rsquo;t accumulated yet.
19      </p>
20      <p>
21        Pathoro is not a job board, not a course marketplace, and not a
22        social feed. It doesn&rsquo;t sign you up for anything on your
23        behalf, and it doesn&rsquo;t claim to have verified an opportunity
24        just because it found it.
25      </p>
26      <p>
27        Pathoro is currently in public alpha – a small, early release meant
28        to be genuinely useful while it&rsquo;s still being built. See{" "}
29        <a href="/terms" className="font-medium text-green underline">Terms</a> for what that means
    in
30        practice, or use{" "}
31        <a href="/contact" className="font-medium text-green underline">Contact</a> to tell us what
    felt
32        useful or confusing.
33      </p>
34    </LegalPageLayout>
35  );
36 }

```

app/privacy/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 56 lines

```

1 import { LegalPageLayout } from "@components/legal/LegalPageLayout";
2
3 export default function PrivacyPage() {
4   return (
5     <LegalPageLayout title="Privacy">
6       <p>
7         This is a plain-language alpha privacy notice, not a formal legal
8         document. Pathoro is a small, early-stage product – here is what it
9         actually does with your information today.
10      </p>
11      <p>
12        <span className="font-semibold text-ink">What Pathoro stores.</span>{" "}
13        Your goal, location, and a few onboarding answers are kept in your
14        browser (not sent anywhere) so the app remembers your place. A scout
15        request saves your goal, city, and route – no email or name. If you
16        submit a trail marker, a &ldquo;take this opportunity&rdquo; request,
17        a Path Guide request, or feedback, Pathoro saves what you typed –
18        including an email address only where that field exists and only if
19        you chose to fill it in – so a real person can review or follow up
20        on it.
21      </p>
22      <p>
23        <span className="font-semibold text-ink">Who can see it.</span>{" "}
24        Submitted content is reviewed by Pathoro before anything public
25        appears (for example, a trail marker only becomes visible after
26        approval). Contact emails are never shown publicly and are only
27        used to follow up on what you submitted.
28      </p>
29      <p>
30        <span className="font-semibold text-ink">Third parties.</span>{" "}
31        Pathoro stores data with Supabase and, when scouting for
32        opportunities, searches the public web through a third-party search
33        API (Tavily). Pathoro does not sell your information.
34      </p>
35      <p>
36        <span className="font-semibold text-ink">Your choices.</span> Don&rsquo;t
37        include anything you don&rsquo;t want stored. If you want something
38        you submitted removed, use{" "}
39        <a href="/contact" className="font-medium text-green underline">Contact</a> and Pathoro will
40        handle it manually – there&rsquo;s no self-serve account or
41        deletion tool yet in this alpha.
42      </p>
43      <p>
44        <span className="font-semibold text-ink">Children.</span> Pathoro is
45        not intended for children under 13. Please don&rsquo;t submit
46        personal information through any Pathoro form if you are under 13.
47      </p>
48      <p>
49        Pathoro does not provide professional, legal, medical, financial,
50        educational, employment, or licensing advice – see{" "}
51        <a href="/terms" className="font-medium text-green underline">Terms</a> for what that means

```

in

```
52         practice.  
53         </p>  
54     </LegalPageLayout>  
55 );  
56 }
```

app/terms/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 56 lines

```

1 import { LegalPageLayout } from "@components/legal/LegalPageLayout";
2
3 export default function TermsPage() {
4   return (
5     <LegalPageLayout title="Terms">
6       <p>
7         This is a plain-language alpha disclaimer, not a formal legal
8         document. By using Pathoro during this public alpha, you understand
9         the following:
10      </p>
11      <ul className="list-disc space-y-2 pl-5">
12        <li>
13          Pathoro helps you explore possible paths, source-backed access
14          points, and starter/community notes. It does not provide
15          professional, legal, medical, financial, educational, employment,
16          or licensing advice. Always verify official requirements
17          (licensing, certification, admissions, legal, medical, financial,
18          or employment) from official sources before relying on them.
19        </li>
20        <li>
21          Community trail markers are moderated before they appear
22          publicly, but their accuracy is not guaranteed. They reflect one
23          person's experience, not a verified fact. A credential is
24          only shown as verified ("Verified experience" or
25          "Licensed guide") when Pathoro has explicitly reviewed
26          and labeled it that way – a submitter typing a credential into
27          their own marker does not make it verified.
28        </li>
29        <li>
30          AI-found opportunities may be incomplete, outdated, or no longer
31          available. Pathoro finding a source is not Pathoro vouching for
32          it – review it yourself before acting.
33        </li>
34        <li>
35          "Take this opportunity" saves a next-step request that
36          Pathoro reviews manually. It does not sign you up, apply on your
37          behalf, or contact an outside organization for you.
38        </li>
39        <li>
40          Pathoro is not intended for children under 13. Do not submit
41          personal information (in a trail marker, feedback, or any other
42          form) if you are under 13.
43        </li>
44        <li>
45          This is an early alpha. Features may change, break, or be removed
46          without notice, and Pathoro is provided as-is with no uptime or
47          accuracy guarantees.
48        </li>
49      </ul>
50    <p>
51      Questions about any of this? Use{" "}
52      <a href="/contact" className="font-medium text-green underline">Contact</a>.

```

```
53         </p>
54     </LegalPageLayout>
55 );
56 }
```

app/contact/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 17 lines

```
1 import { LegalPageLayout } from "@components/legal/LegalPageLayout";
2 import { FeedbackForm } from "@components/FeedbackForm";
3
4 export default function ContactPage() {
5   return (
6     <LegalPageLayout title="Contact">
7       <p>
8         Pathoro is built by a small team during public alpha. This form goes
9         straight to the person building it – tell us what helped, what
10        confused you, what was wrong, or what you wish existed.
11      </p>
12      <div className="shadow-card mt-2 rounded-[26px] border border-line/70 bg-cream-card p-5">
13        <FeedbackForm />
14      </div>
15    </LegalPageLayout>
16  );
17 }
```

app/admin/page.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 131 lines

```
1 import Link from "next/link";
2 import {
3   ClipboardList,
4   Compass,
5   Flag,
6   Inbox,
7   Map,
8   MessageSquare,
9   MousePointerClick,
10  Route as RouteIcon,
11  Search,
12  Signpost,
13  type LucideIcon,
14 } from "lucide-react";
15
16 type HubLink = {
17   href: string;
18   icon: LucideIcon;
19   title: string;
20   description: string;
21 };
22
23 const links: HubLink[] = [
24   {
25     href: "/admin/opportunity-scout",
26     icon: Search,
27     title: "Opportunity Scout",
28     description:
29       "Search the web for route-relevant, hidden-opportunity, and gateway-community candidates.",
30   },
31   {
32     href: "/admin/scout-requests",
33     icon: Compass,
34     title: "Scout Requests",
35     description: "See what real users asked Pathoro to go look for.",
36   },
37   {
38     href: "/admin/discovery-queue",
39     icon: Inbox,
40     title: "Discovery Queue",
41     description: "Log leads on where a real-world opportunity might be found.",
42   },
43   {
44     href: "/admin/opportunity-ingestion",
45     icon: ClipboardList,
46     title: "Opportunity Ingestion",
47     description: "Review and approve opportunity drafts before they go live.",
48   },
49   {
50     href: "/admin/trail-markers",
51     icon: Flag,
52     title: "Trail Marker Review",
```

```

53   description: "Approve or reject signs left by people who've walked a path.",
54 },
55 {
56   href: "/admin/path-guide-requests",
57   icon: Signpost,
58   title: "Path Guide Requests",
59   description: "See who's asking for a path guide, and manually match them with someone ahead.",
60 },
61 {
62   href: "/admin/opportunity-actions",
63   icon: MousePointerClick,
64   title: "Opportunity Actions",
65   description: "See who clicked \"Take this opportunity,\" and what they want to do next.",
66 },
67 {
68   href: "/admin/feedback",
69   icon: MessageSquare,
70   title: "Feedback",
71   description: "What real users said helped, confused them, or was wrong – from the footer and
/contact.",
72 },
73 {
74   href: "/route-planning",
75   icon: RouteIcon,
76   title: "Route Planning",
77   description: "See the public product – what a user sees once they arrive.",
78 },
79 {
80   href: "/trail-map",
81   icon: Map,
82   title: "Advanced Trail Map",
83   description: "Prototype: a more detailed journey map for concentrated goals (e.g. become a
therapist).",
84 },
85 ];
86
87 export default function AdminHubPage() {
88   return (
89     <div className="min-h-screen bg-cream px-6 py-10 sm:px-10">
90       <div className="mx-auto max-w-[720px]">
91         <div className="rounded-2xl border border-line/70 bg-cream-field px-4 py-3 text-[12px] text-
ink-faint">
92           Internal prototype – not linked publicly. This is where Pathoro
93           gets operated: finding, reviewing, and approving real-world
94           opportunities and trail markers before anything reaches a user.
95         </div>
96
97         <h1 className="mt-6 font-serif text-[26px] leading-tight text-ink">
98           Admin hub
99         </h1>
100        <p className="mt-1.5 text-[13px] text-ink-faint">
101          Everything needed to operate Pathoro's opportunity pipeline.
102        </p>
103
104        <div className="mt-6 flex flex-col gap-3">

```

```
314         routeId={opportunity.routeId}
315         routeTitle={route?.title ?? ""}
316         sourceUrl={opportunity.sourceUrl}
317         trustLabel={trustLabel}
318         opportunityType={opportunity.opportunityType}
319         onClose={() => setTakeModalOpen(false)}
320     />
321   )}
322 </div>
323 );
324 }
```

components/community/TrailMarkerComposer.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 253 lines

```

1  "use client";
2
3  import { useState, type FormEvent } from "react";
4  import { X } from "lucide-react";
5  import {
6    COMMUNITY_MARKER_TYPES,
7    MARKER_TYPE_LABELS,
8    TRAIL_MARKER_BODY_MAX_LENGTH,
9    TRAIL_MARKER_BODY_MIN_LENGTH,
10   isValidMarkerBody,
11   type CommunityMarkerType,
12   type ContextType,
13   type MarkerType,
14 } from "@lib/trailMarkerSchema";
15
16 const EMAIL_RE = /^[^\s@]+@[^\s@]+\.[^\s@]+$/;
17
18 export type TrailMarkerContext = {
19   contextType: ContextType;
20   goal?: string;
21   routeId?: string;
22   trailGoal?: string;
23   branchId?: string;
24   milestoneId?: string;
25   opportunityId?: string;
26   candidateId?: string;
27 };
28
29 /**
30  * The one shared "leave a trail marker" form (v0.40 PART 5) – every entry
31  * point (Trail Map, opportunity page, candidate page) renders this same
32  * component with different context, rather than each place growing its
33  * own posting box. `fixedMarkerType` skips the type picker entirely for
34  * the opportunity "Community checks" flow (PART 8), which always submits
35  * marker_type = opportunity_check and never lets someone pick a different
36  * type from that entry point.
37  */
38 export function TrailMarkerComposer({
39   context,
40   fixedMarkerType,
41   title,
42   onClose,
43   onSubmitted,
44 }: {
45   context: TrailMarkerContext;
46   fixedMarkerType?: MarkerType;
47   title?: string;
48   onClose: () => void;
49   onSubmitted?: () => void;
50 }) {
51   const [markerType, setMarkerType] = useState<CommunityMarkerType>(
52     (fixedMarkerType as CommunityMarkerType) ?? COMMUNITY_MARKER_TYPES[0]

```

```

53  );
54  const [body, setBody] = useState("");
55  const [experienceLabel, setExperienceLabel] = useState("");
56  const [authorName, setAuthorName] = useState("");
57  const [contactEmail, setContactEmail] = useState("");
58  const [status, setStatus] = useState<"idle" | "submitting" | "sent">("idle");
59  const [error, setError] = useState<string | null>(null);
60
61  async function handleSubmit(e: FormEvent) {
62    e.preventDefault();
63    if (!isValidMarkerBody(body)) {
64      setError(
65        `Say a bit more – between ${TRAIL_MARKER_BODY_MIN_LENGTH} and ${TRAIL_MARKER_BODY_MAX_LENGTH}
characters.`
66      );
67      return;
68    }
69    const trimmedEmail = contactEmail.trim();
70    if (trimmedEmail && !EMAIL_RE.test(trimmedEmail)) {
71      setError("That email address doesn't look right.");
72      return;
73    }
74    setError(null);
75    setStatus("submitting");
76    try {
77      const res = await fetch("/api/trail-markers", {
78        method: "POST",
79        headers: { "Content-Type": "application/json" },
80        body: JSON.stringify({
81          contextType: context.contextType,
82          goal: context.goal ?? "",
83          routeId: context.routeId ?? "",
84          trailGoal: context.trailGoal ?? "",
85          branchId: context.branchId ?? "",
86          milestoneId: context.milestoneId ?? "",
87          opportunityId: context.opportunityId ?? "",
88          candidateId: context.candidateId ?? "",
89          markerType: fixedMarkerType ?? markerType,
90          body,
91          authorName,
92          experienceLabel,
93          contactEmail: trimmedEmail,
94        })),
95    });
96    const data = await res.json();
97    if (!data.ok) {
98      setError(data.error ?? "Something went wrong. Please try again.");
99      setStatus("idle");
100    }
101    return;
102    setStatus("sent");
103    onSubmitted?.();
104  } catch {
105    setError("Something went wrong reaching Pathoro. Please try again.");
106    setStatus("idle");

```

```

107     }
108   }
109
110   return (
111     <div
112       className="fixed inset-0 z-50 flex items-center justify-center bg-ink/40 px-4 py-8"
113       onClick={onClose}
114     >
115       <div
116         className="shadow-card max-h-full w-full max-w-[480px] overflow-y-auto rounded-[26px] border
border-line/70 bg-cream-card p-6"
117         onClick={(e) => e.stopPropagation()}
118       >
119         <div className="flex items-start justify-between gap-3">
120           <div>
121             <h3 className="font-serif text-[19px] leading-tight text-ink">
122               {status === "sent" ? "Trail marker submitted for review." : title ?? "Leave a trail
marker"}
123             </h3>
124             {status !== "sent" && (
125               <p className="mt-1 text-[12px] leading-relaxed text-ink-faint">
126                 Share something that would help someone behind you on this path.
127               </p>
128             )}
129           </div>
130           <button
131             type="button"
132             onClick={onClose}
133             aria-label="Close"
134             className="shrink-0 text-ink-faint outline-none transition hover:text-ink focus-
visible:ring-2 focus-visible:ring-green/50"
135           >
136             <X className="h-4 w-4" />
137           </button>
138         </div>
139
140         {status === "sent" ? (
141           <div className="mt-4">
142             <p className="text-[13px] leading-relaxed text-ink-soft">
143               Thanks – Pathoro will review this before it appears on the path.
144             </p>
145             <button
146               type="button"
147               onClick={onClose}
148               className="mt-4 w-full rounded-full bg-green py-2.5 text-[13.5px] font-medium text-
cream outline-none transition hover:bg-green-dark focus-visible:ring-2 focus-visible:ring-green/50"
149             >
150               Done
151             </button>
152           </div>
153         ) : (
154           <form onSubmit={handleSubmit} className="mt-4 flex flex-col gap-3.5">
155             <!--fixedMarkerType && (
156               <fieldset>
157                 <legend className="block text-[11px] font-semibold text-ink-faint">
158                   What kind of marker is this?

```

```

159         </legend>
160         <div className="mt-1.5 flex flex-col gap-1.5">
161             {COMMUNITY_MARKER_TYPES.map((type) => (
162                 <label
163                     key={type}
164                     className={`flex cursor-pointer items-center gap-2.5 rounded-2xl border px-3.5
py-2.5 text-[12.5px] transition ${
165                         markerType === type
166                         ? "border-green/50 bg-green-soft/40 text-ink"
167                         : "border-line/70 text-ink-soft hover:border-ink-faint/40"
168                     }`}
169                 >
170                     <input
171                         type="radio"
172                         name="markerType"
173                         value={type}
174                         checked={markerType === type}
175                         onChange={() => setMarkerType(type)}
176                         className="h-3.5 w-3.5 accent-green"
177                     />
178                     {MARKER_TYPE_LABELS[type]}
179                 </label>
180             )})
181         </div>
182     </fieldset>
183 )}
184
185 <label className="block">
186     <span className="block text-[11px] font-semibold text-ink-faint">
187         What should someone know?
188     </span>
189     <textarea
190         value={body}
191         onChange={(e) => setBody(e.target.value)}
192         rows={4}
193         maxLength={TRAIL_MARKER_BODY_MAX_LENGTH}
194         required
195         className="mt-1.5 w-full resize-none rounded-2xl border border-line/70 bg-cream-field
px-3.5 py-2.5 text-[12.5px] text-ink outline-none placeholder:text-ink-faint/70 focus:border-
green/50"
196     />
197 </label>
198
199 <label className="block">
200     <span className="block text-[11px] font-semibold text-ink-faint">
201         Your experience/context (optional)
202     </span>
203     <input
204         type="text"
205         value={experienceLabel}
206         onChange={(e) => setExperienceLabel(e.target.value)}
207         placeholder="Example: apprentice electrician, 2 years in trade"
208         className="mt-1.5 w-full rounded-2xl border border-line/70 bg-cream-field px-3.5 py-
2.5 text-[12.5px] text-ink outline-none placeholder:text-ink-faint/70 focus:border-green/50"
209     />
210 </label>

```

```

211
212     <label className="block">
213         <span className="block text-[11px] font-semibold text-ink-faint">Name (optional)</span>
214         <input
215             type="text"
216             value={authorName}
217             onChange={(e) => setAuthorName(e.target.value)}
218             className="mt-1.5 w-full rounded-2xl border border-line/70 bg-cream-field px-3.5 py-
2.5 text-[12.5px] text-ink outline-none placeholder:text-ink-faint/70 focus:border-green/50"
219         />
220     </label>
221
222     <label className="block">
223         <span className="block text-[11px] font-semibold text-ink-faint">Email (optional)
</span>
224         <input
225             type="email"
226             value={contactEmail}
227             onChange={(e) => setContactEmail(e.target.value)}
228             placeholder="you@example.com"
229             className="mt-1.5 w-full rounded-2xl border border-line/70 bg-cream-field px-3.5 py-
2.5 text-[12.5px] text-ink outline-none placeholder:text-ink-faint/70 focus:border-green/50"
230         />
231         <span className="mt-1 block text-[10.5px] leading-snug text-ink-faint">
232             Only used if Pathoro needs to verify or follow up.
233         </span>
234     </label>
235
236     {error && <p className="text-[11.5px] text-red-600">{error}</p>}
237
238     <button
239         type="submit"
240         disabled={status === "submitting"}
241         className="mt-1 rounded-full bg-green py-2.5 text-[13.5px] font-medium text-cream
outline-none transition hover:bg-green-dark focus-visible:ring-2 focus-visible:ring-green/50
disabled:cursor-not-allowed disabled:opacity-60"
242     >
243         {status === "submitting" ? "Submitting..." : "Submit trail marker"}
244     </button>
245     <p className="text-[10.5px] leading-snug text-ink-faint">
246         Not intended for children under 13 – please don't submit personal information if
you are under 13.
247     </p>
248 </form>
249 })
250 </div>
251 </div>
252 );
253 }

```

components/FeedbackForm.tsx

Pathoro Public Alpha v0.44 — source code deposit excerpt — 130 lines

```

1  "use client";
2
3  import { useState, type FormEvent } from "react";
4  import { FEEDBACK_CATEGORY_LABELS, type FeedbackCategory } from "@lib/feedbackSchema";
5
6  const CATEGORY_ORDER: FeedbackCategory[] = [
7    "helpful",
8    "confusing",
9    "wrong",
10   "path_request",
11   "trail_marker_interest",
12   "other",
13 ];
14
15 const MIN_MESSAGE_LENGTH = 4;
16
17 /** Shared body of the "Share feedback" flow – used both inside the footer
18  * modal and directly on /contact, so there's one form to keep honest
19  * rather than two near-duplicates drifting apart. */
20 export function FeedbackForm({ onSent }: { onSent?: () => void }) {
21   const [category, setCategory] = useState<FeedbackCategory>("helpful");
22   const [message, setMessage] = useState("");
23   const [contactEmail, setContactEmail] = useState("");
24   const [status, setStatus] = useState<"idle" | "submitting" | "sent">("idle");
25   const [error, setError] = useState<string | null>(null);
26
27   async function handleSubmit(e: FormEvent) {
28     e.preventDefault();
29     const trimmed = message.trim();
30     if (trimmed.length < MIN_MESSAGE_LENGTH) {
31       setError("Add a little more detail so Pathoro knows what you mean.");
32       return;
33     }
34     setError(null);
35     setStatus("submitting");
36     try {
37       const res = await fetch("/api/feedback", {
38         method: "POST",
39         headers: { "Content-Type": "application/json" },
40         body: JSON.stringify({
41           category,
42           message: trimmed,
43           pageUrl: typeof window !== "undefined" ? window.location.href : "",
44           contactEmail: contactEmail.trim(),
45         }),
46       });
47       const data = await res.json();
48       if (!data.ok) {
49         setError(data.error ?? "Something went wrong. Please try again.");
50         setStatus("idle");
51         return;
52       }

```

```

53     setStatus("sent");
54     onSent?.();
55   } catch {
56     setError("Something went wrong reaching Pathoro. Please try again.");
57     setStatus("idle");
58   }
59 }
60
61 if (status === "sent") {
62   return (
63     <p className="text-[13px] leading-relaxed text-ink-soft">
64       Thanks – this goes straight to the person building Pathoro. In this
65       alpha, feedback is reviewed manually.
66     </p>
67   );
68 }
69
70 return (
71   <form onSubmit={handleSubmit} className="flex flex-col gap-3.5">
72     <div>
73       <span className="block text-[11px] font-semibold text-ink-faint">What&rsquo;s this about?
</span>
74       <div className="mt-1.5 flex flex-wrap gap-1.5">
75         {CATEGORY_ORDER.map((c) => (
76           <button
77             key={c}
78             type="button"
79             onClick={() => setCategory(c)}
80             className={
81               c === category
82                 ? "rounded-full border border-green/40 bg-green-soft px-2.5 py-1 text-[10.5px]
font-medium text-green outline-none"
83                 : "rounded-full border border-line/70 px-2.5 py-1 text-[10.5px] text-ink-faint
outline-none transition hover:border-green/40 hover:text-ink-soft focus-visible:ring-2 focus-
visible:ring-green/50"
84             }
85           >
86             {FEEDBACK_CATEGORY_LABELS[c]}
87           </button>
88         ))}
89       </div>
90     </div>
91
92     <label className="block">
93       <span className="block text-[11px] font-semibold text-ink-faint">Tell us more</span>
94       <textarea
95         value={message}
96         onChange={(e) => setMessage(e.target.value)}
97         rows={4}
98         placeholder="What felt useful, confusing, or wrong?"
99         className="mt-1.5 w-full resize-none rounded-2xl border border-line/70 bg-cream-field px-
3.5 py-2.5 text-[12.5px] text-ink outline-none placeholder:text-ink-faint/70 focus:border-green/50"
100       />
101     </label>
102
103     <label className="block">

```

```

104     <span className="block text-[11px] font-semibold text-ink-faint">
105       Email (optional, so Pathoro can follow up)
106     </span>
107     <input
108       type="email"
109       value={contactEmail}
110       onChange={(e) => setContactEmail(e.target.value)}
111       placeholder="you@example.com"
112       className="mt-1.5 w-full rounded-2xl border border-line/70 bg-cream-field px-3.5 py-2.5
text-[12.5px] text-ink outline-none placeholder:text-ink-faint/70 focus:border-green/50"
113     />
114   </label>
115
116   {error && <p className="text-[11.5px] text-red-600">{error}</p>}
117
118   <button
119     type="submit"
120     disabled={status === "submitting"}
121     className="mt-1 rounded-full bg-green py-2.5 text-[13.5px] font-medium text-cream outline-
none transition hover:bg-green-dark focus-visible:ring-2 focus-visible:ring-green/50 disabled:cursor-
not-allowed disabled:opacity-60"
122   >
123     {status === "submitting" ? "Sending..." : "Send feedback"}
124   </button>
125   <p className="text-[10.5px] leading-snug text-ink-faint">
126     Not intended for children under 13 – please don't submit personal information if you
are under 13.
127   </p>
128 </form>
129 );
130 }

```

lib/opportunityNarrative.ts

Pathoro Public Alpha v0.44 — source code deposit excerpt — 107 lines

```

1  /**
2   * Pure copy-generation helpers shared by the admin review UI, route-planning
3   * cards, and the opportunity detail page. Every string here is computed from
4   * fields that already exist on Opportunity/IngestionDraft — no new schema.
5   *
6   * The point: Pathoro isn't saving events, it's saving real-world access
7   * points along a path. These functions turn the same underlying fields into
8   * that framing everywhere an opportunity is shown.
9   */
10
11 export type NarrativeInput = {
12   title: string;
13   description: string;
14   whoItIsFor: string;
15   pathItSupports: string;
16   whatItMayOpenNext: string;
17   opportunityType: string;
18   hostName: string;
19   locationLabel: string;
20   dateLabel: string;
21   costLabel: string;
22   sourceUrl: string | null;
23 };
24
25 /** The goal text to carry into /route-planning or /trail-map from an
26  * opportunity page (v0.34 "View full route" / "View Trail Map" CTAs) —
27  * pathItSupports is already exactly this ("Become vegetarian", "Become
28  * an HVAC technician", ...) for every opportunity; title is the only
29  * sane fallback for a record missing it. */
30 export function getRelatedGoalText(input: Pick<NarrativeInput, "pathItSupports" | "title">): string {
31   return input.pathItSupports.trim() || input.title.trim();
32 }
33
34 /** Why this opportunity surfaced for this person, on this route. */
35 export function getWhyThisAppeared(input: NarrativeInput): string {
36   const { pathItSupports, whoItIsFor } = input;
37   if (pathItSupports && whoItIsFor) {
38     return `It supports ${pathItSupports.toLowerCase()} — and it's built for
39     ${whoItIsFor.toLowerCase()}.`;
40   }
41   if (pathItSupports) {
42     return `It supports ${pathItSupports.toLowerCase()}.`;
43   }
44   if (whoItIsFor) {
45     return `It's for ${whoItIsFor.toLowerCase()}.`;
46   }
47   return "It's a path-supporting opportunity for your selected route.";
48 }
49
50 /** What real-world access this opportunity concretely creates. */
51 export function getWhatAccessThisCreates(input: NarrativeInput): string {
52   const { opportunityType, hostName, locationLabel, description } = input;

```

```

52  const parts: string[] = [];
53  if (opportunityType) parts.push(opportunityType);
54  if (hostName) parts.push(`with ${hostName}`);
55  if (locationLabel) parts.push(`in ${locationLabel}`);
56  if (parts.length > 0) {
57    return `A real-world access point: ${parts.join(" ")}`;
58  }
59  return description || "A real-world access point along this route.";
60 }
61
62 /** The concrete next action someone would take to use this opportunity. */
63 export function getNextActionSummary(input: NarrativeInput): string {
64   const { dateLabel, costLabel, sourceUrl } = input;
65   const bits = [dateLabel, costLabel].filter(Boolean);
66   if (bits.length > 0) {
67     return `Show up: ${bits.join(" · ")}`;
68   }
69   if (sourceUrl) {
70     return "Open the original source to take the next step.";
71   }
72   return "Reach out to take the next step.";
73 }
74
75 /**
76  * A short label for "Your next steps" step 1, derived from
77  * opportunityType – not hardcoded per opportunity id, so it reads right
78  * for any opportunity of that type rather than only the three named
79  * examples (v0.35 Part 4). Falls through to a generic label for any
80  * type this doesn't recognize.
81  */
82 export function getImmediateStepLabel(input: Pick<NarrativeInput, "opportunityType">): string {
83   const type = input.opportunityType.toLowerCase();
84   if (type.includes("info session")) return "Check info session details";
85   if (type.includes("assistant") || type.includes("role")) return "Review assistant opportunity";
86   if (type.includes("class") || type.includes("opening")) return "View class options";
87   if (type.includes("group") || type.includes("community")) return "View group details";
88   if (type.includes("person") || type.includes("conversation")) return "Learn more about this connection";
89   if (type.includes("planning") || type.includes("requirement")) return "Review requirements";
90   if (type.includes("trial")) return "Preview this trial";
91   return "Review this opportunity";
92 }
93
94 const CONSUMER_ACTIVITY_TERMS = /\b(class|workshop|lesson|session|course|ticket|screening)\b/i;
95 const ACCESS_TERMS =
96   /\b(mentor|apprentice|grant|market|vendor|program|sourcing|supplier|business|network|community|founder|coworking|trade|export|import|resale|arbitrage)\b/i;
97
98 /**
99  * Opportunity, not consumption – a light transparency signal, not a gate.
100  * Approved opportunities can still be shown even when flagged; this just
101  * tells the user honestly what kind of thing they're looking at.
102  */
103 export function isLikelyConsumerActivity(input: NarrativeInput): boolean {

```

```
104   const text = `${input.opportunityType} ${input.title}`.toLowerCase();
105   if (ACCESS_TERMS.test(text)) return false;
106   return CONSUMER_ACTIVITY_TERMS.test(text);
107 }
```

lib/scoutFit.ts

Pathoro Public Alpha v0.44 — source code deposit excerpt — 75 lines

```

1  /**
2   * Client-safe home for the PathoroFit type/labels – kept out of
3   * lib/tavily.ts (which is `server-only`) so the admin scout page can import
4   * the label map at runtime without pulling the Tavily module into the
5   * client bundle.
6   *
7   * Pathoro-fit is a separate axis from `opportunityCategory`. Category asks
8   * "what kind of opportunity is this substantively" (consumer activity vs.
9   * access point, etc); fit asks "is this even a specific, actionable page at
10  * all" (a real event/program page vs. a Yelp list or generic browse page).
11  * Combining the two is what lets a real cooking-class signup page rank
12  * above a "10 Best Restaurants" listicle even though neither is a
13  * high-agency opportunity.
14  */
15  export type PathoroFit = "strong_opportunity" | "maybe_useful" | "consumer_activity" |
    "weak_informational";
16
17  // v0.42 "Truth, Trust, and Alpha Readiness": "Strong opportunity" read as a
18  // guarantee rather than Pathoro's own estimate – "Strong fit" says the same
19  // thing (this candidate scores well) without implying Pathoro has
20  // confirmed it. See also SCOUT_CONFIDENCE_LABELS below.
21  export const PATHORO_FIT_LABELS: Record<PathoroFit, string> = {
22    strong_opportunity: "Strong fit",
23    maybe_useful: "Maybe useful",
24    consumer_activity: "Consumer activity",
25    weak_informational: "Mostly informational",
26  };
27
28  /** Higher-fit tiers first – shared by lib/tavily.ts's candidate sort and
29   * anywhere else that needs to show the strongest candidates first. */
30  export const PATHORO_FIT_RANK: Record<PathoroFit, number> = {
31    strong_opportunity: 3,
32    maybe_useful: 2,
33    consumer_activity: 1,
34    weak_informational: 0,
35  };
36
37  /**
38   * Shared card/badge styling so every surface that renders a scout
39   * candidate (public scout result page, route-planning's AI-found section)
40   * downplays weak/consumer-only results the same way – see "Improve
41   * weak-result handling" in the v0.18 task notes.
42   */
43  export const FIT_CARD_CLASS: Record<PathoroFit, string> = {
44    strong_opportunity: "border-green/40 bg-green-soft/30 shadow-[0_0_1px_rgba(84,120,32,0.06)]",
45    maybe_useful: "border-line/70 bg-cream-field",
46    consumer_activity: "border-line/70 bg-cream-field",
47    weak_informational: "border-line/50 bg-cream-field/50 opacity-70",
48  };
49
50  export const FIT_BADGE_CLASS: Record<PathoroFit, string> = {
51    strong_opportunity: "border border-green/40 bg-green-soft/70 text-green",

```

```
52 maybe_useful: "border border-line/70 bg-cream-card text-ink-soft",
53 consumer_activity: "border border-line/70 bg-cream-card text-ink-faint",
54 weak_informational: "border border-line/60 bg-cream-card text-ink-faint",
55 };
56
57 // "confidence" on its own reads as Pathoro vouching for the result;
58 // "fit estimate" is clearer that this is Pathoro's own scoring, not a
59 // verification.
60 export const SCOUT_CONFIDENCE_LABELS: Record<string, string> = {
61   high: "High fit estimate",
62   medium: "Medium fit estimate",
63   low: "Low fit estimate",
64 };
65
66 const CANDIDATE_SNIPPET_MAX_LENGTH = 140;
67
68 /** Client-side snippet truncation for scannability – snippets are already
69  * capped server-side, but shorter still reads better in a dense card list. */
70 export function shortenSnippet(snippet: string): string {
71   if (snippet.length <= CANDIDATE_SNIPPET_MAX_LENGTH) return snippet;
72   const truncated = snippet.slice(0, CANDIDATE_SNIPPET_MAX_LENGTH);
73   const lastSpace = truncated.lastIndexOf(" ");
74   return (lastSpace > CANDIDATE_SNIPPET_MAX_LENGTH * 0.6 ? truncated.slice(0, lastSpace) :
75     truncated).trim() + "...";
76 }
```

lib/trustLabels.ts

Pathoro Public Alpha v0.44 — source code deposit excerpt — 83 lines

```

1  import type { Opportunity } from "@lib/opportunitySchema";
2
3  /**
4   * The opportunities table only stores a coarse trustLevel (Low/Medium/
5   * High) plus sourceType/status — there's no dedicated trust-label or
6   * hidden-requirements column (see docs/V0.32 schema notes). Rather than
7   * add a migration for display-only text, these labels are derived from
8   * fields that already exist, the same way Trail Map's Pathoro-estimate
9   * scores are computed rather than hand-typed per record.
10  */
11  export type TrustLabel =
12    | "Verified live"
13    | "Recently checked"
14    | "Source-backed"
15    | "Community-confirmed"
16    | "Stale risk"
17    | "Possible ghost listing"
18    | "Source unclear"
19    | "Unreviewed scout candidate"
20    | "Example listing";
21
22  export const TRUST_LABEL_CLASS: Record<TrustLabel, string> = {
23    "Verified live": "border-green/40 bg-green/10 text-green",
24    "Recently checked": "border-green/40 bg-green/10 text-green",
25    "Source-backed": "border-line/70 bg-cream-field text-ink-soft",
26    "Community-confirmed": "border-line/70 bg-cream-field text-ink-soft",
27    "Stale risk": "border-amber-400/40 bg-amber-400/10 text-amber-700",
28    "Possible ghost listing": "border-red-400/40 bg-red-400/10 text-red-700",
29    "Source unclear": "border-amber-400/40 bg-amber-400/10 text-amber-700",
30    "Unreviewed scout candidate": "border-amber-400/40 bg-amber-400/10 text-amber-700",
31    "Example listing": "border-line/70 bg-cream-field text-ink-faint",
32  };
33
34  const COMMUNITY_SOURCE_TYPES = new Set(["reddit_signal", "volunteer_board", "newsletter"]);
35
36  /** Never claims more confidence than the underlying fields support — a
37   * seed/mock row always reads "Example listing" regardless of its
38   * trustLevel, and a candidate never reads as more than "Unreviewed". */
39  export function computeTrustLabel(
40    opportunity: Pick<Opportunity, "sourceType" | "sourceUrl" | "status" | "trustLevel">
41  ): TrustLabel {
42    if (opportunity.sourceType === "mock_seed") return "Example listing";
43    if (opportunity.status === "expired") return "Stale risk";
44    if (opportunity.status !== "live") return "Source unclear";
45    if (!opportunity.sourceUrl) return "Source unclear";
46    if (COMMUNITY_SOURCE_TYPES.has(opportunity.sourceType)) return "Community-confirmed";
47    if (opportunity.trustLevel === "High") return "Verified live";
48    if (opportunity.trustLevel === "Medium") return "Source-backed";
49    return "Possible ghost listing";
50  }
51
52  /** A scout candidate is always this label, independent of its confidence

```

```

53  * field – "unreviewed" is a review-state fact, not a quality estimate. */
54  export const CANDIDATE_TRUST_LABEL: TrustLabel = "Unreviewed scout candidate";
55
56  /**
57   * Honest best-effort answer to "what hidden requirements matter?" from
58   * frictionLevel/effortLevel/costLabel – the closest existing fields to a
59   * real hidden-requirements note. Always framed as a Pathoro estimate, not
60   * an extracted fact, since none of this is actually verified per-listing.
61   */
62  export function getHiddenRequirementsNote(input: {
63    frictionLevel: string;
64    effortLevel: string;
65    costLabel: string;
66  }): string {
67    const parts: string[] = [];
68    if (input.frictionLevel === "High") {
69      parts.push("real friction to get started – paperwork, prerequisites, or a waitlist");
70    } else if (input.frictionLevel === "Medium") {
71      parts.push("some friction to get started");
72    }
73    if (input.effortLevel === "High") {
74      parts.push("a real time commitment once you're in");
75    }
76    if (input.costLabel) {
77      parts.push(`a cost of ${input.costLabel}`);
78    }
79    if (parts.length === 0) {
80      return "No major hidden requirements are flagged here – but always verify specifics before
81      relying on this.";
82    }
83    return `Pathoro estimate: expect ${parts.join(" and ")}. Verify specifics before committing.`;
84  }

```

lib/trailMarkerSchema.ts

Pathoro Public Alpha v0.44 — source code deposit excerpt — 217 lines

```

1  // Legacy (v0.13) marker types – kept valid forever (see migration 008),
2  // still shown correctly wherever an old marker is displayed, but no longer
3  // offered in the v0.40 community-layer composer.
4  export type LegacyMarkerType =
5    | "practical_tip"
6    | "hidden_requirement"
7    | "access_advice"
8    | "what_it_opened"
9    | "warning_or_friction"
10   | "bridge_person_or_group"
11   | "cheaper_alternative"
12   | "opportunity_quality";
13
14  // v0.40 "Community Layer Foundation" marker types – what
15  // TrailMarkerComposer actually offers. `opportunity_check` is the one
16  // exception: it's never in the composer's own type picker, it's set
17  // programmatically by the opportunity "Community checks" section (see
18  // components/opportunity/CommunityChecksSection.tsx).
19  export type CommunityMarkerType =
20    | "better_first_step"
21    | "hidden_friction"
22    | "warning"
23    | "what_opened_doors"
24    | "what_required"
25    | "useful_resource"
26    | "direct_experience"
27    | "opportunity_check";
28
29  export type MarkerType = LegacyMarkerType | CommunityMarkerType;
30
31  export const MARKER_TYPE_LABELS: Record<MarkerType, string> = {
32    // legacy
33    practical_tip: "Practical tip",
34    hidden_requirement: "Hidden requirement",
35    access_advice: "Access advice",
36    what_it_opened: "What this opened",
37    warning_or_friction: "Warning / friction",
38    bridge_person_or_group: "Bridge person or group",
39    cheaper_alternative: "Cheaper alternative",
40    opportunity_quality: "Real opportunity or consumer activity?",
41    // v0.40 community layer
42    better_first_step: "Better first step",
43    hidden_friction: "Hidden friction",
44    warning: "Warning",
45    what_opened_doors: "What opened doors",
46    what_required: "What this required",
47    useful_resource: "Useful resource",
48    direct_experience: "I've been through this",
49    opportunity_check: "Opportunity check",
50  };
51
52  export const MARKER_TYPES = Object.keys(MARKER_TYPE_LABELS) as MarkerType[];

```

```

53
54 /** The ordered picklist TrailMarkerComposer shows – matches v0.40 PART 5
55 * exactly. `opportunity_check` is deliberately excluded; it's only ever
56 * set via the fixedMarkerType prop from the opportunity community-checks
57 * entry point, never chosen freely. */
58 export const COMMUNITY_MARKER_TYPES: CommunityMarkerType[] = [
59   "better_first_step",
60   "hidden_friction",
61   "warning",
62   "what_opened_doors",
63   "what_required",
64   "useful_resource",
65   "direct_experience",
66 ];
67
68 export function isMarkerType(value: unknown): value is MarkerType {
69   return typeof value === "string" && (MARKER_TYPES as string[]).includes(value);
70 }
71
72 export type TrailMarkerStatus = "pending" | "approved" | "rejected" | "archived";
73
74 export const TRAIL_MARKER_STATUS_LABELS: Record<TrailMarkerStatus, string> = {
75   pending: "Pending review",
76   approved: "Approved",
77   rejected: "Rejected",
78   archived: "Archived",
79 };
80
81 export function isTrailMarkerStatus(value: unknown): value is TrailMarkerStatus {
82   return (
83     value === "pending" || value === "approved" || value === "rejected" || value === "archived"
84   );
85 }
86
87 /** Where a marker attaches – every marker must carry one of these, never
88 * posted context-free. See docs/MVP-LOCKED-PRINCIPLES.md#trail-markers-not-comments. */
89 export type ContextType =
90   | "trail_map"
91   | "branch"
92   | "milestone"
93   | "opportunity"
94   | "candidate_opportunity"
95   | "route";
96
97 export const CONTEXT_TYPE_LABELS: Record<ContextType, string> = {
98   trail_map: "Trail map",
99   branch: "Branch",
100  milestone: "Milestone",
101  opportunity: "Opportunity",
102  candidate_opportunity: "Candidate opportunity",
103  route: "Route",
104 };
105
106 export function isContextType(value: unknown): value is ContextType {
107   return (

```

```

108     value === "trail_map" ||
109     value === "branch" ||
110     value === "milestone" ||
111     value === "opportunity" ||
112     value === "candidate_opportunity" ||
113     value === "route"
114 );
115 }
116
117 /** How much weight a marker's context/experience claim should carry.
118 * `verified_experience` and `licensed_guide` are admin-only upgrades - a
119 * public submitter can never set either directly (see
120 * lib/trailMarkerCredibility.ts). */
121 export type CredibilityType =
122   | "peer"
123   | "verified_experience"
124   | "licensed_guide"
125   | "credential_not_verified";
126
127 export const CREDIBILITY_TYPE_LABELS: Record<CredibilityType, string> = {
128   peer: "Peer marker",
129   verified_experience: "Verified experience",
130   licensed_guide: "Licensed guide",
131   credential_not_verified: "Credential not verified",
132 };
133
134 export function isCredibilityType(value: unknown): value is CredibilityType {
135   return (
136     value === "peer" ||
137     value === "verified_experience" ||
138     value === "licensed_guide" ||
139     value === "credential_not_verified"
140   );
141 }
142
143 /** A structured "sign from someone who's walked this path" - not a
144 * comment. `contactEmail` and `moderationNotes` are admin-only; the public
145 * read path never selects those columns in the first place (see
146 * lib/trailMarkersDb.ts), so they're optional/undefined on anything that
147 * reached the client through the public API. */
148 export type TrailMarker = {
149   id: string;
150   contextType: ContextType;
151   goal: string;
152   routeId: string | null;
153   trailGoal: string | null;
154   branchId: string | null;
155   milestoneId: string | null;
156   opportunityId: string | null;
157   candidateId: string | null;
158   markerType: MarkerType;
159   body: string;
160   authorName: string;
161   authorRole: string;
162   experienceLabel: string;

```

```

163   credibilityType: CredibilityType;
164   contactEmail?: string | null;
165   status: TrailMarkerStatus;
166   helpfulCount: number;
167   moderationNotes?: string | null;
168   createdAt: string;
169   updatedAt: string;
170 };
171
172 export const TRAIL_MARKER_BODY_MIN_LENGTH = 10;
173 export const TRAIL_MARKER_BODY_MAX_LENGTH = 600;
174
175 export function isValidMarkerBody(body: string): boolean {
176   const trimmed = body.trim();
177   return (
178     trimmed.length >= TRAIL_MARKER_BODY_MIN_LENGTH &&
179     trimmed.length <= TRAIL_MARKER_BODY_MAX_LENGTH
180   );
181 }
182
183 export const TRAIL_MARKER_EXPERIENCE_LABEL_MAX_LENGTH = 120;
184 export const TRAIL_MARKER_AUTHOR_NAME_MAX_LENGTH = 80;
185
186 export function createTrailMarkerId(): string {
187   return `trail-${Date.now().toString(36)}-${Math.random().toString(36).slice(2, 7)}`;
188 }
189
190 // v0.41 "Seed High-Quality Starter Trail Markers" – Pathoro-authored
191 // editorial notes, never a real submitter. No schema change: these are
192 // plain trail_markers rows distinguished only by author_name/author_role,
193 // exactly per the product rule to never fake a community identity (see
194 // docs/MVP-LOCKED-PRINCIPLES.md#trail-markers-not-comments).
195 export const PATHORO_STARTER_AUTHOR_NAME = "Pathoro";
196 export const PATHORO_STARTER_AUTHOR_ROLE = "Starter trail note";
197
198 /** True only for Pathoro's own seeded editorial notes – requires both
199  * fields to match exactly, so a real submitter typing similar words into
200  * their own name/role fields doesn't accidentally (or deliberately) get
201  * mistaken for one. */
202 export function isPathoroStarterNote(marker: Pick<TrailMarker, "authorName" | "authorRole">): boolean
203 {
204   return (
205     marker.authorName === PATHORO_STARTER_AUTHOR_NAME &&
206     marker.authorRole === PATHORO_STARTER_AUTHOR_ROLE
207   );
208 }
209
210 /** What the credibility badge should say – "Starter note" for Pathoro's
211  * own seeded markers (never "Credential not verified", which would read
212  * as if a real person's claim just hadn't been checked yet), the normal
213  * credibility label for everything else. */
214 export function getCredibilityBadgeLabel(
215   marker: Pick<TrailMarker, "authorName" | "authorRole" | "credibilityType">
216 ): string {

```

```
216     return isPathoroStarterNote(marker) ? "Starter note" :  
        CREDIBILITY_TYPE_LABELS[marker.credibilityType];  
217 }
```

lib/opportunitySchema.ts

Pathoro Public Alpha v0.44 — source code deposit excerpt — 214 lines

```

1  export type OpportunitySourceType =
2    | "eventbrite"
3    | "luma"
4    | "library"
5    | "community_center"
6    | "parks_rec"
7    | "coworking"
8    | "university"
9    | "newsletter"
10   | "volunteer_board"
11   | "direct_submission"
12   | "reddit_signal"
13   | "mock_seed";
14
15  export type OpportunityStatus =
16    | "draft"
17    | "needs_review"
18    | "live"
19    | "expired"
20    | "preview"
21    | "rejected";
22
23  export type EffortLevel = "Low" | "Medium" | "High";
24  export type FrictionLevel = "Low" | "Medium" | "High";
25  export type TrustLevel = "Low" | "Medium" | "High";
26
27  export type Opportunity = {
28    id: string;
29    title: string;
30    sourceUrl: string | null;
31    sourceName: string;
32    sourceType: OpportunitySourceType;
33    city: string;
34    state: string;
35    locationLabel: string;
36    dateLabel: string;
37    costLabel: string;
38    hostName: string;
39    description: string;
40    routeId: string;
41    opportunityType: string;
42    whoItIsFor: string;
43    pathItSupports: string;
44    whatItMayOpenNext: string;
45    effortLevel: EffortLevel;
46    frictionLevel: FrictionLevel;
47    trustLevel: TrustLevel;
48    status: OpportunityStatus;
49    /** Internal Pathoro detail page, only set once a real detail page exists. */
50    href?: string;
51    /**
52     * Seed/mock opportunities only – if set, this seed should only be shown

```

```

53  * when the user's pathGoal text contains one of these words. Keeps demo
54  * data from appearing on unrelated goals (a vegetarian cooking class
55  * showing up for "build wealth"). Reviewed/live/candidate opportunities
56  * are never filtered this way – only seed data needs it since real data
57  * is inherently already goal-relevant.
58  */
59  relevanceKeywords?: string[];
60 };
61
62 export const OPPORTUNITY_SOURCE_LABELS: Record<OpportunitySourceType, string> = {
63   eventbrite: "Eventbrite",
64   luma: "Luma",
65   library: "Library calendar",
66   community_center: "Community center calendar",
67   parks_rec: "Parks & recreation",
68   coworking: "Coworking / makerspace calendar",
69   university: "University public events",
70   newsletter: "Local newsletter",
71   volunteer_board: "Volunteer board",
72   direct_submission: "Direct Pathoro submission",
73   reddit_signal: "Reddit local signal",
74   mock_seed: "Mock seed data",
75 };
76
77 /**
78  * "Opportunity, not consumption" plus "Gateway Communities" – what kind of
79  * opportunity a scout candidate looks like, independent of route/source
80  * fit. Scout-response-only classification (see
81  * docs/V0.11-AI-OPPORTUNITY-SCOUT.md); not a field on the persisted
82  * Opportunity type and not sent to Supabase. The gateway-community values
83  * are structure-based (institution types), never identity-based – see
84  * docs/MVP-LOCKED-PRINCIPLES.md#gateway-communities. resale_arbitrage and
85  * small_business_opening (v0.12) are split out of the broader
86  * income_generating/ownership_path values so a flea-market resale lead and
87  * a small-business-grant lead don't get flattened into the same label.
88  */
89 export type OpportunityCategory =
90   | "consumer_activity"
91   | "skill_building"
92   | "income_generating"
93   | "access_point"
94   | "ownership_path"
95   | "proximity_builder"
96   | "credential_step"
97   | "community_entry"
98   | "compounding_opportunity"
99   | "gateway_community"
100  | "bridge_person"
101  | "place_based_network"
102  | "diaspora_route"
103  | "trade_access_point"
104  | "relationship_path"
105  | "resale_arbitrage"
106  | "small_business_opening";
107

```

```

108 export const OPPORTUNITY_CATEGORY_LABELS: Record<OpportunityCategory, string> = {
109   consumer_activity: "Consumer activity",
110   skill_building: "Skill-building",
111   income_generating: "Income-generating",
112   access_point: "Access point",
113   ownership_path: "Ownership path",
114   proximity_builder: "Proximity builder",
115   credential_step: "Credential step",
116   community_entry: "Community entry",
117   compounding_opportunity: "Compounding opportunity",
118   gateway_community: "Gateway community",
119   bridge_person: "Bridge person",
120   place_based_network: "Place-based network",
121   diaspora_route: "Diaspora route",
122   resale_arbitrage: "Resale / arbitrage",
123   small_business_opening: "Small business opening",
124   trade_access_point: "Trade access point",
125   relationship_path: "Relationship path",
126 };
127
128 export const OPPORTUNITY_STATUS_LABELS: Record<OpportunityStatus, string> = {
129   draft: "Draft",
130   needs_review: "Needs review",
131   live: "Live",
132   expired: "Expired",
133   preview: "Preview",
134   rejected: "Rejected",
135 };
136
137 export const RECOMMENDED_SOURCE_TYPES: OpportunitySourceType[] = [
138   "eventbrite",
139   "luma",
140   "library",
141   "community_center",
142   "parks_rec",
143   "coworking",
144   "university",
145   "newsletter",
146   "volunteer_board",
147   "direct_submission",
148 ];
149
150 /** Maps a suggested routeId to a human-readable opportunity type label. */
151 export const ROUTE_OPPORTUNITY_TYPE_LABELS: Record<string, string> = {
152   "real-openings": "Class / Opening",
153   community: "Group / Community",
154   people: "Person / Conversation",
155   requirements: "Planning / Requirements",
156   "try-it": "Small Trial",
157 };
158
159 /**
160  * Simple keyword-based route fit suggestion, shared between the ingestion
161  * API route (server) and the admin prototype UI (client) so both agree on
162  * the same rules.

```

```


163  */
164  export function suggestRouteIdFromText(text: string): string {
165      const t = text.toLowerCase();
166      if (/\\b(class|workshop|event|opening)\\b/.test(t)) return "real-openings";
167      if (/\\b(group|community|meeting)\\b/.test(t)) return "community";
168      if (/\\b(mentor|person|talk|shadow)\\b/.test(t)) return "people";
169      if (/\\b(checklist|requirements?|certification|setup)\\b/.test(t)) return "requirements";
170      if (/\\b(trial|challenge|test|beginner)\\b/.test(t)) return "try-it";
171      return "real-openings";
172  }
173
174  /** Request body for POST /api/ingest-opportunity. */
175  export type IngestionRequestBody = {
176      sourceUrl: string;
177      sourceType: OpportunitySourceType;
178      city: string;
179  };
180
181  /** A draft opportunity extracted from a URL, awaiting human review. */
182  export type IngestionDraft = {
183      title: string;
184      description: string;
185      dateLabel: string;
186      costLabel: string;
187      hostName: string;
188      opportunityType: string;
189      whoItIsFor: string;
190      pathItSupports: string;
191      whatItMayOpenNext: string;
192      effortLevel: EffortLevel;
193      frictionLevel: FrictionLevel;
194      trustLevel: TrustLevel;
195      suggestedRouteId: string;
196      sourceUrl: string;
197      sourceType: OpportunitySourceType;
198      city: string;
199      locationLabel: string;
200  };
201
202  export type IngestionResponse =
203      | { ok: true; draft: IngestionDraft; warnings: string[] }
204      | { ok: false; error: string };
205
206  /**
207   * Returns the internal detail page URL for an opportunity, or undefined if
208   * it isn't live yet (in which case it should open a preview instead of
209   * navigating anywhere).
210   */
211  export function getOpportunityDetailHref(opportunity: Opportunity): string | undefined {
212      if (opportunity.status !== "live") return undefined;
213      return opportunity.href ?? `/opportunity/${opportunity.id}`;
214  }

```

APPENDIX — SCREENSHOT

Homepage


https://pathoro-mvp.vercel.app/ — onboarding: Welcome, Orientation, and “You Are Here” landscape cards.

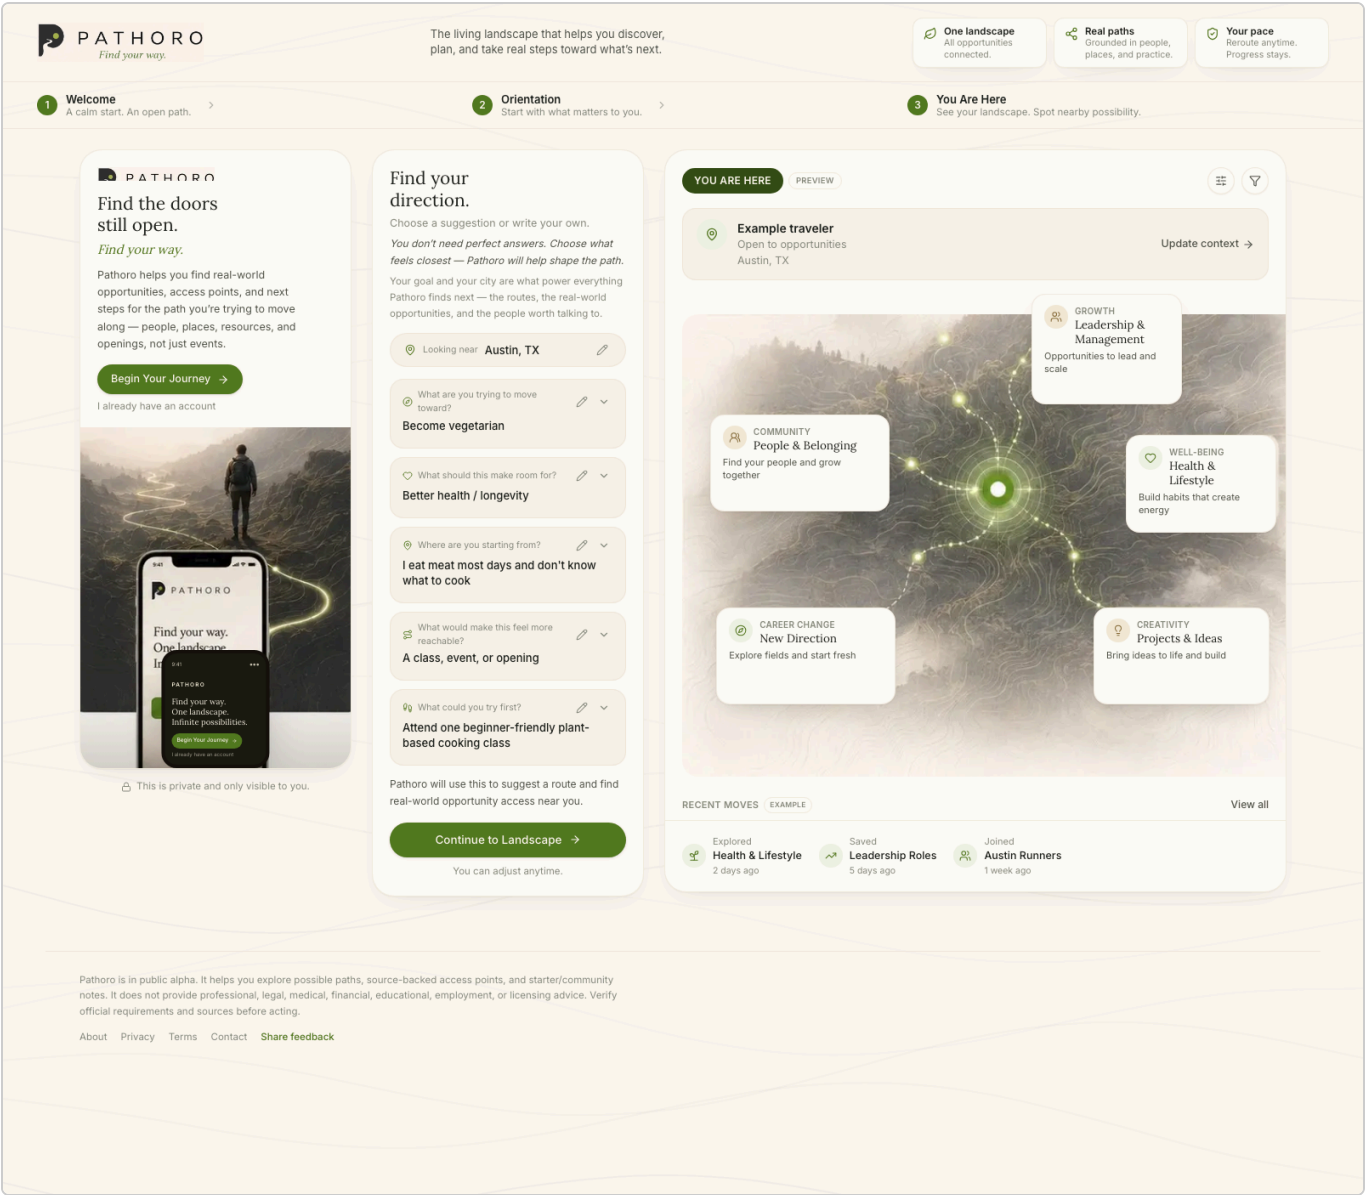

APPENDIX — SCREENSHOT

Route Planning

https://pathoro-mvp.vercel.app/route-planning?goal=licensed%20electrician

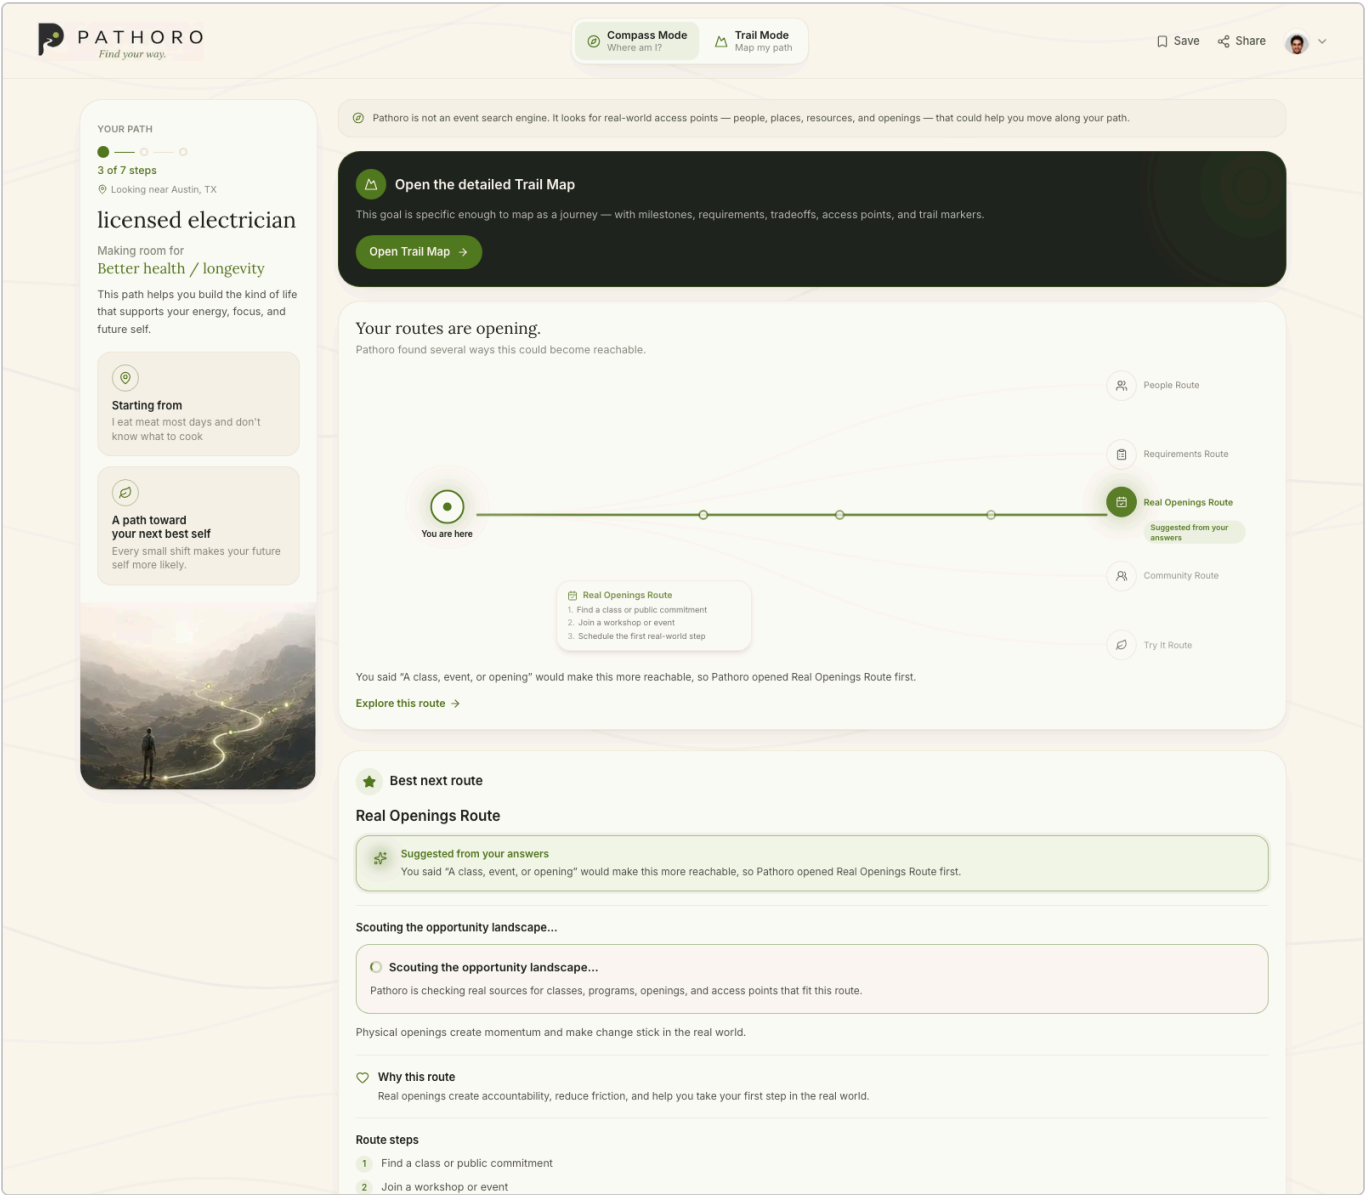

<https://pathoro-mvp.vercel.app/trail-map?goal=licensed%20electrician> — branching path visualization and comparison.



APPENDIX — SCREENSHOT

Trail Notes / Starter Notes panel

Trail Map sidebar showing Pathoro starter trail notes, each clearly labeled “Starter note” / “Pathoro · Starter trail note.”

Talk to someone on this path

PEER TRAIL MARKER

Ask what this role actually requires day to day.

Find a guide

ALPHA

Path Guides are people ahead on this path. Pathoro distinguishes licensed guidance from lived experience.



Trail notes (4)



Leave a trail marker

Pathoro starter notes appear first during alpha. As people contribute, real trail markers from people ahead will replace and improve them.

Submitted markers are reviewed before they appear here. Approved markers are community context, not guaranteed facts.

BETTER FIRST STEP

Starter note

For a beginner, the better first step is usually an apprenticeship, pre-apprenticeship, helper role, or licensing information page — not a job post that already requires journeyman-level experience.

Pathoro · Starter trail note

WARNING

Starter note

WARNING**Starter note**

Watch for electrician listings that look entry-level but mention 2–3 years of experience, journeyman status, or commercial experience. Those are usually not true first steps.

Pathoro · Starter trail note

WHAT THIS REQUIRED**Starter note**

This path usually depends on local licensing rules, supervised work hours, and apprenticeship structure. Verify the requirements in your state or city before choosing a route.


Pathoro · Starter trail note

WHAT OPENED DOORS**Starter note**

The strongest access points tend to be union apprenticeship pages, trade school open houses, workforce training programs, and electrical helper roles with paid training.

Pathoro · Starter trail note

In alpha, Pathoro combines source-backed scouting, starter notes, and moderated community markers. Review sources before acting.

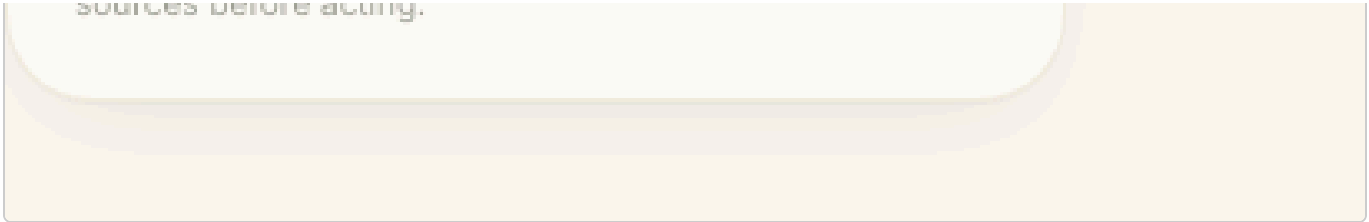

APPENDIX — SCREENSHOT

Opportunity Page

https://pathoro-mvp.vercel.app/opportunity/wedding-photographer-assistant-opportunity

COMPASS MODE

Where am I?

TRAIL MODE

Map my path

SAVE

SHARE

← Back to route planning

Pathoro doesn't just list this — it helps you tell whether it's real, reachable from where you are, and worth your time.

YOUR GOAL

Ⓜ

Become a wedding photographer

VIEW TRAIL MAP

ROUTE STEPS

Real Openings Route

1

Find a class or public commitment

2

Join a workshop or event

3

Schedule the first real-world step

VIEW FULL ROUTE

Scout similar access points

→

Example listing

Assistant role / Access point

Route stop on Real Openings Route

Looks like a real opportunity

WEDDING PHOTOGRAPHER ASSISTANT OPPORTUNITY

Ⓜ

Pathoro example · Austin, TX (on-location at weddings) · Ongoing, weekend availability needed · Paid per shoot

A working wedding photographer is looking for a second shooter / assistant to learn the wedding-day flow, help with gear, and get real experience before booking solo clients.

Illustrative only — not a photo of this specific opportunity

Ⓜ

Austin, TX (on-location at weddings)

Independent wedding photographer

Source

Pathoro example

Is this reachable from where you are?

It supports become a wedding photographer — and it's built for photographers with basic skills looking for their first real wedding experience.

➤ What path this opens

A real-world access point: Assistant role / Access point with Independent wedding photographer in Austin, TX (on-location at weddings).

Trust & source

Medium trust ●●●●●

Source: Pathoro example

Related openings

Plant-Based Cooking Class

Intro Ceramics Night

HVAC Apprenticeship Info Session

Low effort

Low effort

Low effort

Take this opportunity

➔

Save for later

Ⓜ

Scout similar access points

In this alpha, Pathoro helps you organize the next step and reviews requests manually. Show up: Ongoing, weekend availability needed · Paid per shoot.

Route context

Real Openings Route

Real openings create accountability, reduce friction, and help you take your first step in the real world.

VIEW FULL ROUTE

VIEW TRAIL MAP

YOUR NEXT STEPS

1

Review assistant opportunity

Show up: Ongoing, weekend availability needed · Paid per shoot.

2

Ask someone who's done this before you commit — see "Find someone ahead" below.

Who can help you understand this?

Someone who's already been through assistant role / access point can tell you what the listing won't — whether it's worth your time, and what to expect going in.

FIND SOMEONE AHEAD

ALPHA

Path Guides are people ahead on this path. Pathoro distinguishes licensed guidance from lived experience.

Role dialogue

CONCEPT

Instead of showing you another job listing, Pathoro helps you understand whether this role is real, reachable, and useful for your path.

· Is this role real or stale?

· What does this role open next?

· What hidden requirements matter?

· What would make me competitive?

· Who should I talk to before applying?

· What is the first move from where I am?

Verified live

Recently checked

Employer-posted

Community-confirmed

Stale risk

Possible ghost listing

Source unclear

Start dialogue

Check if this is real


file:///private/tmp/claude-501/-Users-rubenm-Desktop-pathoro-mvp/7bbcac12-5d0c-4ded-b2a2-ee80619f2650/scratchpad/copyright/appendix.html

7/10

APPENDIX — SCREENSHOT

Trail Markers & Community Checks

Opportunity-page community layer: moderated trail markers and community checks, with the public alpha disclaimer footer.

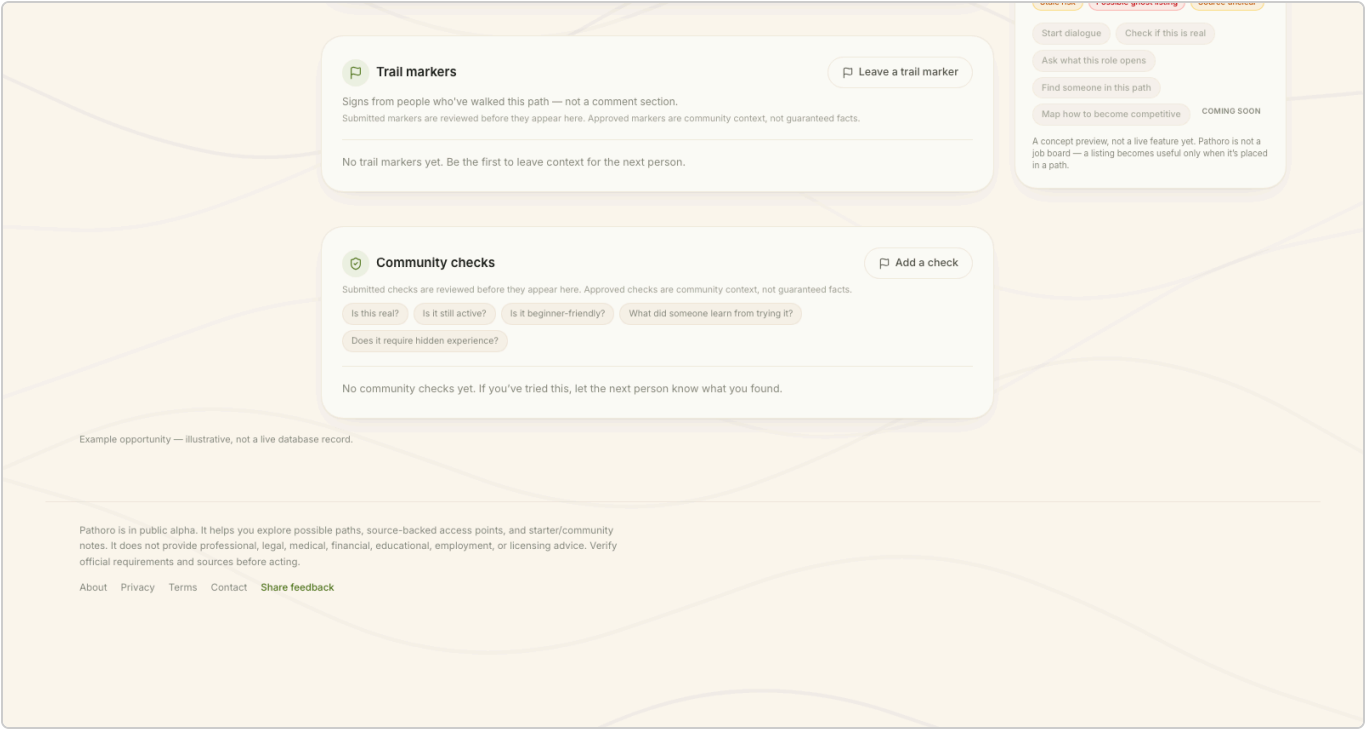

APPENDIX — SCREENSHOT

Contact / Feedback

https://pathoro-mvp.vercel.app/contact



[← Back to Pathoro](#)

Contact

Pathoro is built by a small team during public alpha. This form goes straight to the person building it — tell us what helped, what confused you, what was wrong, or what you wish existed.

What's this about?

This helped

This confused me

This result was wrong

I want this path added

I want to leave a trail marker

Something else

Tell us more

What felt useful, confusing, or wrong?

Email (optional, so Pathoro can follow up)

you@example.com

Send feedback

Not intended for children under 13 — please don't submit personal information if you are under 13.

Pathoro is in public alpha. It helps you explore possible paths, source-backed access points, and starter/community notes. It does not provide professional, legal, medical, financial, educational, employment, or licensing advice. Verify official requirements and sources before acting.

About

Privacy

Terms

Contact

Share feedback

APPENDIX — ORIGINAL PATHORO COPY (STARTER TRAIL NOTES)

Starter Trail Notes — “Licensed Electrician” path

Original, Pathoro-authored editorial content (never presented as real user submissions; clearly labeled “Pathoro · Starter trail note” in the product). Twenty-four such notes exist across six curated paths; this page reproduces the four for the electrician path shown in the screenshots above.

BETTER FIRST STEP

For a beginner, the better first step is usually an apprenticeship, pre-apprenticeship, helper role, or licensing information page — not a job post that already requires journeyman-level experience.

Pathoro · Starter trail note

WARNING

Watch for electrician listings that look entry-level but mention 2–3 years of experience, journeyman status, or commercial experience. Those are usually not true first steps.

Pathoro · Starter trail note

WHAT THIS REQUIRED

This path usually depends on local licensing rules, supervised work hours, and apprenticeship structure. Verify the requirements in your state or city before choosing a route.

Pathoro · Starter trail note

WHAT OPENED DOORS

The strongest access points tend to be union apprenticeship pages, trade school open houses, workforce training programs, and electrical helper roles with paid training.

Pathoro · Starter trail note