[PRODUCT NAME]

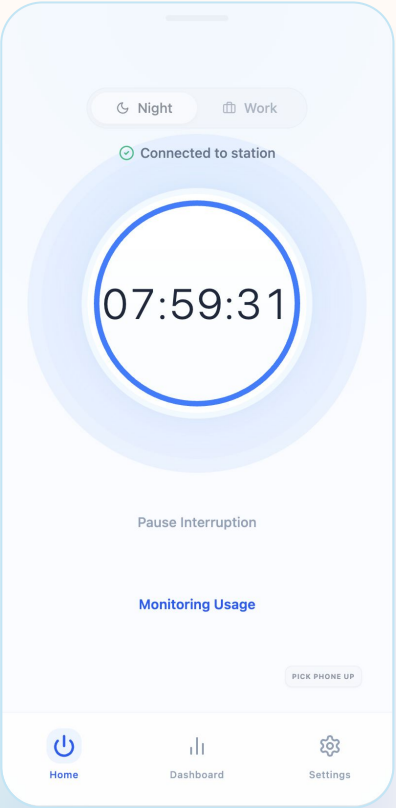

MOTIVATION

Challenge

In low-energy moments, students default to phone scrolling as an easy escape, leading to prolonged use, delayed sleep, and a cycle of fatigue and loss of control.

Opportunities

We could gently interrupt automatic scrolling through low-friction, context-aware support, helping users transition to rest or healthier behaviors without relying on willpower.

93%

of Gen Z report losing sleep due to excessive scrolling

Source: aasm.org

SURVEYS

Research Goal: Understand self-care habits, motivations, and barriers among college students, and identify why routines are difficult to maintain.

- 12 questions
- 22 participants (college students)
- Focused on habits, barriers, and current support tools

KEY FINDINGS

86%

report low energy / lack of motivation as the main barrier

55%

want to exercise but cannot maintain the habit

50%

experience stress / mental overload that disrupts routines

73%

use no tools to support self-care habits

DIARY STUDIES

Research Goal: Dive deeper into real-life contexts to uncover the underlying reasons behind barriers to maintaining self-care routines.

- 7-day diary study with morning + night reflections
- Participants recorded activities, energy levels, and challenges
- Captured in-the-moment behaviors and breakdowns

KEY FINDINGS

01

Low energy frequently prevents users from initiating self-care

02

Users default to **scrolling** as an effortless way to pass time

03

Scrolling becomes a **passive loop** that is difficult to interrupt

04

Users avoid full routines but are more open to small, **simple actions**

USER ENACTMENTS

Research Goal: Understand self-care habits, motivations, and barriers among college students, and identify why routines are difficult to maintain.

Approaches

- Lighting changes
- Tactile interactions (physical objects / tokens)
- Phone-centered intervention
- Small actions
- Social context (shared vs private space)

KEY FINDINGS

01

Interventions must **interrupt behavior**, not wait for engagement

02

Lower effort = higher likelihood of response

03

Users rarely **initiate action** when already in passive scrolling

04

Escalating / "pushy" cues are more effective than subtle ones

KEY INSIGHTS

The findings from our studies have helped us better understand how users fall into phone scrolling loops and how to design interventions that effectively interrupt them.

Breaking loops

Passive scrolling loops often require interruption to break

Activation

The problem is about activating user action, not awareness

Interruption

Interventions must be external, noticeable, and low-effort

Simplicity

Users respond better to one simple action

INTRODUCING XXX

A hybrid system combining a physical device and mobile app to reduce excessive phone use and support healthier habits.

Target Users

Young adults (18–30) who:

- struggle with late-night scrolling
- experience focus & productivity issues
- are tech-savvy
- prefer soft guidance over strict restrictions

Key Value

Supports intentional phone use through gentle, continuous behavioral guidance

KEY FEATURES

<u>Phone Bed</u> (Physical Device)

- Provides **light + sound reminders** to guide behavior
- Automatically plays **calming music / white noise** when phone is placed
- Detects phone pickup and triggers **increasing alerts** to reduce distraction
- Supports **alarm wake-up** and **session completion feedback**
- Tracks **phone placement time & pickup frequency**

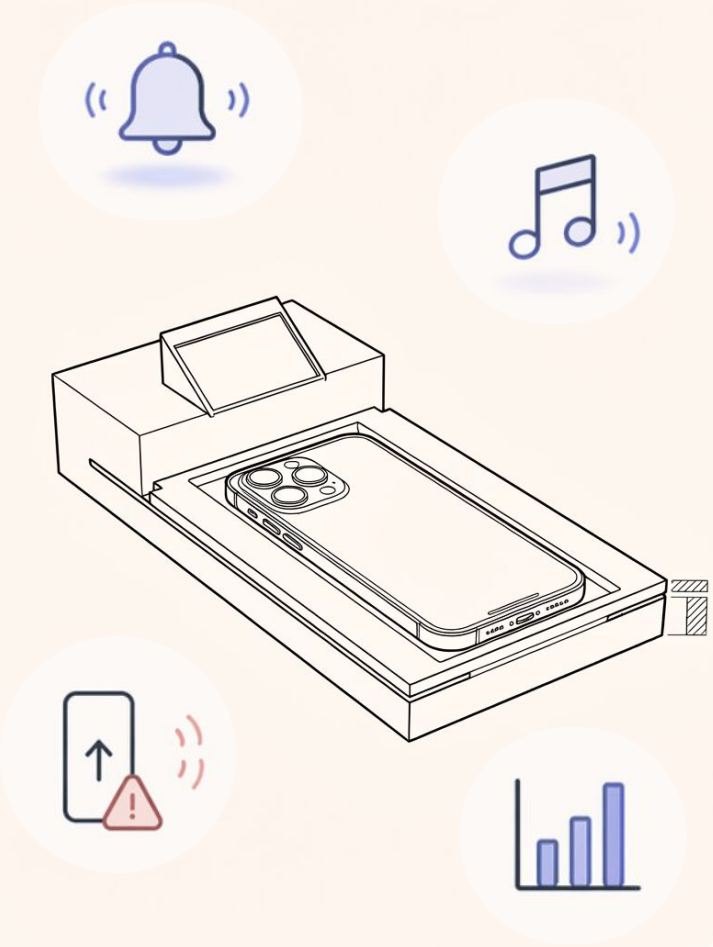

KEY FEATURES

Mobile App

- Set **sleep schedules & work sessions**
- Customize **usage limits** (e.g., timed access / break intervals)
- Control **audio settings** (music, white noise, duration)
- View **behavior data & usage insights**

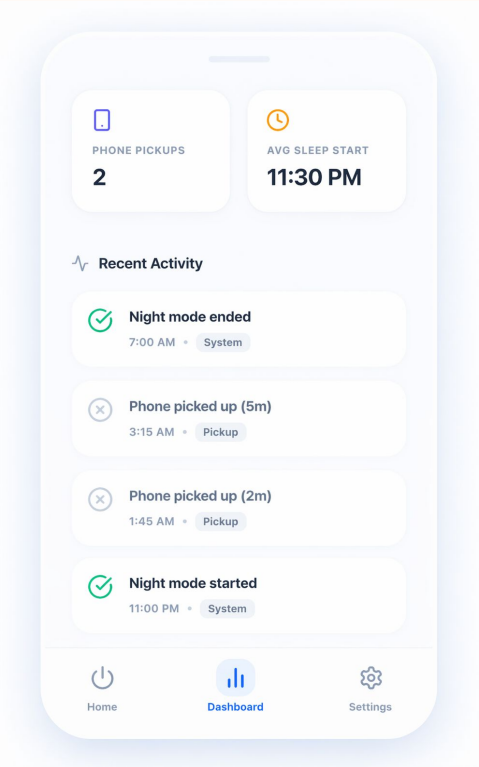

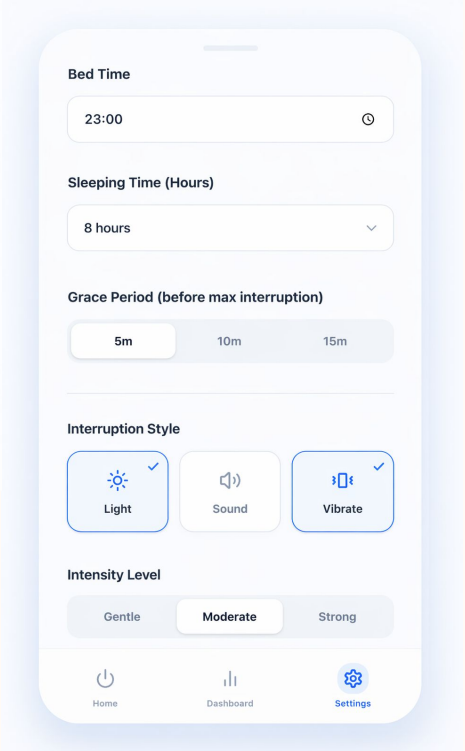

BEHIND THE SCENES

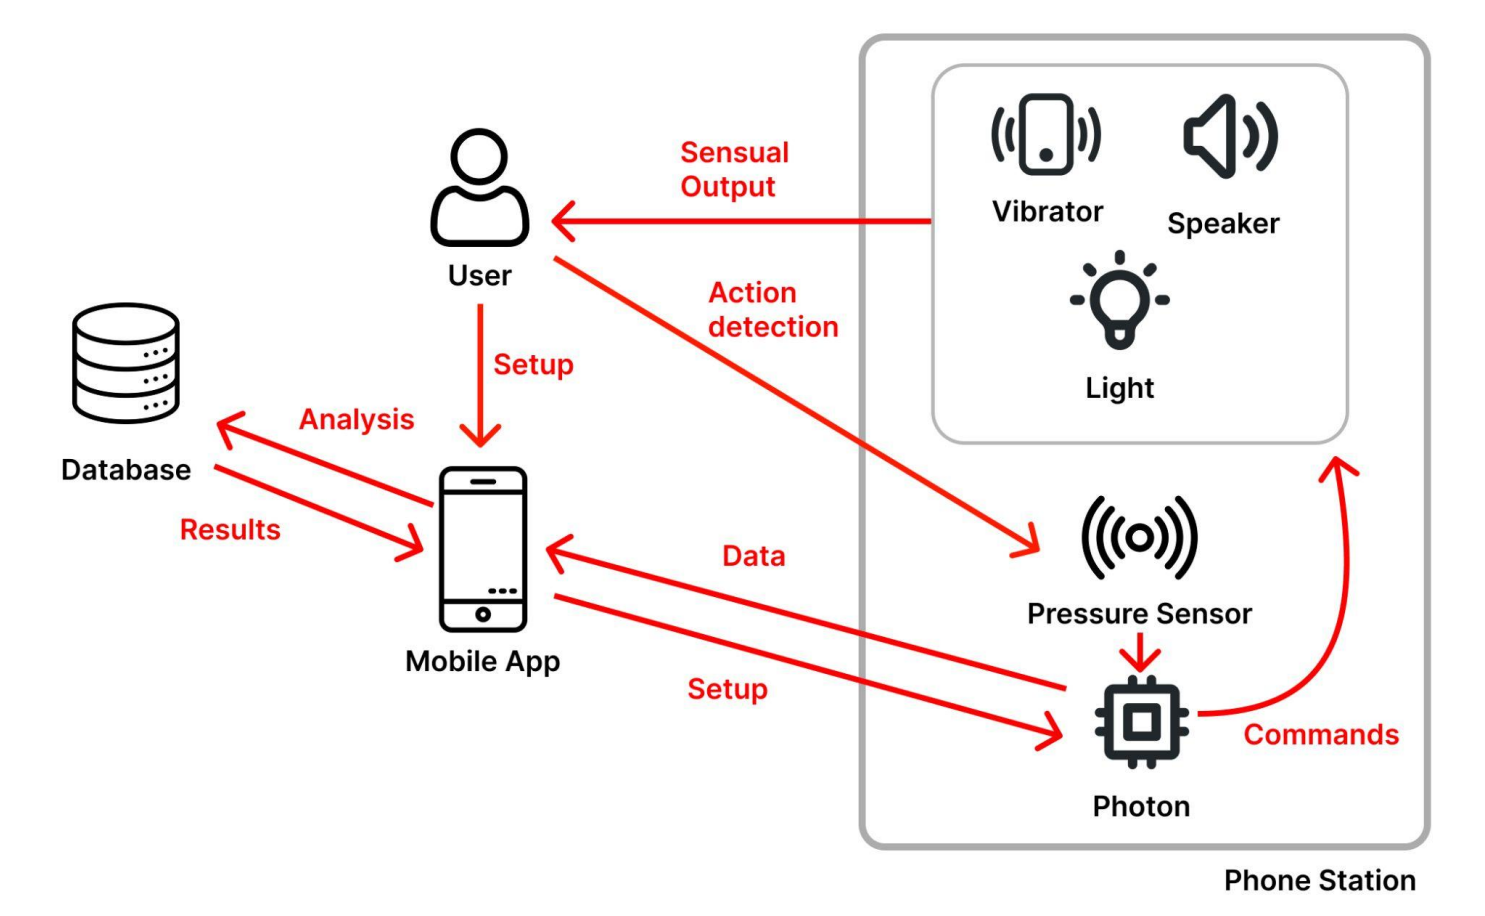

Thanks!