
SubTrack: User Flow Diagram

Main path from first launch to managing a subscription, with the key decisions. Numbers in brackets refer to the Figma screens.

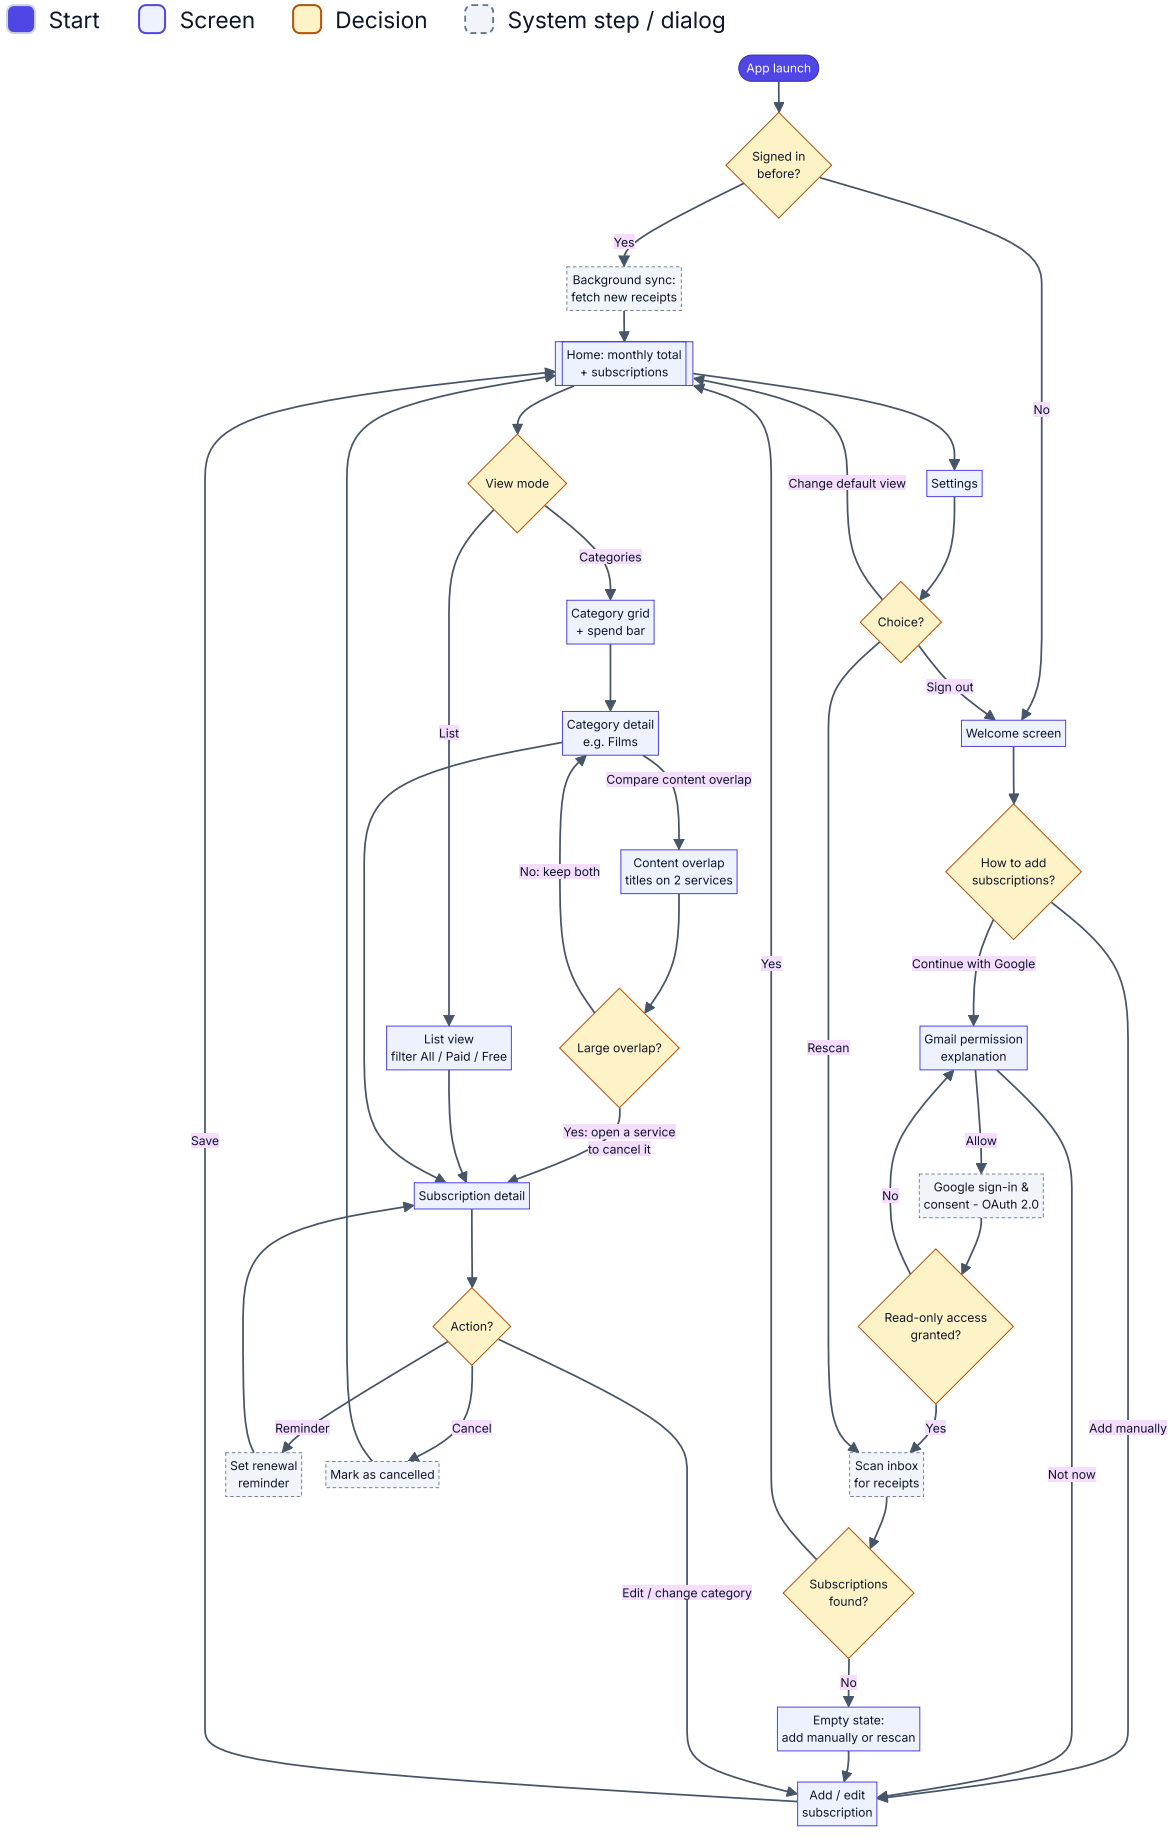

Main ("happy") path

#	Step	Screen	Decision / note
1	User opens the app for the first time	[01] Welcome	Signed in before? No → Welcome. Yes → silent background sync, then Home.
2	Taps "Continue with Google"	[02] Gmail permission	The app explains the read-only scope *before* showing Google's consent dialog. "Not now" leads to manual entry.
3	Chooses an account and grants `gmail.readonly`	Google system dialog	Denied → back to the explanation screen (can retry or go manual).
4	The app scans billing emails and shows live progress	[03] Scanning	Nothing found → empty state with "Add manually" and "Rescan".
5	Sees the monthly total and the list sorted by next renewal	[04] Home: list	Filters: All / Paid / Free / Renewing soon.
6	Switches to "Categories" to see spend per category	[05] Home: categories	The choice is remembered (Settings → Default view).
7	Opens a category, then a subscription	[06] Category · [07] Detail	Actions: edit, change category, set reminder, open account page, mark as cancelled.
8	Compares two streaming services in that category	[10] Content overlap	Shows how many films/series are on both (e.g. Netflix + Disney+). Large overlap → open one service and mark it cancelled.
9	Fixes a wrong price/category or adds a missing service	[08] Add / edit	Save returns to Home and recalculates totals.
10	Manages the account	[09] Settings	Rescan inbox, auto-scan weekly, currency, delete local data, sign out (→ Welcome).

Alternative and error paths

- **No Gmail / privacy-cautious user:** Welcome → "Add subscriptions manually" → Add/Edit. The full app works without Gmail.
- **Permission denied or token expired:** the app returns to the permission screen and never retries silently.
- **Offline during a scan:** the scan pauses, shows a snackbar ("No connection, we'll continue when you're back online") and keeps what has already been found.
- **Wrong detection:** the user edits the category or price, and the correction is stored and reused at the next scan.