


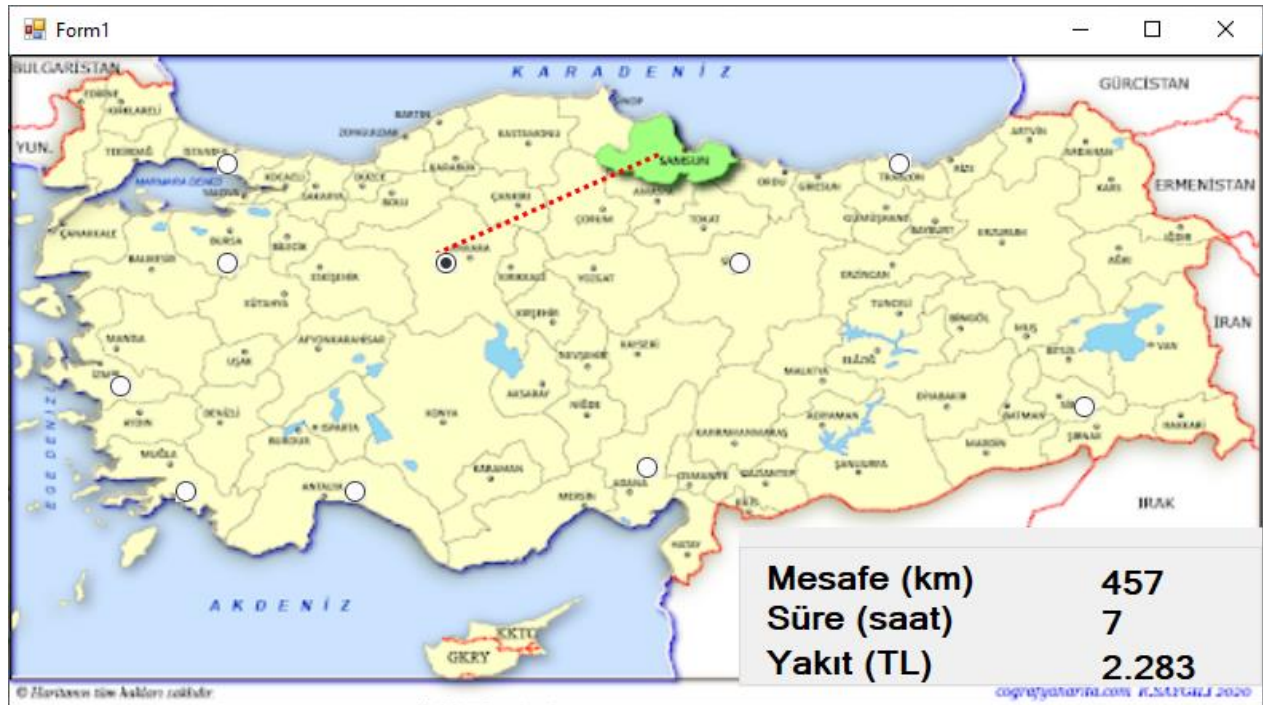

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;
using Microsoft.VisualBasic.PowerPacks; // bu satırı ekle

namespace WindowsFormsApplication84
{
    public partial class Form1 : Form
    {
        double farkx, farky, mesafe, saat, yakit;
        public Form1()
        {
            InitializeComponent();
        }

        private void radioButton2_CheckedChanged(object sender, EventArgs e)
        {
            lineShape1.X2 = radioButton2.Left;
            lineShape1.Y2 = radioButton2.Top;
        }

        private void Form1_Load(object sender, EventArgs e)
        {
            lineShape1.X1 = radioButton1.Left;
            lineShape1.Y1 = radioButton1.Top;
        }
    }
}
```

```

    }

    private void lineShape1_Click(object sender, EventArgs e)
    {

    }

    private void lineShape1_EnabledChanged(object sender, EventArgs e)
    {

    }

    private void lineShape1_EndPointChanged(object sender, EventArgs e)
    {
        farkx = lineShape1.X1 - lineShape1.X2;
        farky = lineShape1.Y1 - lineShape1.Y2;
        mesafe = Math.Sqrt(farkx * farkx + farky * farky);
        mesafe = mesafe * 3;
        saat = mesafe / 70;
        yakit = mesafe * 5;
        label1.Text = mesafe.ToString("N0");
        label2.Text = saat.ToString("N0");
        label3.Text = yakit.ToString("N0");

    }

    private void radioButton9_CheckedChanged(object sender, EventArgs e)
    {
        lineShape1.X2 = radioButton9.Left;
        lineShape1.Y2 = radioButton9.Top;
    }

    private void radioButton10_CheckedChanged(object sender, EventArgs e)
    {
        lineShape1.X2 = radioButton10.Left;
        lineShape1.Y2 = radioButton10.Top;
    }

    private void radioButton8_CheckedChanged(object sender, EventArgs e)
    {
        lineShape1.X2 = radioButton8.Left;
        lineShape1.Y2 = radioButton8.Top;
    }

    private void radioButton6_CheckedChanged(object sender, EventArgs e)
    {
        lineShape1.X2 = radioButton6.Left;
        lineShape1.Y2 = radioButton6.Top;
    }

    private void radioButton7_CheckedChanged(object sender, EventArgs e)
    {
        lineShape1.X2 = radioButton7.Left;
        lineShape1.Y2 = radioButton7.Top;
    }

```

```
private void radioButton4_CheckedChanged(object sender, EventArgs e)
{
    lineShape1.X2 = radioButton4.Left;
    lineShape1.Y2 = radioButton4.Top;
}

private void radioButton11_CheckedChanged(object sender, EventArgs e)
{
    lineShape1.X2 = radioButton11.Left;
    lineShape1.Y2 = radioButton11.Top;
}

private void radioButton5_CheckedChanged(object sender, EventArgs e)
{
    lineShape1.X2 = radioButton5.Left;
    lineShape1.Y2 = radioButton5.Top;
}

private void radioButton3_CheckedChanged(object sender, EventArgs e)
{
    lineShape1.X2 = radioButton3.Left;
    lineShape1.Y2 = radioButton3.Top;
}
}
```