

1. Introduction


1.1 Overview

The main goal of this workshop is to construct a single-date land cover map by classification of a Landsat image, construct a land cover change map and to estimate areas of land cover change from a sample of reference observations. We will do most of our work on the Windows PCs in room 435 on the fourth floor.

The tools for completing this work will be done in a Virtual Machine (VM) that hosts a suite of open-source tools and that can be installed on Windows, OS X, Solaris and Linux operating systems. The VM is a VirtualBox disk image of the 14.04 LTS release of Ubuntu Mate distribution (<https://ubuntu-mate.org/>) as of June 10, 2015. This image is stored as an archived Open Virtualization Format (see: http://en.wikipedia.org/wiki/Open_Virtualization_Format for reference). In case shared folders, USB devices, etc. don't mount automatically, you may need to install the "Guest Additions" which is very simple and full instructions are available here: <https://www.virtualbox.org/manual/ch04.html>. In addition to the default Ubuntu applications, a suite of useful software is pre-installed on the VM, including:

Git
GDAL
GRASS GIS
Orfeo ToolBox
QGIS
Python (including many scientific Python libraries)
R
RStudio

We assume that you are not familiar with any of these tools and one of the aims of today's assignment is to get an introduction to the software environment. This involves learning how to display and stretch imagery, stack image bands and do some basic image band arithmetic. In this and other lab handouts, menus, buttons, dialog boxes and other components of the software are *italicized*. Folder and file names on the lab computers referred to in the handouts are put in "quotation marks".



1.2 Install

1. Download a binary of *Oracle VirtualBox* compatible for your operating system from <https://www.virtualbox.org/wiki/Downloads>; follow the instructions to install.
2. Download the latest version of the VM from <http://earth.bu.edu/public/ceholden/VM/> (as of June 24, 2015 the latest version is "Ubuntu_Mate_14.04_20150610.ova")
3. Open *VirtualBox* and click *File > Install Appliance* and browse to the directory containing the downloaded ".ova" file. Once installed the ".ova" file can be deleted.
4. Before launching the VM, it is necessary to pay attention to the memory allocation: In *VirtualBox*, highlight the VM in the left-hand pane and click *Settings* (yellow cogwheel) > *System > Motherboard* tab > increase *Base Memory* on the scale line; the amount of allocated memory will depend on the host computer but it is recommended to use slightly more than half of the memory of the host computer (upper part of the green part of the *Base Memory* scale line).
5. Another useful feature is *Shared folders* which are directories on the host computer or mounted devices that can be accessed from within the VM (although not technically not the same thing, in this and other modules the terms *folder* and *directory* means the same thing). You can add shared directories from *Settings > Shared Folders*.
6. In *VirtualBox*, highlight the VM in the left-hand pane and click *Start* (green arrow). This will launch the VM; the username and password are both "opengeo-vm" (without quotation marks).
7. To view in fullscreen mode click *View > Switch to Fullscreen* in the VM top menu.
8. The interface of the VM can be changed to style of Windows and OS X and various Linux distributions by the *Menu* in the upper left corner > *Preferences > MATE Tweak > Interface* (the Windows-style interface is referred to as Redmond and the OS X interface as Cupertino according to the locations of the headquarters of Microsoft and Apple).
9. Some of the more useful applications are the *Caja* file browser (similar to the file browsers in Windows and OS X), the *MATE Terminal* which provides text-based access to the operating system, *QGIS* which is the main graphical user interface used in this training material, the *LibreOffice* suite which is similar to *Microsoft Office*, and *Atom* or *Pluma* both ASCII text editors. You can add these software to the quick launch panel by right clicking the name in the menu > *Add to panel*.
10. Make yourself acquainted to the VM and these software.

1.3 Using the terminal

1. QGIS provides a graphical interface for executing many useful programs and tools but there are a few programs, including some very useful GDAL programs, that need accessing via the terminal. For these reasons and many others, learning to use the terminal is important. For users without Linux and Unix experience this can be a bit intimidating at first but it's not hard

2. Open *MATE terminal*: you will see black window saying

```
opengeo-vm@opengeo-vm: ~$
```


This means username “opengeo-vm” at the host of the server with the same name; “~” means you are currently in your home directory; “\$” is the prompt symbol. There are many good terminal tutorials online, like this one for example:

<https://www.digitalocean.com/community/tutorials/an-introduction-to-the-linux-terminal>

Spend an half an hour to complete this or another online terminal tutorial if needed.

1.4 Data organization

1. Keeping your data organized will greatly facilitate your work. We suggest the following structure: in your home directory, which might be a shared folder, a mobile disk or the home directory in the virtual machine, create three directories: one for scratch files (temporary files, test files, etc.), one for the datasets that you will use (Landsat data for example) and one for working on the assignments. These directories will be referred to as your scratch, data and work directories. For the data directory, it is recommended to create subdirectories for each Landsat path and row, with each image in separate subdirectories with the path and row directory; and that each assignment has its own work subdirectory (“1_into, 2_classification, 3_change, ...”). Further instructions are provided in each module regarding the assignment structure (referred to as “0_subdir, 1_subdir, ...” below). This gives structure as depicted below:

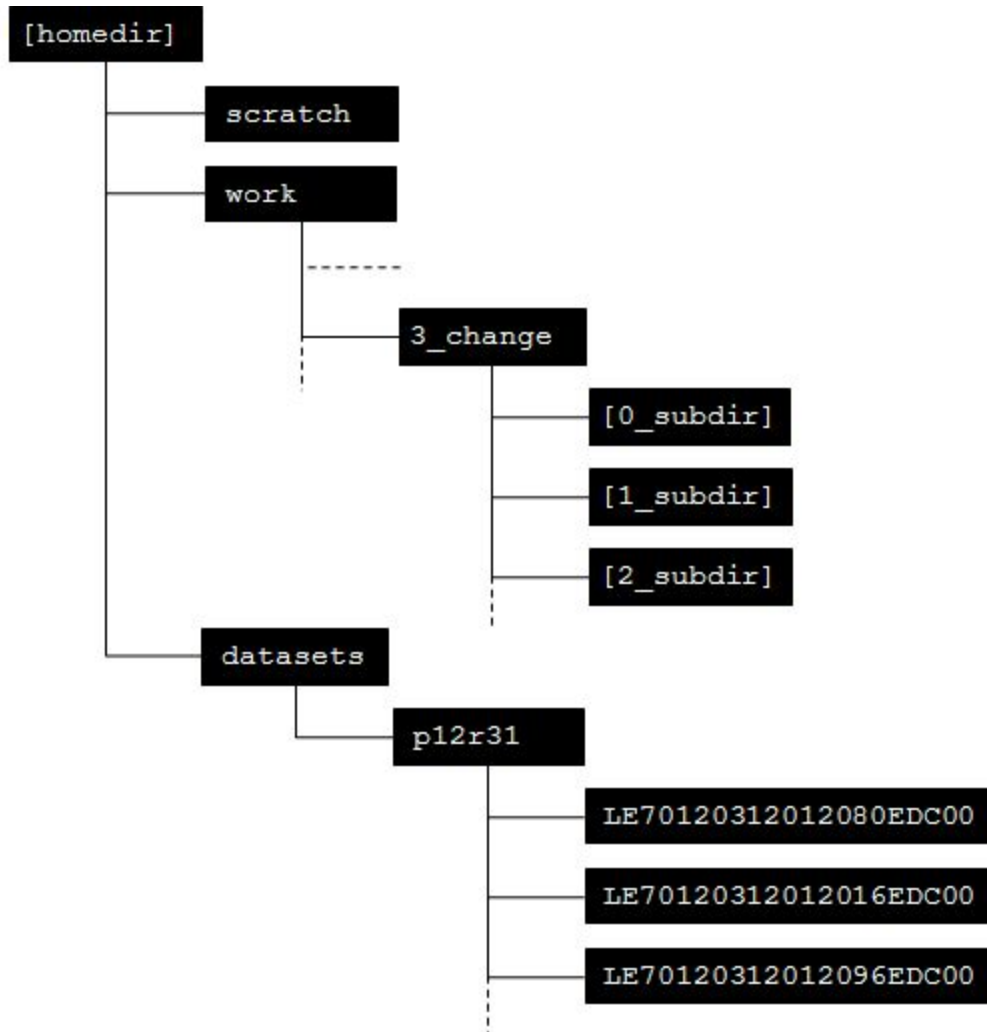

2. Create the structure. In this example, my home directory is /home/opengeo-vm/; navigate to your home directory and create a directory called “datasets” in the *MATE Terminal*. If you didn’t learn how to do it in Subsection 1.3, type:

```

opengeo-vm@opengeo-vm:~$ cd ~
opengeo-vm@opengeo-vm:~$ mkdir datasets
opengeo-vm@opengeo-vm:~$ cd datasets
opengeo-vm@opengeo-vm:~/datasets$

```

3. Create your working directory. If you didn’t learn how to do it in Subsection 1.3, type:

```

opengeo-vm@opengeo-vm:~$ cd ~
opengeo-vm@opengeo-vm:~$ mkdir work
opengeo-vm@opengeo-vm:~$ cd work
opengeo-vm@opengeo-vm:~/work$

```

4. Create a scratch directory. If you now navigate to your home directory and type `ls -l` to list the directory content, you should see the following:

```


opengeo-vm@opengeo-vm:~$ ls -l
drwxrwxr-x 2 opengeo-vm opengeo-vm 4096 Jun 24 11:24 datasets
drwxrwxr-x 2 opengeo-vm opengeo-vm 4096 Jun 24 14:05 scratch

```

```
drwxrwxr-x 7 opengeo-vm opengeo-vm 4096 Jun 24 14:05 work
```

1.5 Extract Landsat data

1. Create a directory in “work” called “1_introduction”. In “1_introduction”, create four subdirectories: “0_sourcedata”, “1_extract”, “2_stack” and “3_ndvi”.
2. Copy a Landsat tarball (a compressed Landsat image with extension “tar.gz”) to “0_sourcedata”.
3. You can extract the data using either the *Caja* file browser or *MATE Terminal*: to use *Caja*, right click the tarball > *Extract to...*; this will open the Extract dialog window > navigate to “1_extract” > click *Create Folder* to create a directory with the name of the Landsat tarball > click *Extract*. It should look like this in Caja:

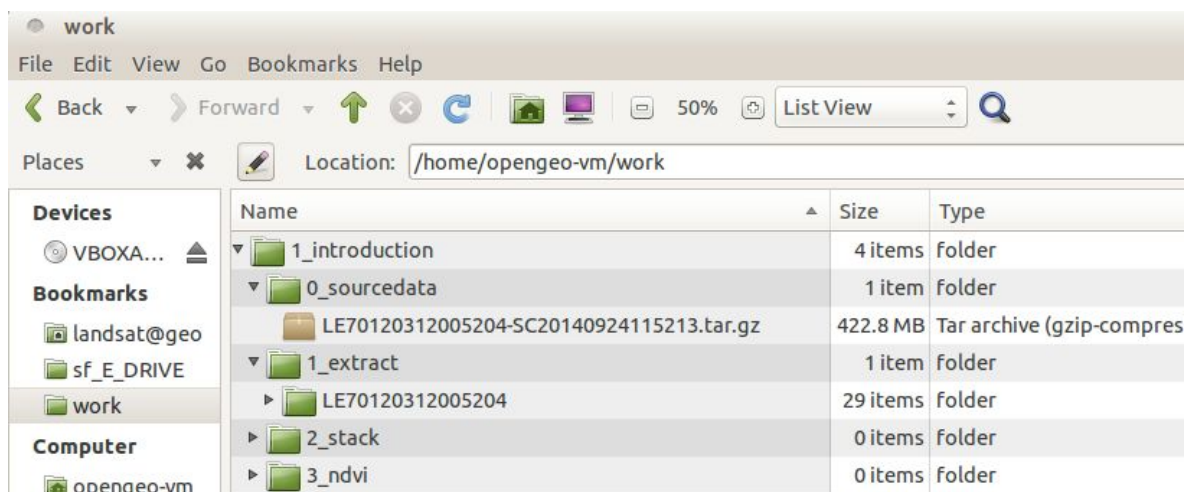


with the contents of the subdirectory in “1_extract” (in this example “LE120312005204”) containing all of individual Landsat bands. In MATE terminal, you will need navigate to “1_extract”, create the image directory and type `tar -xvf [tarball]` to extract the tarball (a very useful trick when using the terminal is to type the first letter of directories or files and hit the tab key to autocomplete, this is especially helpful when completing long filenames like that of the tarball):


```
opengeo-vm@opengeo-vm:~$ cd work/1_introduction/1_extract/
opengeo-vm@opengeo-vm:~/work/1_introduction/1_extract$ mkdir
LE70120312005204
opengeo-vm@opengeo-vm:~/work/1_introduction/1_extract$ tar
-xvf
/home/opengeo-vm/work/1_introduction/0_sourcedata/LE7012031200
5204-SC20140924115213.tar.gz
```

1.6 Stack Landsat bands and subset






1. The main interface for analyzing geographical data in this training material is *QGIS*. It is similar to proprietary software like *ArcGIS* but it's free and open source and allows for integration of user-contributed plugins, *GDAL*, *Orfeo Toolbox*, etc
2. To create a layer stack of your images, first open *QGIS*. After the application opens, click *Raster > Miscellaneous > Merge*; this will open the *Merge* dialog > click *Input files* to select Landsat bands 1-5 and 7 in "1_extract"..
3. Click Output files and navigate to "2_stack" and provide an appropriate file name like "LE70120312005204_stack" for example.
4. In the *Merge* dialog, leave all options unchecked except for *Layer stack > OK*. This will add the stacked image to the QGIS canvas.
5. Click *Raster > Extraction > Clipper*; this will open the *Clipper* dialog > specify the newly created stack as input and the specify an output file, for example "LE70120312005204_stack_subset". Select *Extent* as *Clipping mode* and draw a rectangle using the mouse on the canvas > click *OK* in the *Clipper* dialog to create the subset.

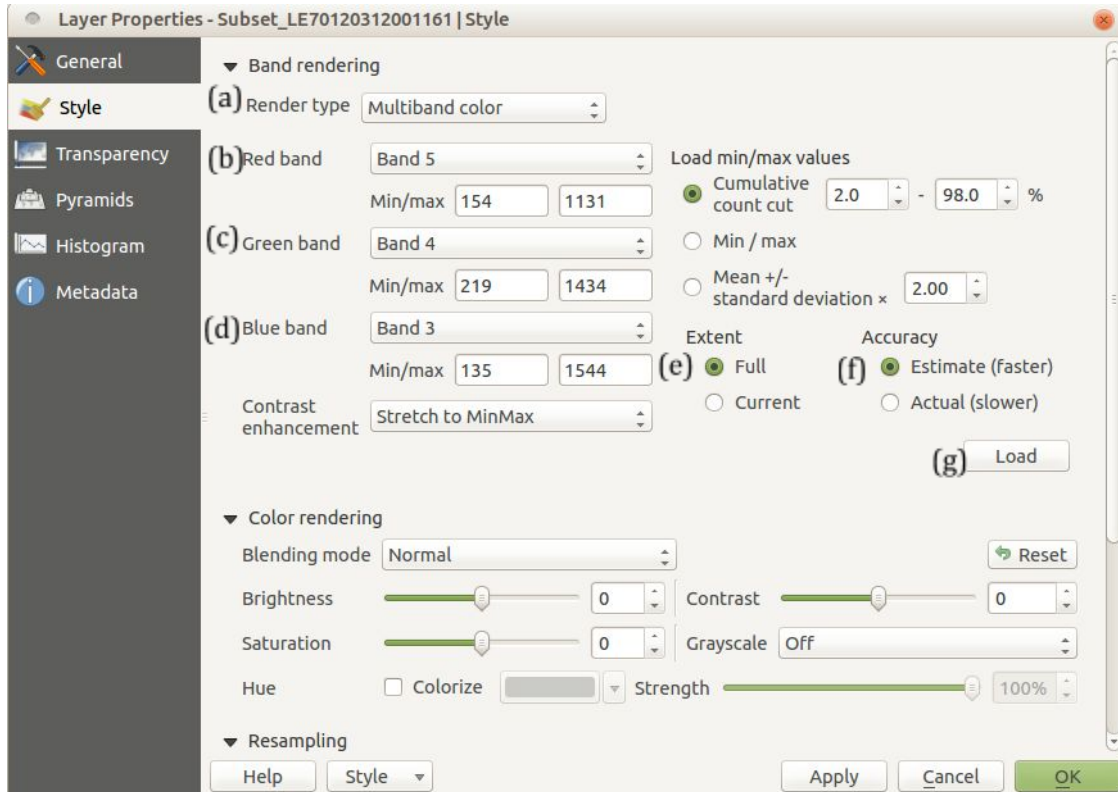


1.7 Image processing software

1. While in the *QGIS Desktop* open the subset of a Landsat image located in "*~/sample_data*" from *Layer > Add Layer > Add Raster Layer* or click  to the left of the *Layer* pane.
2. To change the color composite right click "Subset_LE70120312001161.tif" in the layer pane > *Properties > Style*; the window below should appear; set *Rendertype* (a) to multicolor and the *Red*, *Green* and *Blue* band to bands 5, 4 and 3 (b-d), set *Extent* to *Full* (e), *Accuracy* to *Estimate* (f) and click *Load* (g) to display a stretched 5-4-3-false color composite of the Landsat image.




4. Use the different zoom and pan tools to get acquainted to the interface. QGIS has many different tools for navigating an image, but here are a few to get you started:

Button	Name	Purpose
	Zoom in	Zoom in to a selected area
	Zoom out	Zoom out of a selected area
	Zoom full	Zoom to the full extent of the highlighted layer
	Zoom back	Zoom to the previous extent
	Edit	Edit the highlighted vector layer. This can be used to edit attributes or add and delete features.

	Identify Features	View the attributes of the highlighted layer at the specified location. This works for either raster or vector layers.
	Pan Map	Pan around the map without selecting any layers.
	Save	Save the current QGIS project.

5. Now try to use the *Raster > Raster Calculator* to calculate NDVI which equals $(\text{band 4} - \text{band 3}) \div (\text{band 4} + \text{band 3})$ and apply an appropriate color ramp and make sure you save it to "3_ndvi"; it should look like below:

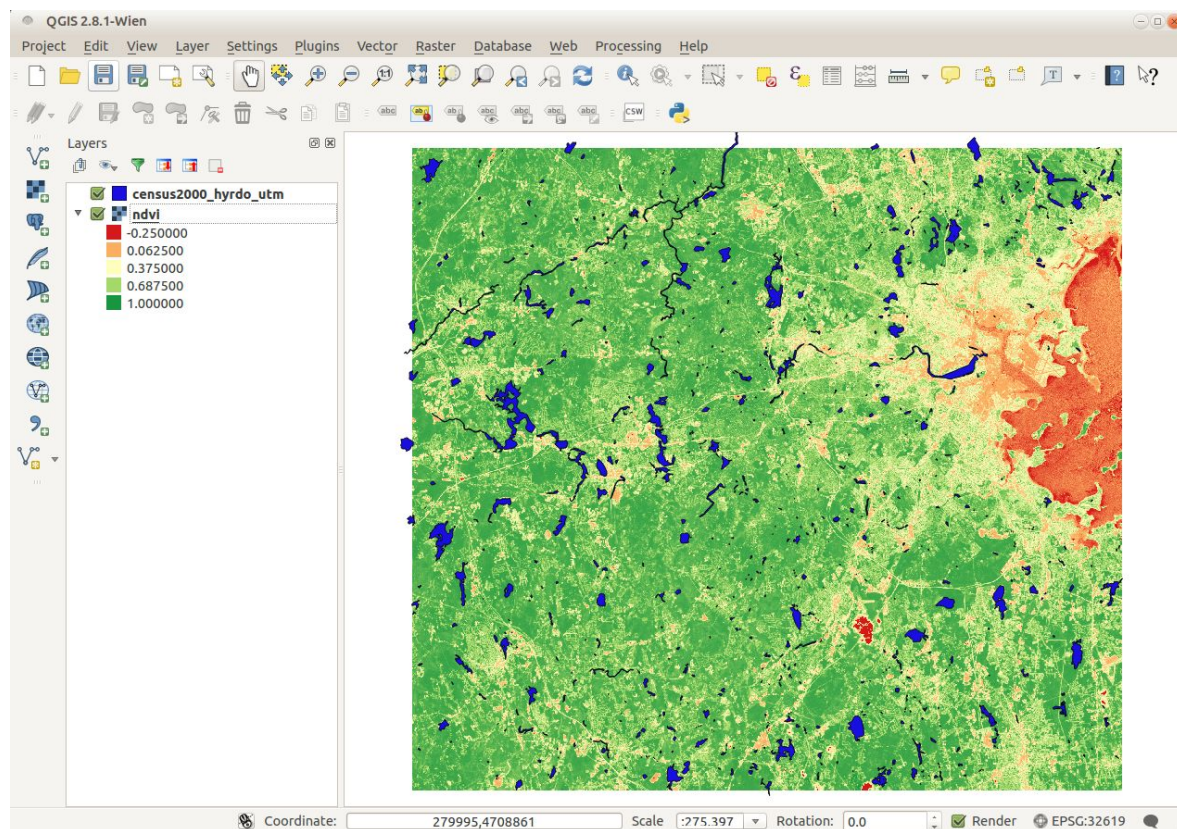

1.8 Create an image composite

[To do: Go through the steps of creating an image composite.]