01 Request routing and shared records

Android and web use the same poll API and persistent data source.

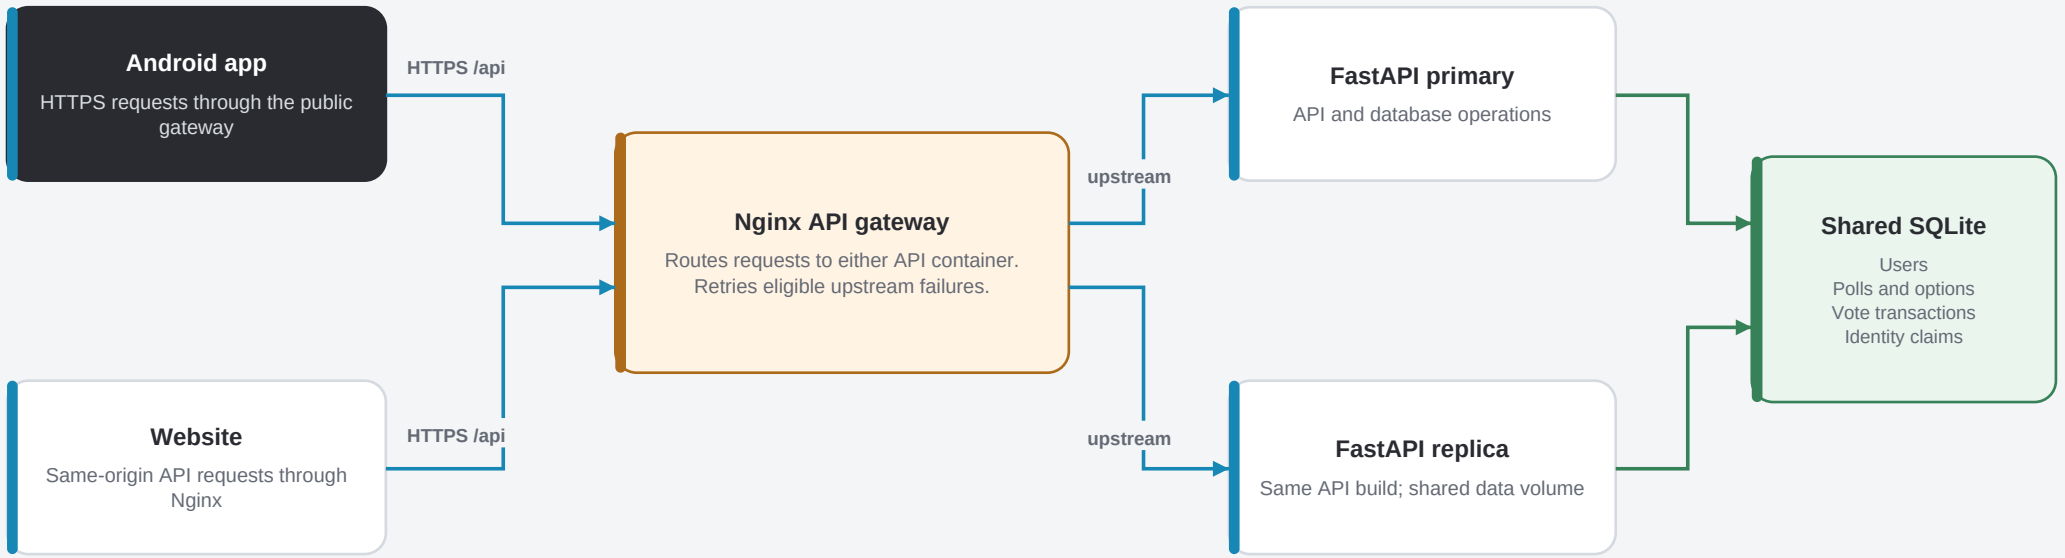

One shared source

Both API containers mount the same Docker volume. Ballots, account links, unique identity claims, poll options, and vote totals persist in the same SQLite database. A server status check reads this shared record.

02 Sign-in and restoring VOTED

The signed-in account can recover its saved choice even when no ID is saved on the phone.

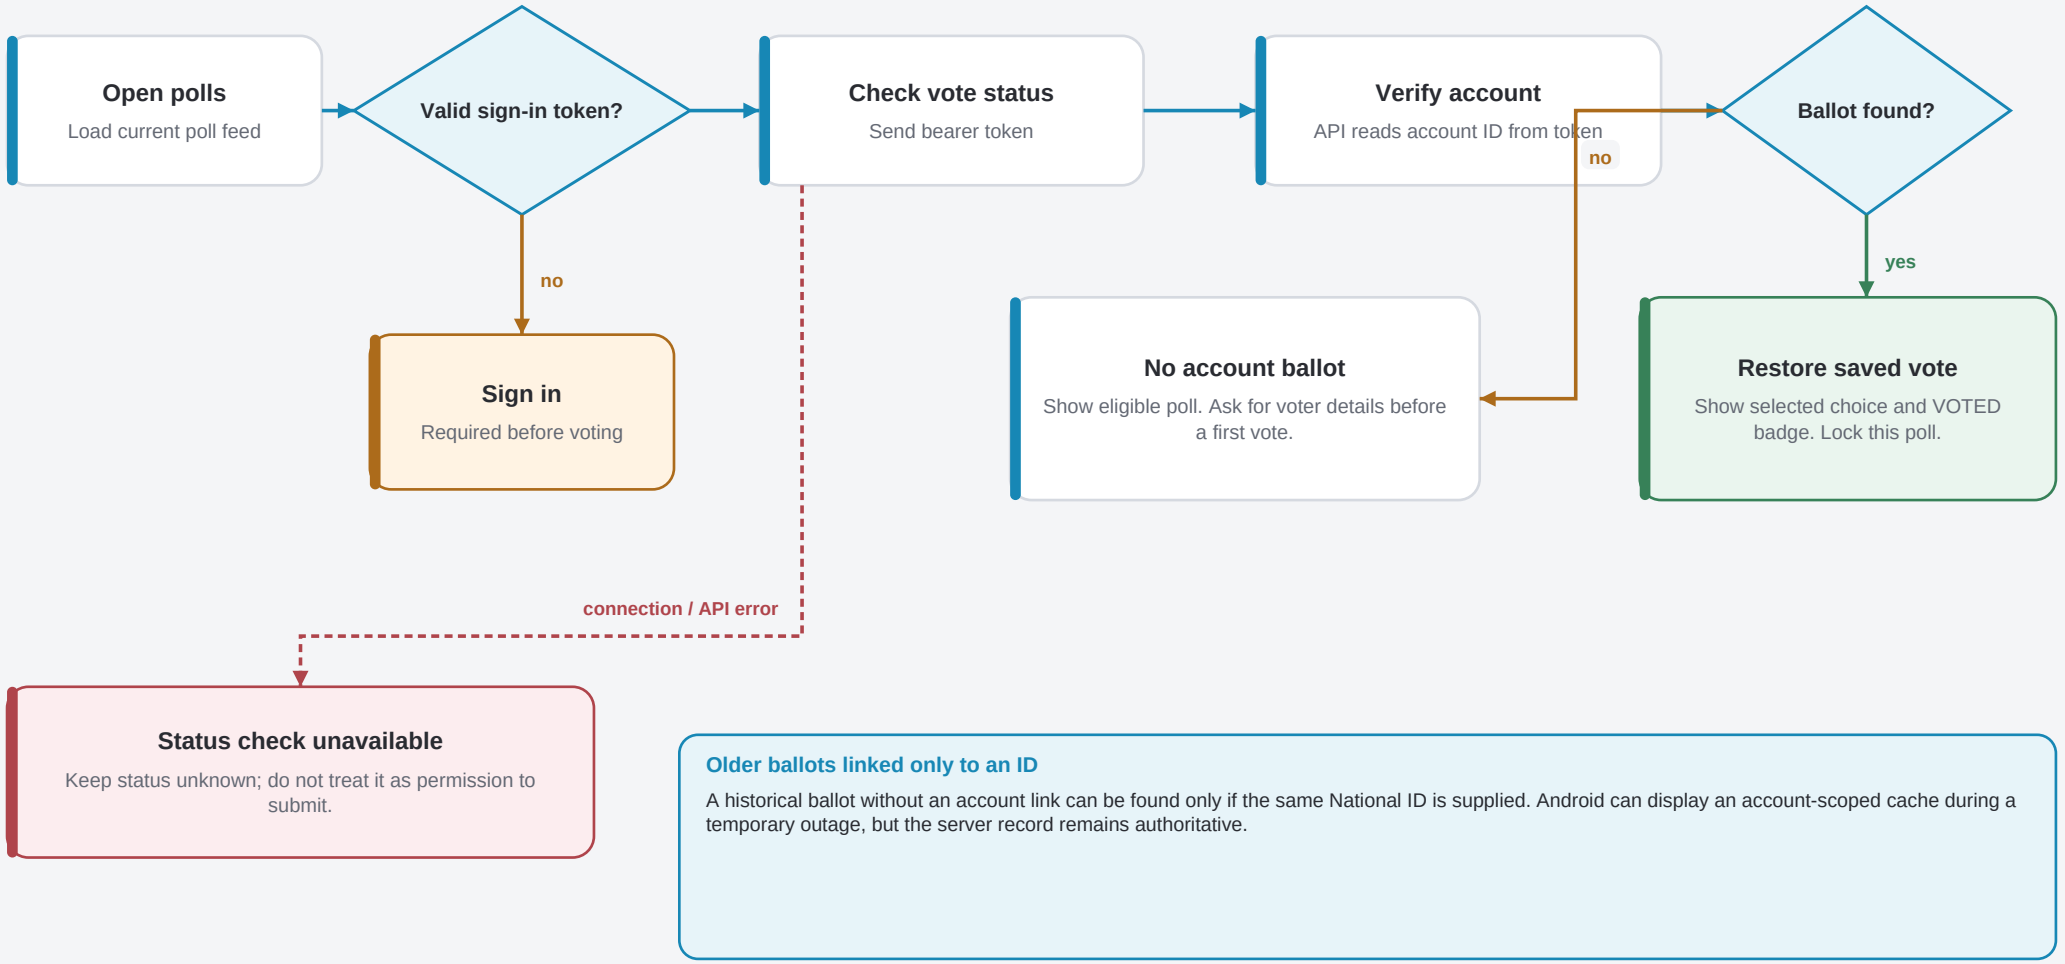

Older ballots linked only to an ID

A historical ballot without an account link can be found only if the same National ID is supplied. Android can display an account-scoped cache during a temporary outage, but the server record remains authoritative.

03 Casting a first vote

The client checks ballot history first; the API is the final authority for verification and saving.

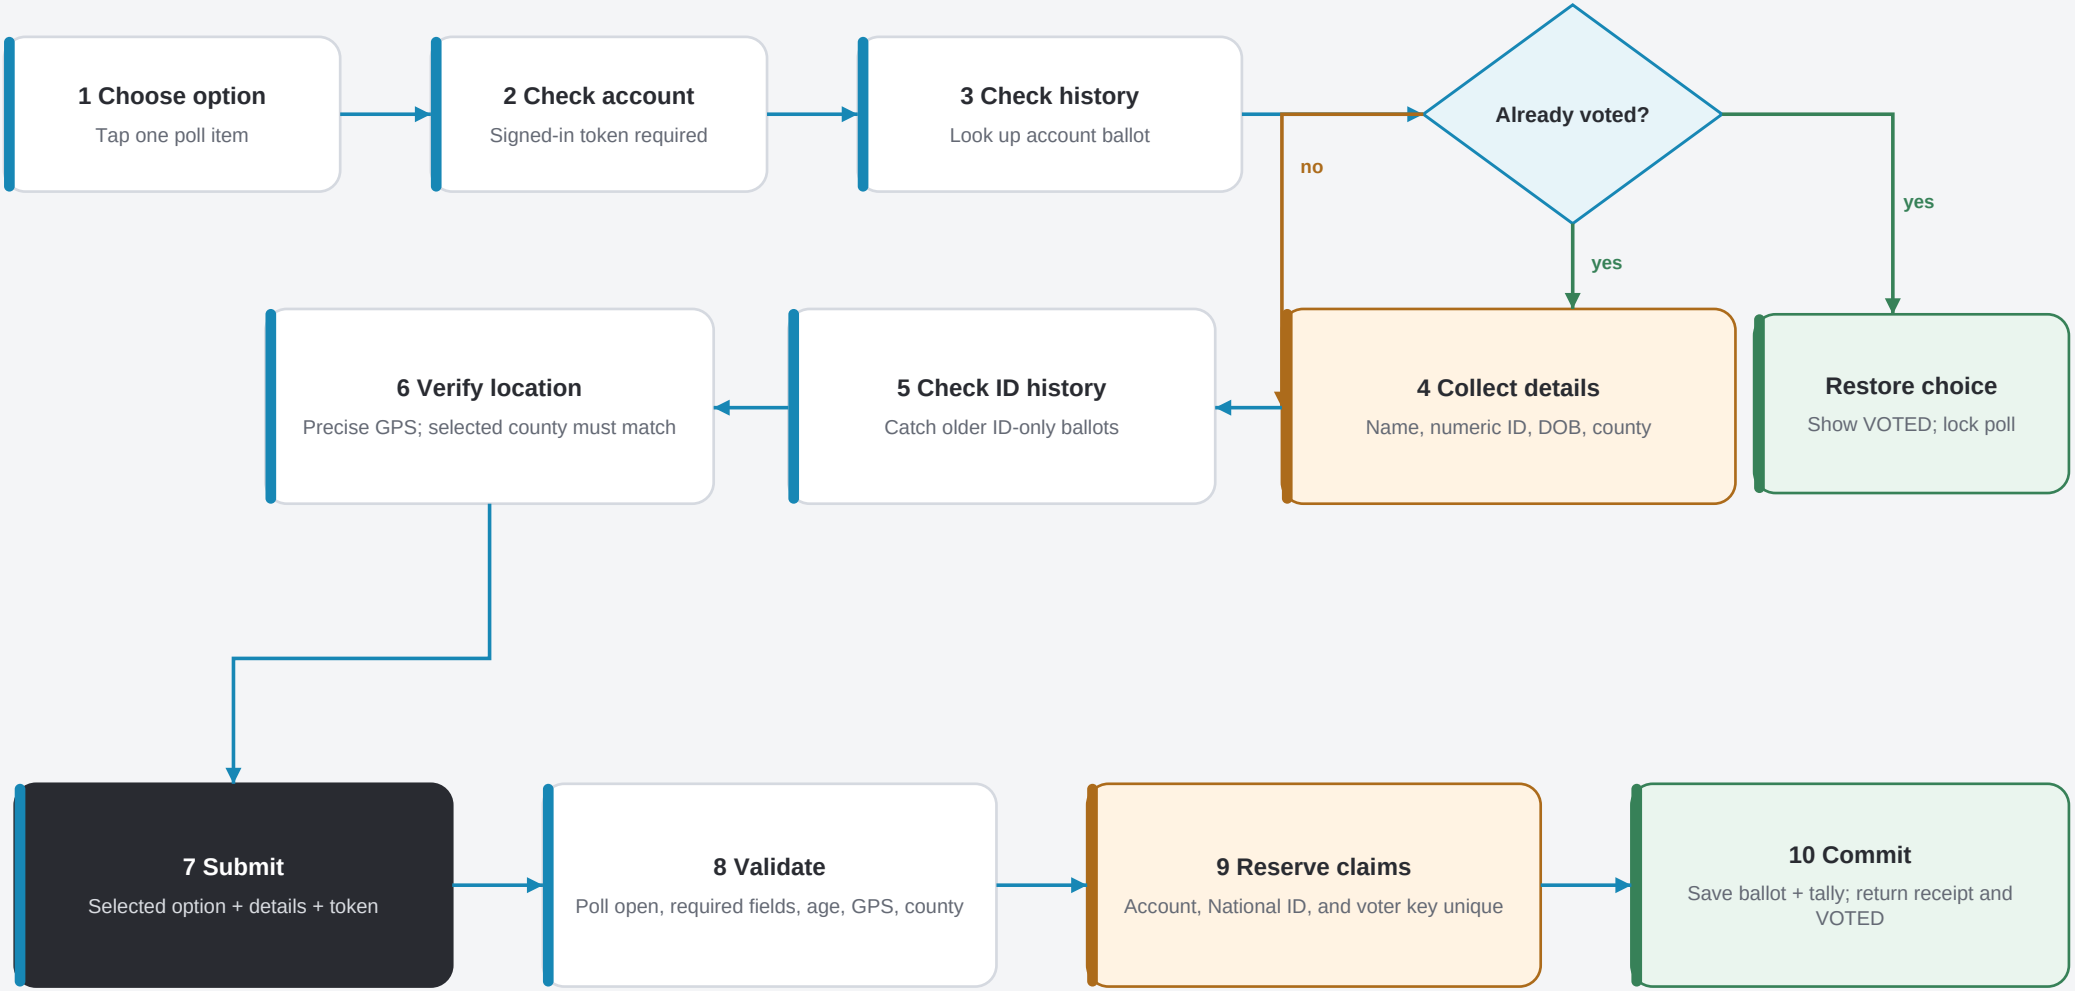

If a check fails

The API returns a validation error or an already-voted conflict. A rejected request does not add a ballot or increase the tally.

04

Two devices submit at once

Status checks improve the interface; the unique database claims settle a simultaneous submission safely.

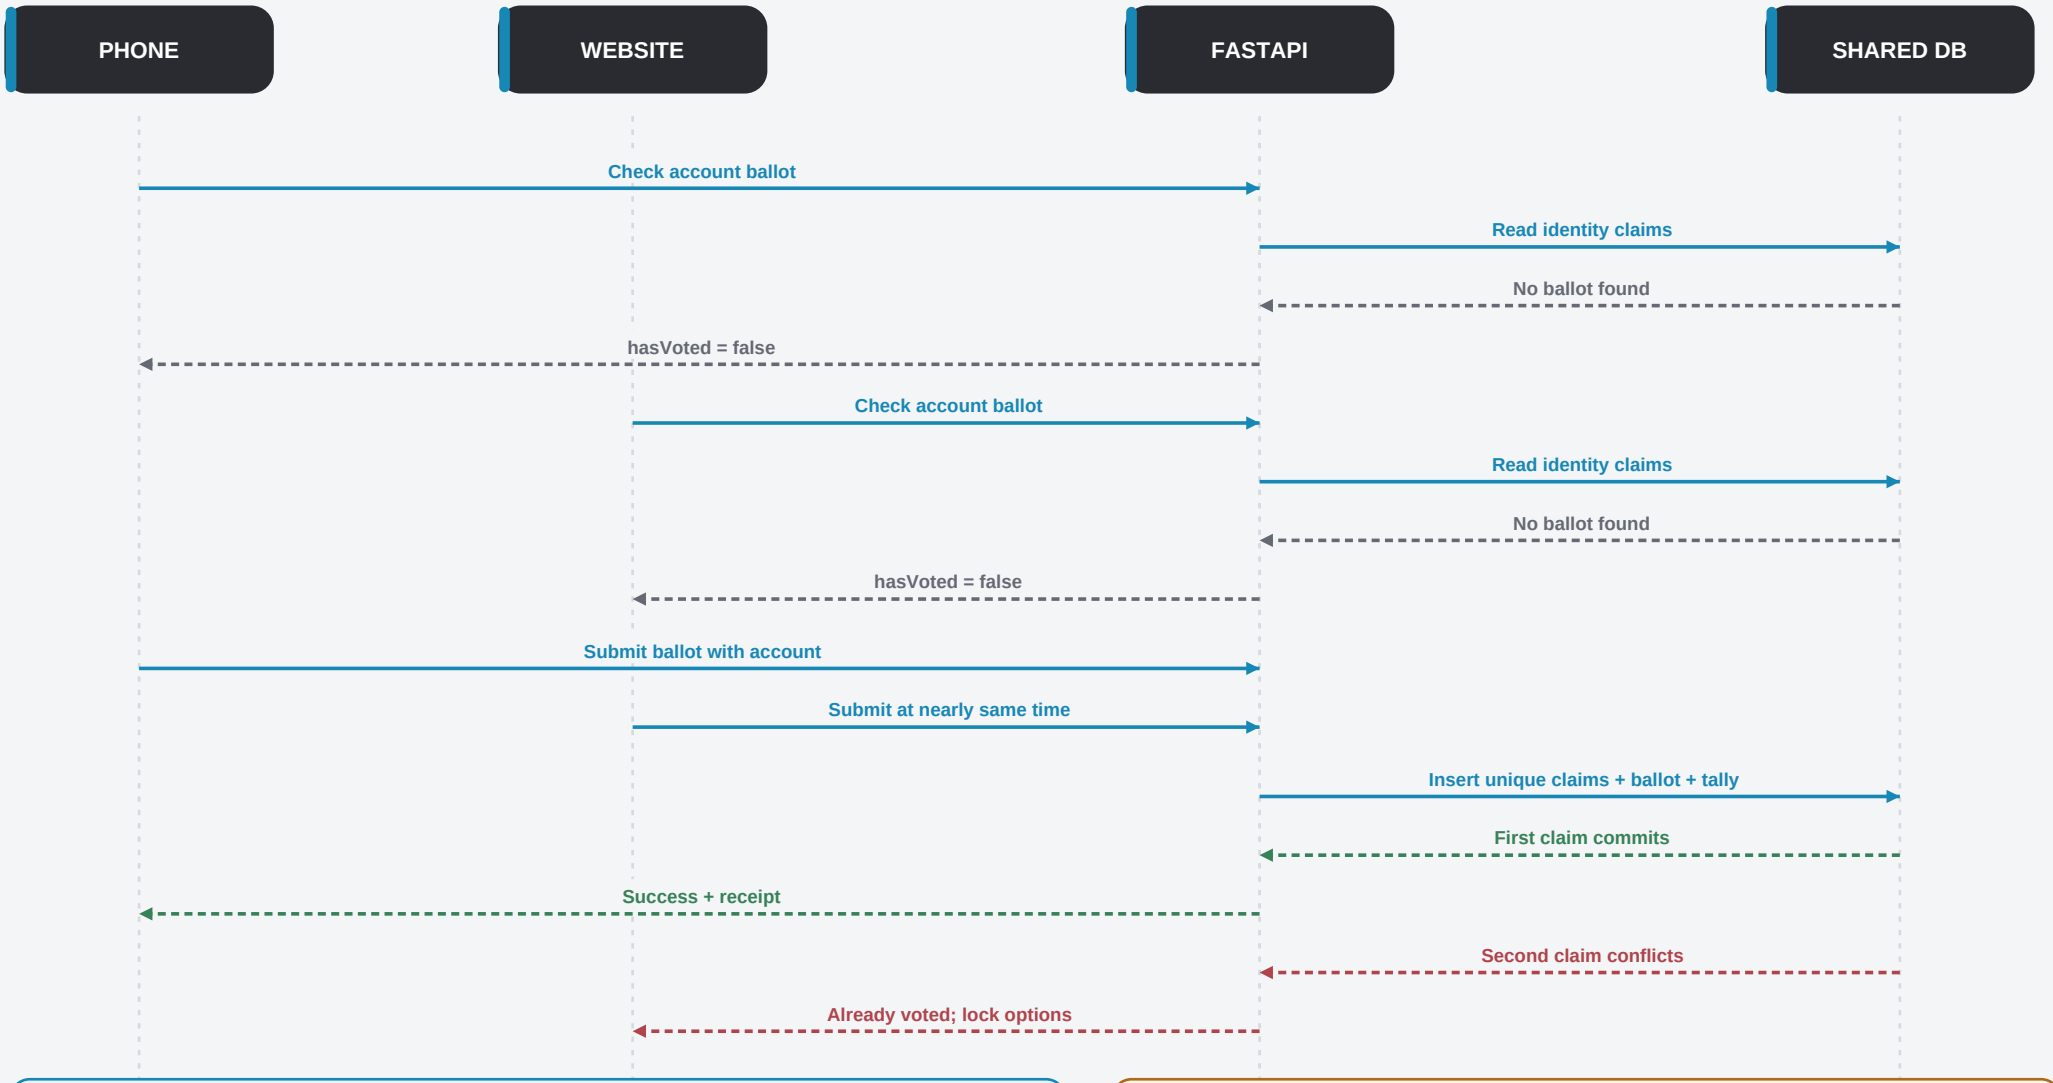

After conflict

Android immediately reloads the saved ballot. The web locks the poll and restores the choice on status sync.

Why tally is safe

Unique claims are in the ballot transaction. The conflicting transaction rolls back before tally changes.

05

What is saved, and where

A sign-in session and a submitted ballot are separate records with different purposes.

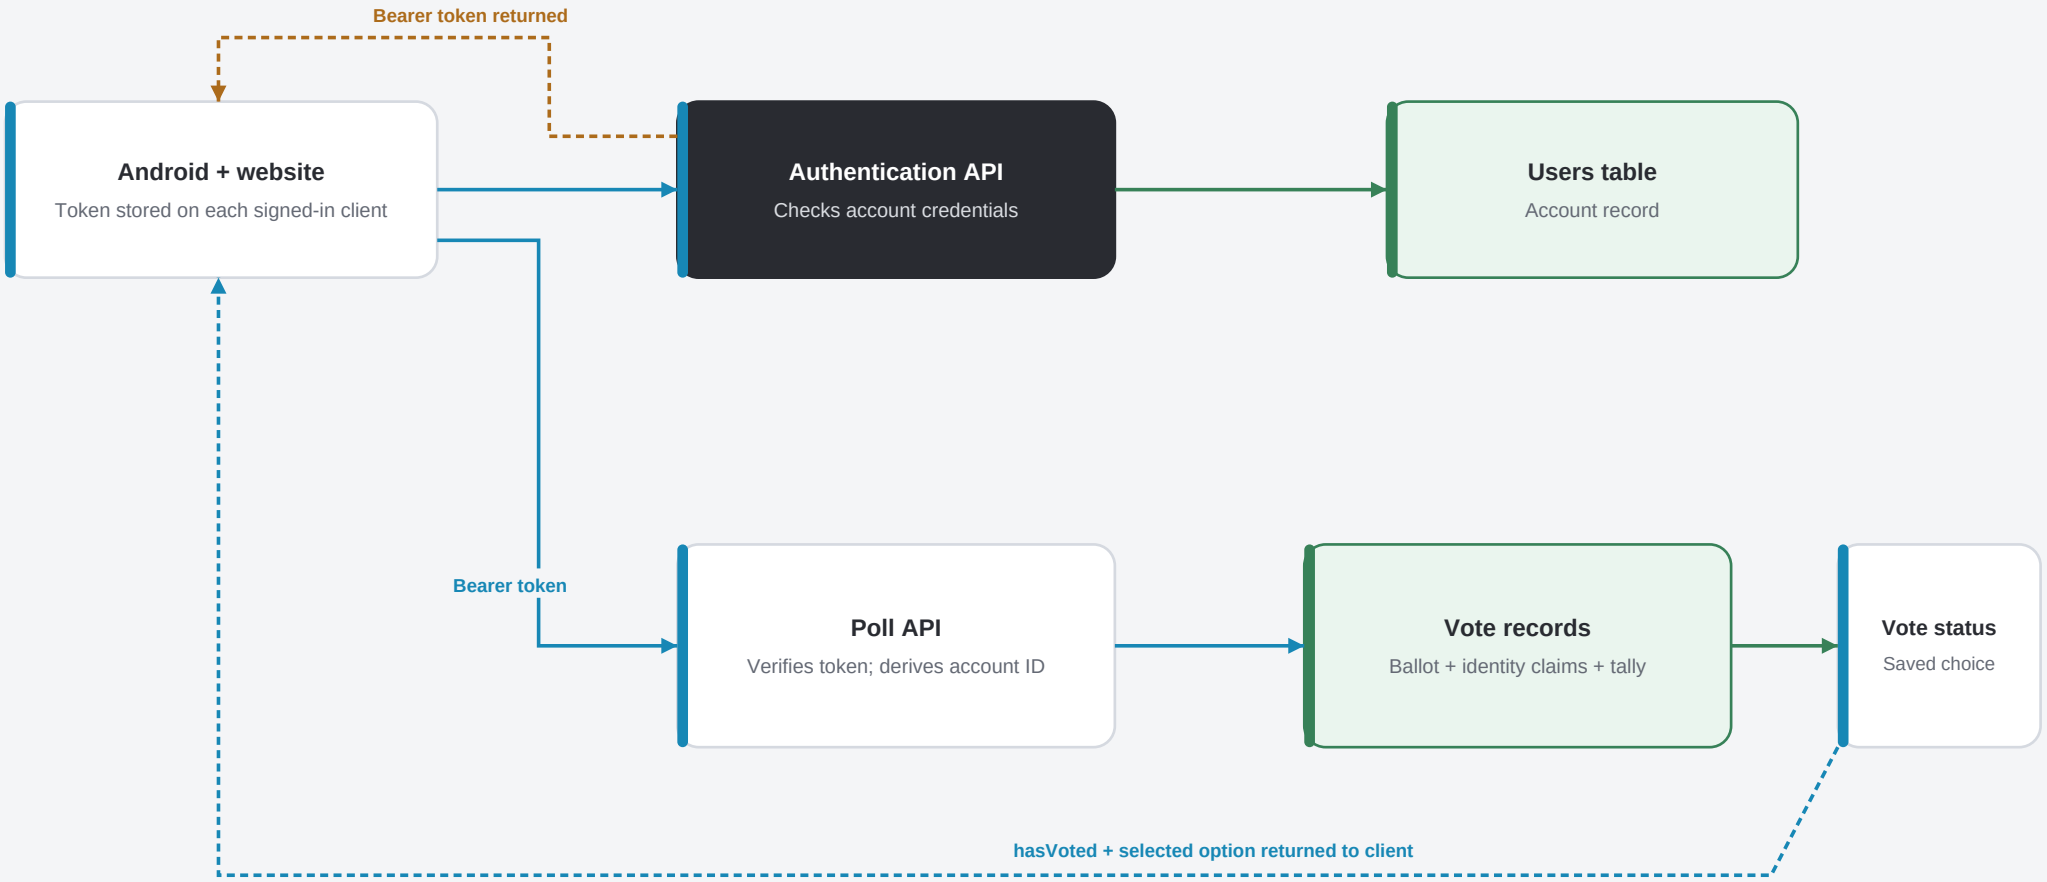

Important distinction

The token keeps the user signed in. The database ballot remains after refresh, sign-out, or reinstall. A local vote cache only helps restore the interface during an outage.