0714

表的操作

对表的创建、查看、修改、删除

查看所有表

`show tables`

```
Type 'help;' or '\h' for help. Type '\c' to clear the current

mysql> use information_schema;
Database changed
mysql> show tables;
+---------------------------------------+
| Tables_in_information_schema          |
+---------------------------------------+
| CHARACTER_SETS                        |
| COLLATION_CHARACTER_SET_APPLICABILITY |
| COLLATIONS                            |
| COLUMN_PRIVILEGES                     |
| COLUMN_STATISTICS                     |
| COLUMNS                               |
| ENGINES                               |
| EVENTS                                |
| FILES                                 |
| INNODB_BUFFER_PAGE                    |
| INNODB_BUFFER_PAGE_LRU                |
| INNODB_BUFFER_POOL_STATS              |
| INNODB_CACHED_INDEXES                 |
| INNODB_CMP                            |
| INNODB_CMP_PER_INDEX                  |
```

可以看到，在查看表之前，有这么一句 `use information_schema` ,在cmd中需要先选择数据库，再对表进行查看，navicat是一个可视化工具，是可以用鼠标进行选择的

> 💡 因为我之前创建的数据库里面没有表，就先查看了information_schema

空的数据库是这样的


```
mysql> use test_carter;
No connection. Trying to reconnect...
Connection id:    12
Current database: *** NONE ***

Database changed
mysql> show tables;
Empty set (0.00 sec)
```

创建表

```
create table 表名(
                字段名 数据类型,
                字段名 数据类型,
                字段名 数据类型 comment '其他'
              )character set=字符集编码 collate=排序规则
```

```
CREATE TABLE users (
id BIGINT,
username VARCHAR(20) COMMENT '用户名',
`password` VARCHAR(30),
birthday DATE
) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci;
```

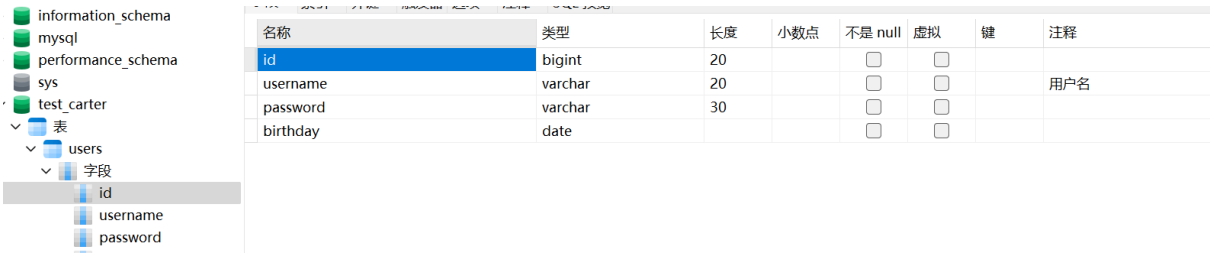

password是sql已有语法，在此处可用反引号包裹

comment是注释

查看表

```
desc 表名
```





```
mysql> use test_carter;
Database changed
mysql> desc users;
+----------+-------------+------+-----+---------+-------+
| Field    | Type        | Null | Key | Default | Extra |
+----------+-------------+------+-----+---------+-------+
| id       | bigint(20)  | YES  |     | NULL    |       |
| username | varchar(20) | YES  |     | NULL    |       |
| password | varchar(30) | YES  |     | NULL    |       |
| birthday | date        | YES  |     | NULL    |       |
+----------+-------------+------+-----+---------+-------+
4 rows in set (0.00 sec)

mysql>
```

删除表

drop table 表名

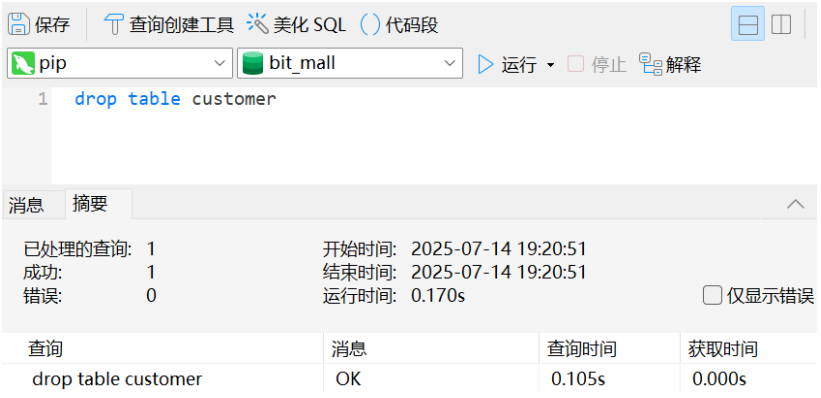

增删改查操作（CRUD）


create retrieve update delete

create 创建新增

1 单行数据指定列插入


`insert into 表名(列名，列名，...) values (值，值，...)`

如果说是全列插入，就不用指定列名了

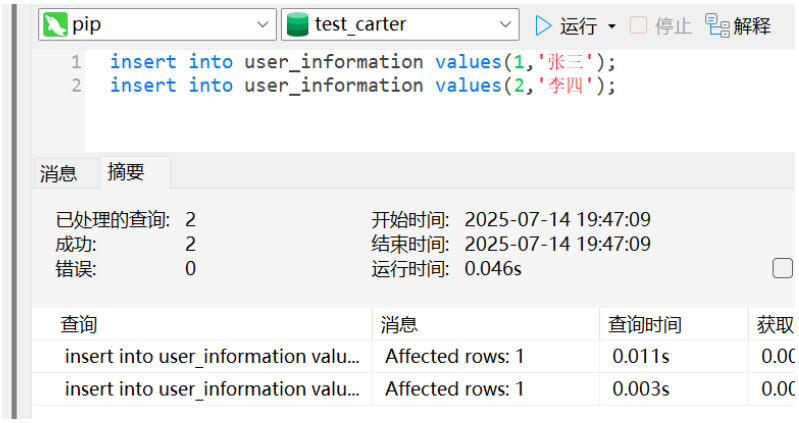

2 多行数据指定列插入

`insert into user_information (id,user_name) values(3,'赵六'),(4,'赵高');`

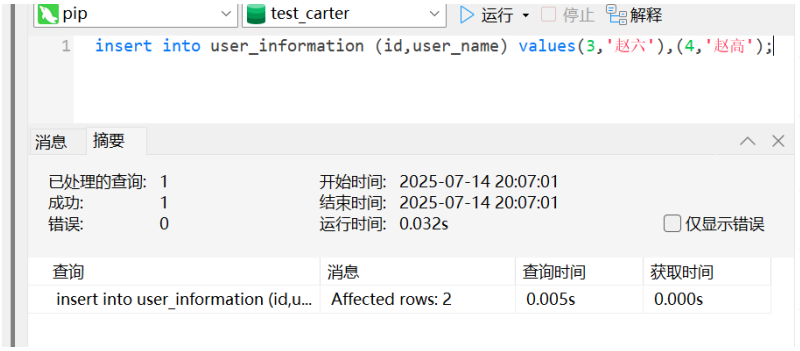

Retrieve 读取，查询


1 全列查询

`select *from user_information;`




2 指定列查询

select 列名，列名，... from 表名;

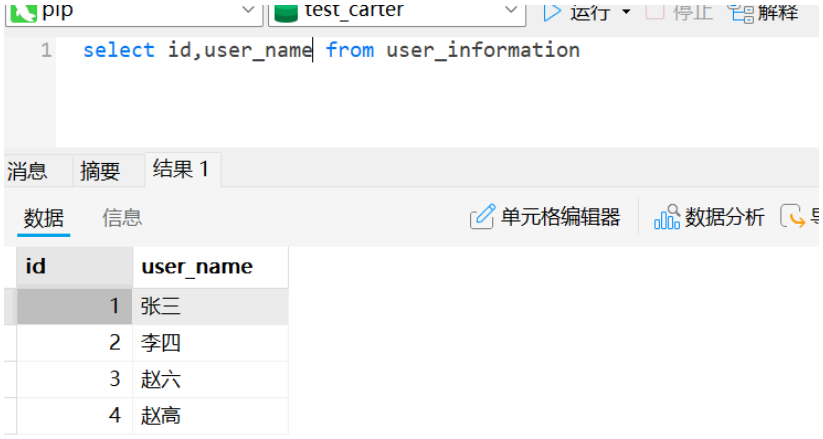

3 查询字段为表达式

先准备了这么一张表

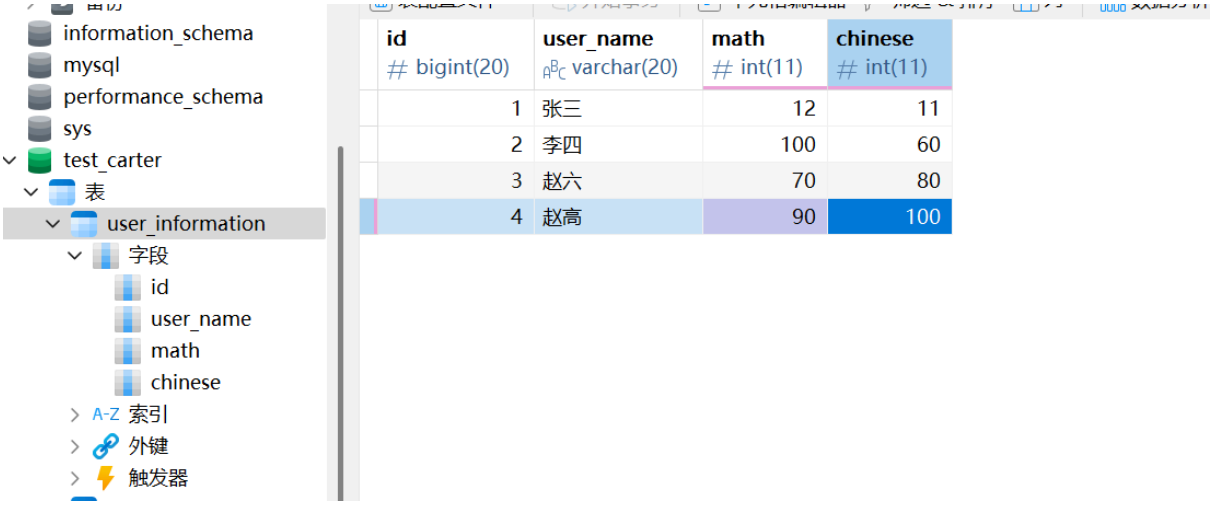


```
select id,user_name,math+100 from user_information;
```



再比如select id,user_name,math+chinese from user_information;

