


LAPORAN INSTALASI WORDPRESS DI AWS EC2


Muhammad Zharfan Bimantoro - 2602624891

1. Persiapan

- Menggunakan AWS regular.

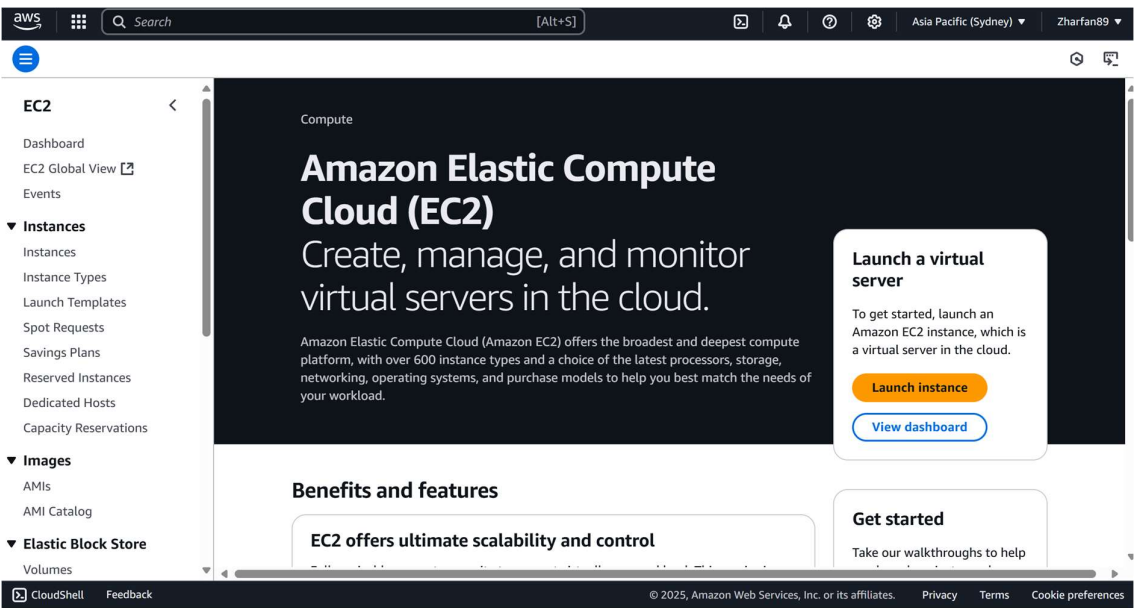


- Membuat 2 instance EC2:
 - Web Server
 - Database Server

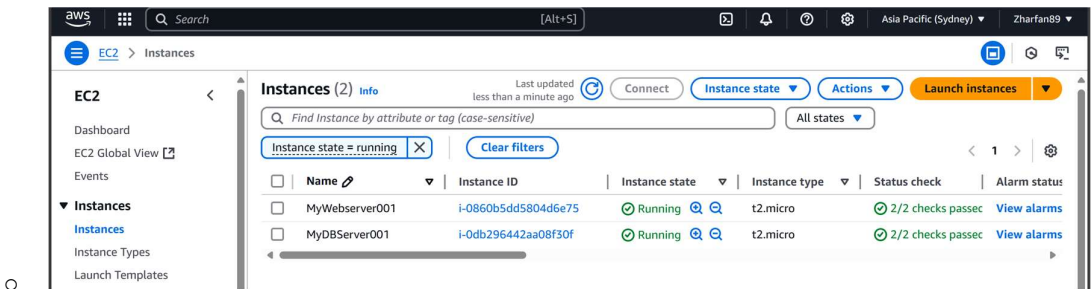

2. Pembuatan Instance

A. Web Server

- Berikan nama untuk webserver yang akan dibuat

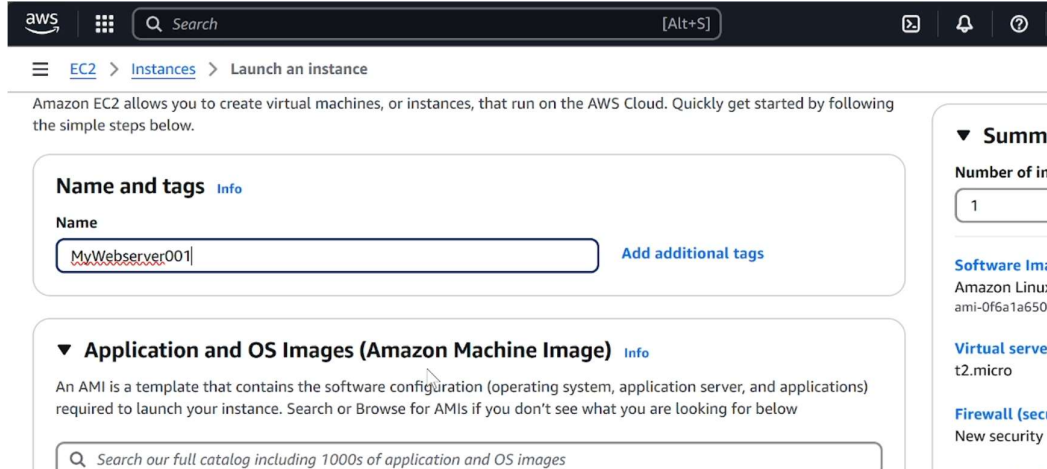

aws Search [Alt+S]

EC2 > Instances > Launch an instance

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags Info

Name

MyWebserver001 Add additional tags

▼ **Application and OS Images (Amazon Machine Image)** Info

An AMI is a template that contains the software configuration (operating system, application server, and applications) required to launch your instance. Search or Browse for AMIs if you don't see what you are looking for below

Search our full catalog including 1000s of application and OS images

▼ **Summary**


Number of instances 1

Software Image Amazon Linux ami-0f6a1a650

Virtual server type t2.micro

Firewall (security group) New security group

- AMI: Amazon Linux 2

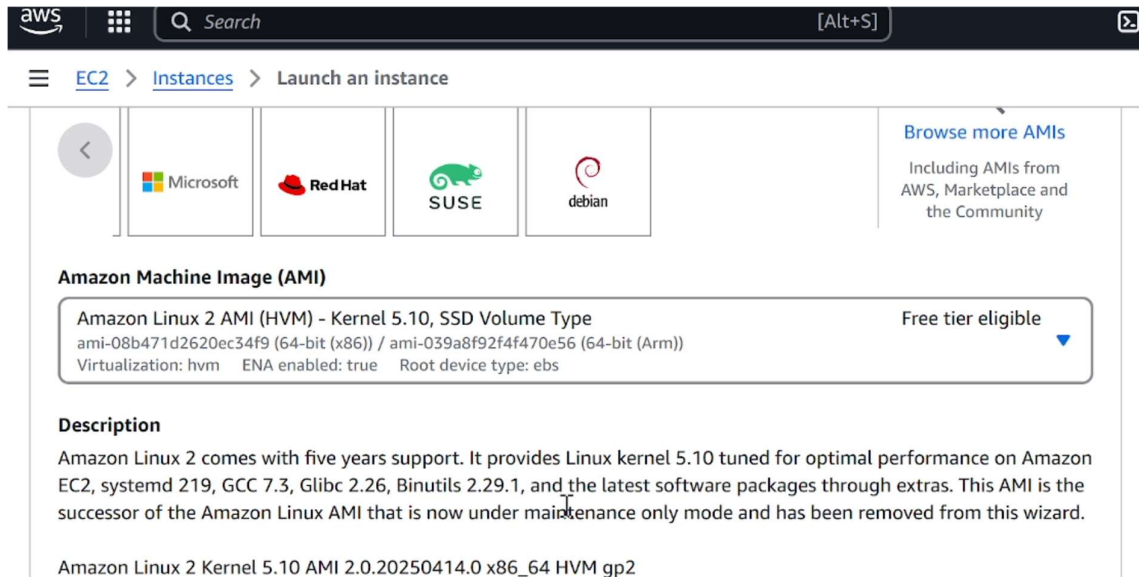

aws Search [Alt+S]

EC2 > Instances > Launch an instance

Microsoft Red Hat SUSE debian

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Amazon Linux 2 AMI (HVM) - Kernel 5.10, SSD Volume Type Free tier eligible

ami-08b471d2620ec34f9 (64-bit (x86)) / ami-039a8f92f4f470e56 (64-bit (Arm))


Virtualization: hvm ENA enabled: true Root device type: ebs

Description

Amazon Linux 2 comes with five years support. It provides Linux kernel 5.10 tuned for optimal performance on Amazon EC2, systemd 219, GCC 7.3, Glibc 2.26, Binutils 2.29.1, and the latest software packages through extras. This AMI is the successor of the Amazon Linux AMI that is now under maintenance only mode and has been removed from this wizard.

Amazon Linux 2 Kernel 5.10 AMI 2.0.20250414.0 x86_64 HVM gp2

- Instance Type: t2.micro

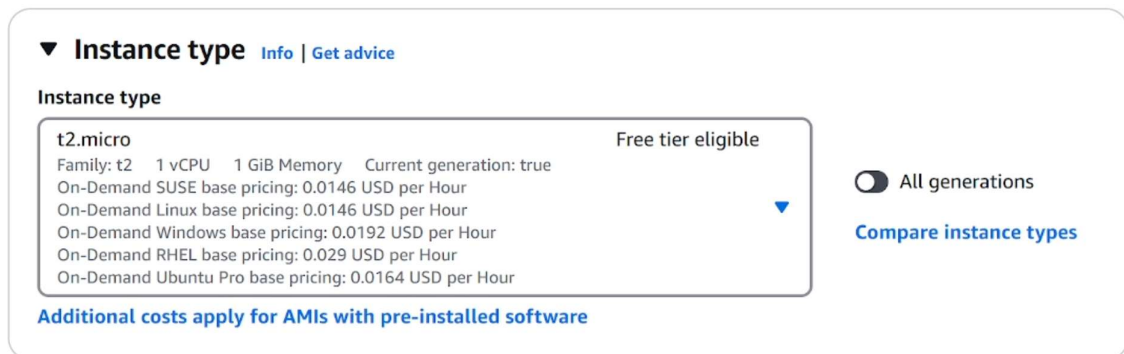

▼ **Instance type** Info | Get advice

Instance type

t2.micro Free tier eligible

Family: t2 1 vCPU 1 GiB Memory Current generation: true

On-Demand SUSE base pricing: 0.0146 USD per Hour

On-Demand Linux base pricing: 0.0146 USD per Hour

On-Demand Windows base pricing: 0.0192 USD per Hour

On-Demand RHEL base pricing: 0.029 USD per Hour

On-Demand Ubuntu Pro base pricing: 0.0164 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

- Buat keypair untuk menghubungkan instance

Key pair name
Key pairs allow you to connect to your instance securely.

Project01

The name can include up to 255 ASCII characters. It can't include leading or trailing spaces.

Key pair type

☒ RSA
RSA encrypted private and public key pair

☐ ED25519
ED25519 encrypted private and public key pair

Private key file format

☒ .pem
For use with OpenSSH

☐ .ppk
For use with PuTTY

- Pastikan VPC dan subnet yang digunakan untuk webserver dan dbserver sama

▼ **Network settings** [Info](#)

VPC - required [Info](#)

vpc-0f2f67e93df61742a (default) ↕

172.31.0.0/16

Subnet [Info](#)

subnet-07b7b2544f7a9f723

VPC: vpc-0f2f67e93df61742a Owner: 841894291715

Availability Zone: ap-southeast-2a Zone type: Availability Zone

IP addresses available: 4091 CIDR: 172.31.32.0/20

↕ [Create new subnet](#)

- Security Group: web-sg
 - Allow SSH (22) from Anywhere

aws [Search](#) [Alt+S]

EC2 > Instances > Launch an instance

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0) [Remove](#)

Type	Protocol	Port range	Source type	Source	Description - optional
ssh	TCP	22	Anywhere	0.0.0.0/0	e.g. SSH for admin desktop

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

- Allow HTTP (80) from Anywhere (0.0.0.0/0)

Source type: Anywhere

Source: 0.0.0.0/0

Description - optional: e.g. SSH for admin desktop


Type: HTTP

Protocol: TCP

Port range: 80

Remove

- Assign Public IP: Yes
- Ketika berhasil, akan ada notifikasi berikut:

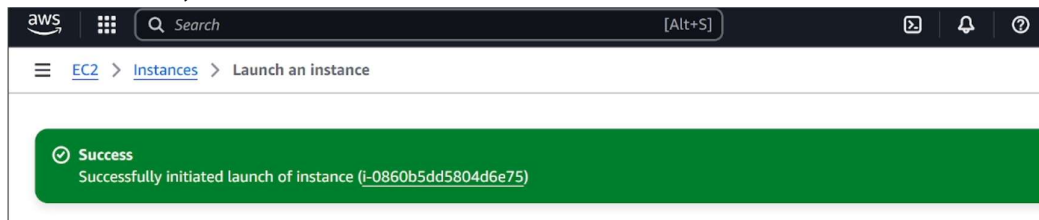

B. Database Server

- Berikan nama untuk database server yang akan dibuat

It seems like you may be new to launching instances in EC2. Take a walkthrough to learn about EC2, how to launch instances.

Do not show me this message again Take a walkthrough

Launch an instance

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags

Name: MyDBServer001

Add additional tags

- AMI: Amazon Linux 2

The screenshot shows the AWS Management Console interface for launching an instance. The breadcrumb navigation is 'EC2 > Instances > Launch an instance'. Below the navigation bar, there are tabs for different operating systems: Amazon Linux, Mac, CentOS, Ubuntu, Red Hat, and SUSE. The 'Amazon Linux 2 AMI (AMI)' section is selected. It displays the AMI name 'Amazon Linux 2 AMI (HVM) - Kernel 5.10, SSD Volume Type' and its ID 'ami-08b471d2620ec34f9'. It also shows the architecture 'x86_64', the publish date '2025-04-11', and the username 'ec2-user'. A 'Verified provider' badge is visible. The description states that Amazon Linux 2 comes with five years of support and is the successor of the Amazon Linux AMI. The instance type 't2.micro' is selected in the dropdown menu.

- Instance Type: t2.micro

The screenshot shows the 'Instance type' section of the AWS Management Console. The breadcrumb navigation is 'EC2 > Instances > Launch an instance'. The 'Instance type' dropdown menu is open, showing 't2.micro' as the selected option. The 't2.micro' section displays the family 't2', 1 vCPU, 1 GiB Memory, and current generation status. It also lists the on-demand pricing for various operating systems: SUSE (0.0146 USD per Hour), Linux (0.0146 USD per Hour), Windows (0.0192 USD per Hour), RHEL (0.029 USD per Hour), and Ubuntu Pro (0.0164 USD per Hour). A 'Free tier eligible' badge is visible. The 'All generations' toggle is turned off. A 'Compare instance types' link is present. The 'Additional costs apply for AMIs with pre-installed software' note is also shown.

- Gunakan keypair yang sama dengan webserver sebelumnya

The screenshot shows the 'Key pair (login)' section of the AWS Management Console. The breadcrumb navigation is 'EC2 > Instances > Launch an instance'. The 'Key pair (login)' section displays a message: 'You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.' Below the message, there is a dropdown menu for 'Key pair name - required' with 'Project01' selected. A 'Create new key pair' button is also visible.

- Gunakan VPC dan subnet yang sama dengan webserver

The screenshot shows the 'Network settings' section of the AWS 'Launch an instance' page. It includes a dropdown for VPC (vpc-0f2f67e93df61742a), a dropdown for Subnet (subnet-07b7b2544f7a9f723), and a dropdown for Auto-assign public IP (Enable). A note at the bottom states: 'Additional charges apply when outside of free tier allowance'.

- Security Group: db-sg


- Allow SSH (22) from My IP

The screenshot shows the 'Inbound Security Group Rules' for the 'db-sg' security group. It displays 'Security group rule 1 (TCP, 22, 0.0.0.0/0)' with a 'Remove' button. The rule details are: Type: ssh, Protocol: TCP, Port range: 22, Source type: Anywhere, Source: 0.0.0.0/0, and Description: e.g. SSH for admin desktop.

- Allow MySQL/Aurora (3306) from Web Server Security Group

The screenshot shows the second rule in the 'Inbound Security Group Rules' list: 'Security group rule 2 (TCP, 3306, sg-0f056da038a60c137)' with a 'Remove' button. The rule details are: Type: Custom TCP, Protocol: TCP, Port range: 3306, Source type: Custom, Source: sg-0f056da038a60c137, and Description: e.g. SSH for admin desktop.

- Assign Public IP: Yes
- Ketika berhasil, akan ada notifikasi berikut:

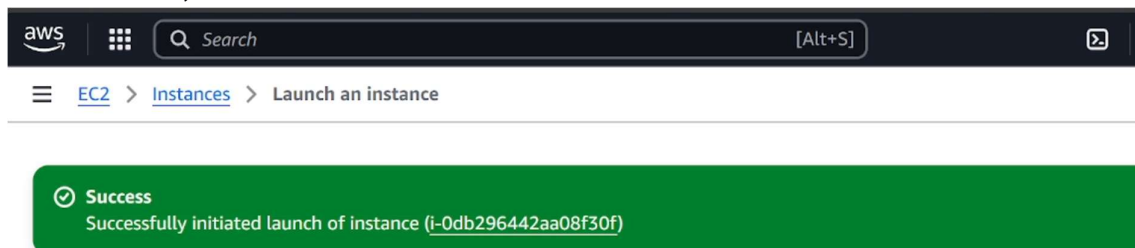

3. Setup Database Server

- Pastikan kedua instances dalam status "Running"

Instances (2) Info

Last updated less than a minute ago

Refresh

Connect

Instance state ▼

All state

☐	Name  ▼	Instance ID	Instance state ▼	Instance type
☐	MyWebserver...	i-0860b5dd5804d6e75	 Running  	t2.micro
☐	MyDBServer001	i-0db296442aa08f30f	 Running  	t2.micro

- Catat Public IP dan Private IP dari kedua instance
- Pilih instance yang digunakan sebagai database server, kemudian gunakan AWS Connect, kemudian klik “Connect”

aws



[Alt+S]



[EC2](#) > [Instances](#) > [i-0db296442aa08f30f](#) > [Connect to instance](#)

Instance ID

 [i-0db296442aa08f30f](#) (MyDBServer001)

Connection Type

☒ **Connect using EC2 Instance Connect**
Connect using the EC2 Instance Connect browser-based client, with a public IPv4 or IPv6 address.

☐ **Connect using EC2 Instance Connect via VPC endpoint**
Connect using the EC2 Instance Connect browser-based client, with a VPC endpoint.

☒ **Public IPv4 address**
 3.107.164.143

☐ **IPv6 address**
—

Username

Enter the username defined in the AMI used to launch the instance. If you didn't define a custom username, use the default username, ec2-user.

- Install MariaDB:
 - `sudo yum update -y`

```
#
~\##### Amazon Linux 2
~~~\#####\
~~~\####| AL2 End of Life is 2026-06-30.
~~~\#/
~~~~V~'-->
~~~~
~~~~.-.-
~~~~/_m/'--/
Amazon Linux 2023, GA and supported until 2028-03-15.
https://aws.amazon.com/linux/amazon-linux-2023/

[ec2-user@ip-172-31-39-42 ~]$ sudo yum update -y
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
No packages marked for update
```

- `sudo yum install mariadb-server -y`



```

Installing : 1:mariadb-server-5.5.68-1.amzn2.0.1.x86_64
Verifying  : 1:perl-Compress-Raw-Zlib-2.061-4.amzn2.0.2.x86_64
Verifying  : perl-IO-Compress-2.061-2.amzn2.noarch
Verifying  : perl-Net-Daemon-0.48-5.amzn2.noarch
Verifying  : perl-Data-Dumper-2.145-3.amzn2.0.2.x86_64
Verifying  : perl-DBD-MySQL-4.023-6.amzn2.x86_64
Verifying  : perl-Compress-Raw-Bzip2-2.061-3.amzn2.0.2.x86_64
Verifying  : 1:mariadb-5.5.68-1.amzn2.0.1.x86_64
Verifying  : perl-DBI-1.627-4.amzn2.0.2.x86_64
Verifying  : perl-PlRPC-0.2020-14.amzn2.noarch
Verifying  : 1:mariadb-server-5.5.68-1.amzn2.0.1.x86_64

Installed:
  mariadb-server.x86_64 1:5.5.68-1.amzn2.0.1

```

- sudo systemctl start mariadb
- sudo systemctl enable mariadb
- Amankan MariaDB:
 - sudo mysql_secure_installation

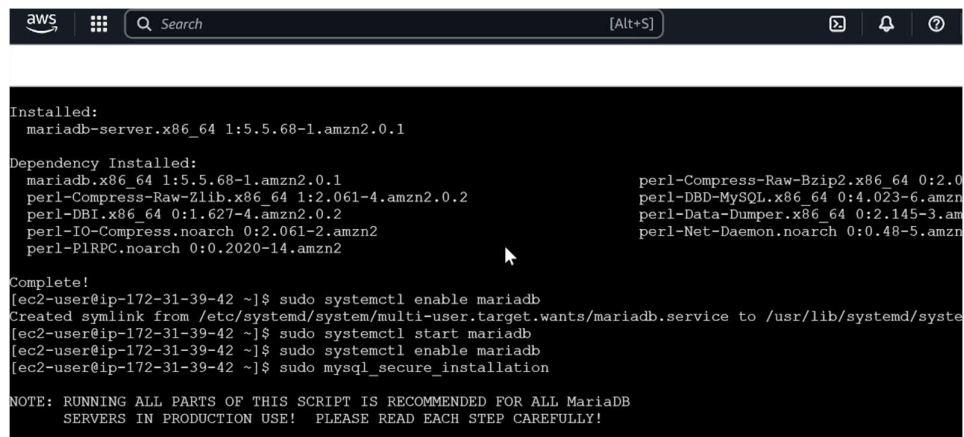

```

aws [Search] [Alt+S]

Installed:
  mariadb-server.x86_64 1:5.5.68-1.amzn2.0.1

Dependency Installed:
  mariadb.x86_64 1:5.5.68-1.amzn2.0.1
  perl-Compress-Raw-Zlib.x86_64 1:2.061-4.amzn2.0.2
  perl-DBI.x86_64 0:1.627-4.amzn2.0.2
  perl-IO-Compress.noarch 0:2.061-2.amzn2
  perl-PlRPC.noarch 0:0.2020-14.amzn2
  perl-Compress-Raw-Bzip2.x86_64 0:2.061-3.amzn2.0.2
  perl-DBD-MySQL.x86_64 0:4.023-6.amzn2
  perl-Data-Dumper.x86_64 0:2.145-3.amzn2
  perl-Net-Daemon.noarch 0:0.48-5.amzn2

Complete!
[ec2-user@ip-172-31-39-42 ~]$ sudo systemctl enable mariadb
Created symlink from /etc/systemd/system/multi-user.target.wants/mariadb.service to /usr/lib/systemd/system/mariadb.service
[ec2-user@ip-172-31-39-42 ~]$ sudo systemctl start mariadb
[ec2-user@ip-172-31-39-42 ~]$ sudo systemctl enable mariadb
[ec2-user@ip-172-31-39-42 ~]$ sudo mysql_secure_installation

NOTE: RUNNING ALL PARTS OF THIS SCRIPT IS RECOMMENDED FOR ALL MariaDB
SERVERS IN PRODUCTION USE! PLEASE READ EACH STEP CAREFULLY!

```

- Buat Database dan User, dalam contoh menggunakan username [Lord] dan password [tungtungsahur]
 - CREATE DATABASE wordpress;
 - CREATE USER 'Lord'@'%' IDENTIFIED BY 'tungtungsahur';
 - GRANT ALL PRIVILEGES ON wordpress.* TO 'Lord'@'%';
 - FLUSH PRIVILEGES;
 - EXIT;


```
aws Search [Alt+S]

MariaDB [(none)]> CREATE DATABASE Wordpress;
Query OK, 1 row affected (0.00 sec)

MariaDB [(none)]> CREATE USER 'wpuser'@'%' IDENTIFIED BY 'passwordku123';
ERROR 1396 (HY000): Operation CREATE USER failed for 'wpuser'@'%'
MariaDB [(none)]> CREATE USER 'Lord'@'%' IDENTIFIED BY 'tungtungsahur';
Query OK, 0 rows affected (0.00 sec)

aws Search [Alt+S]

MariaDB [(none)]> CREATE USER 'Lord'@'%' IDENTIFIED BY 'tungtungsahur';
Query OK, 0 rows affected (0.00 sec)

MariaDB [(none)]> grant all privileges on wordpress.* to 'Lord'@'%';
'> exit;
'> exit;
-> EXIT;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL
syntax to use near 'EXIT' at line 2
MariaDB [(none)]> GRANT ALL PRIVILEGES ON wordpress.* to 'Lord'@'%';
Query OK, 0 rows affected (0.00 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.00 sec)

MariaDB [(none)]> EXIT
Bye
[ec2-user@ip-172-31-39-42 ~]$ sudo nano /etc/my.cnf
[ec2-user@ip-172-31-39-42 ~]$ sudo nano /etc/my.cnf
[ec2-user@ip-172-31-39-42 ~]$ sudo nano /etc/my.cnf
[ec2-user@ip-172-31-39-42 ~]$ sudo systemctl restart mariadb
```

- Edit bind-address:
 - sudo nano /etc/my.cnf
 - akan muncul tampilan berikut

```
aws Search [Alt+S]

GNU nano 2.9.8 /etc/my.cnf

[mysqld]
datadir=/var/lib/mysql
socket=/var/lib/mysql/mysql.sock
# Disabling symbolic-links is recommended to prevent assorted security risks
symbolic-links=0
# Settings user and group are ignored when systemd is used.
# If you need to run mysqld under a different user or group,
# customize your systemd unit file for mariadb according to the
# instructions in http://fedoraproject.org/wiki/Systemd

[mysqld_safe]
log-error=/var/log/mariadb/mariadb.log
pid-file=/var/run/mariadb/mariadb.pid

# include all files from the config directory
#includedir /etc/my.cnf.d
```

- # Tambahkan “bind-address=0.0.0.0”

```
aws [Alt+S]
GNU nano 2.9.8 /etc/my.cnf

[mysqld]
datadir=/var/lib/mysql
socket=/var/lib/mysql/mysql.sock
# Disabling symbolic-links is recommended to prevent assorted security risks
symbolic-links=0
bind-address=0.0.0.0
# Settings user and group are ignored when systemd is used.
# If you need to run mysqld under a different user or group,
# customize your systemd unit file for mariadb according to the
# instructions in http://fedoraproject.org/wiki/Systemd

[mysqld_safe]
log-error=/var/log/mariadb/mariadb.log
pid-file=/var/run/mariadb/mariadb.pid
```

- `sudo systemctl restart mariadb`

4. Setup Web Server

- Pilih instance yang digunakan sebagai web server, kemudian pilih AWS Connect, kemudian klik “Connect”

aws [Alt+S]

EC2 > Instances

Instances (1/2) Info Last updated 43 minutes ago [Connect](#)

Find Instance by attribute or tag (case-sensitive) All states

Instance state = running Clear filters

	Name	Instance ID	Instance state	Instance type	Sta
☒	MyWebserver001	i-0860b5dd5804d6e75	Running	t2.micro	
☐	MyDBServer001	i-0db296442aa08f30f	Running	t2.micro	

aws [Alt+S]

EC2 > Instances > i-0860b5dd5804d6e75 > Connect to instance

Connect to instance Info

Connect to your instance i-0860b5dd5804d6e75 (MyWebserver001) using any of these options

EC2 Instance Connect

Session Manager

SSH client

EC2 serial console

Instance ID
i-0860b5dd5804d6e75 (MyWebserver001)

Connection Type

☒ Connect using EC2 Instance Connect
Connect using the EC2 Instance Connect browser-based client, with a public IPv4 or IPv6 address.

☐ Connect using a VPC endpoint

☒ Public IPv4 address
54.252.213.192

☐ IPv6 address

- Akan muncul tampilan berikut:

```

aws
[Alt+S]
Asia Pacific (Sydney)
Zharfan89

last login: Sun Apr 27 03:14:48 2025 from ec2-13-239-158-3.ap-southeast-2.compute.amazonaws.com

Amazon Linux 2
AL2 End of Life is 2026-06-30.

A newer version of Amazon Linux is available!
Amazon Linux 2023, GA and supported until 2028-03-15.
https://aws.amazon.com/linux/amazon-linux-2023/

ec2-user@ip-172-31-47-161 ~]$

i-0860b5dd5804d6e75 (MyWebserver001)
PublicIPs: 54.252.213.192 PrivateIPs: 172.31.47.161

```

- Install Apache dan PHP:
 - `sudo yum update -y`
 - `sudo yum install httpd php php-mysqlnd php-fpm php-json -y`

```

[ec2-user@ip-172-31-47-161 ~]$ sudo yum update -y
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
amzn2-core
No packages marked for update
[ec2-user@ip-172-31-47-161 ~]$ sudo yum install httpd php php-mysqlnd php-fpm php-json -y
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
No package httpd available.
Resolving Dependencies
...

Installed:
php.x86_64 0:5.4.16-46.amzn2.0.6      php-common.x86_64 0:5.4.16-46.amzn2.0.6      php-fpm.x86_64 0:5.4.16-46.amzn2.0.6
php-mysqlnd.x86_64 0:5.4.16-46.amzn2.0.6

Dependency Installed:
apr.x86_64 0:1.7.2-1.amzn2.0.1      apr-util.x86_64 0:1.6.3-1.amzn2.0.1      apr-util-bdb.x86_64 0:1.3.4-1.amzn2.0.1
generic-logos-httpd.noarch 0:18.0.0-4.amzn2      httpd.x86_64 0:2.4.62-1.amzn2.0.2      httpd-filesys.x86_64 0:2.4.62-1.amzn2.0.2
httpd-tools.x86_64 0:2.4.62-1.amzn2.0.2      libzip010-compat.x86_64 0:0.10.1-9.amzn2.0.5      mailcap.noarch 0:1.0.3-1.amzn2.0.1
mod_http2.x86_64 0:1.15.19-1.amzn2.0.2      php-cli.x86_64 0:5.4.16-46.amzn2.0.6      php-pdo.x86_64 0:5.4.16-46.amzn2.0.6

Complete!

php-json is available in Amazon Linux Extra topic "php8.2"

To use, run
# sudo amazon-linux-extras install php8.2

Learn more at
https://aws.amazon.com/amazon-linux-2/faqs/#Amazon_Linux_Extras

```

- `sudo systemctl start httpd`
- `sudo systemctl enable httpd`

```
aws [Search] [Alt+S]

To use, run
# sudo amazon-linux-extras install php8.2

Learn more at
https://aws.amazon.com/amazon-linux-2/faqs/#Amazon_Linux_Extras

[ec2-user@ip-172-31-47-161 ~]$ sudo systemctl start httpd
[ec2-user@ip-172-31-47-161 ~]$ sudo systemctl enable httpd
Created symlink from /etc/systemd/system/multi-user.target.wants/httpd.service to /usr/lib/systemd/system/
```

- Download WordPress:

- cd /var/www/html
- sudo wget <https://wordpress.org/latest.tar.gz>

```
aws [Search] [Alt+S]

To use, run
# sudo amazon-linux-extras install php8.2

Learn more at
https://aws.amazon.com/amazon-linux-2/faqs/#Amazon_Linux_Extras

[ec2-user@ip-172-31-47-161 ~]$ sudo systemctl start httpd
[ec2-user@ip-172-31-47-161 ~]$ sudo systemctl enable httpd
Created symlink from /etc/systemd/system/multi-user.target.wants/httpd.service to /usr/lib/systemd/system/
[ec2-user@ip-172-31-47-161 ~]$ cd /var/www/html
[ec2-user@ip-172-31-47-161 html]$ sudo wget https://wordpress.org/latest.tar.gz
--2025-04-25 08:41:07-- https://wordpress.org/latest.tar.gz
Resolving wordpress.org (wordpress.org)... 198.143.164.252
Connecting to wordpress.org (wordpress.org)|198.143.164.252|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 26921903 (26M) [application/octet-stream]
Saving to: 'latest.tar.gz'

100%[=====>] 2
```

- sudo tar -xzf latest.tar.gz
- sudo cp -r wordpress/* .
- sudo chown -R apache:apache /var/www/html
- sudo chmod -R 755 /var/www/html

```
aws [Search] [Alt+S]

[ec2-user@ip-172-31-47-161 ~]$ sudo systemctl start httpd
[ec2-user@ip-172-31-47-161 ~]$ sudo systemctl enable httpd
Created symlink from /etc/systemd/system/multi-user.target.wants/httpd.service to /usr/lib
[ec2-user@ip-172-31-47-161 ~]$ cd /var/www/html
[ec2-user@ip-172-31-47-161 html]$ sudo wget https://wordpress.org/latest.tar.gz
--2025-04-25 08:41:07-- https://wordpress.org/latest.tar.gz
Resolving wordpress.org (wordpress.org)... 198.143.164.252
Connecting to wordpress.org (wordpress.org)|198.143.164.252|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 26921903 (26M) [application/octet-stream]
Saving to: 'latest.tar.gz'


100%[=====I

2025-04-25 08:41:12 (5.80 MB/s) - 'latest.tar.gz' saved [26921903/26921903]

[ec2-user@ip-172-31-47-161 html]$ sudo tar -xzf latest.tar.gz
[ec2-user@ip-172-31-47-161 html]$ sudo cp -r wordpress/* .
[ec2-user@ip-172-31-47-161 html]$ sudo chown -R apache:apache /var/www/html
[ec2-user@ip-172-31-47-161 html]$ sudo chmod -R 755 /var/www/html
```

5. Konfigurasi WordPress

- Edit wp-config.php:
 - `define('DB_NAME', 'wordpress');` masukkan nama database pada instance database server
 - `define('DB_USER', 'Lord');` masukkan nama username yang telah dibuat di instance database server (MariaDB)
 - `define('DB_PASSWORD', 'tungtungsahur');` masukkan password untuk username yang telah dibuat di instance database server (MariaDB)
 - `define('DB_HOST', '<172.31.39.42>');` masukkan private IP yang sesuai dengan database server

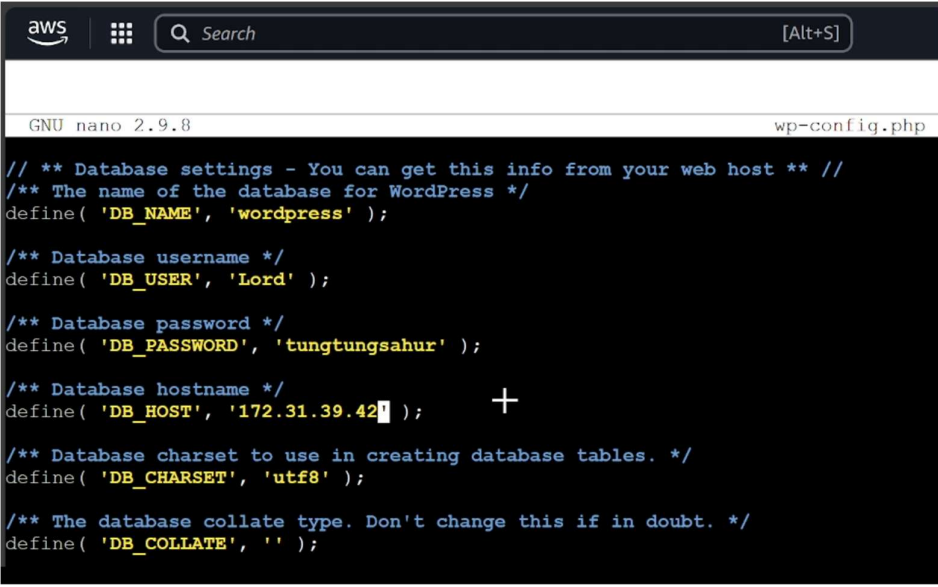

The screenshot shows a terminal window with the AWS logo and a search bar at the top. The terminal title is "GNU nano 2.9.8" and the file being edited is "wp-config.php". The code in the file is as follows:

```
// ** Database settings - You can get this info from your web host ** //
/** The name of the database for WordPress */
define( 'DB_NAME', 'wordpress' );

/** Database username */
define( 'DB_USER', 'Lord' );

/** Database password */
define( 'DB_PASSWORD', 'tungtungsahur' );

/** Database hostname */
define( 'DB_HOST', '172.31.39.42' );

/** Database charset to use in creating database tables. */
define( 'DB_CHARSET', 'utf8' );


/** The database collate type. Don't change this if in doubt. */
define( 'DB_COLLATE', '' );
```

- Restart Apache:
 - `sudo systemctl restart httpd`

6. Testing

- Akses di browser:
 - `http://<Public-IP-Web-Server>`
- Lanjutkan instalasi WordPress melalui browser.
- Akan tampil halaman berikut:

- Pilih bahasa yang ingin digunakan untuk instalasi wordpress

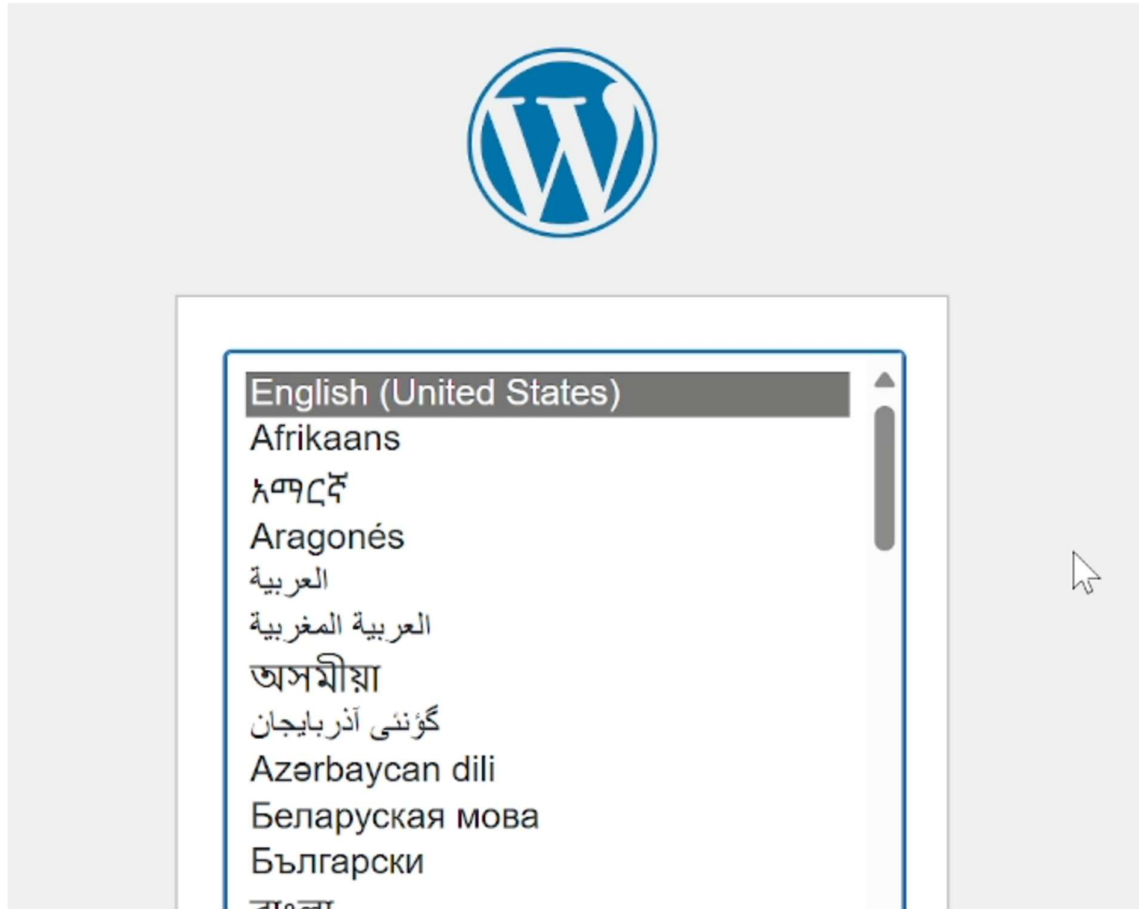

- Tentukan informasi yang ingin digunakan dalam wordpress



Welcome

Welcome to the famous five-minute WordPress installation process! Just fill in the information below and you'll be on your way to using the most extendable and powerful personal publishing platform in the world.

Information needed

Please provide the following information. Do not worry, you can always change these settings later.

Site Title

Username

Username can have only alphanumeric characters, spaces, underscores, hyphens, periods, and the @ symbol.


- Isi informasi yang dibutuhkan untuk instalasi wordpress

Information needed


Please provide the following information. Do not worry, you can always change these settings later.

Site Title	PT. XYZ Berdikari
Username	Zharfan Usernames can have only alphanumeric characters, spaces, underscores, hyphens, periods, and the @ symbol.
Password	tungtungsahur Medium Important: You will need this password to log in. Please store it in a secure location.
Your Email	tolacicloc@gmail.com

- Akan muncul tampilan berikut jika berhasil

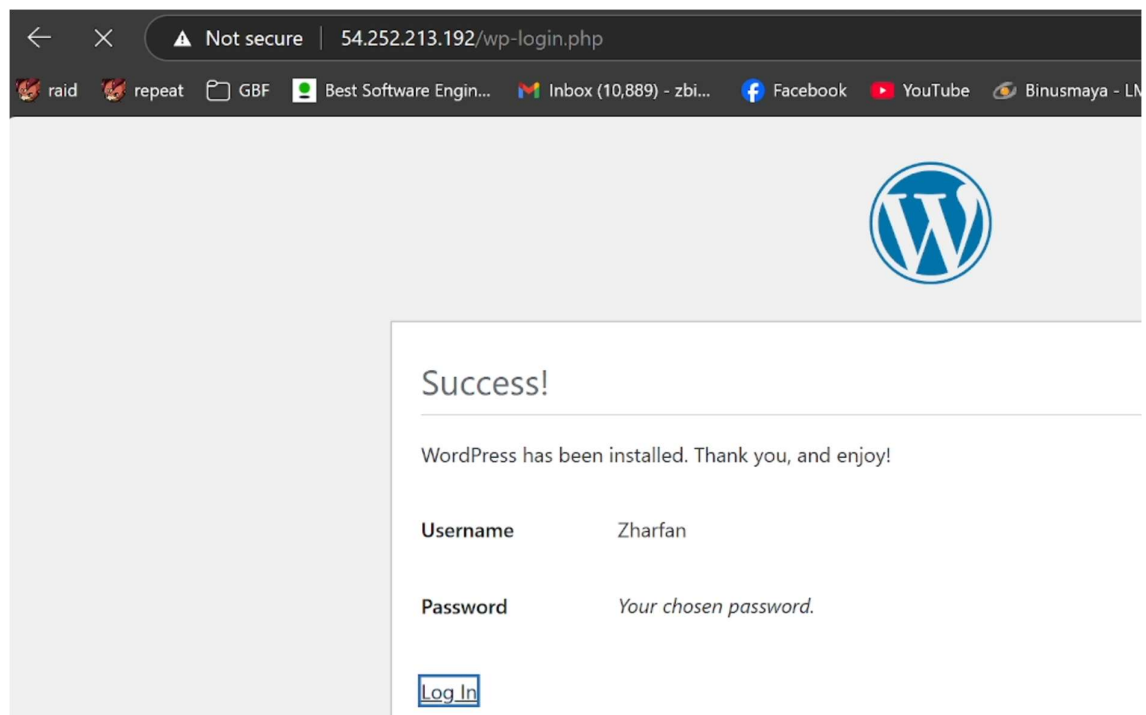

- Kemudian akan muncul tampilan untuk login

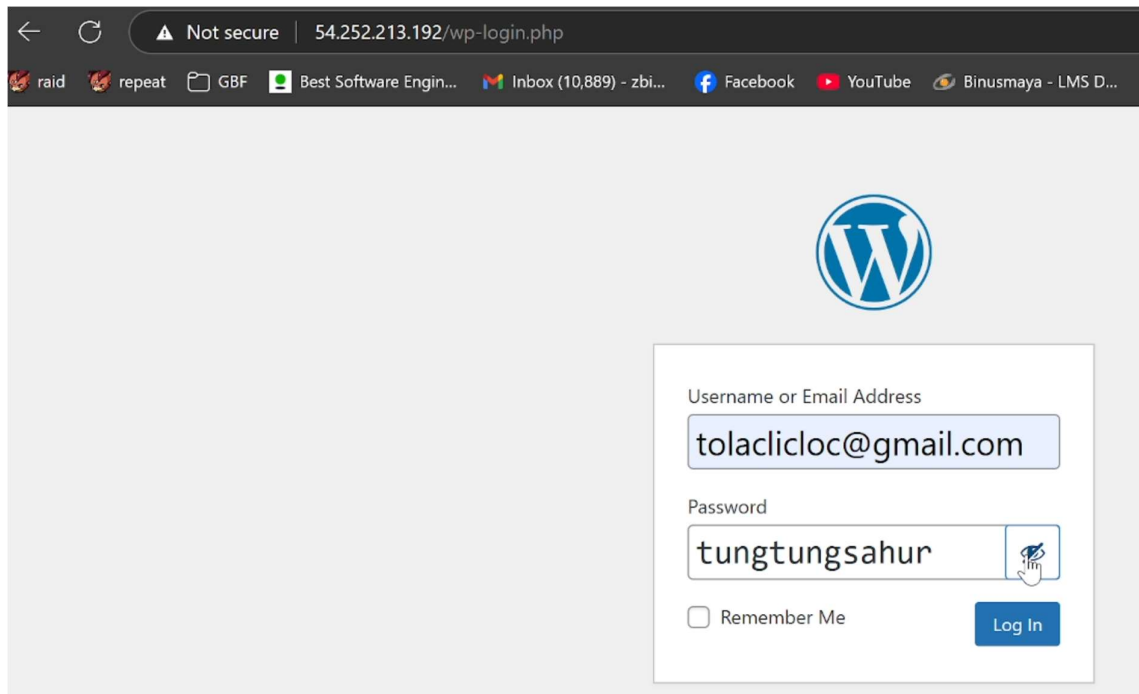

- Akan muncul tampilan berikut:

