




Schema on the pipeline of Melomind

Fanny GROSSELIN

01-02-2017

During Calibration

During Calibration

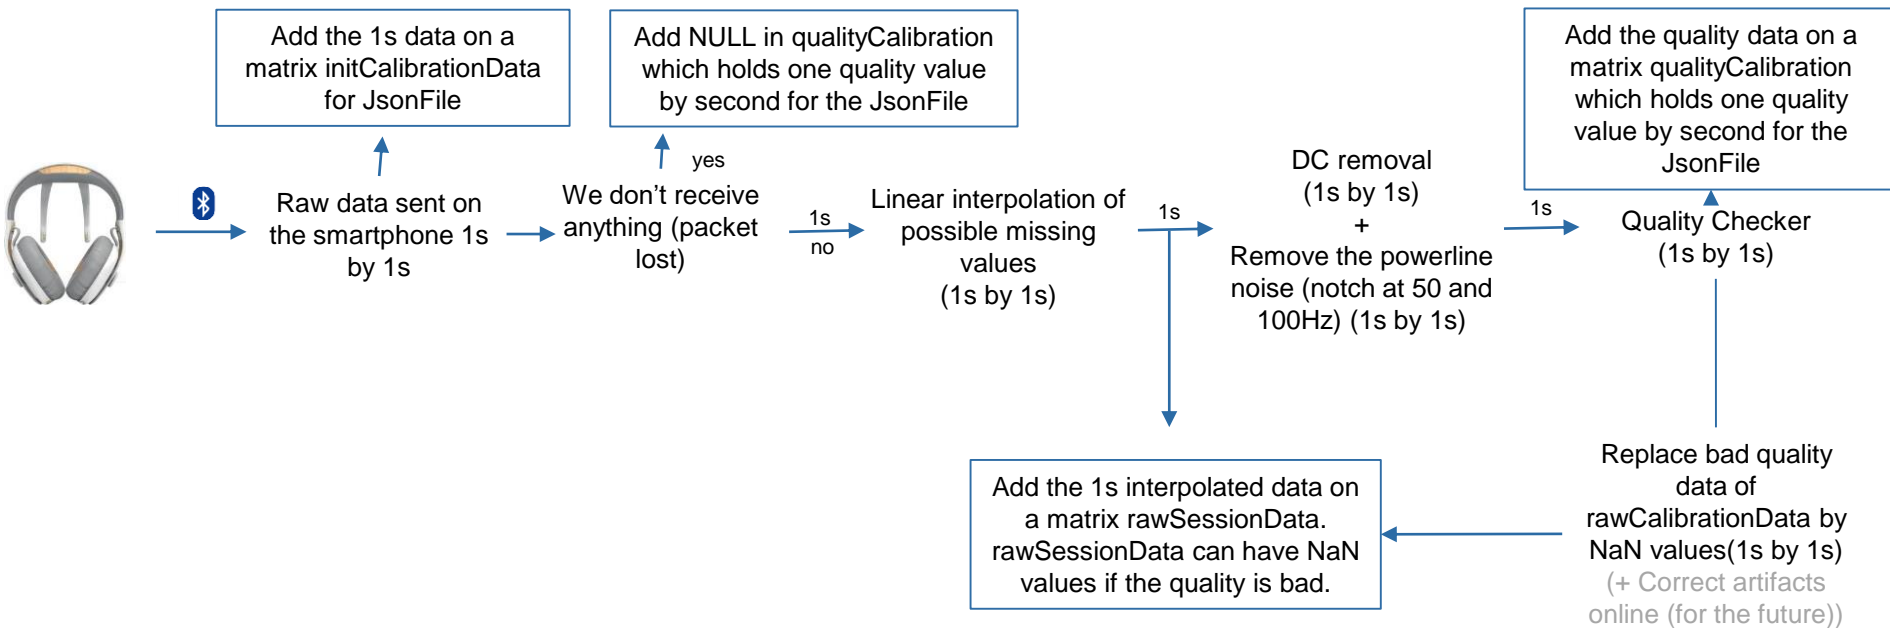


This is **rawCalibrationData** which is used in the next pipelines.

initCalibrationData is sent to the server with the **qualityCalibration** on a Json file. **initCalibrationData** is without any process in order to have the original data for a possible work offline.


At the end of the Calibration

At the end of the Calibration

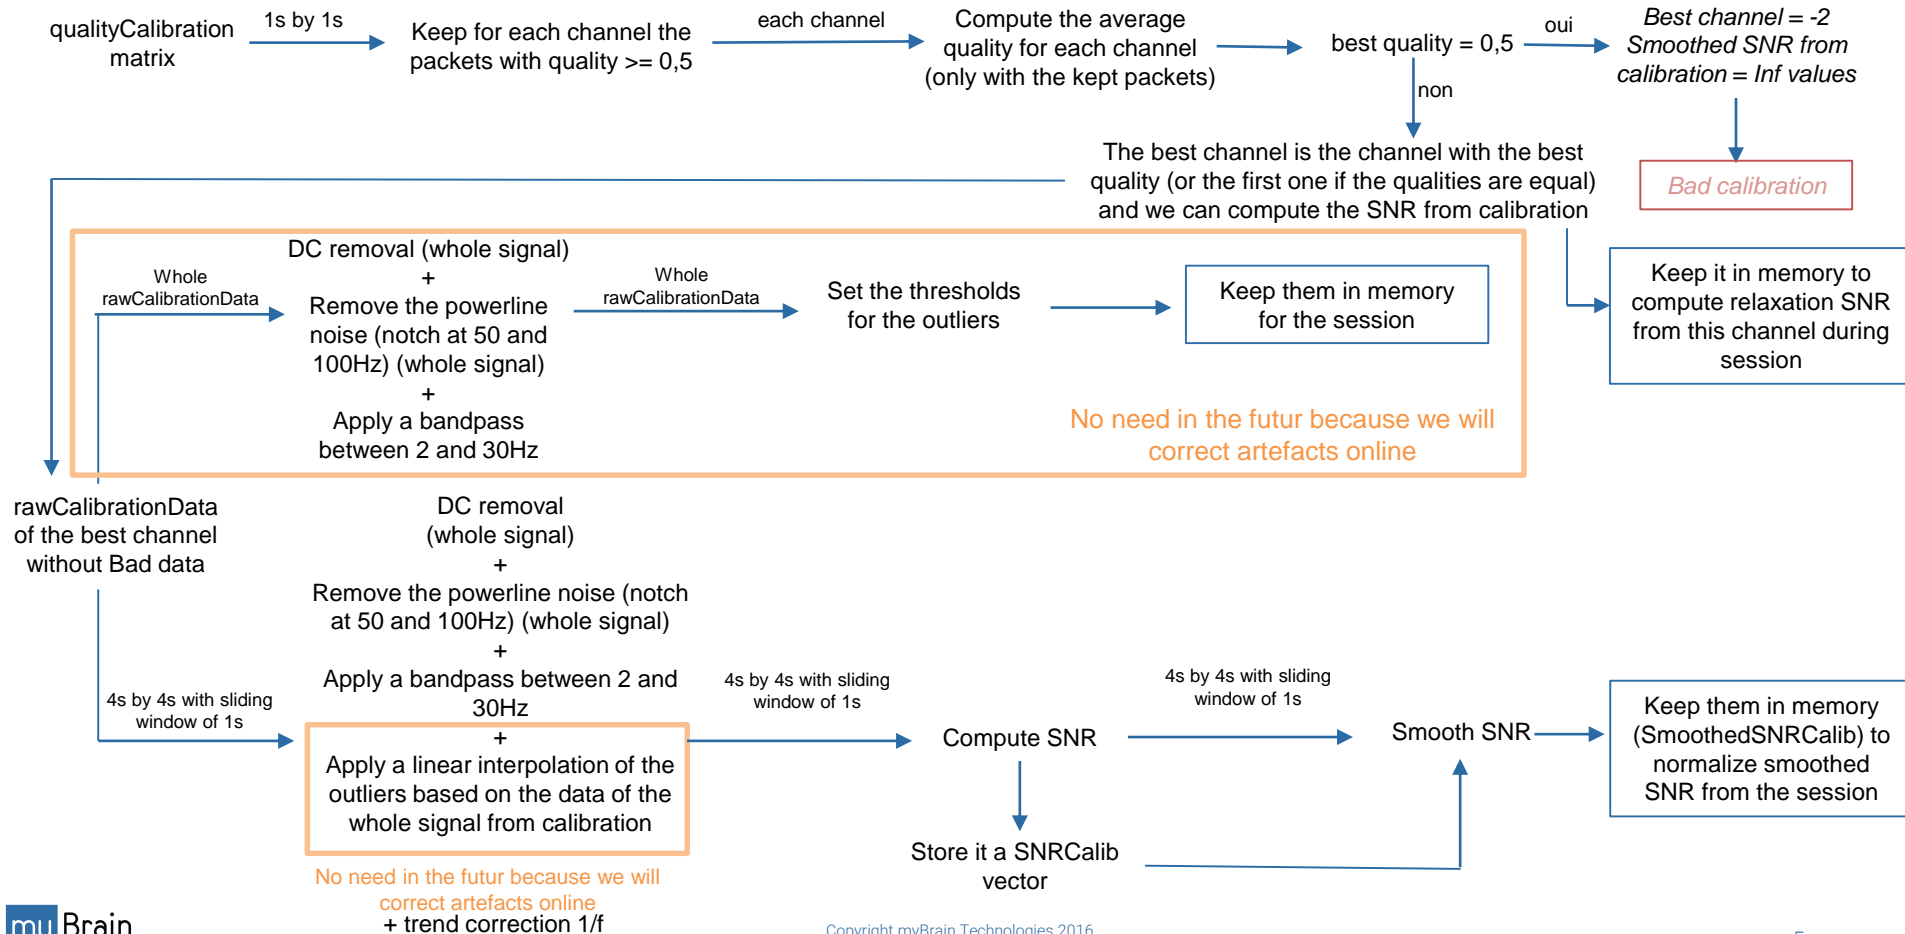

During Session

During Session

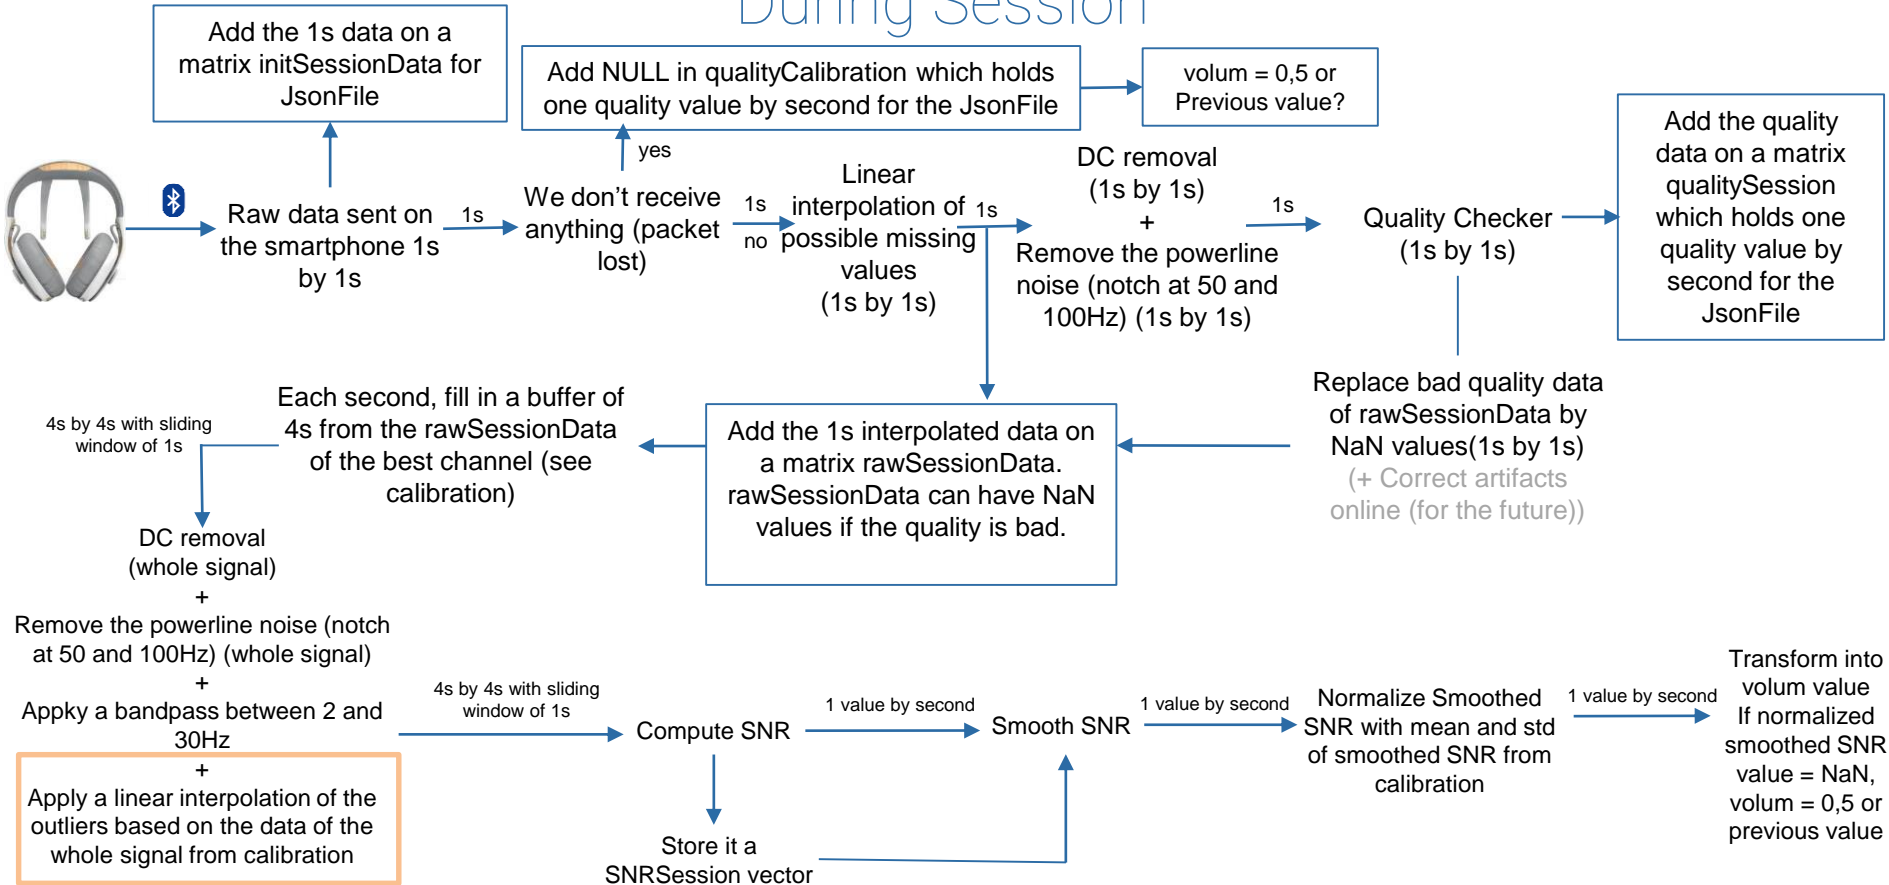

No need in the futur because we will correct artefacts online

+ trend correction 1/f

During Session

This is **rawSessionData** which is used to compute the relaxation index and statistics about relaxation state. The NaN values correspond to bad quality values.

initSessionData is sent to the server with the **qualitySession** on a Json file. **initSessionData** is without any process in order to have the original data for a possible work offline.

At the end of the Session

At the end of the Session

