Testkit-Manager User Guide

Contents

1.	Overview	2
2	Installation	3
3.	Customizing Tests	4
	3.1 Filtering Test Cases	4
	3.2 Using Test Plan	
	3.3 Useful Features	22
4.	Executing Test Cases	34
	4.1 Executing Auto Test Cases	34
	Viewing Report	
	5.1 Viewing Summary Reports	38
	5.2 Viewing Test Report in List View	38
	5.3 Viewing Test Report in Tree View	39
	5.4 Useful Features	42
6.	Statistic Test Result	50

1. Overview

Testkit-Manager, a Graphical User Interface (GUI) front-end in browser, manages auto test cases execution remotely and provides unified web UI to help manual tests execution.

Testkit-Manager has the following features:

- You can filter test cases as per their property value, including architecture, version, category, priority, status, execution type, test suite, type, test set, and component. After that, you can view the detailed information of the test cases.
- You can save the detailed test case information as a test plan, and load, delete, or execute the test plan.
- You can install, update, and delete test case packages.
- You can execute both auto test cases and manual test cases as well as add test result to manual test cases.
- After executing test cases, Testkit-Manager generates a report automatically. After that, you can view, compare, delete, submit, and export the report.

2. Installation

- 1. git source code
 - git clone https://github.com/testkit/testkit-manager.git
- build rpm package
 - cd testkit-manager; ./pack
- 3. install dependence packages on host
 - Host (ubuntu11.10)
 - sudo apt-get install libxml-simple-perl
 - sudo apt-get install libdigest-sha-perl
 - sudo apt-get install libjson-perl
 - sudo apt-get install libio-pty-easy-perl
 - sudo apt-get install libxml-libxslt-perl
 - sudo apt-get install cpanminus
 - sudo cpanm JSON
 - sudo apt-get install rpm
 - Host (fedora17)
 - sudo yum install wget
 - sudo yum install perl-libxml-perl
 - sudo yum install perl-App-cpanminus
 - sudo yum install perl-Digest-SHA
 - sudo yum install perl-XML-Simple
 - sudo yum install perl-XML-LibXSLT
- 4. install testkit-manger on host
 - Host (ubuntu11.10)
 - sudo rpm -ivh testkit-manager-x.x.x-x.noarch.rpm --nodeps
 - Host (fedora17)
 - sudo rpm -ivh testkit-manager-x.x.x-x.noarch.rpm
- 5. install 'sdb' on host
 - sudo cp <somewhere>/sdb /usr/bin
 - sudo chmod 755 /usr/bin/sdb
- 6. connect device
 - power on device
 - connect USB
 - type command 'sudo sdb devices' from the host to check if the device is really connected
- 7. configure repository of test packages

Please put test packages to /home/package

If you have your own place to save the test packages, you also can configure the repository of test packages in configuration file '/opt/testkit/manager/CONF'

repo_url=<repo address>

<repo address> can be a remote server address or a local path on the host machine

- 8. startup
 - type command 'sudo /opt/testkit/manager/webapps/bin/testkit_start.pl' from the host
 - open web page on browser: http://<test-machine-name>:8899

3. Customizing Tests

3.1 Filtering Test Cases

You can filter test cases according to their property values:

① Architecture ② Version ③ Category ④ Priority ⑤ Status ⑥ Execution Type ⑦ Test suite ⑧ Type ⑨ Test set ⑩ Component

To filter test cases, perform the following steps:

- 1. Log in to http://localhost:8899.
- 2. Click the **CUSTOM** tab.

When the tab page is refreshing, all the buttons are disabled, and the progress bar is displayed on the right top of the tab page, as shown by [1] in Figure 3-1.



Figure 3-1 CUSTOM tab page in loading progress

After the tab page is refreshed, some buttons are enabled, and the progress bar is hidden. The tab page:

- Displays **Filter**, **View**, and **Update** on top, as shown by [1] in Figure 3-2.
- Lists installed packages, as shown by [2] in Figure 3-2.
- Lists uninstalled or later-version packages which are scanned from repos, as shown by [3] in Figure 3-2.

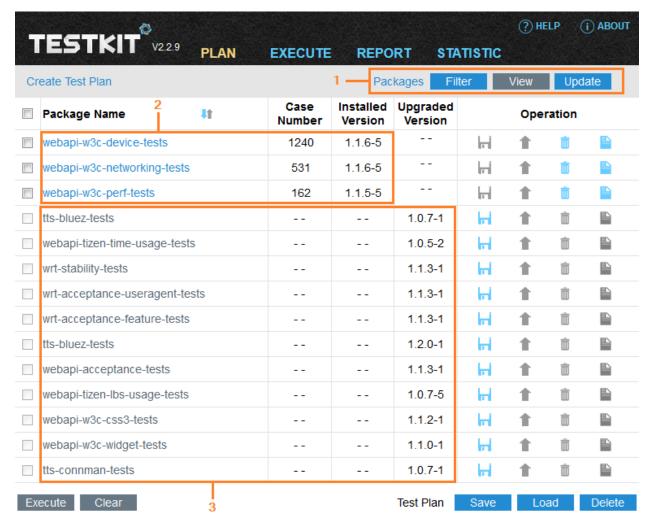


Figure 3-2 CUSTOM tab page

3. Click Filter.

Options display, as shown by [2] in Figure 3-3. If you click **Filter** button again, options are hidden.

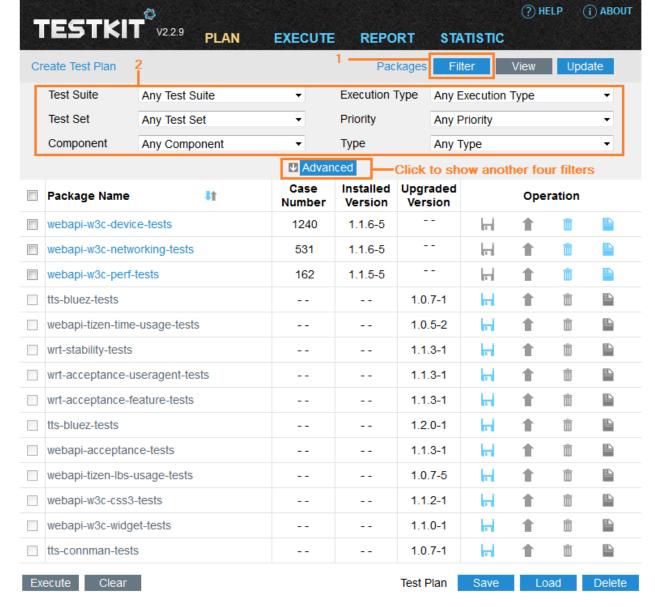


Figure 3-3 Options on the Custom tab page

4. Take the **Priority** and **Execution type** options for example.

Note: Assume that all the 10 options' value are initial values "Any ***". All the installed test case packages display.

(1). Select **P3** from the **Priority** checkbox.

The test case packages display, which include test cases whose priority is P3, as shown in Figure 3-4.

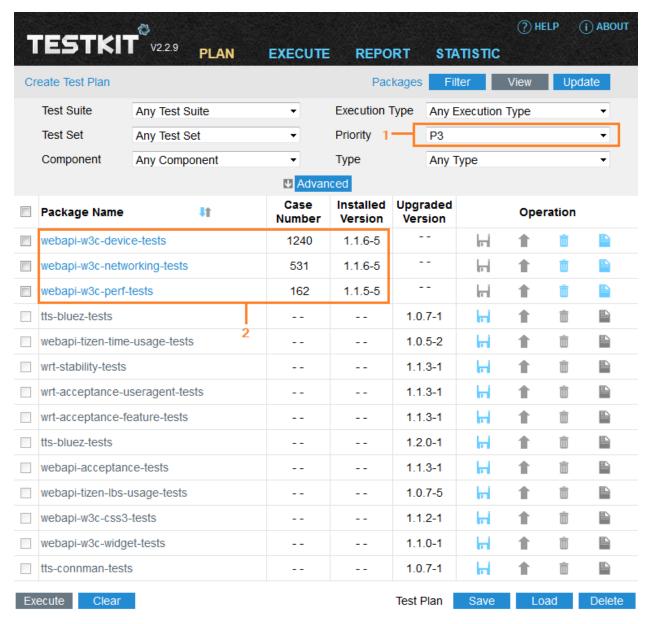


Figure 3-4 Test case packages (1)

(2). Select auto from the Execution type check box.

The test case packages display, which include the test cases whose priority is P3 and whose Execution type is auto, as shown in Figure 3-5.

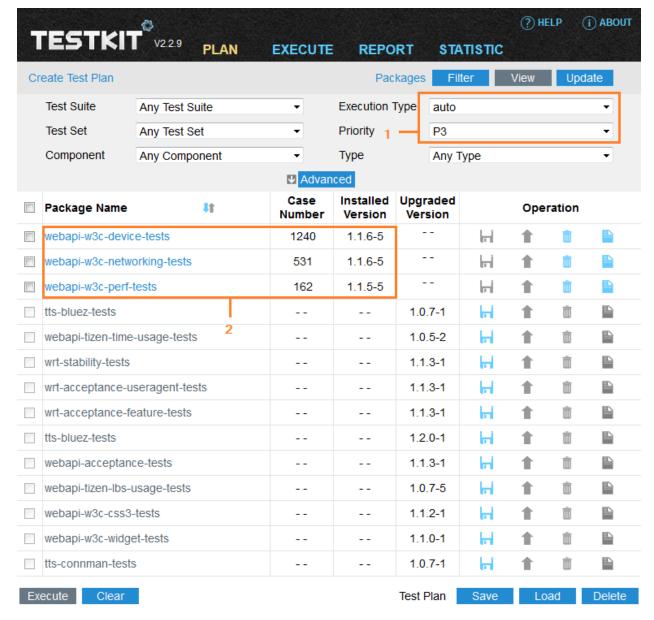


Figure 3-5 Test case packages (2)

Note: You can select other options in the same way. All the required test case packages display.

5. Select a test case package to test, as shown in Figure 3-6.

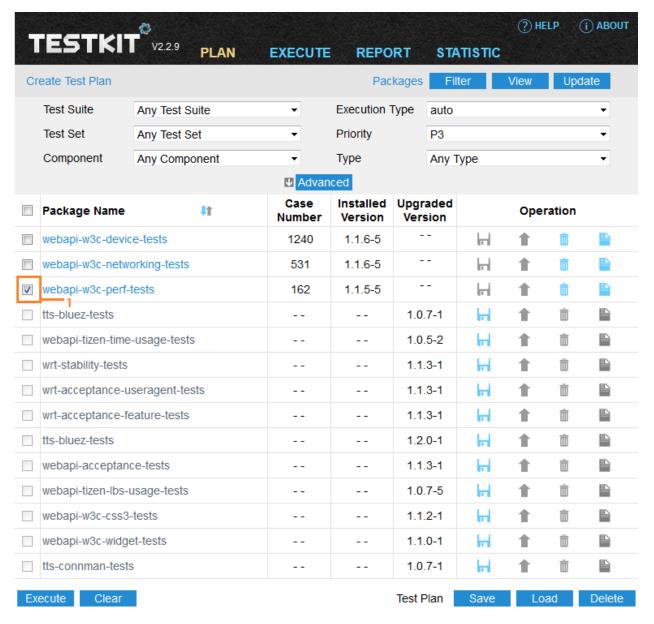


Figure 3-6 Selecting a test case package

3.2 Using Test Plan

A test plan saves the information of filtered test cases for future test. You can save, load, or manage a test plan.

3.2.1 Saving Test Plan

To save a test plan, perform the following steps:

1. Filter test case packages. For details, see section 3.1.

2. Click Save.

Save operations display, as shown by [2] in Figure 3-7. The **Save** button updates to **Close**, as shown by [1] in Figure 3-7. If you click **Close**, the save operations are hidden.

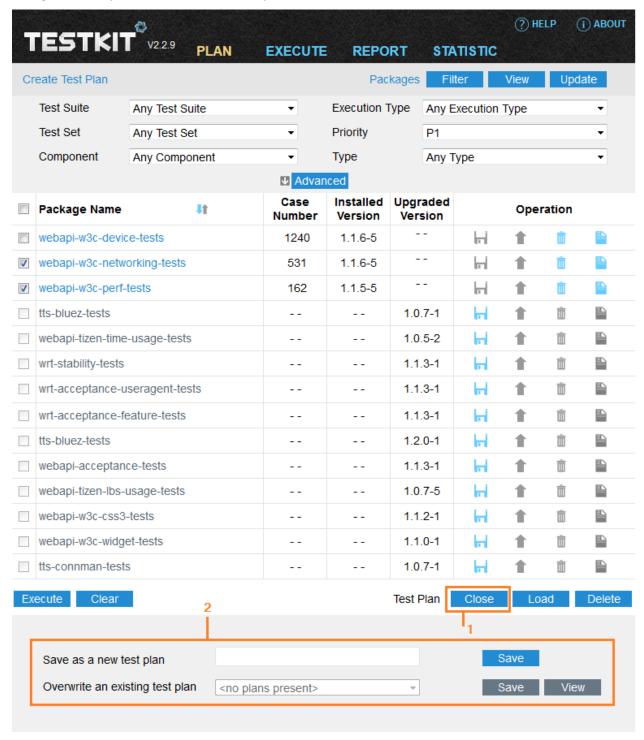


Figure 3-7 Clicking the Save button

3. Enter the test plan name in text box [1]. Then click **Save**, as shown by [2] in Figure 3-8.

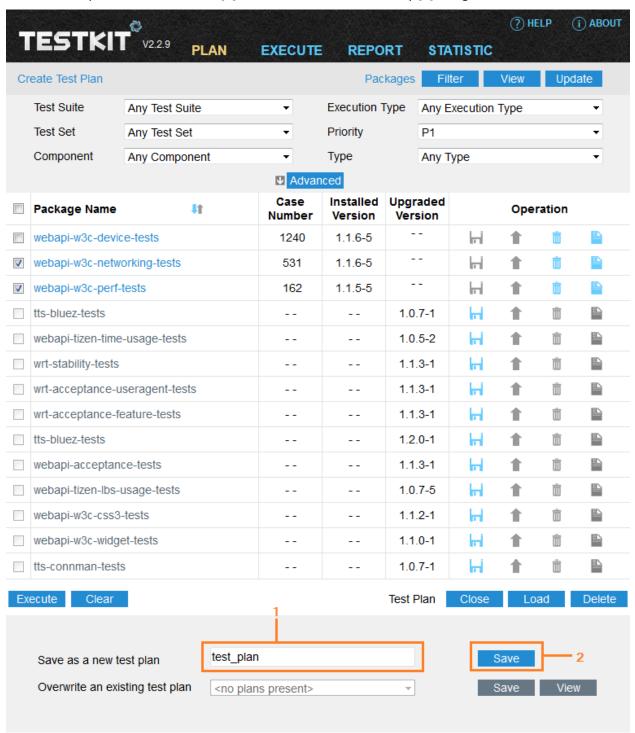


Figure 3-8 Entering the test plan name (1)

4. An alert displays, as shown in Figure 3-9. Click **OK** to save the test plan.

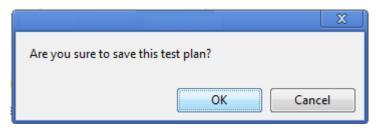


Figure 3-9 Confirmation dialog box (1)

After the test plan is saved successfully, the test plan name displays, as shown by [1] in figure 3-10.

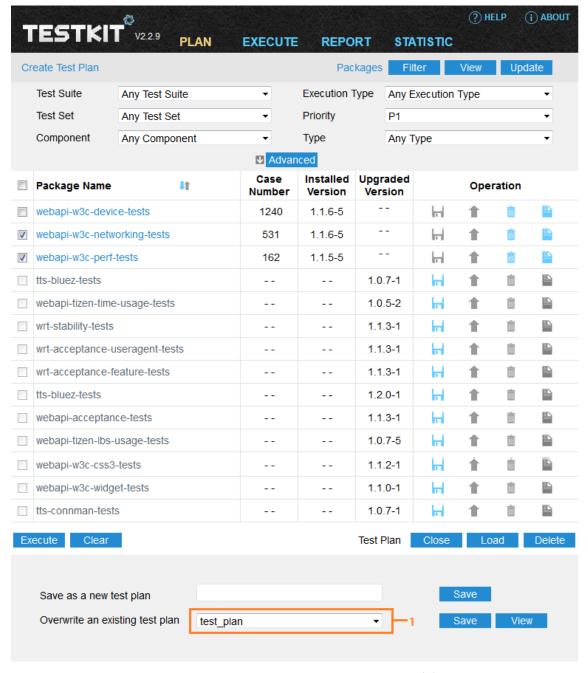


Figure 3-10 Entering the test plan name (2)

5. If there has been a test plan whose name is the same as the entered test plan name, as shown in Figure 3-11:

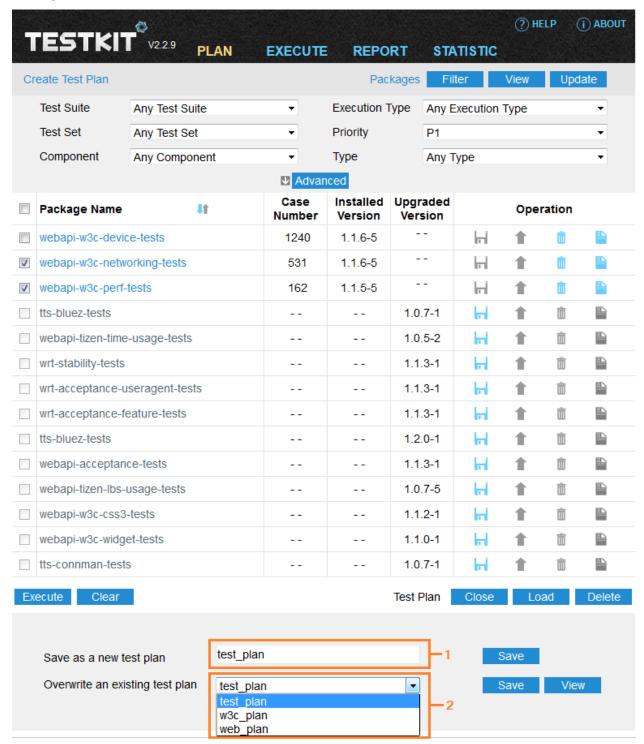


Figure 3-11 Saving an existing test plan name

Click **Save**. A dialog box pops up, reading "Test plan: <Test plan name input> exists, Are you sure to overwrite it?"



Figure 3-12 Confirmation dialog box (2)

- Click OK. → The test plan test_plan overwrites the existing one.
- Click Cancel. → The test plan test_plan is not saved.
- 6. Select a test plan that you want to view, as shown by [1] in Figure 3-13. Then click **View**, as shown by [2] in Figure 3-13.

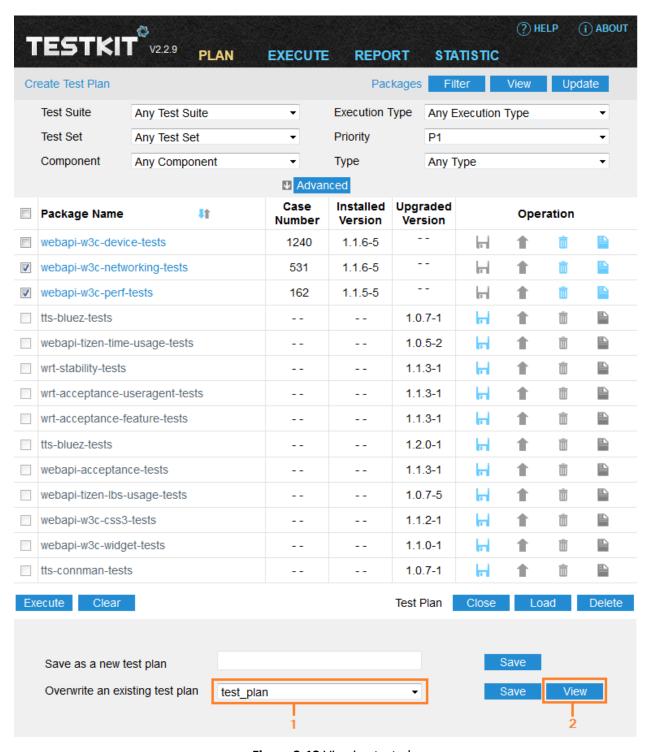


Figure 3-13 Viewing test plan

- 7. A popup page displays, as shown in Figure 3-14.
 - View test plan name, as shown by [1].
 - View packages name, as shown by [2].

- View the filtered value, as shown by [3]. If the filtered value is "Any ***", it displays as "--".
- Click **Close** to close the popup page.

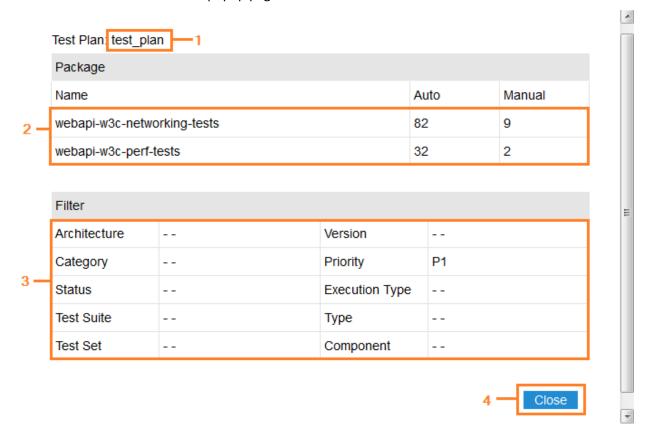


Figure 3-14 Viewing popup page

Note:

Do not leave **test plan name** blank. If you click **Save** without entering a test plan name, an alert pops up, as shown in Figure 3-15. Click **OK**.

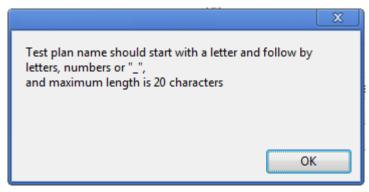


Figure 3-15 Confirmation dialog box (3)

3.2.2 Loading Test Plan

To load a test plan, perform the following steps:

1. Click **Load**, as shown in Figure 3-16.

	ESTKIT V2.2.9 PLAN	EXECUTE	REPO	RT STA	TISTIC			
Cr	eate Test Plan		Packages F			View	Upo	late
	Package Name	Case Number	Installed Version	Upgraded Version		Ope	ration	
	webapi-w3c-networking-tests	531	1.1.6-5		Ы	1	Ô	
	webapi-w3c-perf-tests	162	1.1.5-5		Н	1	Ò	
	tts-bluez-tests			1.0.7-1	Н	1	Ô	
	webapi-tizen-alarm-usage-tests			1.0.6-1	Н	1	Ô	
	webapi-tizen-time-usage-tests			1.0.5-2	Н	1	Ô	
	tts-bluez-tests			1.2.0-1	Н	1	Ô	
	webapi-w3c-device-tests			1.1.6-5	Н	1	Ô	
	webapi-acceptance-tests			1.1.3-1	Н	1	Ô	
	webapi-tizen-lbs-usage-tests			1.0.7-5	Н	1	Ē	
	webapi-w3c-css3-tests			1.1.2-1	Н	1	Ē	
	webapi-w3c-widget-tests			1.1.0-1	Н	1	Î	
	webapi-nonw3c-tests			1.1.6-5	Н	1	Ē	
	tts-connman-tests			1.0.7-1	Н	1	Î	

Figure 3-16 Clicking the Load button (1)

2. Load operations display, as shown by [2] in Figure 3-17. The **Load** button updates to **Close**, as shown by [1] in Figure 3-17. If you click **Close**, load operations are hidden. Select a test plan name, and click **Load**.

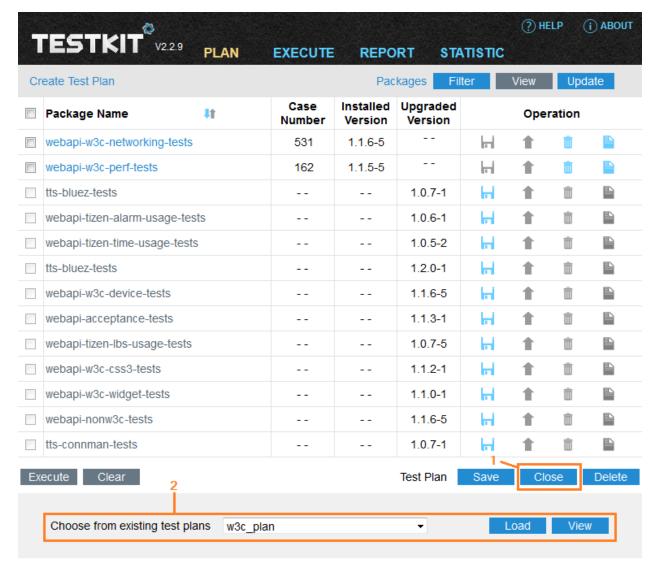


Figure 3-17 Clicking the Load button (2)

3. If there are missing packages that need to be installed. The number of missing packages will display on the top , as shown by [1] in Figure 3-18. The number of installing packages will display , as shown by [2]. After finish installing, the results will display, as shown by [3] [4] . If there are packages that fail to be installed, the test plan would not be loaded, and you can click link, as shown by [6] to refresh the page. If all the packages have been installed successfully, the test plan will be loaded automatically.

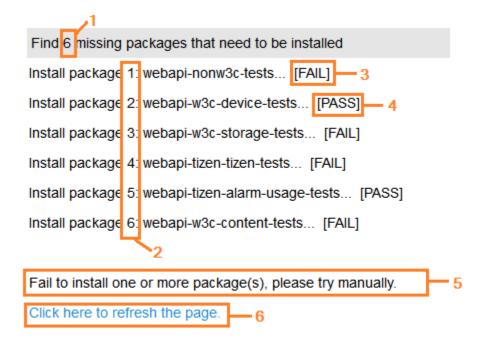


Figure 3-18 Test plan loaded

4. Click the **View** button to view the test plan, as shown in Figure 3-17. For details, see step 7 in section 3.2.1.

3.2.3 Deleting Test Plan

To **delete** a test plan that has been saved, perform the following steps:

1. Click **Delete**, as shown in Figure 3-19.

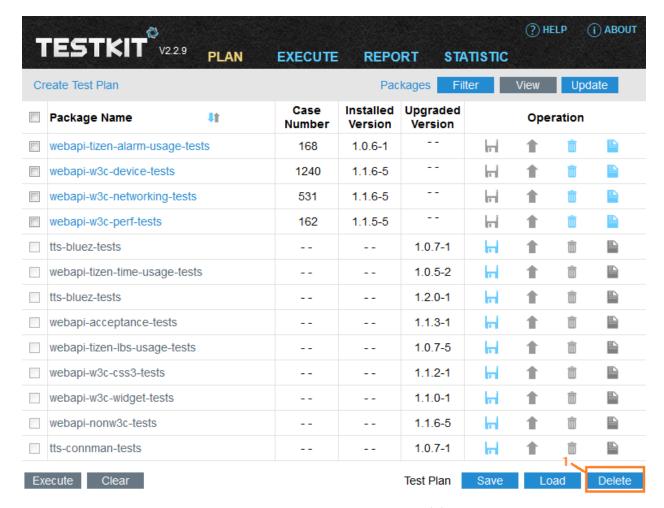


Figure 3-19 Deleting test plan (1)

2. Delete operations display, as shown by [2] in Figure 3-20. The **Delete** button updates to **Close**, as shown by [1] in Figure 3-20. If you click the **Close** button, the delete operations are hidden.

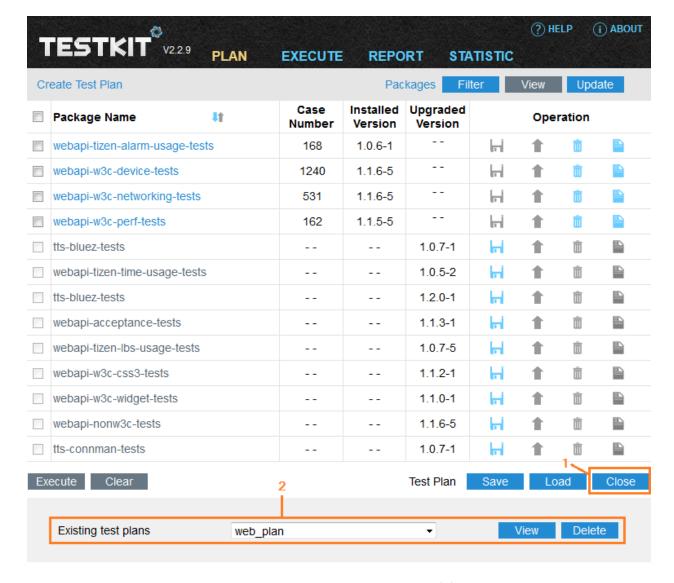


Figure 3-20 Managing test plan (2)

- 3. Select a test plan name, and click the **View** button. View popup page will display. For details, see step 7 in section 3.2.1.
- 4. Select one test plan name, and click the **Delete** button. An alert pops up, as shown in Figure 3-21. Click **OK**. The test plan is deleted.

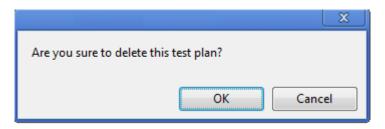


Figure 3-21 Confirmation dialog box (4)

3.2.4 Executing Test Plan

- Execute an existing test plan:
 - 1. Type the test plan name and click **Load**.

The test plan is loaded and the page automatically refreshes.

- 2. Click **Execute**. The page refreshes and the test plan is executed.
- Execute a temporary test plan:
 - 1. Select a test case package. For details, see section 3.1.
 - 2. Click **Execute**. The page refreshes and the test plan is executed.

3.3 Useful Features

3.3.1 Viewing Test Case Information

To view test case information, perform the following steps:

1. Click **view** icon, as shown by [1] in Figure 3-22. Or Click checkbox and click view button, as shown by [1] [2] in Figure 3-23. The page refreshes, as shown in Figure 3-22. Current View method is displayed, as shown by [1] in Figure 3-24. Click **List View** to view test cases in list view, as shown by [2] in Figure 3-24.

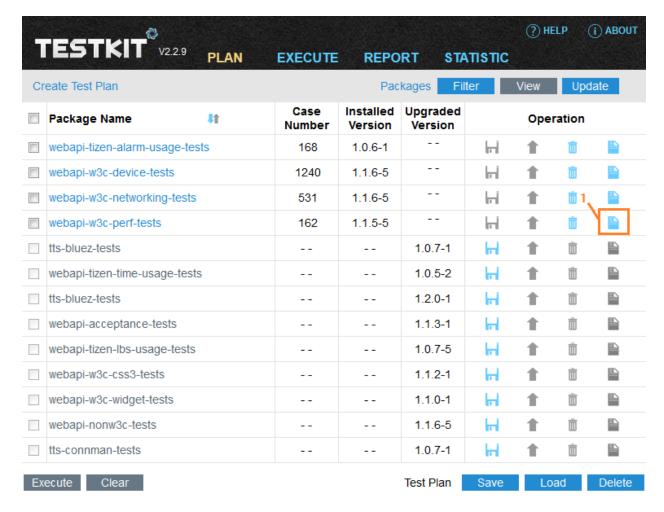


Figure 3-22 Viewing test cases (1)

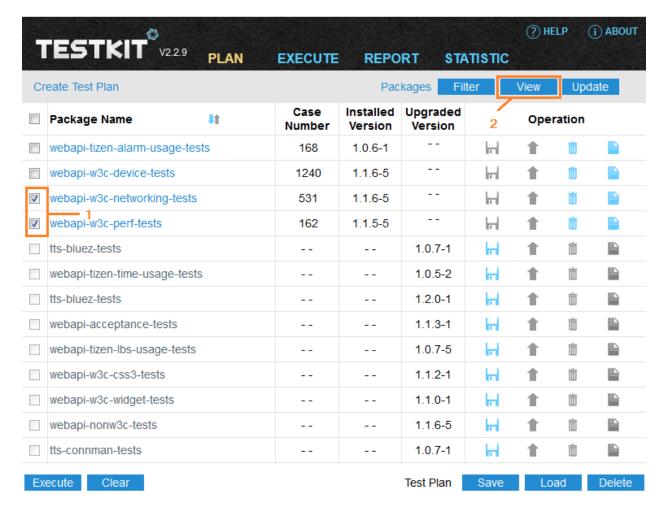


Figure 3-23 Viewing test cases (2)

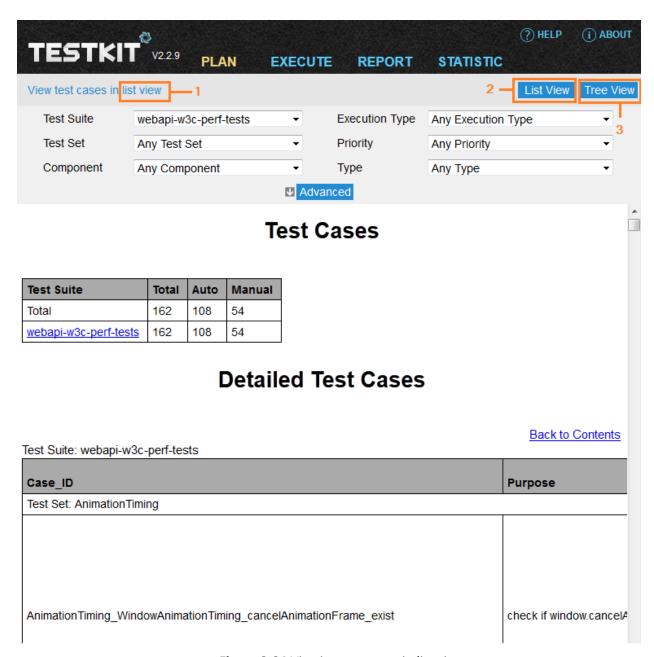


Figure 3-24 Viewing test cases in list view

2. Click the **Tree View** button to view test cases in tree view, as shown by [3] in Figure 3-24. The page refreshes, as shown in Figure 3-25.

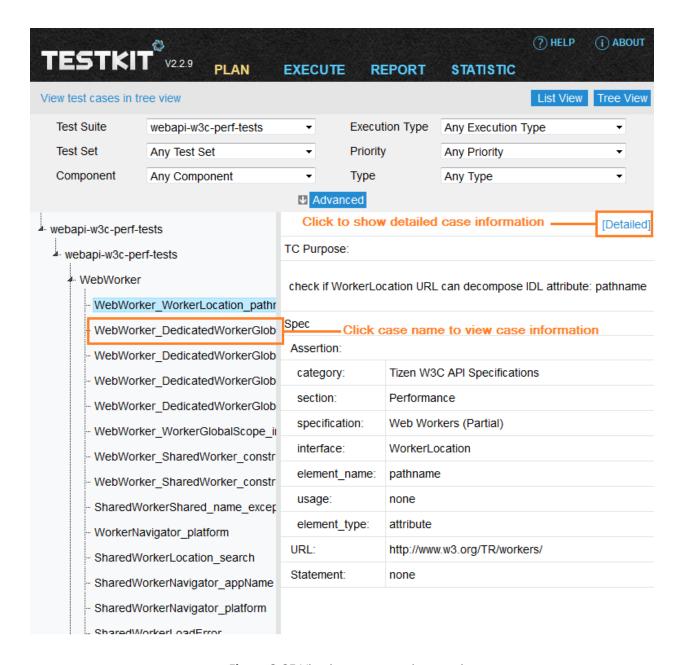


Figure 3-25 Viewing test cases in tree view

3. Click the test case name. The detailed test case information displays in the right pane of the page.

3.3.2 Sorting Test Case Packages

Click the icon. The test case packages are sorted.

Note: You can click the icon again. The test case packages are reversely sorted.

Figure 3-26 shows the details.

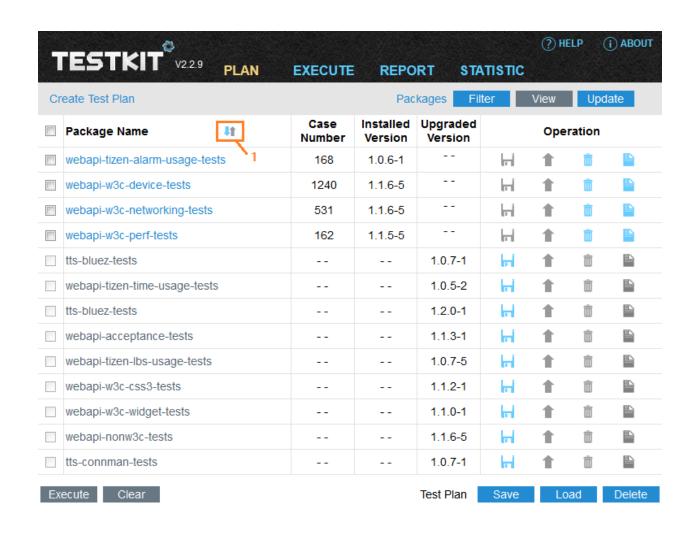


Figure 3-26 Sorting test case packages

3.3.3 Deleting Test Case Package

Click the iii icon, as shown in Figure 3-27.

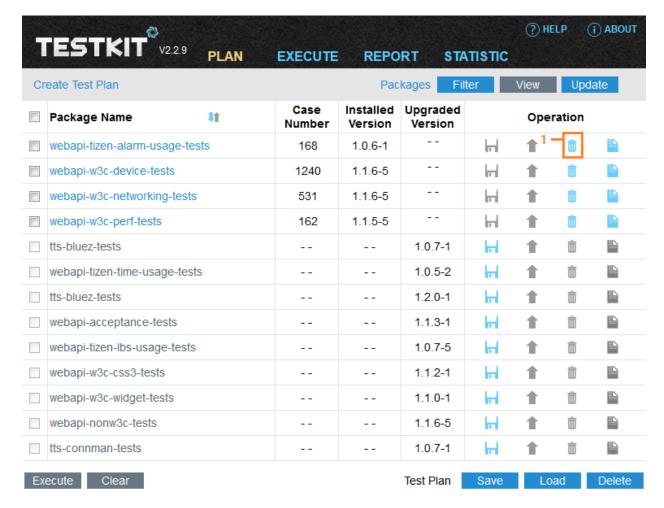


Figure 3-27 Deleting test case package

A dialog box is displayed, asking for your confirmation. Click **OK**.

3.3.4 Listing Test Case Package Information

Click the test case package name. The detailed information displays, as shown in Figure 3-28.

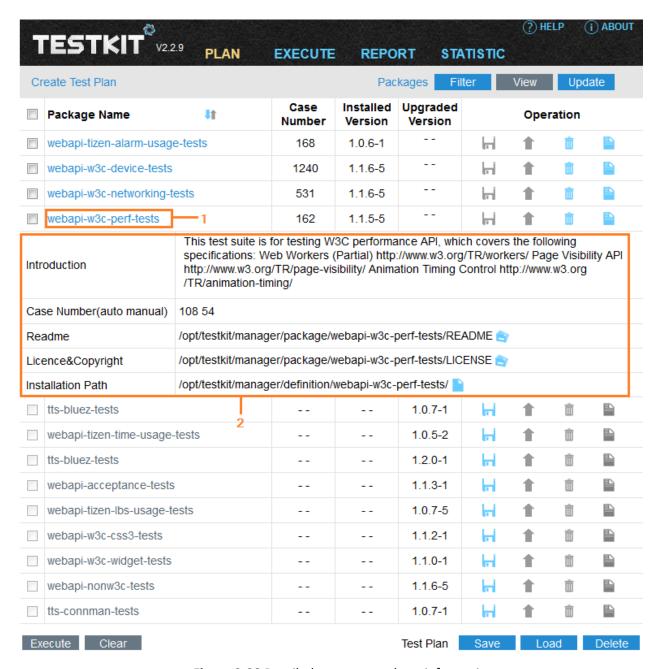


Figure 3-28 Detailed test case package information

3.3.5 Update package list from repo

Click Update button ,testkit-manager will scan package list from repo, and list all the packages that not installed , we can click install icon to install these packages. At the same time, if there are newer version for the package which has been installed from repo, the update icon for this package will be enabled. We can click update icon to update this package to the latest version, as shown in Figure 3-29 and Figure 3-30.

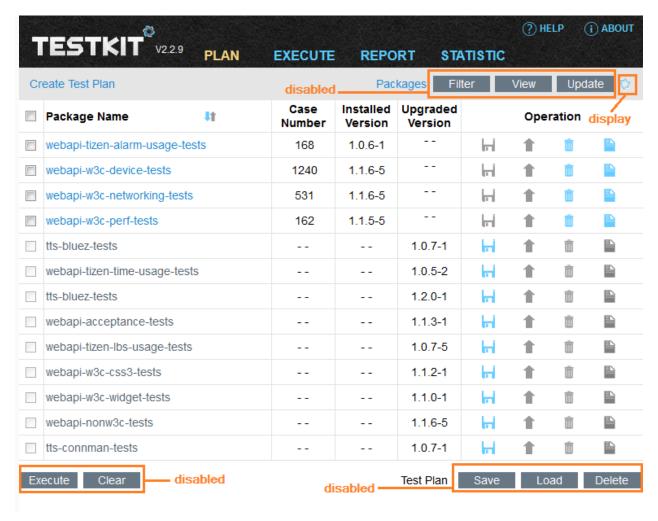


Figure 3-29 Update package list from repo(start)

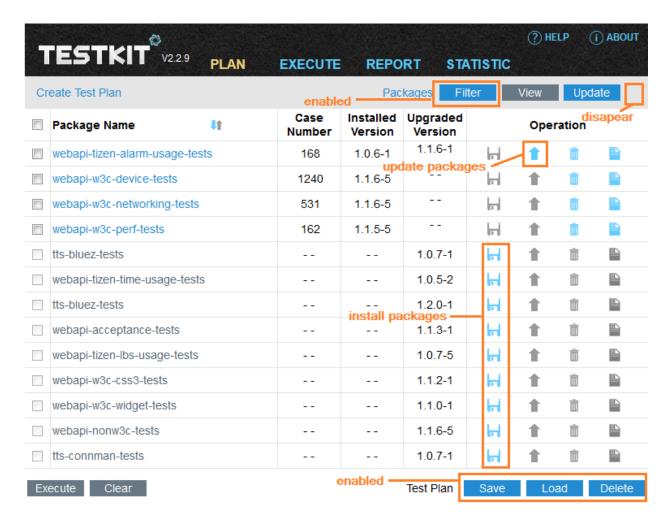


Figure 3-30 Update package list from repo(finish)

3.3.6 Clear all filters and package check box

After selecting filters or package check box, the clear button will be enabled, as shown in Figure 3-31.

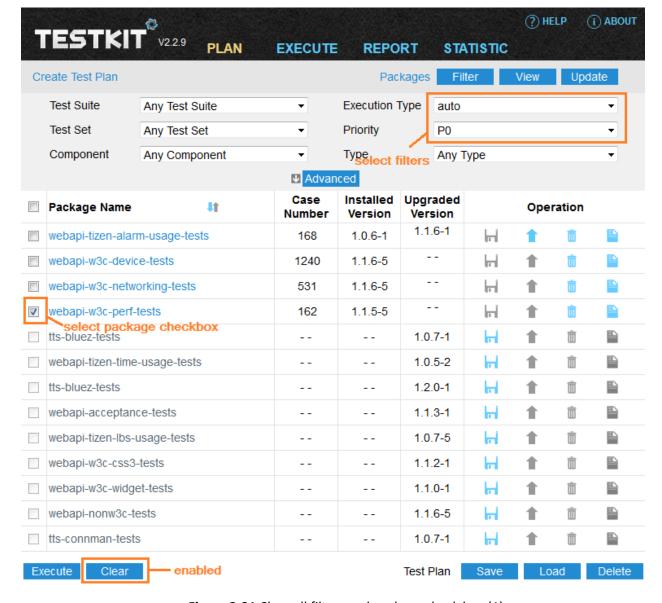


Figure 3-31 Clear all filters and package check box (1)

Click Clear button, all filters and package check box will change to init value, as shown in Figure 3-32.

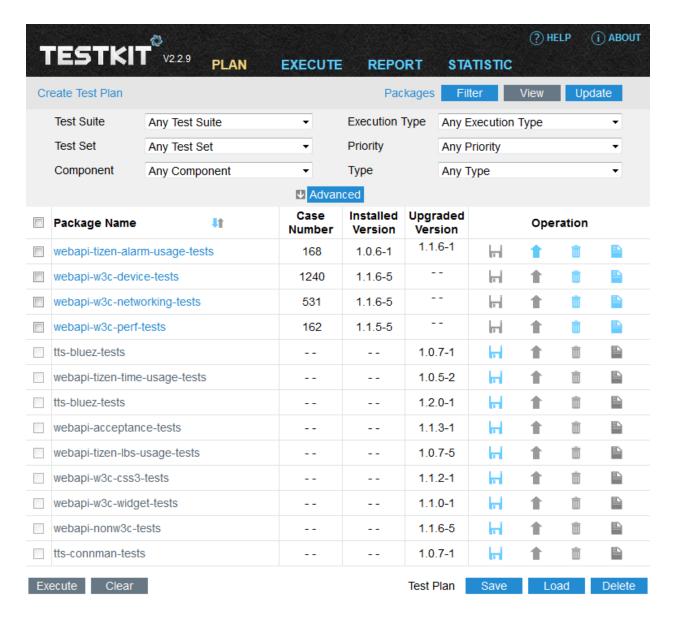


Figure 3-32 Clear all filters and package check box (2)

4. Executing Test Cases

4.1 Executing Auto Test Cases

You can use either of the following two ways to execute test cases:

- Filter test cases or load test plan (with auto test cases), and click Execute on the CUSTOM page.
- Select a test plan and click Execute on the EXECUTE page.

The test plan runs with log. When the profile finishes running, a test report generates automatically. Click the **Stop** button to stop executing the test plan.

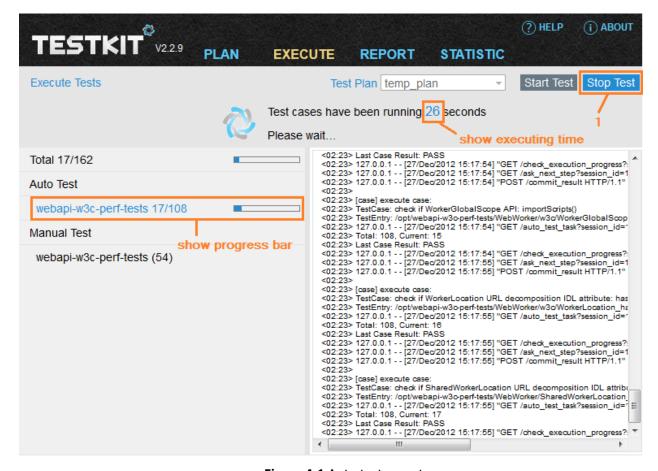


Figure 4-1 Auto test report

4.1 Executing Manual Test Cases

1. When the test plan (with manual test cases) finishes running, the page refreshes, as shown in Figure 4-2. Then, you can add the result of manual test cases:

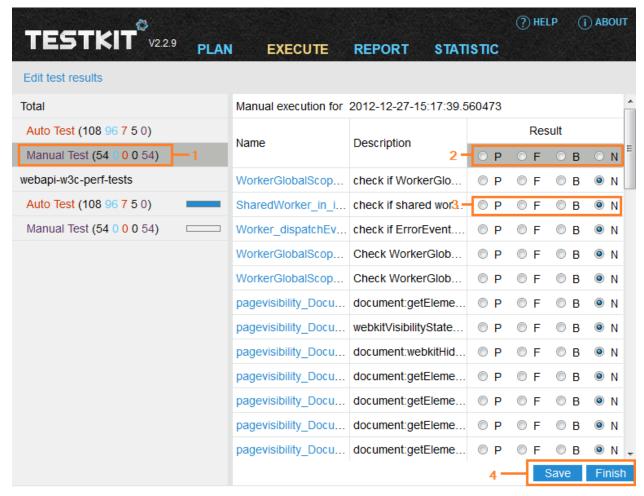


Figure 4-2 Manual test cases

- Click Manual Test. All the manual test cases display on the right pane of the page.
- Run the test cases manually, obtain the results, and then select Pass, Fail, Block or N/A for the test results.
- Click Save.
- Click **Finish** to complete the execution.
- 2. Then, the **REPORT** page refreshes and displays, as shown in Figure 4-3. Current View method is displayed, as shown by [1] in Figure 4-3. Click **Tree View** to view test report in tree view, as shown by [2] in Figure 4-3.

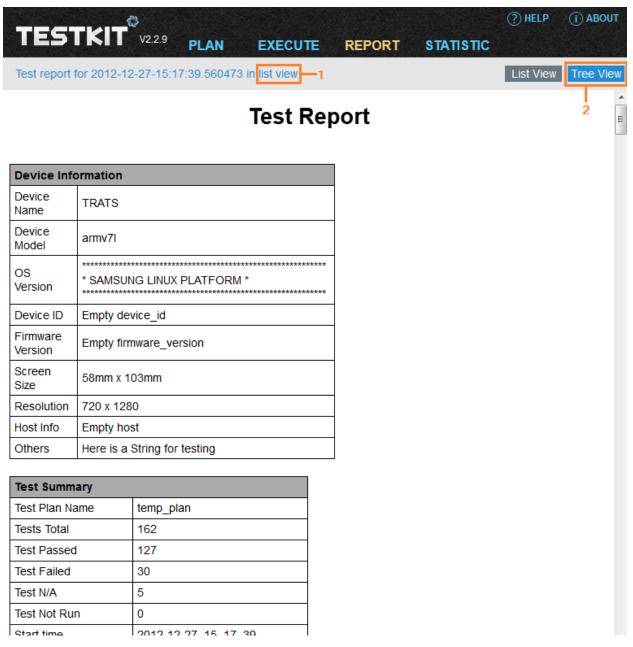


Figure 4-3 Viewing test report in list view

3. View test report in tree view.

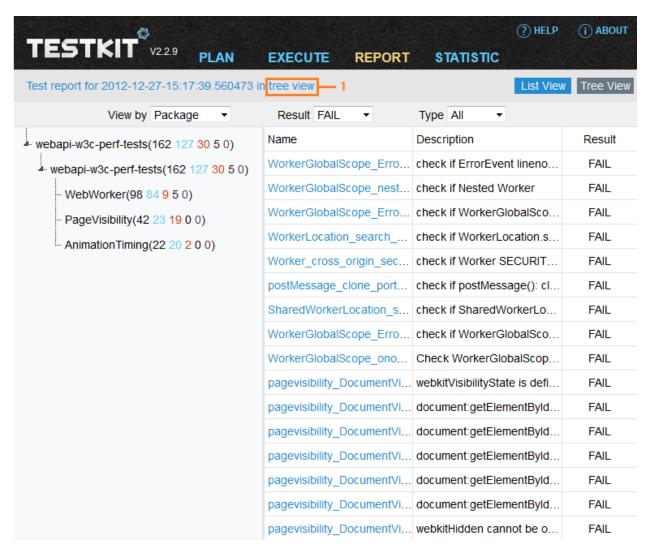


Figure 4-4 View test report in tree view

5. Viewing Report

5.1 Viewing Summary Reports

Click the ² icon to view summary reports, as shown in Figure 5-1. (i) ABOUT ? HELP PLAN **EXECUTE** REPORT STATISTIC Test report for all executions **Test Time** Test Plan Device Name | Status (Auto | Manual) Operation 2013-01-08-15:09:37.226076 temp_plan TRATS Complete | Complete Compare

Figure 5-1 Summary reports

You can view summary information, including:

- Test environment
- Total number of test cases
- Number of passed, failed, and blocked test cases
- Test log

You can also click:

✓

to download consolidated log

5.2 Viewing Test Report in List View

After the icon shown by [1] in Figure 5-1 is clicked, the page refreshes, as shown in Figure 5-2.

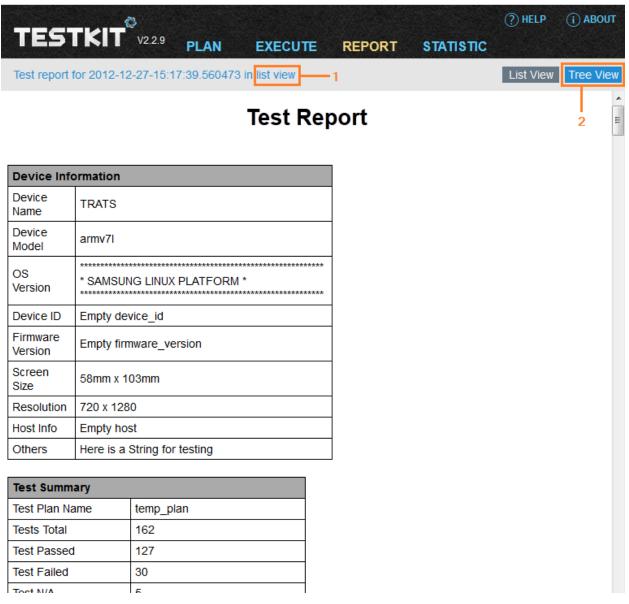


Figure 5-2 Viewing test report in list view

5.3 Viewing Test Report in Tree View

Click the Tree View button in Figure 5-2. The page refreshes, as shown in Figure 5-3.

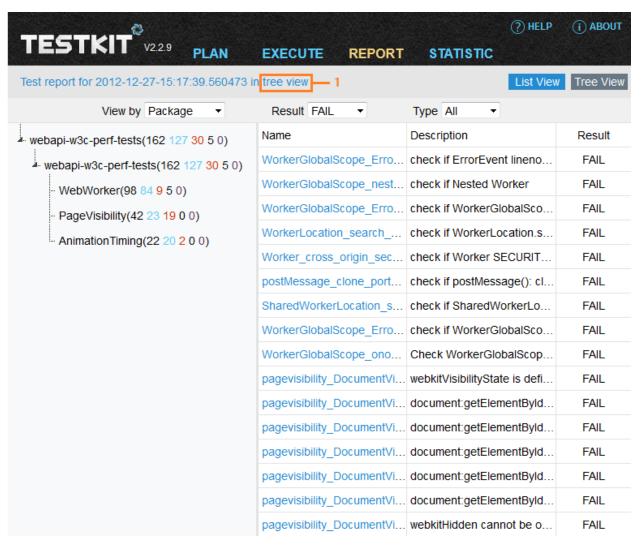


Figure 5-3 Viewing test report in tree view

1. Select **Package** from the **View by:** drop-down list box.

Note: You can view the detailed reports by "Packages", "Component", or "Test type". The following steps use "Packages" as an example.

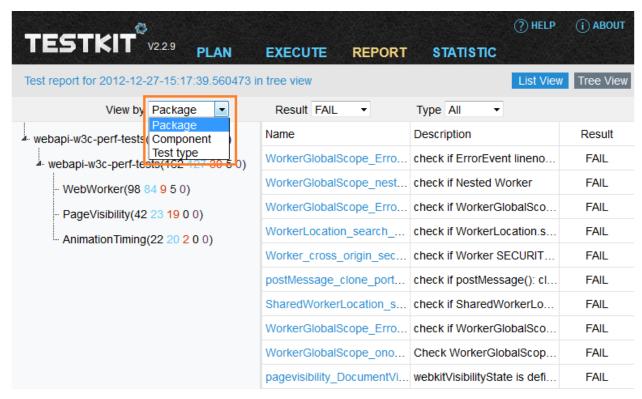


Figure 5-4 Filtering detailed reports

- 2. Filter a test report by selecting **Result** and **Type**, by the same way as step 1.
- 3. Click the test case name to view its detailed information.

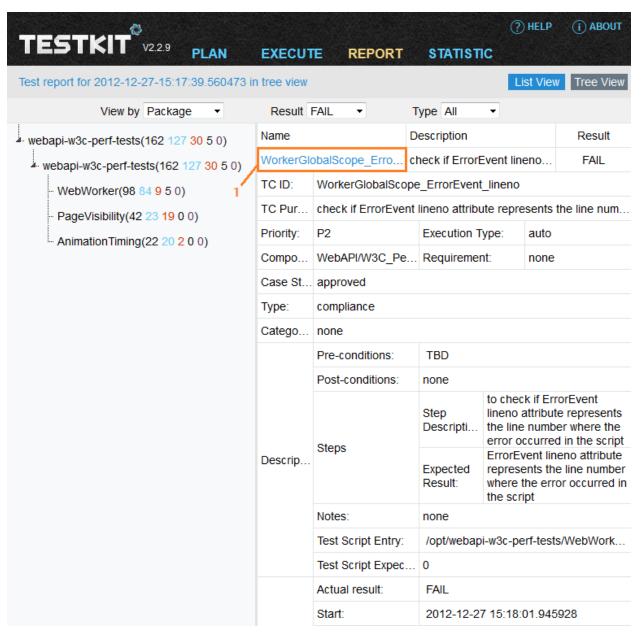


Figure 5-5 Detailed test case information

5.4 Useful Features

5.4.1 Submitting Report

To submit a test report to QA test tools, perform the following steps:

- 1. Log in to http://localhost:8899/.
- 2. Click the **REPORT** tab.

The **REPORT** tab page displays, as shown in Figure 5-6

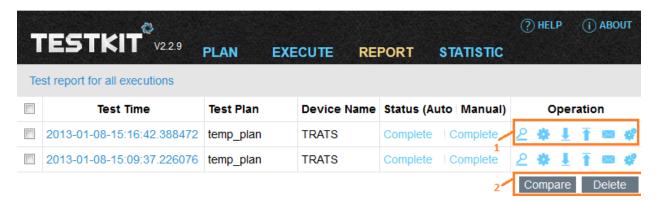


Figure 5-6 Refreshed REPORT tab page

3. Select one or multiple check boxes.

The buttons **Compare and Delete** become available.

4. Click **Submit**, as shown [1] in Figure 5-7.

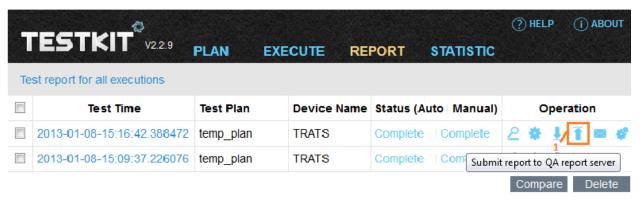


Figure 5-7 Refreshed REPORT tab page

5. The page refreshes, as shown in Figure 5-8.



Figure 5-8 Refreshed REPORT tab page

- (1). Type server name in context Input Server Name.
- (2). Type token in context **Input Token**.

Note: The token is a string which records account and password. You can obtain it after logging in to QA test tools.

(3). Type the report date in context **Input Image Date**.

Note: **%2E** is used to indicate ".". For example, type **20120319%2E5** for "20120319.5".

(4). Select values from the target, testtype, and hwproduct combo boxes, as shown in Figure 5-9.

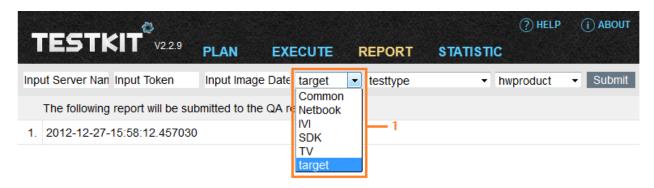


Figure 5-9 Selecting a test report to submit

(5). Click **Submit**, as shown in Figure 5-10. The report is submitted to the QA test tools.



Figure 5-10 Submitting a test report

5.4.2 Comparing Reports

To compare reports, perform the following steps:

1. Select reports, and click the Compare button, as shown in Figure 5-11.

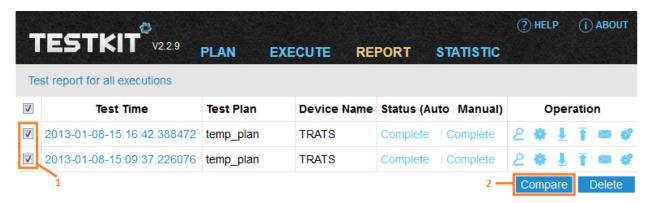


Figure 5-11 Comparing reports (1)

2. The page refreshes, as shown in Figure 5-12.

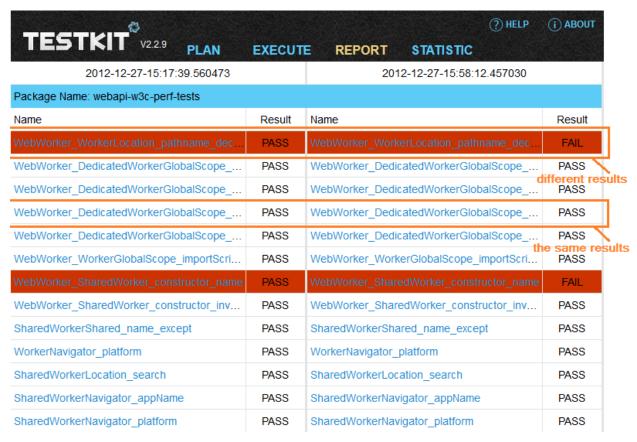


Figure 5-12 Comparing reports (2)

5.4.3 Deleting Report

To delete a test report, perform the following steps:

1. Select one or multiple test reports, as shown in Figure 5-13.

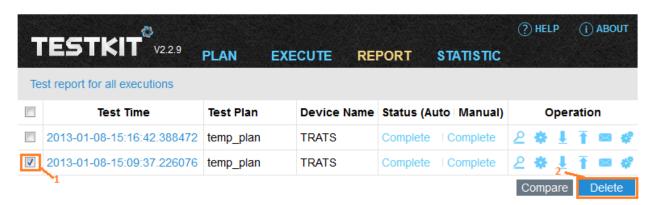


Figure 5-13 Deleting test report(s)

2. Click **Delete**. An alert pops up, as shown in Figure 5-14.



Figure 5-14 Confirmation dialog box (5)

- Click OK. → The report and its child reports are deleted.
- Click Cancel. → The report and its child reports are not deleted.

5.4.4 Rerun cases which are not passed

The results include Fail, Block and N/A, the cases can be reran and be submitted to execute page As Figure 5-15 tells:

• If the results includes Fail, Block and N/A, the ** button becomes available with the title "Rerun cases which are not passed".



Figure 5-15 Rerun test cases in report

1 .Click . The page refreshes, as shown in Figure 5-16. Then, the test cases which are not passed in previous test will be executed again. However, the drop down box of Test Plan will display "rerun+father_report_time"

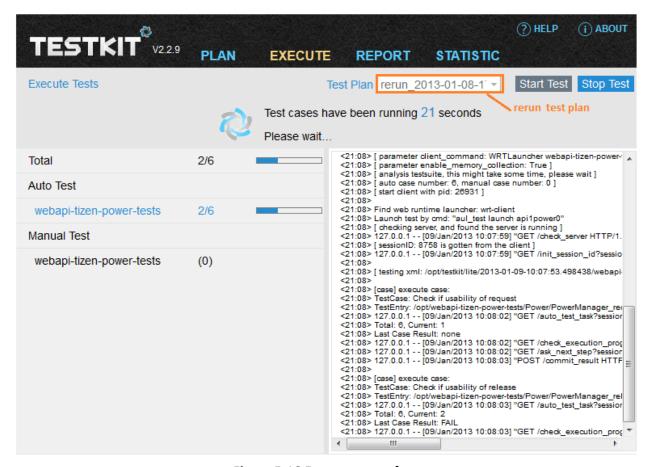


Figure 5-16 Execute page of rerun

2 . The report of rerun will be under the father report and add " . " before its time. As Figure 5-17 tells:

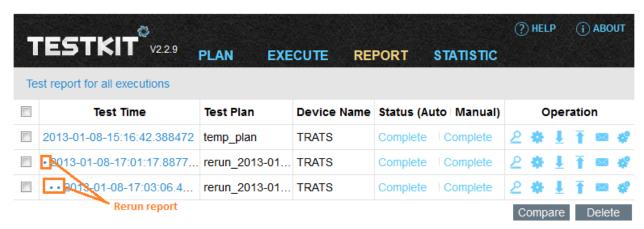


Figure 5-17 Report page includes rerun report

5.4.5 Complete Report with Manual Test Cases

The test case packages include manual test cases whose results need to be submitted to the report manually.

As Figure 5-18 tells:

• If Manual Status is "Incomplete", the ** button becomes available with the title "Continue Execution".

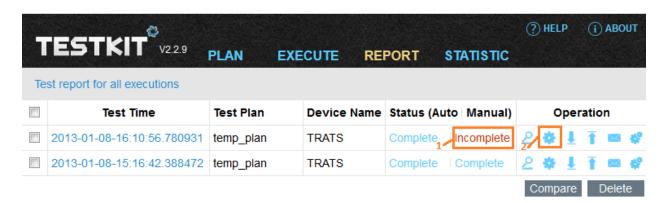


Figure 5-18 Manual test cases report

1 . Click . The page refreshes, as shown in Figure 5-19. Then, you can select the result of manual test cases.

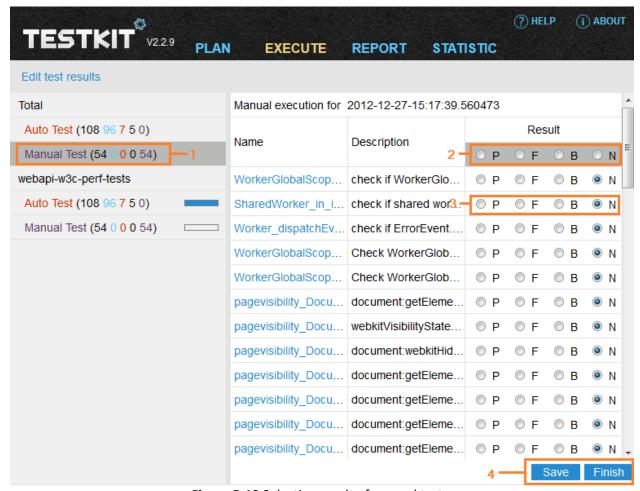


Figure 5-19 Selecting result of manual test cases

1

Caution: Use caution in the following step, for the result cannot be changed after it.

6. Statistic Test Result

1. Click the **STATISTIC** tab to view statistics by package chart. The page refreshes, as shown in Figure 6-1. The filter function becomes available.

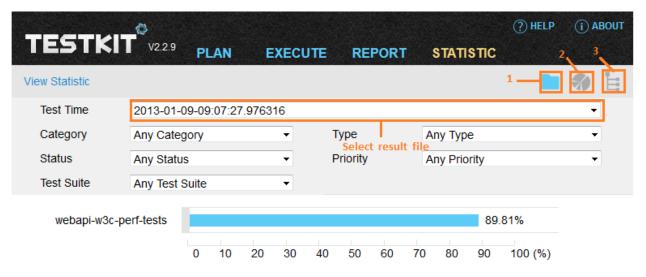


Figure 6-1 Viewing statistics by package chart(results)

2. Click the icon marked by [2] in Figure 6-1 to view statistic by component chart. The page refreshes, as shown in Figure 6-2. The filter function becomes available.

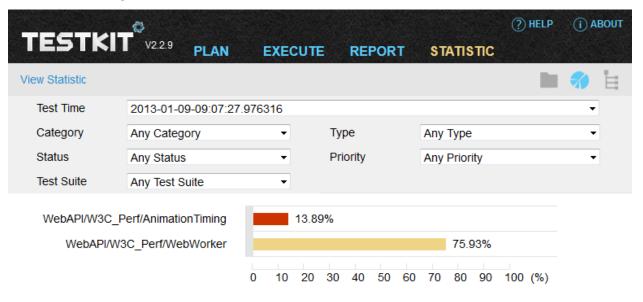


Figure 6-2 Viewing statistics by component chart (results)

3. Click the icon marked by [3] in Figure 6-1 to view statistics by spec chart. The page refreshes, as shown in Figure 6-3. The filter function becomes available.

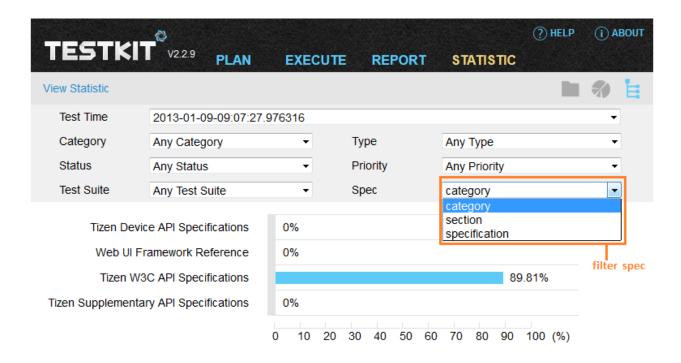


Figure 6-3 Viewing statistics by spec chart(results)

4. Click the spec filter in Figure 6-3 to view statistics by spec chart. The page refreshes, as shown in Figure 6-4 and 6-5. The filter function becomes available.

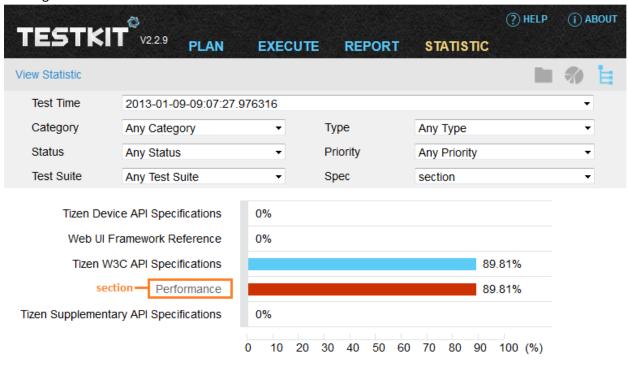


Figure 6-4 Viewing statistics by spec chart(results)

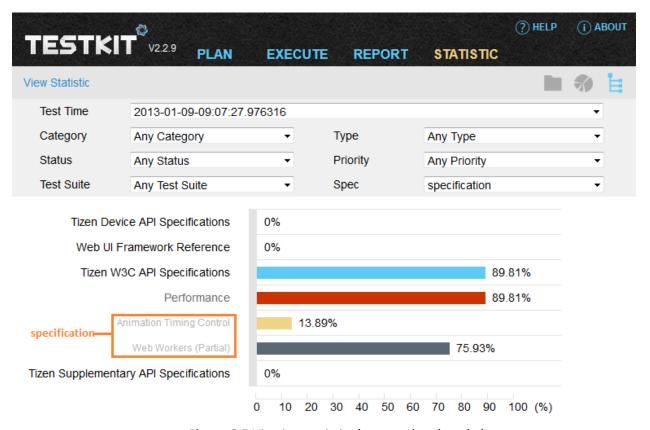


Figure 6-5 Viewing statistics by spec chart(results)