

Topology

SNMP functionality is VERY limited in Packet Tracer!


1. Configure the following SNMP communities on R1:

read-only: Cisco1

read/write: Cisco2

```
R1>en
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#snmp-server community Cisco1 ro
%SNMP-5-WARMSTART: SNMP agent on host R1 is undergoing a warm start
R1(config)#snmp-server community Cisco2 rw
```

2. Use SNMP 'Get' messages via the MIB browser on PC1 to check the following:

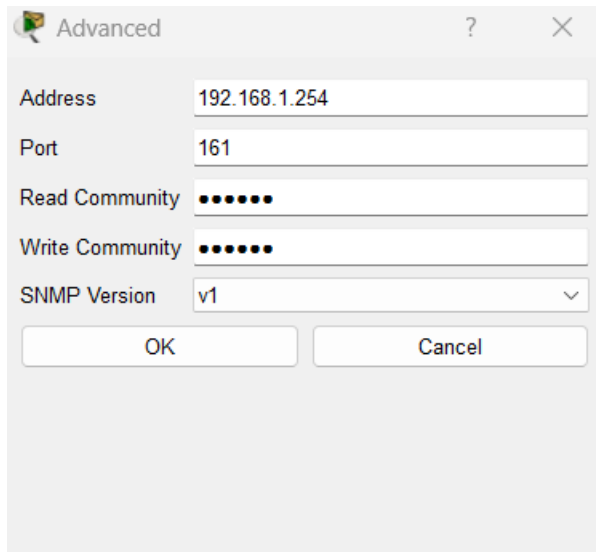


The image shows a dialog box titled "Advanced" with a question mark icon and a close button. It contains the following fields:

- Address: 192.168.1.254
- Port: 161
- Read Community: (masked with dots)
- Write Community: (masked with dots)
- SNMP Version: v1 (dropdown menu)

At the bottom, there are two buttons: "OK" and "Cancel".

Cisco1 and Cisco2 are entered as the Read and Write communities respectively.

- **How long has R1 been running? (system uptime)**

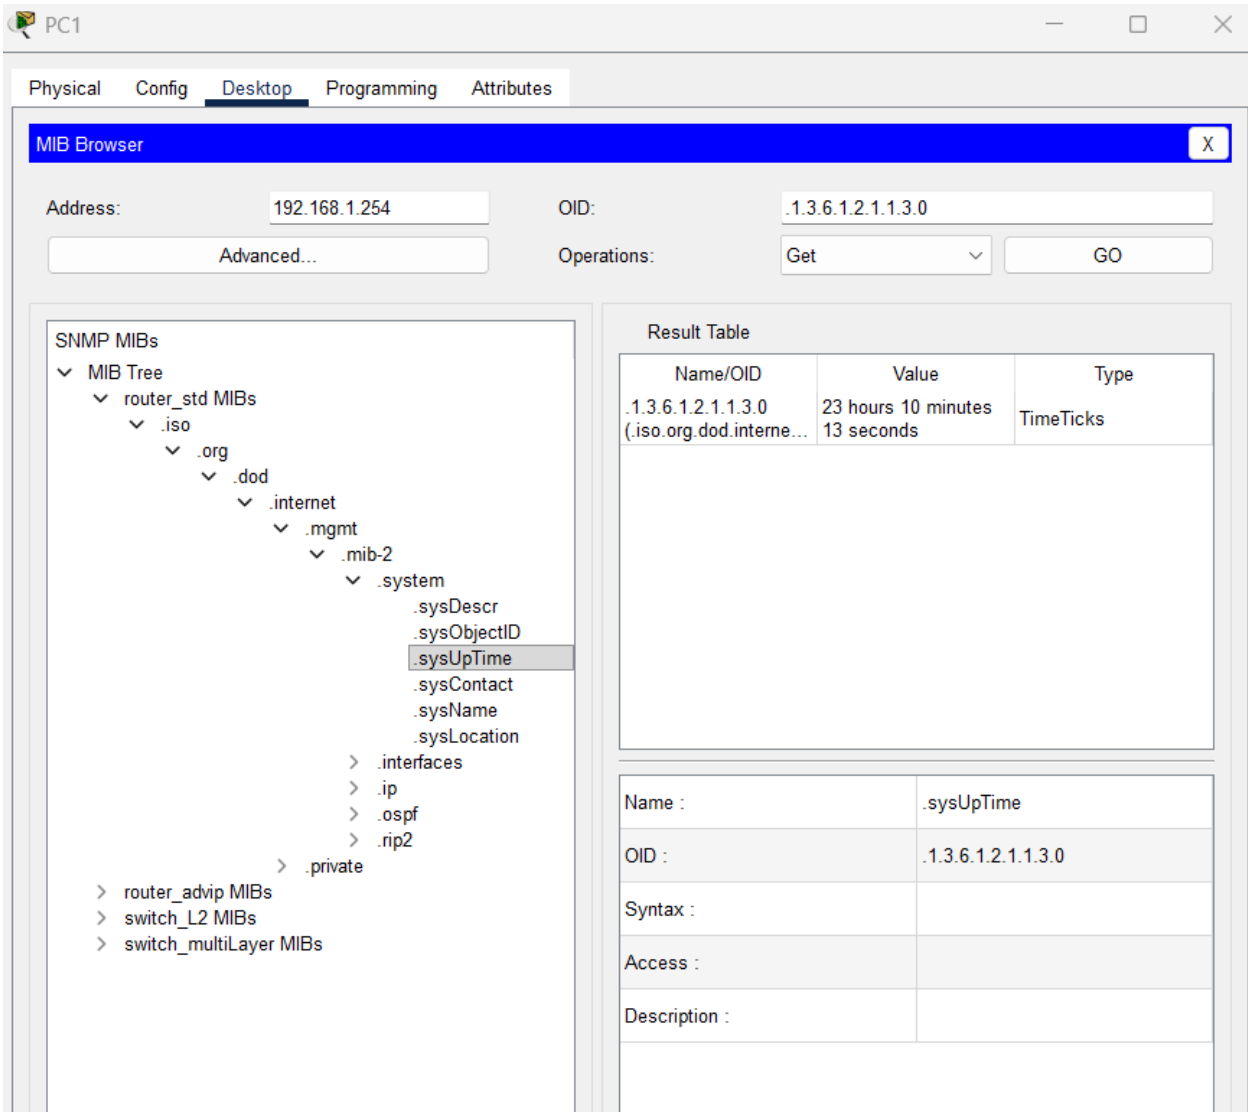

23 hours 10 minutes and 13 seconds

- **What is the currently configured hostname on R1?**

PC1

Physical Config **Desktop** Programming Attributes

MIB Browser X

Address: 192.168.1.254 OID: .1.3.6.1.2.1.1.5.0

Advanced... Operations: Get GO

SNMP MIBs

- ▼ MIB Tree
 - ▼ router_std MIBs
 - ▼ .iso
 - ▼ .org
 - ▼ .dod
 - ▼ .internet
 - ▼ .mgmt
 - ▼ .mib-2
 - ▼ .system
 - .sysDescr
 - .sysObjectID
 - .sysUpTime
 - .sysContact
 - .sysName**
 - .sysLocation
 - > .interfaces
 - > .ip
 - > .ospf
 - > .rip2
 - > .private
 - > router_advip MIBs
 - > switch_L2 MIBs
 - > switch_multiLayer MIBs

Result Table

| Name/OID | Value | Type |
|--|-------|-------------|
| .1.3.6.1.2.1.1.5.0
(.iso.org.dod.interne... | R1 | OctetString |


| | |
|---------------|--------------------|
| Name : | .sysName |
| OID : | .1.3.6.1.2.1.1.5.0 |
| Syntax : | |
| Access : | |
| Description : | |


R1

- **How many interfaces does R1 have?**




- **What are those interfaces?**

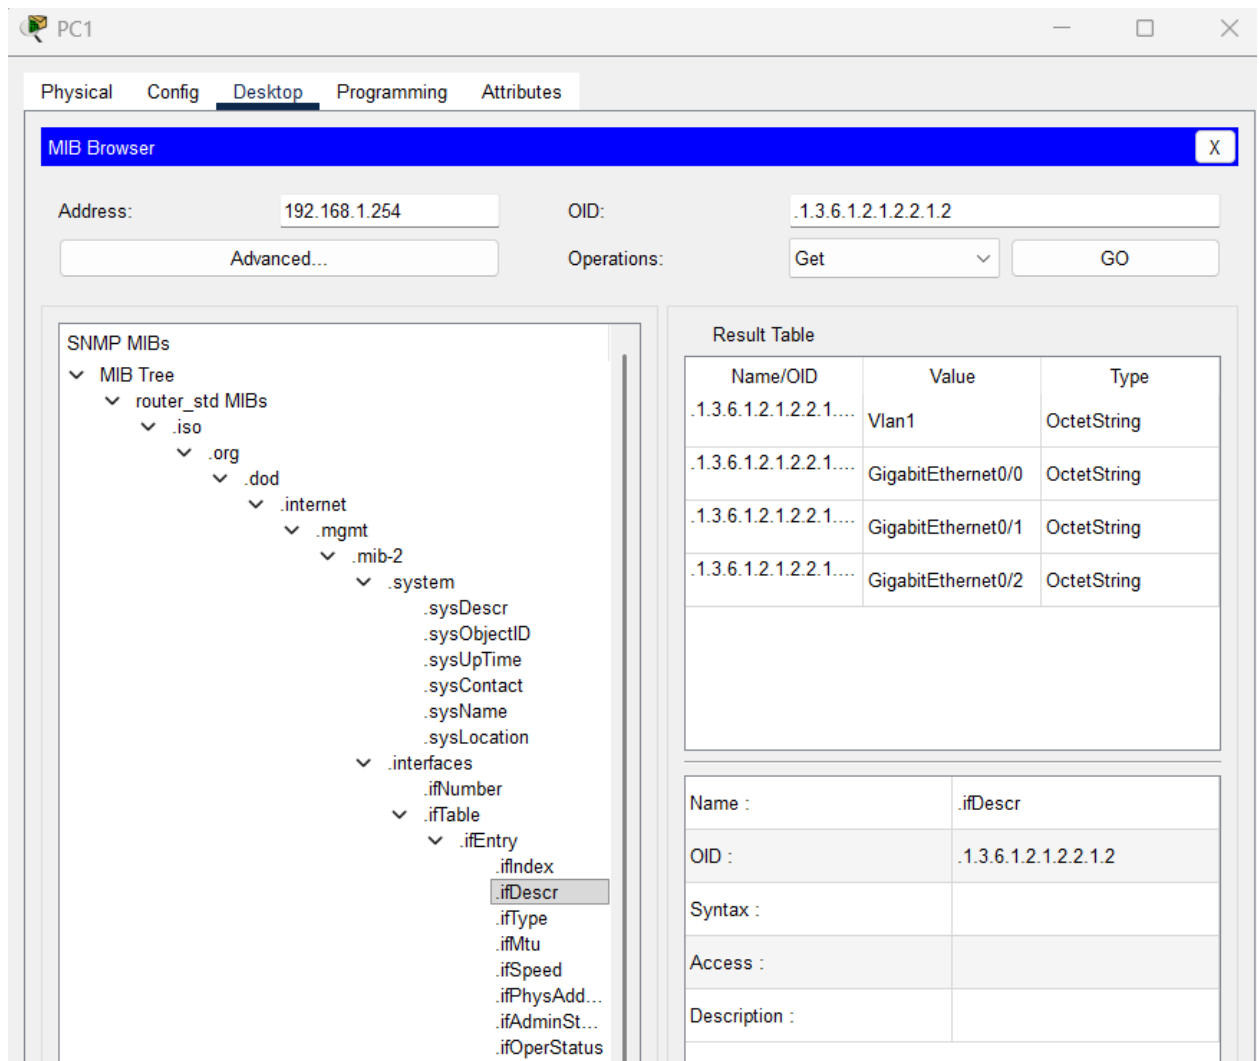

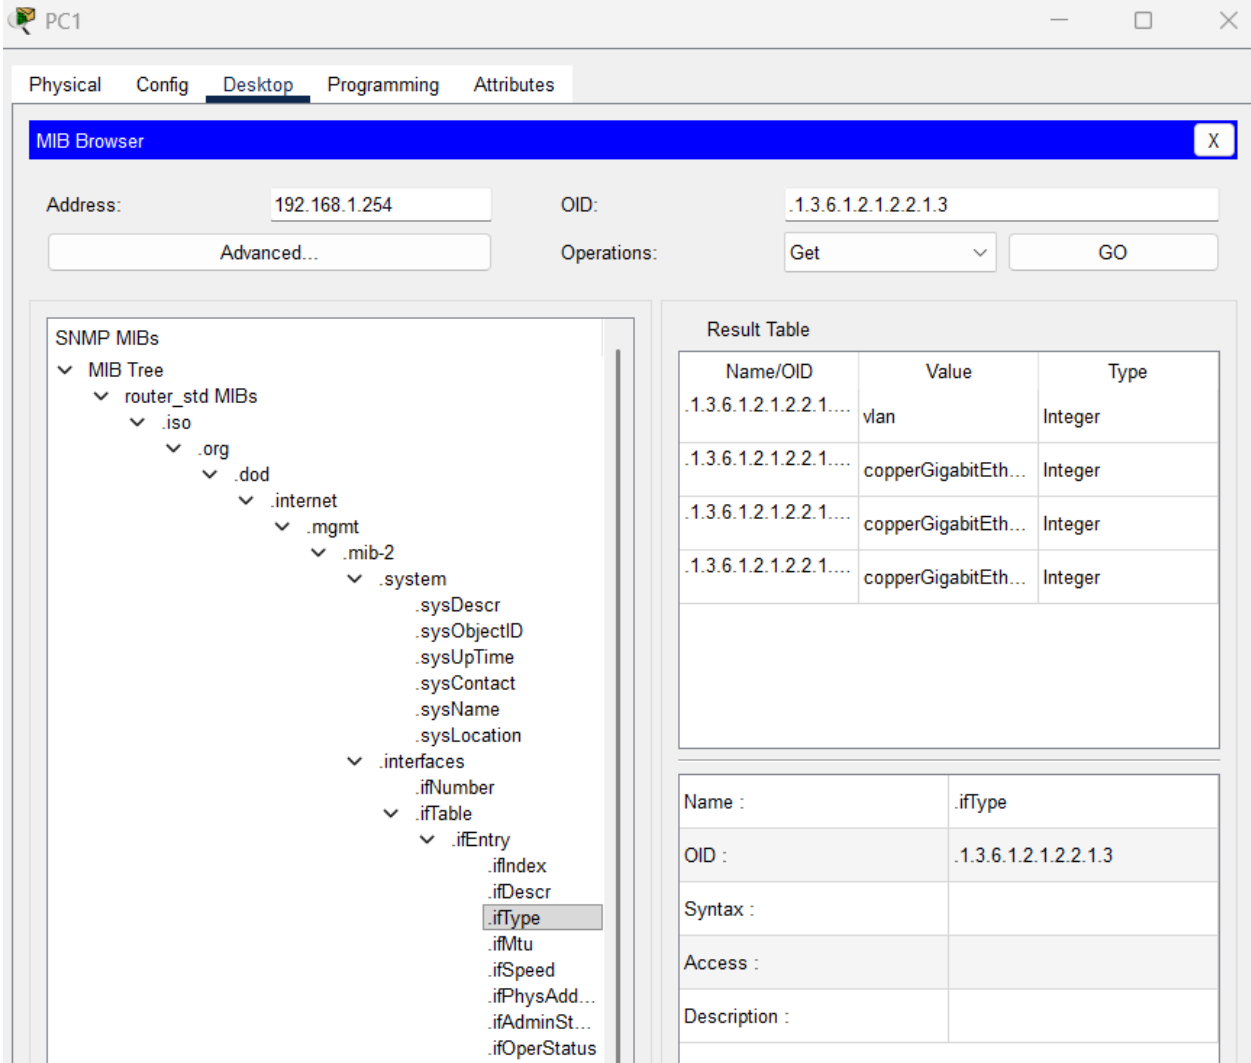

Copper gigabitethernet interfaces

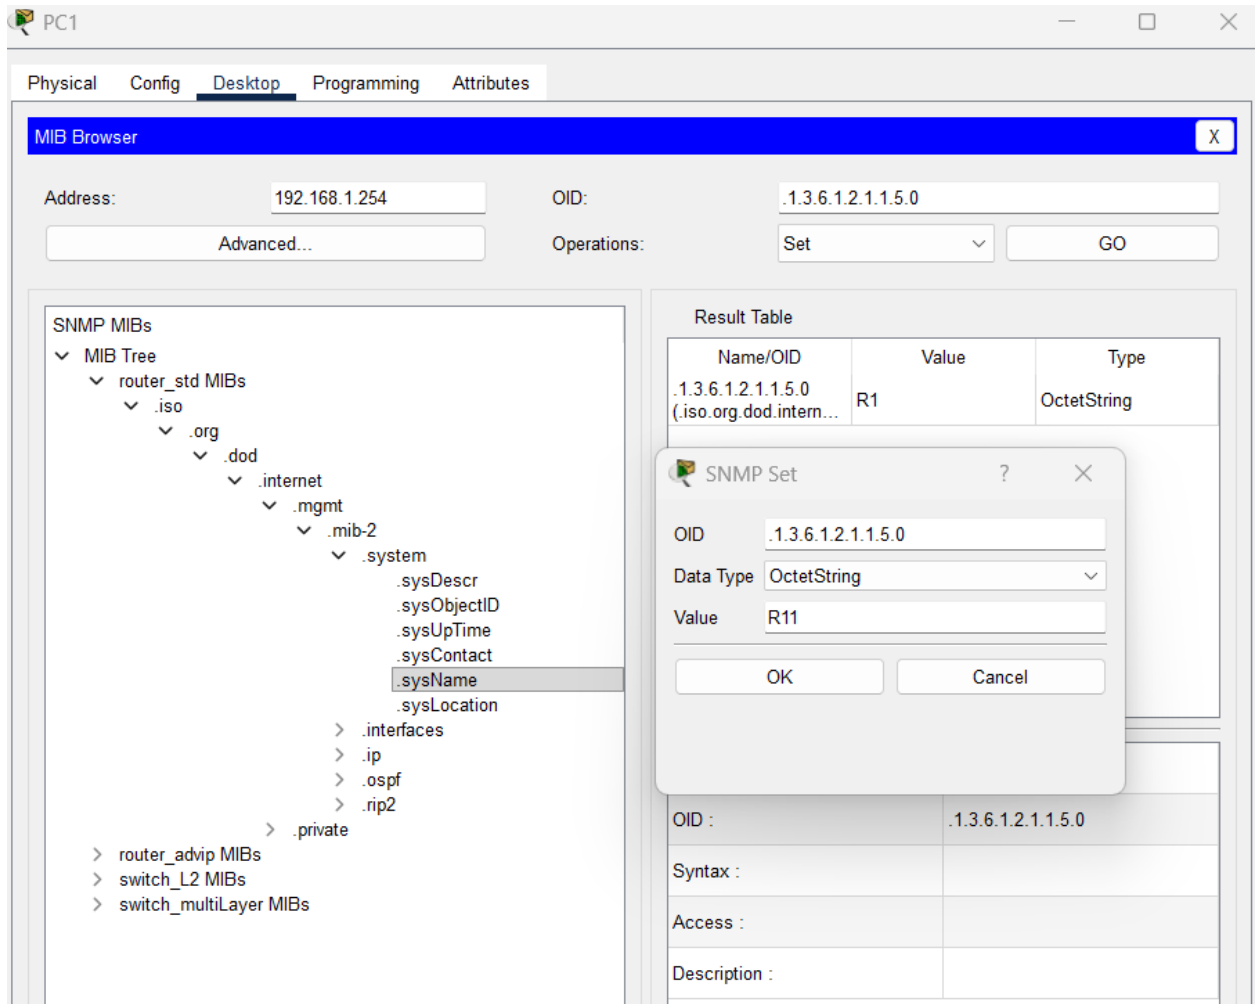

PC1

PhysicalConfigDesktopProgrammingAttributes

MIB BrowserX

Address:192.168.1.254OID:.1.3.6.1.2.1.1.5.0Advanced...Operations:SetGO

SNMP MIBs

- MIB Tree
 - router_std MIBs
 - .iso
 - .org
 - .dod
 - .internet
 - .mgmt
 - .mib-2
 - .system
 - sysDescr
 - sysObjectID
 - sysUpTime
 - sysContact
 - sysName
 - sysLocation
 - .interfaces
 - .ip
 - .ospf
 - .rip2
 - .private
 - router_advip MIBs
 - switch_L2 MIBs
 - switch_multiLayer MIBs

Result Table

| Name/OID | Value | Type |
|---|-------|-------------|
| .1.3.6.1.2.1.1.5.0
(.iso.org.dod.intern... | R11 | OctetString |

| | |
|---------------|--------------------|
| Name : | .sysName |
| OID : | .1.3.6.1.2.1.1.5.0 |
| Syntax : | |
| Access : | |
| Description : | |

```
R11>en
R11#show run | include host
hostname R11
```