EXP 3	Design of the Members Form

Aim:

To design the Members form that registers students as library members with an Active/Inactive status.

Theory:

Only registered and active members may borrow books, so the member record carries a status field that is checked when a book is issued.

- **Auto Number:** Member ID is generated automatically from 1001.
- **Unique Roll Number:** A student can be registered only once.
- **Email and Phone fields:** Built-in Email and Phone field types validate the format.
- **Default value:** Member Status starts as Active, and an on-load workflow fills the Registration Date with the current date.

Fields of the Members form:

Field	Type	Rule
Member ID	Auto Number	Starts at 1001
Full Name	Single Line	Mandatory
Roll Number	Single Line	Unique
Email	Email	Format validated
Phone Number	Phone	Format validated
Department	Drop Down	CSE / AIML / ECE / IT / MECH / EEE
Address	Single Line	Optional
Registration Date	Date	Mandatory, defaults to today
Member Status	Drop Down	Active (default) / Inactive

Procedure:

1. Create a new form named Members from the builder.
2. Add the fields in the table and set Member ID as an auto number starting from 1001.
3. In the Application IDE mark Full Name, Registration Date and Member Status as mandatory and Roll Number as unique; set the initial value of Member Status to Active.
4. Go to Workflow > New Workflow, choose Members, record event Created, form event Load of the form, and add the Deluge script that sets Registration Date to the current date.
5. Open the live Members form and register a member to verify the defaults.

Program (Members form definition):

```
form Members
{
    displayname = "Members"
    success message = "Member registered successfully!"
    Section
    (
        type = section
```

```
        displayname = "Member Details"
    )
    Member_ID
    (
        type = autonumber
        displayname = "Member ID"
        start index = 1001
    )
    must have Full_Name
    (
        type = text
        displayname = "Full Name"
    )
    unique Roll_Number
    (
        type = text
        displayname = "Roll Number"
    )
    Email
    (
        type = email
        displayname = "Email"
    )
    Phone
    (
        type = phonenumber
        displayname = "Phone Number"
    )
    Department
    (
        type = picklist
        displayname = "Department"
        values = {"CSE","AIML","ECE","IT","MECH","EEE"}
    )
    Single_Line
    (
        type = text
        displayname = "Address"
    )
    Membership
    (
        type = section
        displayname = "Membership"
    )
    must have Registration_Date
    (
        type = date
        displayname = "Registration Date"
    )
    must have Member_Status
    (
        type = picklist
        displayname = "Member Status"
        values = {"Active","Inactive"}
        initial value = "Active"
    )
}
```

Program (Workflow "Default Registration Date" - Members, on load):

```
// Members - on load (Created): registration date defaults to today
input.Registration_Date = zoho.currentdate;
```

Output:

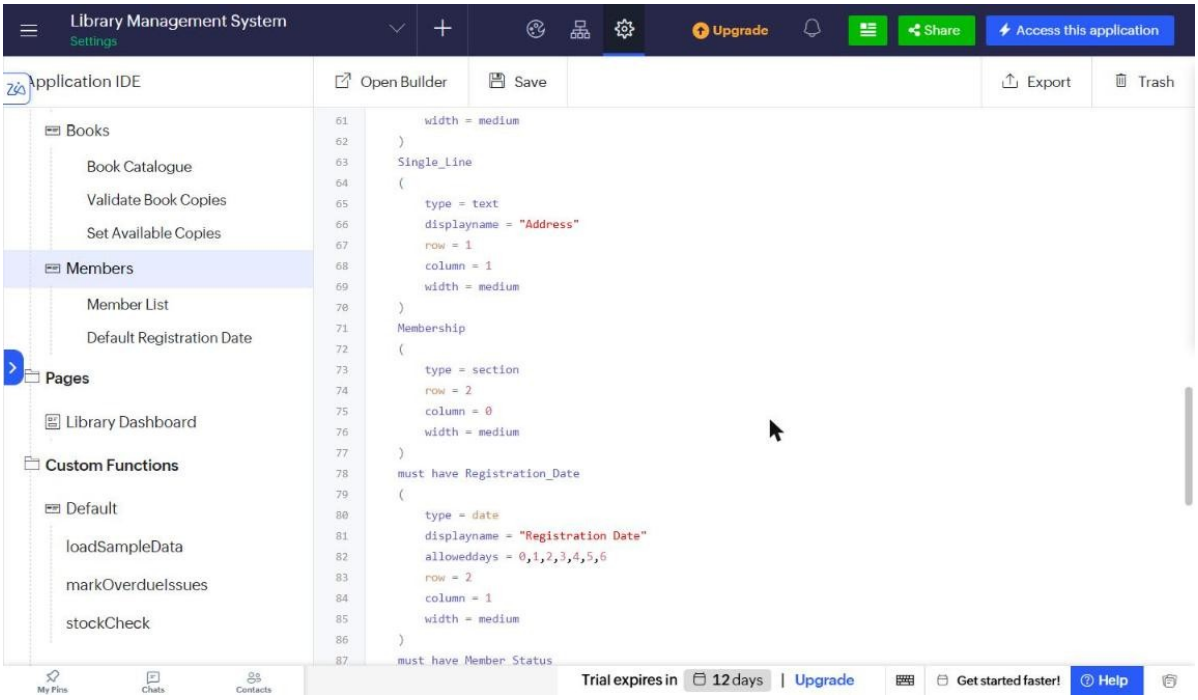


Fig. 3.1: Members form fields in the Application IDE

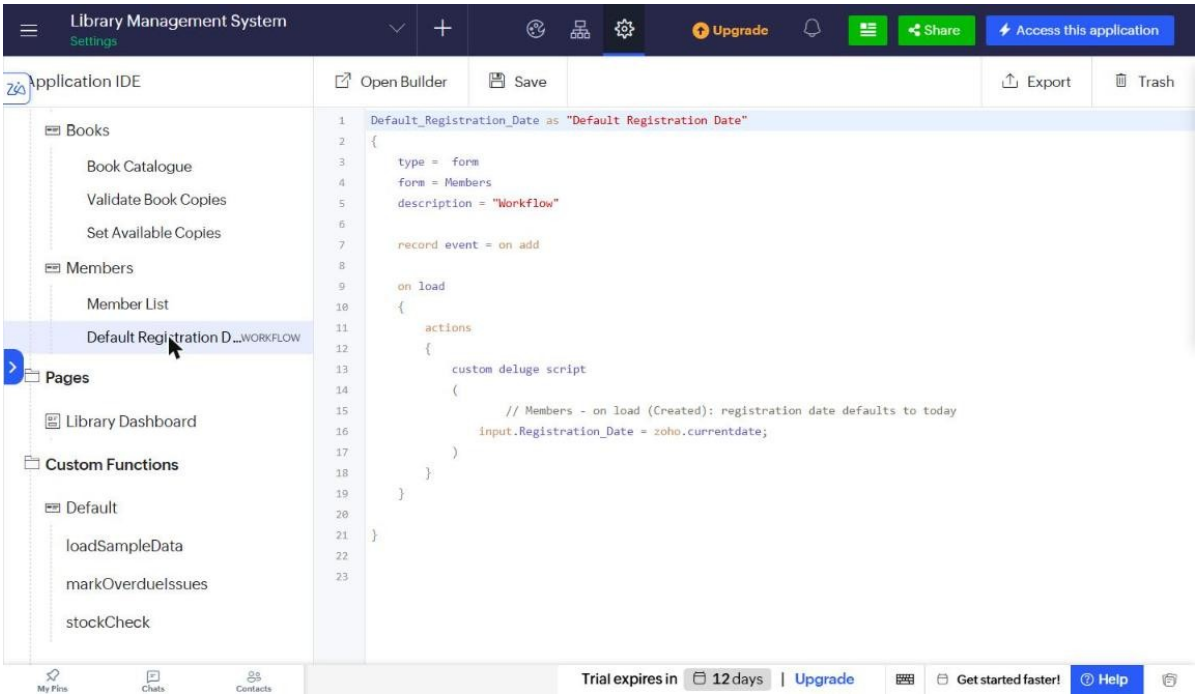


Fig. 3.2: Default Registration Date workflow script

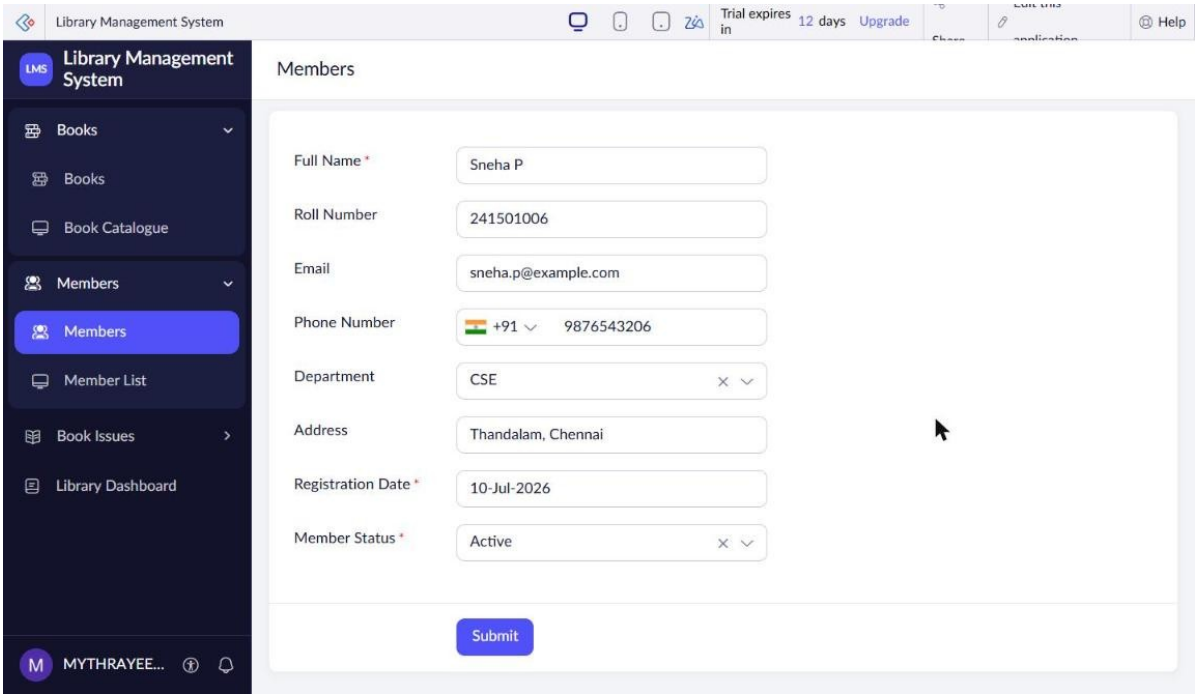


Fig. 3.3: Members form in the live application

Result:

The Members form was created with a unique roll number, validated email and phone fields, a default registration date and an Active/Inactive status.