

Question 1 (1 point)

What type of function can be declared as a final function in C++.

- ☐ Virtual member function
- ☐ Pure virtual member function
- ☐ static member function
- ☐ A and B are both correct
- ☐ None of the above

Question 2 (1 point)

Class A is a subclass of B, and B is subclass of C and C is subclass of D. If all of these classes have their own ctor and dtor, and if an object of D goes out of scope what is the order of calls to the destructors of these classes:

- ☐ D, C, B, A
- ☐ A, B, C, D
- ☐ Only D
- ☐ None of the above

Next Page

Page 2 of 15

Question 3 (1 point)

A public static data member in a C++ class:

- ☐ Must be declared globally outside the class definition
- ☐ Will be initialized to zero automatically
- ☐ All of the above
- ☐ None of the above are correct

Next Page

Page 3 of 15

Question 4 (1 point)

Which one of the following statements is correct? Select the best answer.

- ☐ An abstract class is a class that contains a virtual function.
- ☐ An abstract class is a class that contains at least one pure virtual function.
- ☐ An abstract class is class that is derived from a virtual base class
- ☐ A, and B are correct answers
- ☐ All of the above are correct answers
- ☐ None of the above is a correct answer

Question 5 (1 point)

Which one of the following statements are correct?

- ☐ A. An abstract class is a class that is at the root of the class hierarchy
- ☐ B. An abstract class is a class that cannot have an object.
- ☐ C. An abstract class can be a reference or pointer argument of a global function
- ☐ B and C are both correct.
- ☐ None of the above is correct

Question 6 (1 point)

Which one of the following statements is correct?

- ☐ A. An overloaded operator cannot be declared static
- ☐ B. Operators << and >> cannot be defined as a member of a class
- ☐ C. Operators -, [], and [] must be defined as a member of class
- ☐ D. Only B and C are the correct answers
- ☐ E. All of the above are correct answers
- ☐ F. None of the above are correct answers

Question 7 (1 point)

Which one of the following statements is correct about a final class in C++:

- ☐ A. C++ doesn't support final classes
- ☐ B. A final class in C++ is class that cannot be a base class
- ☐ C. A final class is class that its member function cannot be overridden.
- ☐ D. B, and C are both correct answers
- ☐ E. None of the above is a correct answer

Question 8 (1 point)

Which one of the following statements is a correct in C++?

- ☐ A. An overloaded operator function must be always a member of a class or a friend of a class
- ☒ B. An overloaded operator function must have at least a class object as its argument.
- ☐ C. An overloaded operator cannot return a pointer, but can return a reference.
- ☐ A and B are correct answers
- ☐ All of the above are correct answers
- ☐ None of the above is a correct answer

Which one of the following group of operators must be overloaded as a member function in a C++ class? In other words they cannot be defined as a non-member global function.

- ☐ ==, >=, <=
- ☐ &&, ||, new
- ☐ ++, and --
- ☒ (), =, []
- ☐ All of the above
- ☐ None of the above.

Consider the following program and determine what is the program's output. Write your answer in the following given space:

```
class A {
public:
    void fun1(){
        cout << "A fun1\n";
    }
    virtual void fun2(){
        cout << "A fun2\n";
    }
    void fun3(){
        cout << "A fun3\n";
    }
};
```

```
class B: public A {
public:
    void fun1(){
        cout << "B
fun1\n";
    }
    void fun2(){
        cout << "B
fun2\n";
    }
    virtual void fun3(){
        cout << "B
fun3\n";
    }
};
```


```
class C:public B {
public:
    void fun1(){
        cout << "C fun1\n";
    }
    void fun2(){
        cout << "C fun2\n";
    }
    void fun3(){
        cout << "C fun3\n";
    }
};
```

```
void bar(A& x, A& y, B&
z) {
    x.fun1();
    x.fun2();
    y.fun1();
    y.fun2();
    y.fun3();
    z.fun1();
    z.fun2();
}
```

```
int main() {
    A myA;
    B myB;
    C myC;
    bar(myA, myB,
myC);
    return 0;
}
```

Question 11 (5 points)

Consider the following class diagram, and answer the following questions, in box below the question:

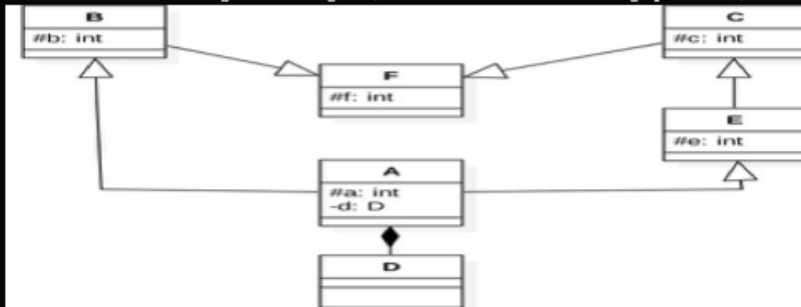

- Assuming that we need to use objects of classes A, B, C, D, E, and F, which class(s) need to have a virtual base class. (2 marks)?
- Assume each class has its own `ctor` for initializing its data member and its own `dtor` for some sort of cleanup. Also for the simplicity purposes assume that general format of class `ctors` is: `X(int x)`.
- write the implementation of `ctor` for class A (2 marks).
- Class A is declared with the label `{leaf}`. What this label mean (1 mark)

Consider the following simple C++ code that uses three class called Animal, Cat and Fish. As given code shows each animal's move is strongly bound to its implementation and if you want to change the animal's move behaviour there is no way other than changing the given code in the animal classes. In this section you should refactor this program using **Strategy Pattern** to allow more flexibility for changes. In other words we should be able to set or change the move behaviour of an animal at the runtime. For example if a cat's move style is currently "walking", we should be able to change it to "swimming" at the runtime (within main function).

	Using Animal objects	Program output
<pre> class Animal { protected: string name; public: Animal(string name){this->name=name;} virtual void move() = 0; }; class Cat: public Animal { public: Cat(string name): Animal(name){} void move(){ cout<<"Walking-"<<name<<endl; } }; class Fish: public Animal { public: Fish(string name): Animal(name){} void move(){ cout<<"Swimming-"<<name <<endl; } }; </pre>	<pre> int main(){ Cat kitty ("Cat"); kitty.move(); Fish fishy ("Fish"); fishy.move(); return 0; } </pre>	<pre> Walking-Cat Swimming-Fish </pre>

To refresh your memory here is the example model of Strategy Design Pattern:



To better understand how your refactored code should work, the following pseudo-code of a main function and its expected output is given:

Pseudo-code for a main function that uses strategy pattern	Output
Create an object of Cat called kitty Set move-strategy of walking to kitty kitty performs move (means prints Moving-Cat) Create an object Fish called fishy; Set move-strategy of swimming to fishy fishy performs move (means prints Swimming-Fish) Now set the move strategy of walking to fishy fishy performs move (means prints Walking-Fish)	Walking-Cat Swimming-Fish Walking-Fish

Now on the following space, rewrite the above classes based on using Strategy Pattern. Also write a main function that applies the above pseudo-code, and shows how your strategy pattern works.

Question 13 (12 points)

Consider the following code segment, which belongs to a portion of legacy software. Now you should refactor it to conform to basic four pillars of object-oriented design (abstraction, encapsulation, modularity, hierarchy):

```
struct Company{
    string companyName;
    string companyAddress;
    vector<string> employees;           // vector of information about employees
                                      // (name, address, date of birth)
    string dateStableisEstablished; // the date that company was established
    vector <string> employeeState; // information about employees' current states
                                      //(active, suspended, retired, fired)
    vector <string> customers          // vector of information about customers
                                      //(name, address, email)
};
```

In the following space write your refactored code.

Note: For the simplicity purposes you don't need to worry about any functions in your code.

Question 14 (15 points)

Consider the following class definition which is similar to what we used during lectures, then answer the following questions;

```
class String {
    char* storageM;
    char* cursorM ;           // cursor to traverse along the stroageM elements
public:
    bool cursor_ok();         // returns true if cursorM is not pointing to '\0'
    void set_cursor();         // sets cursorM back to the beginning of storageM
    String (const char* s);    // allocates memory and copies s into storageM. Also
                                // sets cursorM to the first element of storageM
};


int main (){
    String text = " be aware of bugs "; // creating an object of String
    text.set_cursor();
    while(text.cursor_ok()) // printing words in the given text
        cout << text++ << endl;
    // creating an object of String with 20 elements all filled with '\0'
    String word = 20;
    cout << "Please enter a word with no spaces (max 19 characters): " << endl;
    cin >> word; // using istream object cin to read a word
    ...         // More code
    return 0;
}

// this box shows the program output. Also shows user input, which is: Apple
be
aware
of
bugs
Please enter a word with no spaces (max 19 characters):
Apple
Output is: Apple
```

In the following space ONLY write the definition of any function that is needed to allow the given main function work. **Marks will be deducted for writing unnecessary functions. Don't write any function that its prototype is given, and don't worry about adding prototypes of the functions that you write, into the class definition.**

Question 15 (15 points)

Based on the following class diagram write the definition of class `JobHunter` and `JobSeeker` in Java. Please only implement the constructors of these classes, and their methods: `register`, `notifyAllObservers`, and `update`. You don't have to worry about other functions in these classes.

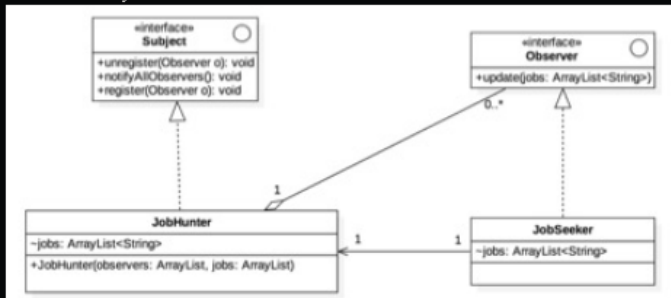

Note: Some of the data members of classes `JobHunter` and `JobSeeker` are shown in this diagram. You need to pay attention to relationship among the classes and consider more data members if needed.

Write the definition of your classes in the following space: