msvtx_nTGCInnerStation

overview · all regions and selections · rank 74 / 98

rank 74 / 98 by endcap / ht40 / D_equal

region	selection	D_equal	D_pooled	125/15	125/55	200/50	400/100	600/150	1000/275	n_bkg
endcap	all	0.039	0.062	0.020	0.050	0.022	0.042	0.091	0.097	34,970
endcap	ht40	nan	nan	nan	nan	nan	nan	nan	nan	0
endcap	bkg split	nan	below 34,970 / above 0							
barrel	all	0.038	0.022	0.068	0.074	0.034	0.028	0.016	0.019	1,089
barrel	ht40	nan	nan	nan	nan	nan	nan	nan	nan	0
barrel	bkg split	nan	below 1,089 / above 0							
all	all	0.036	0.060	0.016	0.034	0.022	0.040	0.081	0.087	36,059
all	ht40	nan	nan	nan	nan	nan	nan	nan	nan	0
all	bkg split	nan	below 36,059 / above 0							


selections: all = every event; ht40 = htmiss_NOSYS >= 40 GeV, signal and background
pages: per region -> [all] 2x2, [ht40] 2x2, [background below vs above] 1x2

msvtx_nTGCInnerStation


region: ENDCAP · selection: all (every event) · rank 74 / 98

D_equal 0.039 D_pooled 0.062 min 0.020 (mH125_mS15) max 0.097 (mH1000_mS275) bkg n = 34,970 sig n = 9,996


each mass point vs background · raw

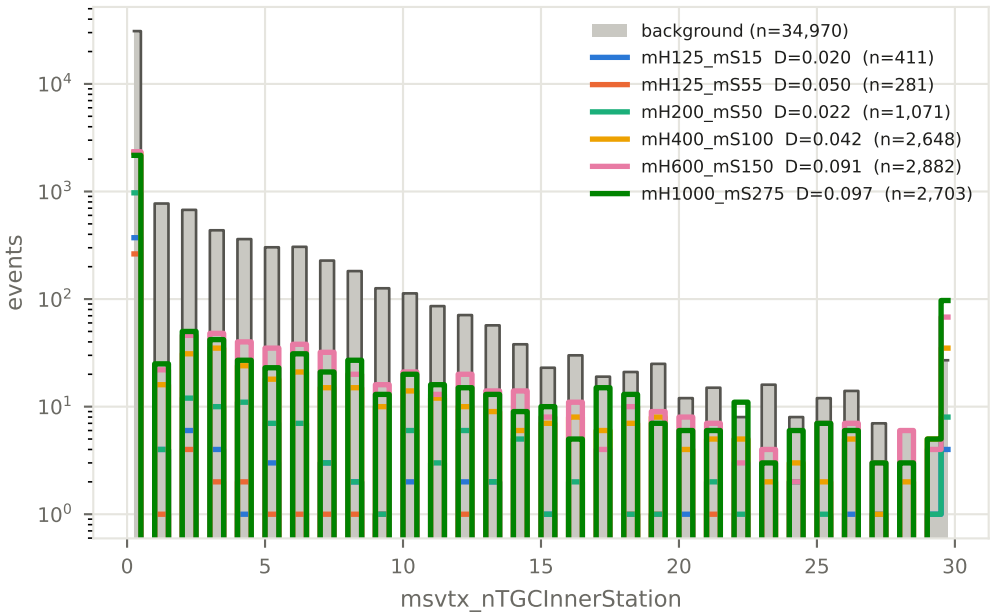


each mass point vs background · normalized

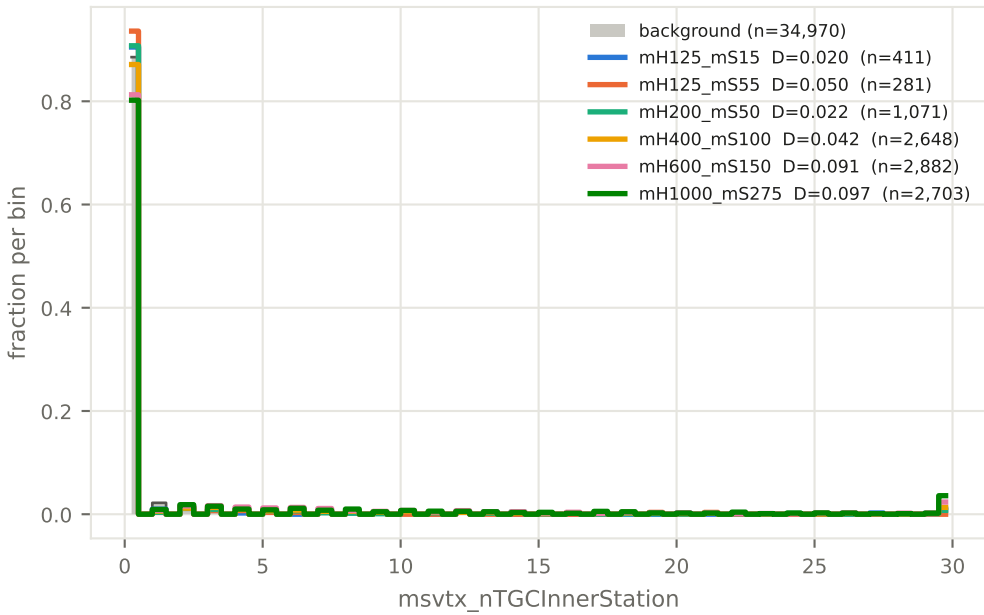

combined signal vs background · raw

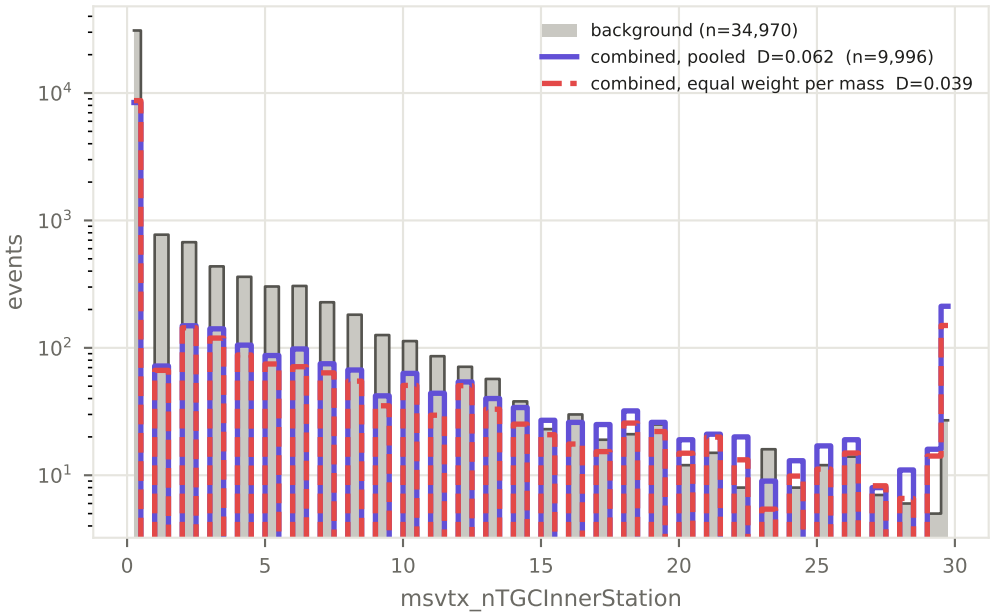

combined signal vs background · normalized

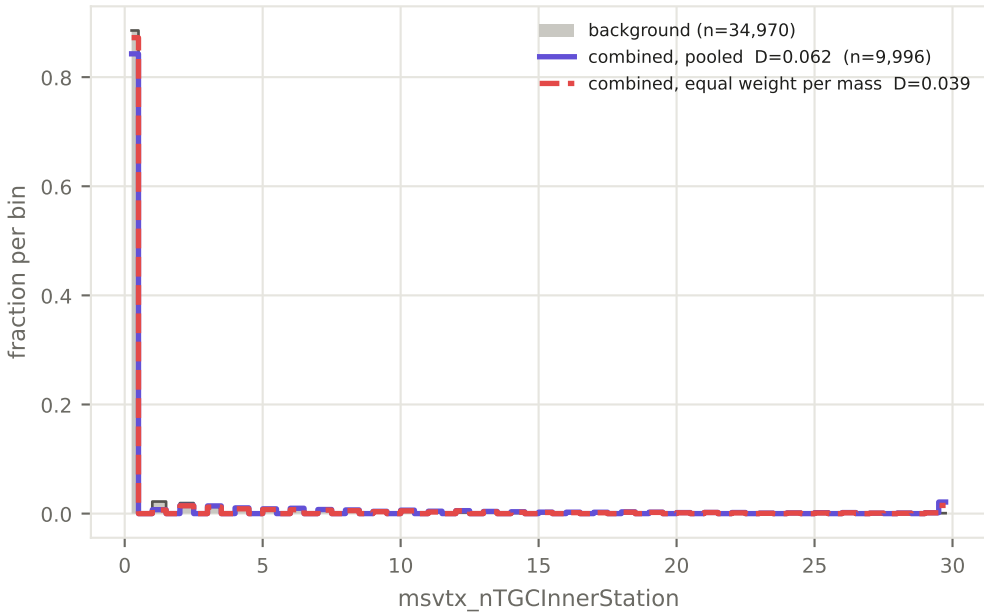


edge bins include under/overflow · NaN and -999 removed

msvtx_nTGCInnerStation


region: ENDCAP · selection: ht40 (htmiss_NOSYS >= 40 GeV, signal and background) · rank 74 / 98

D_equal nan D_pooled nan bkg n = 0 sig n = 9,996


each mass point vs background · raw

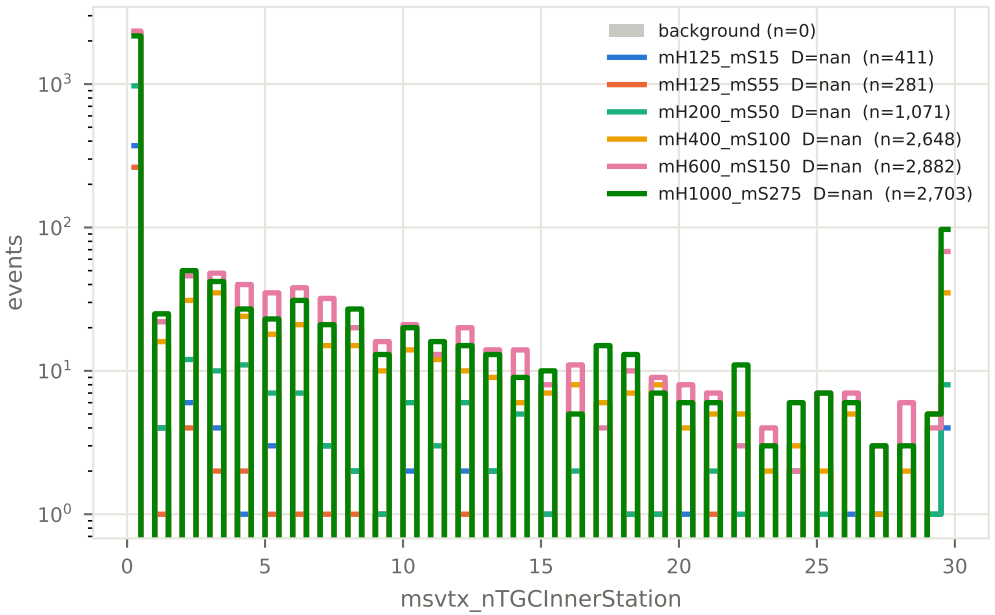


each mass point vs background · normalized

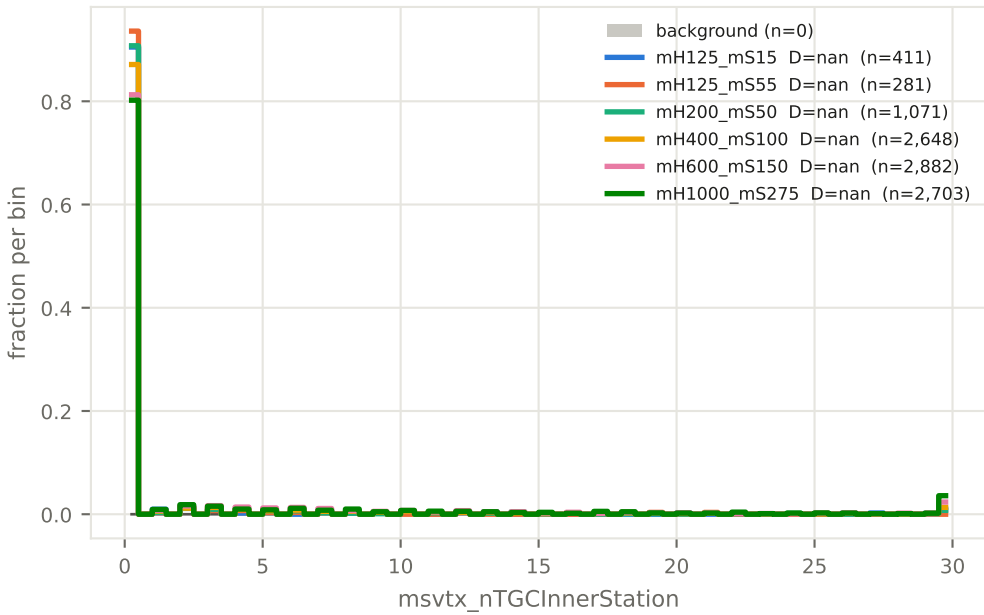

combined signal vs background · raw

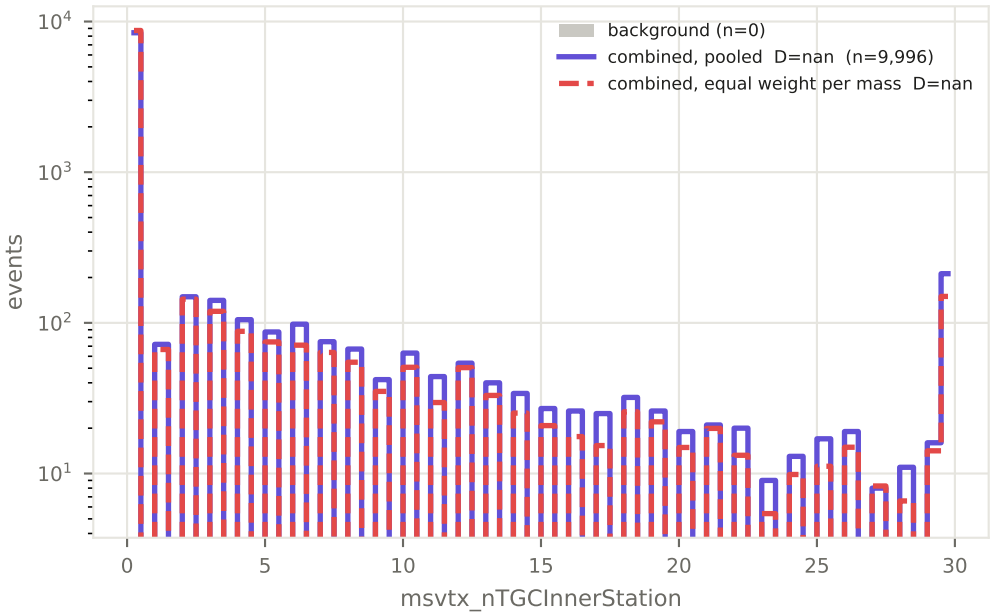

combined signal vs background · normalized

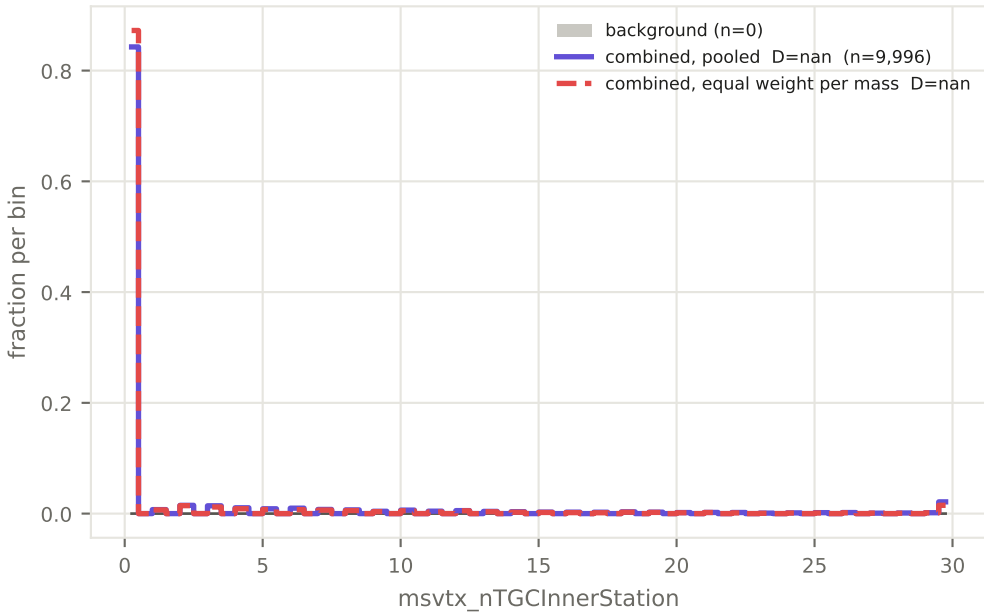



edge bins include under/overflow · NaN and -999 removed

msvtx_nTGCInnerStation

region: ENDCAP · background only: below vs at/above the cut (htmiss_NOSYS >= 40 GeV, signal and background) · rank 74 / 98

`D(below vs above) nan  n below = 34,970  n above = 0  large D = background shape changes across the cut`

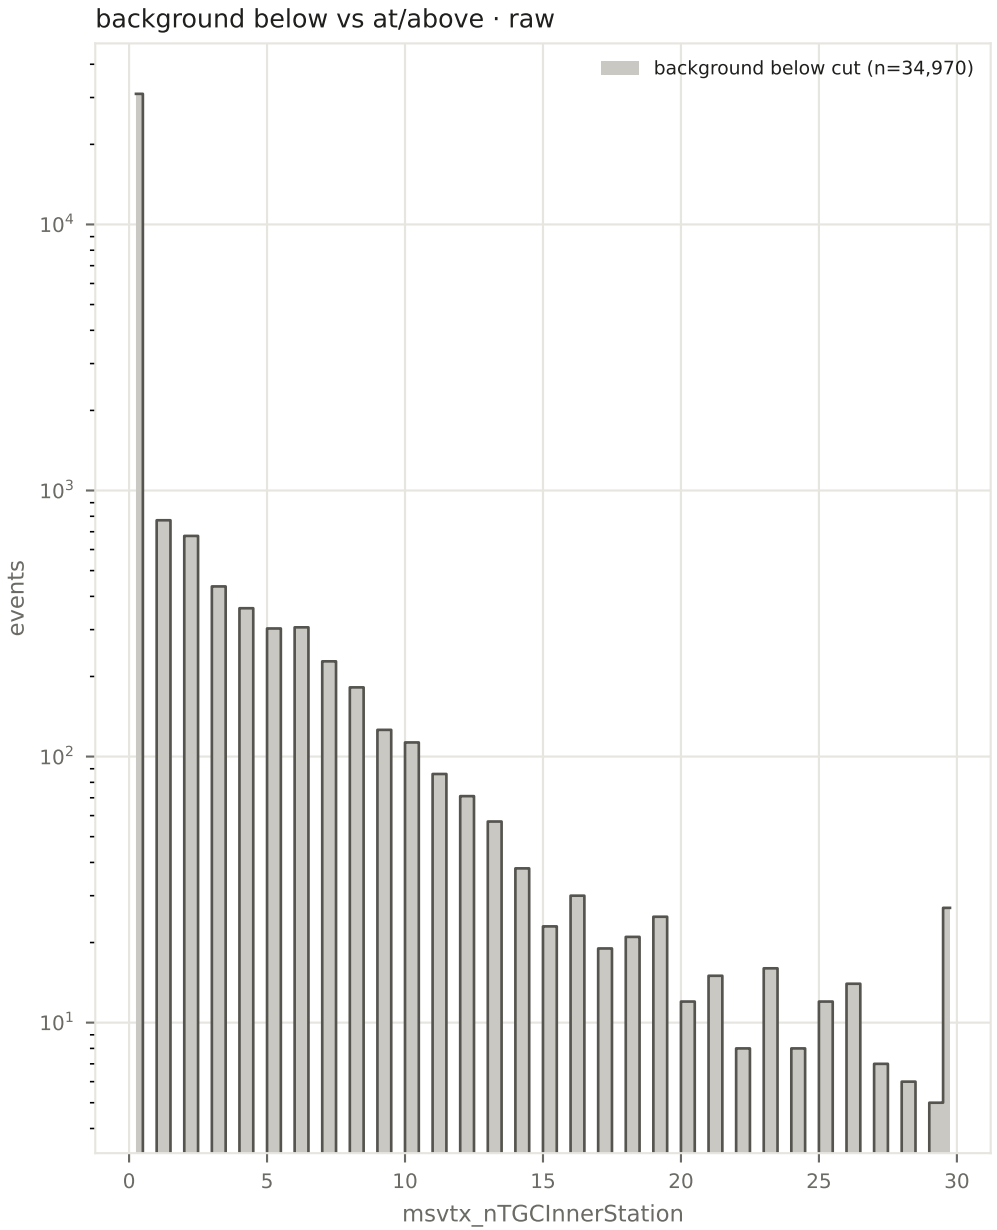

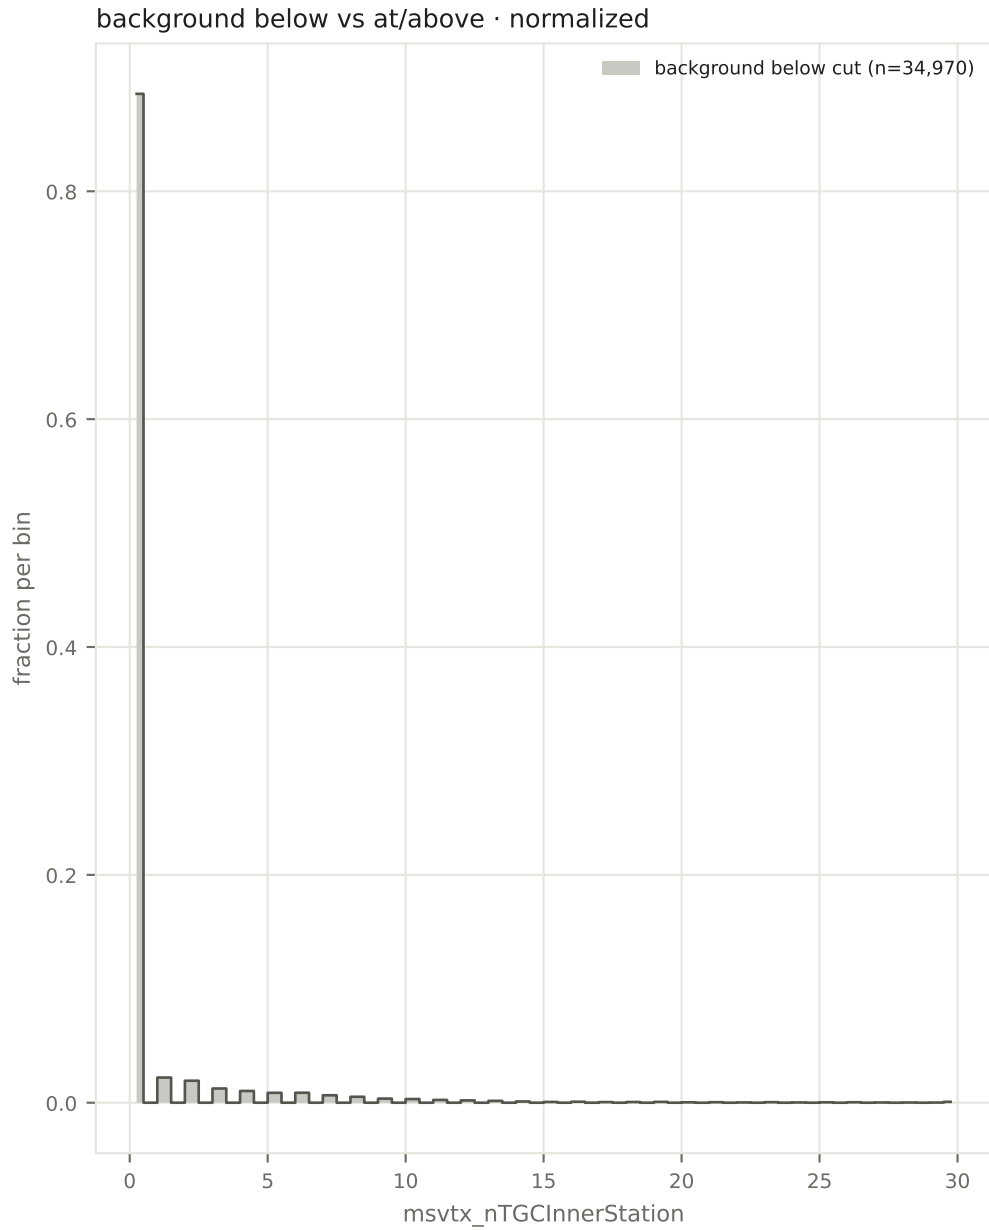


msvtx_nTGCInnerStation


region: BARREL · selection: all (every event) · rank 74 / 98

D_equal 0.038 D_pooled 0.022 min 0.016 (mH600_mS150) max 0.074 (mH125_mS55) bkg n = 1,089 sig n = 4,987


each mass point vs background · raw

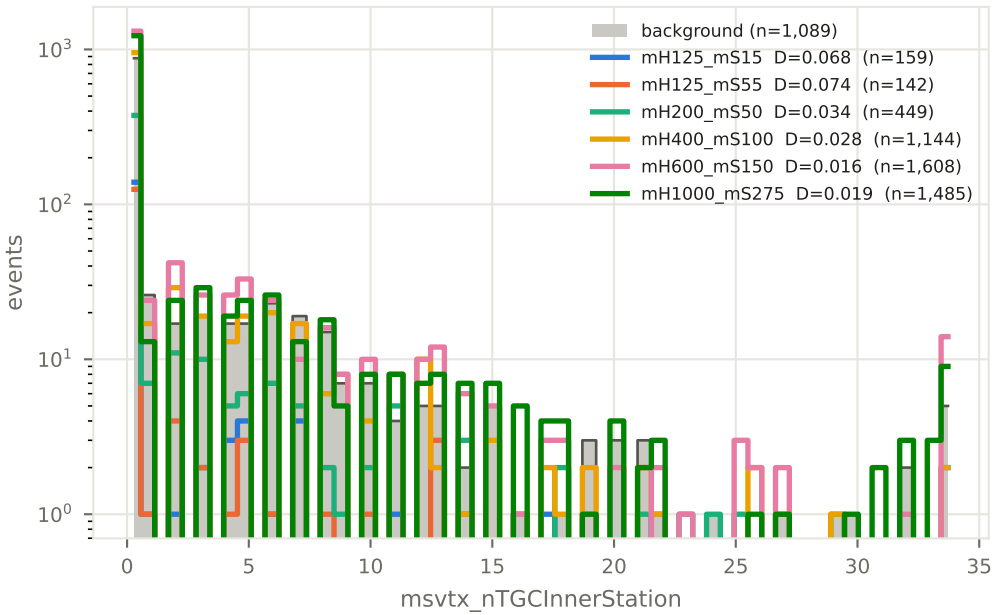


each mass point vs background · normalized

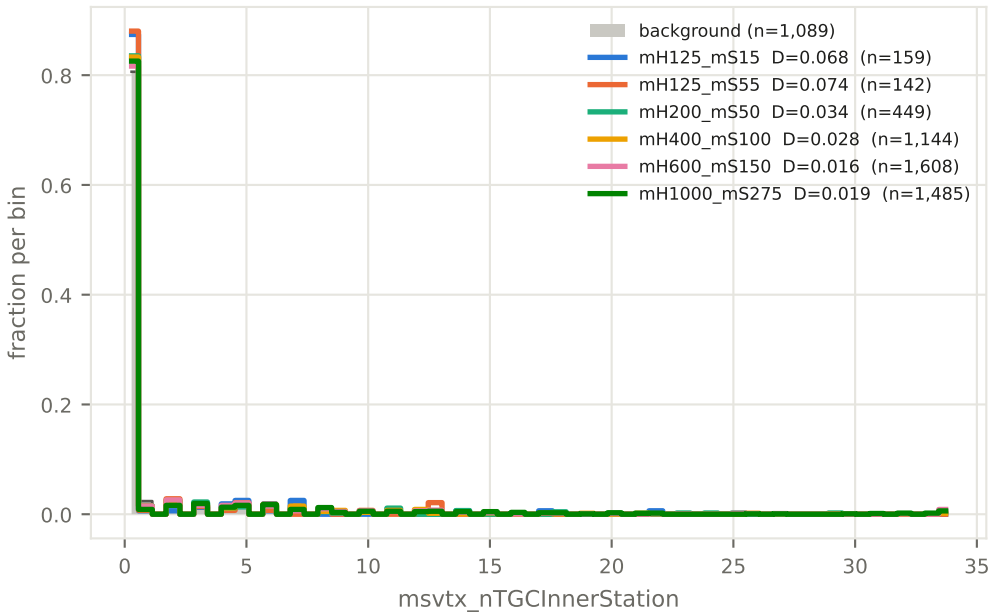

combined signal vs background · raw

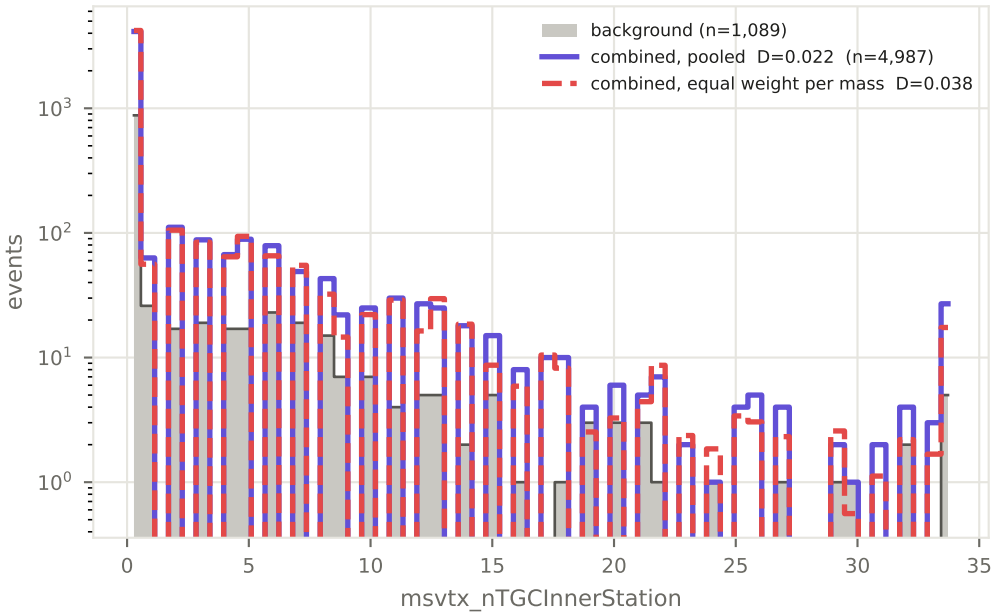

combined signal vs background · normalized

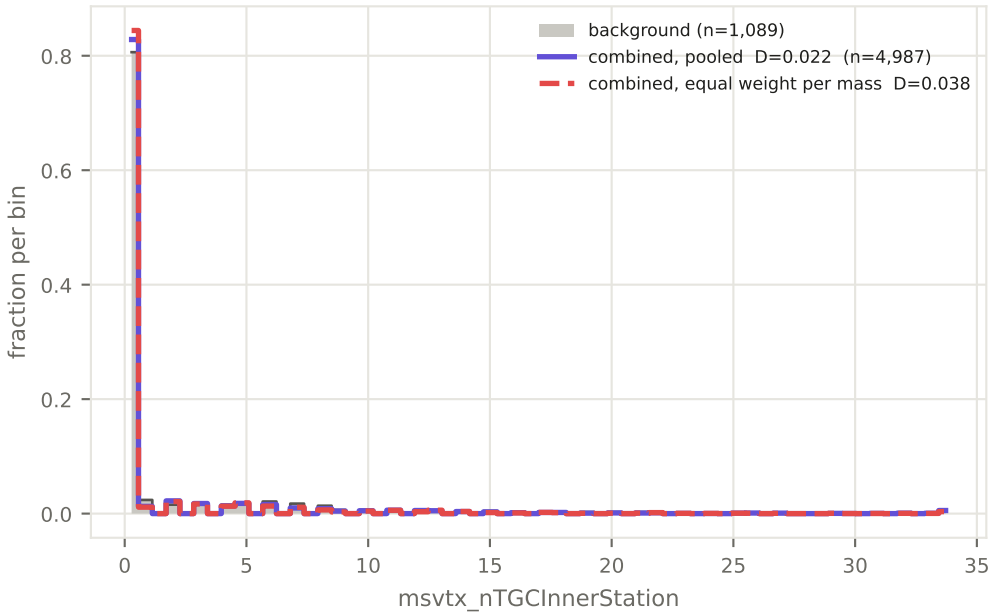


edge bins include under/overflow · NaN and -999 removed

msvtx_nTGCInnerStation


region: BARREL · selection: ht40 (htmiss_NOSYS >= 40 GeV, signal and background) · rank 74 / 98

D_equal nan D_pooled nan bkg n = 0 sig n = 4,987


each mass point vs background · raw

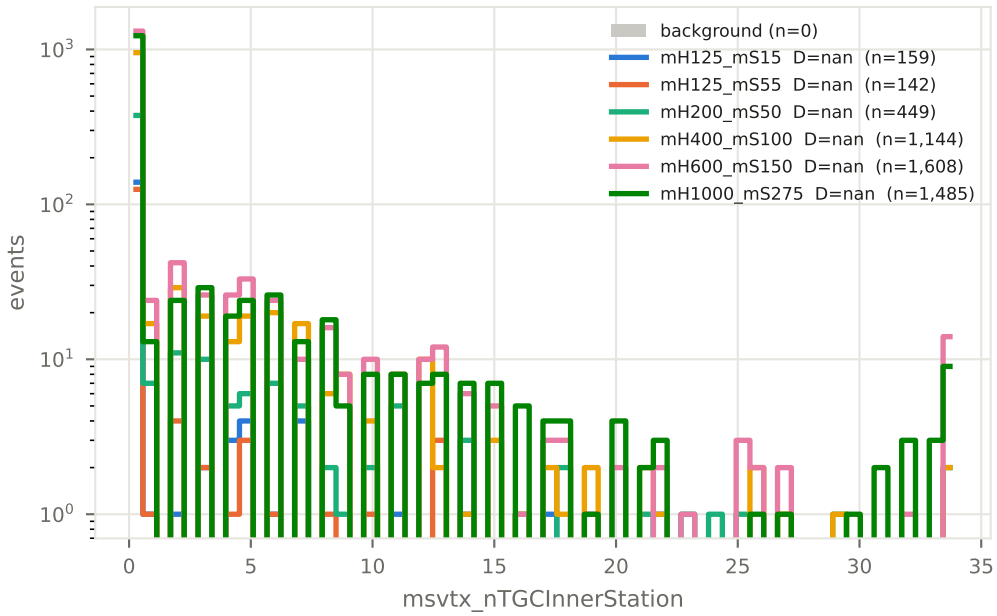


each mass point vs background · normalized

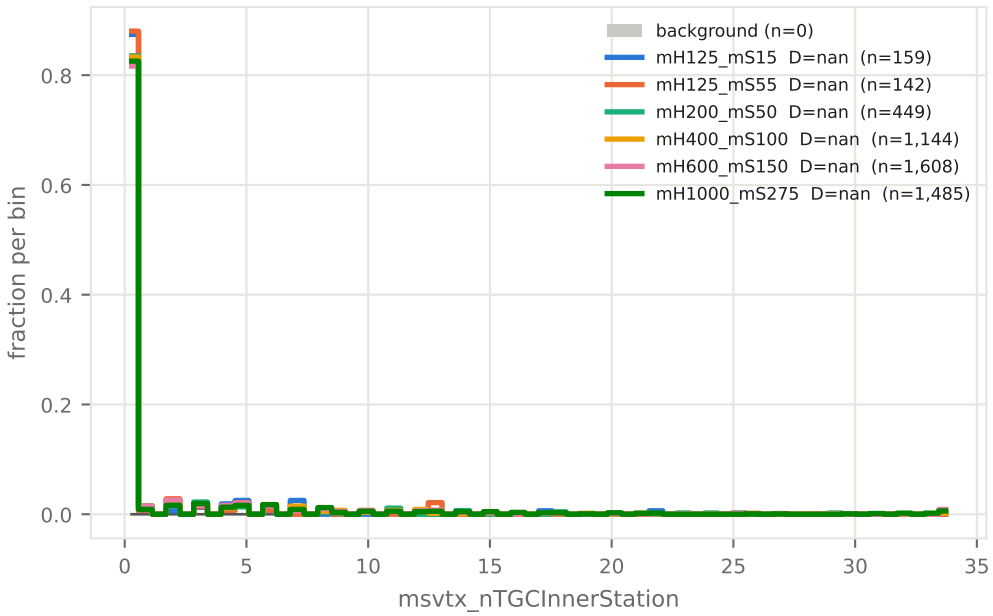

combined signal vs background · raw

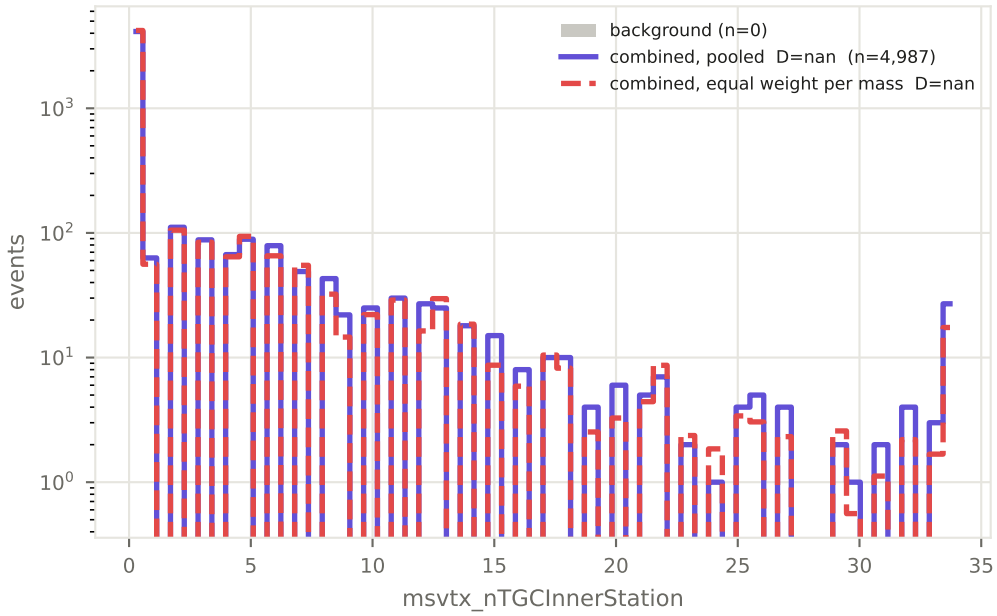

combined signal vs background · normalized

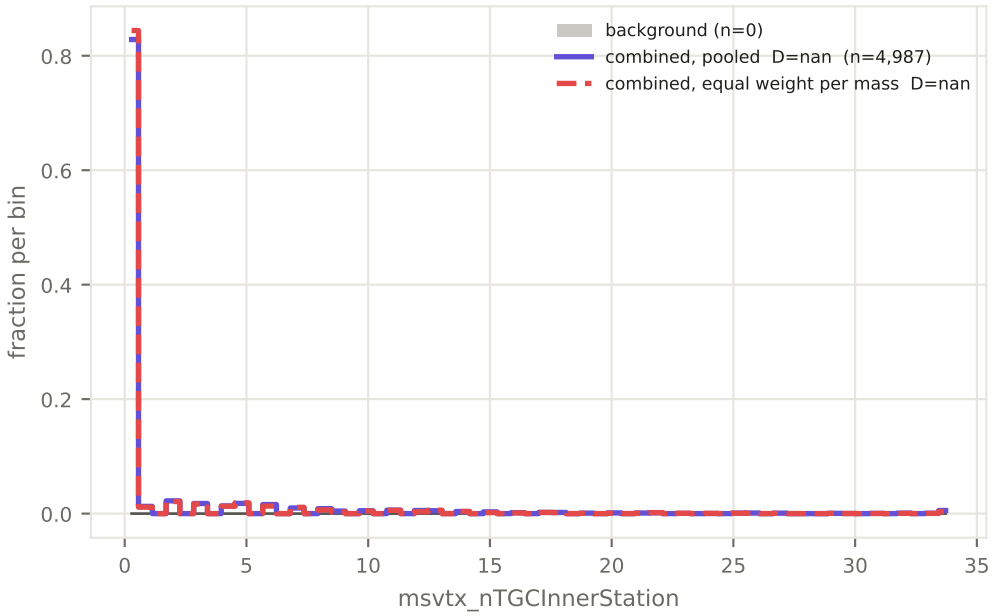



edge bins include under/overflow · NaN and -999 removed

msvtx_nTGCInnerStation

region: BARREL · background only: below vs at/above the cut (htmiss_NOSYS >= 40 GeV, signal and background) · rank 74 / 98

D(below vs above) nan n below = 1,089 n above = 0 large D = background shape changes across the cut

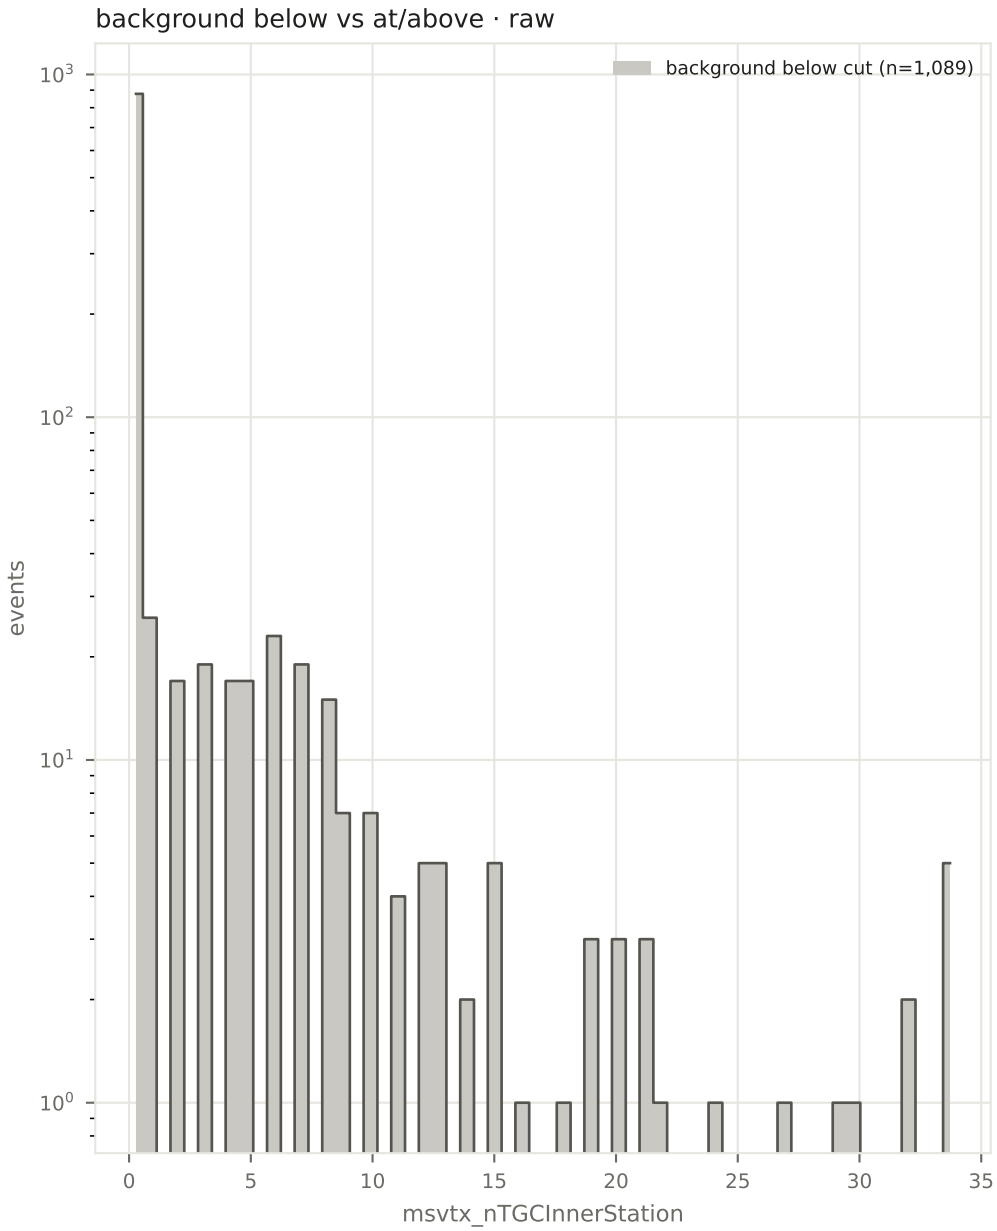

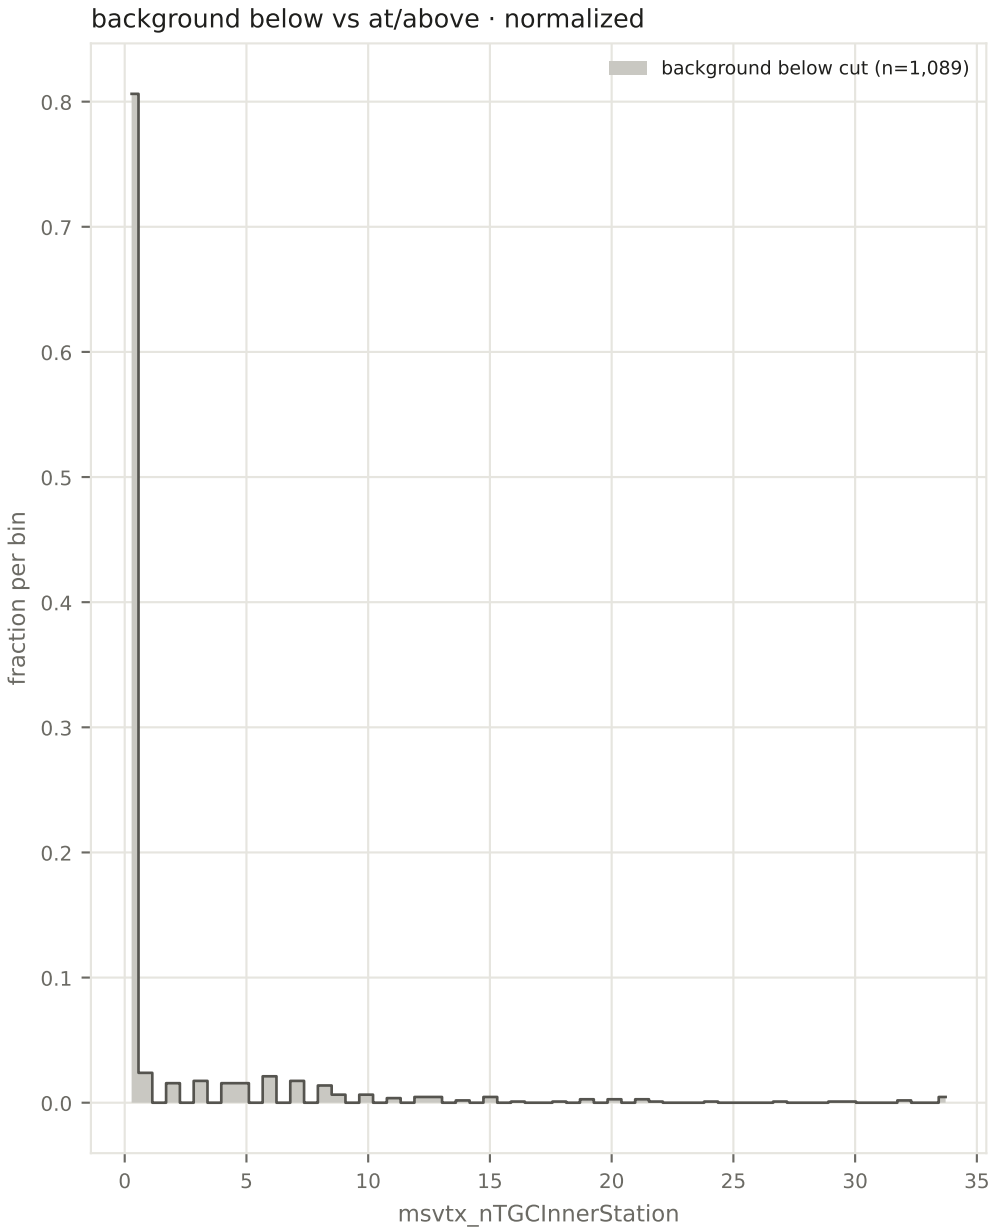


msvtx_nTGCInnerStation


region: ALL · selection: all (every event) · rank 74 / 98

D_equal 0.036 D_pooled 0.060 min 0.016 (mH125_mS15) max 0.087 (mH1000_mS275) bkg n = 36,059 sig n = 14,983


each mass point vs background · raw

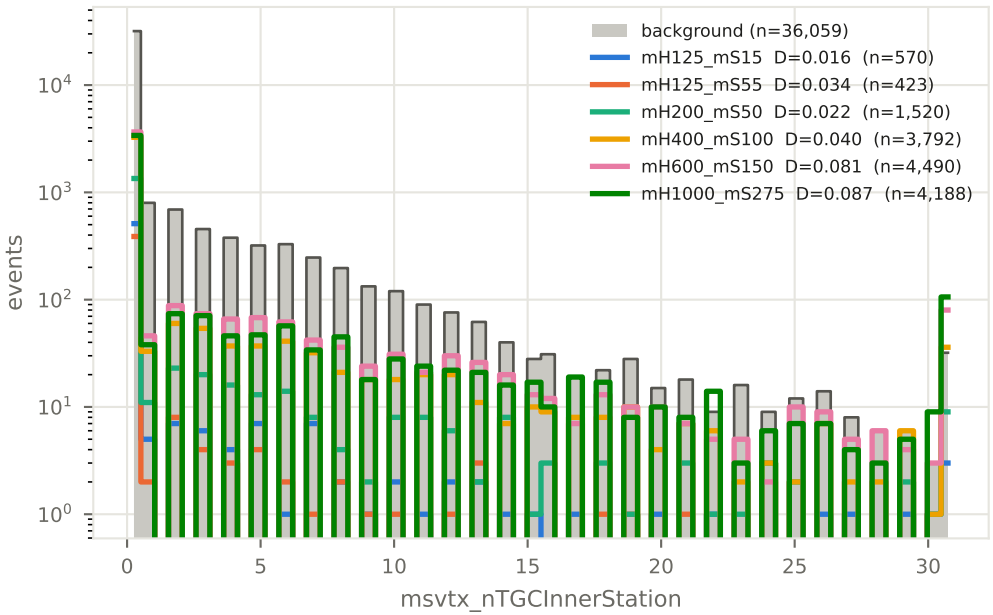


each mass point vs background · normalized

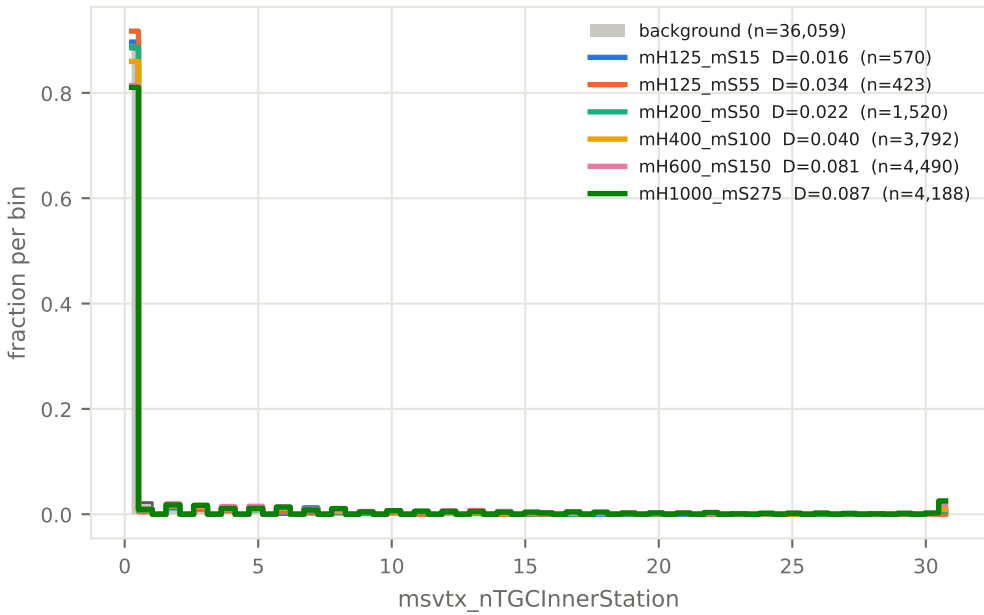

combined signal vs background · raw

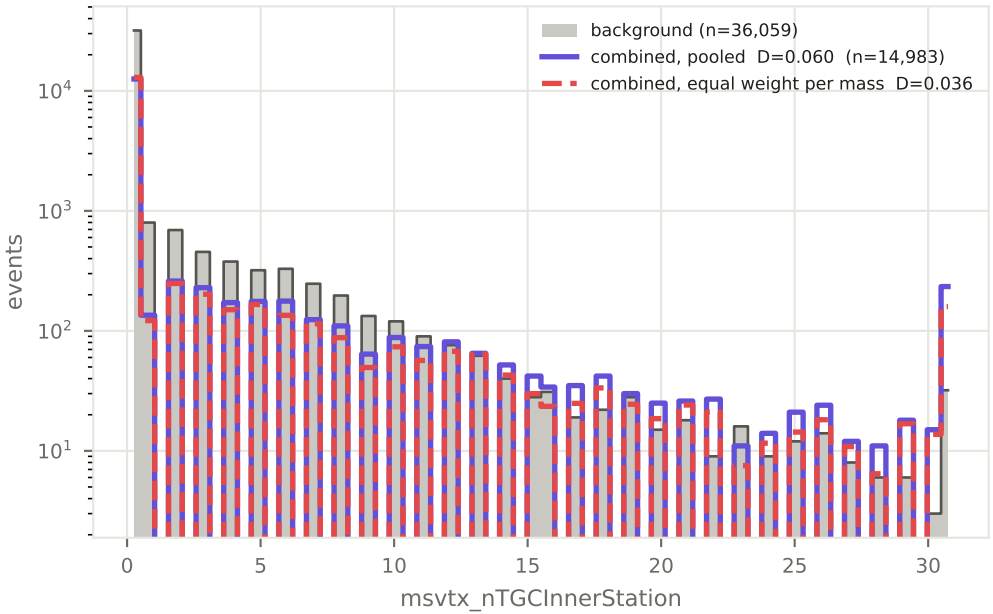

combined signal vs background · normalized

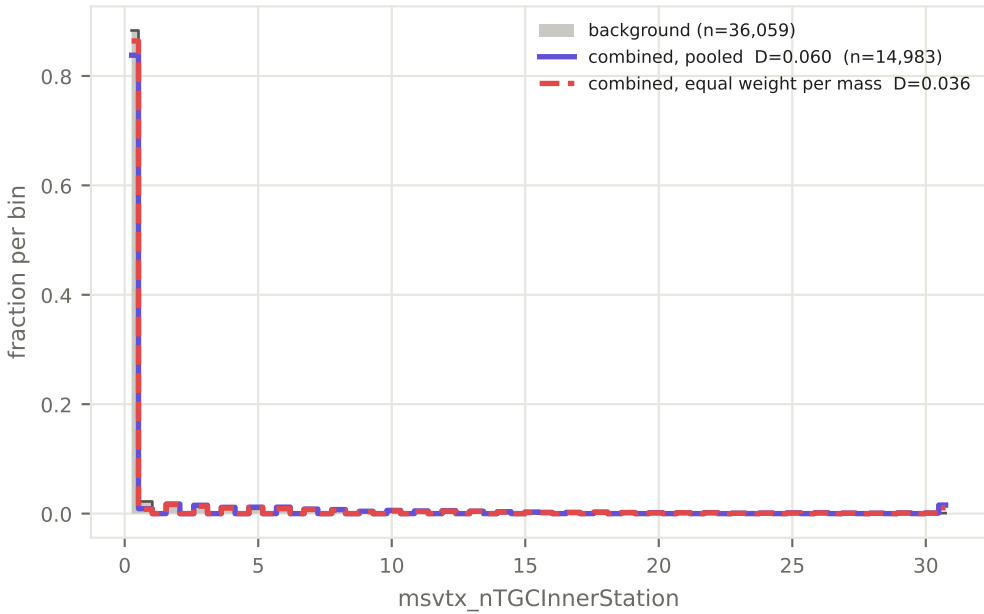


edge bins include under/overflow · NaN and -999 removed

msvtx_nTGCInnerStation


region: ALL · selection: ht40 (htmiss_NOSYS >= 40 GeV, signal and background) · rank 74 / 98

D_equal nan D_pooled nan bkg n = 0 sig n = 14,983


each mass point vs background · raw

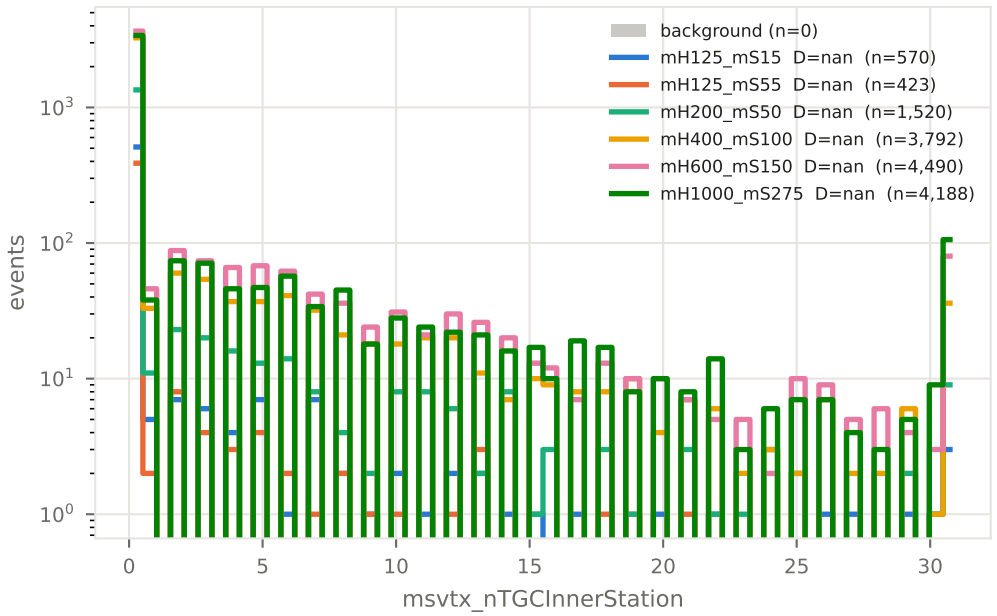


each mass point vs background · normalized

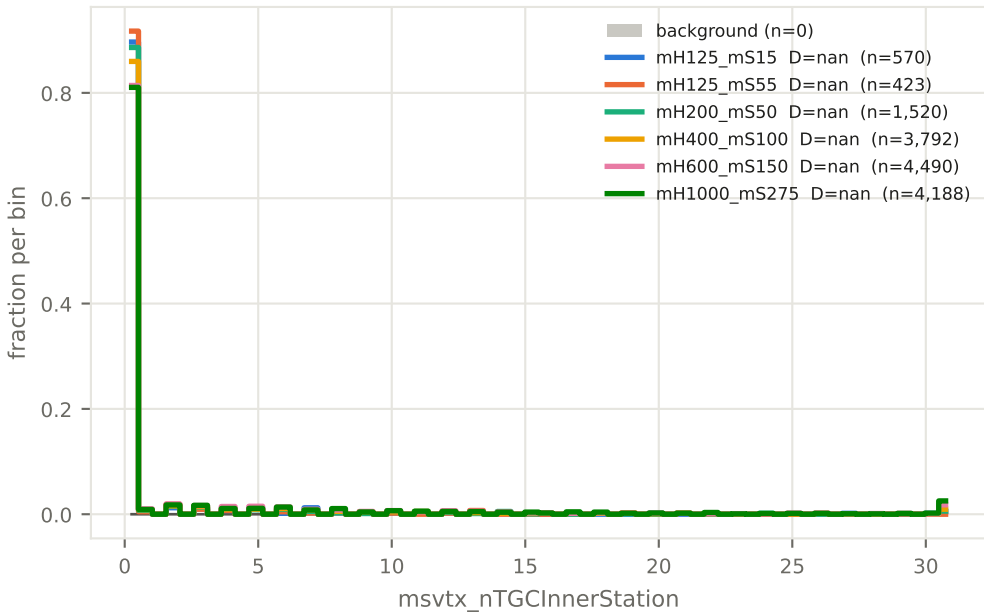

combined signal vs background · raw

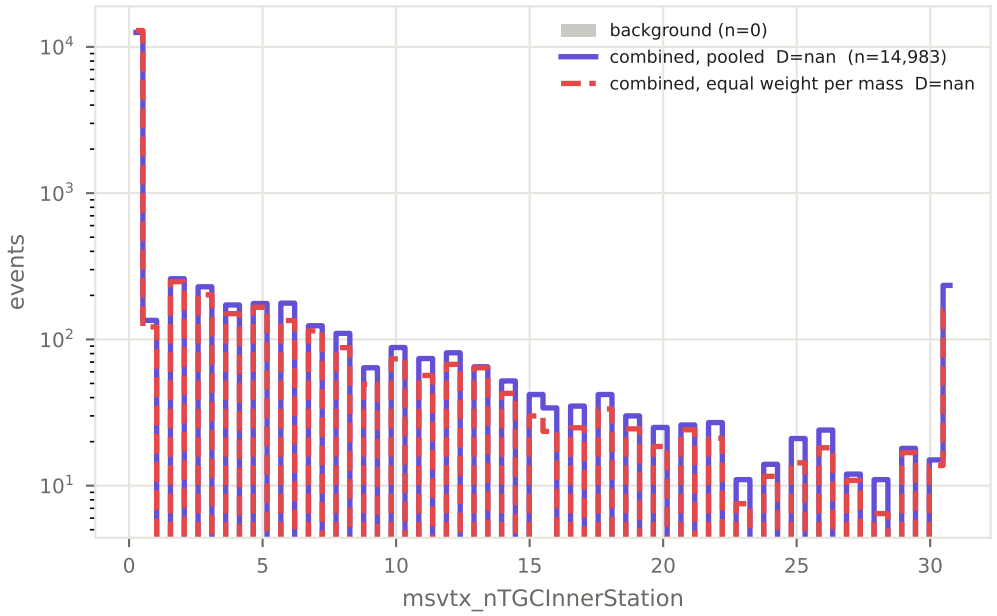

combined signal vs background · normalized

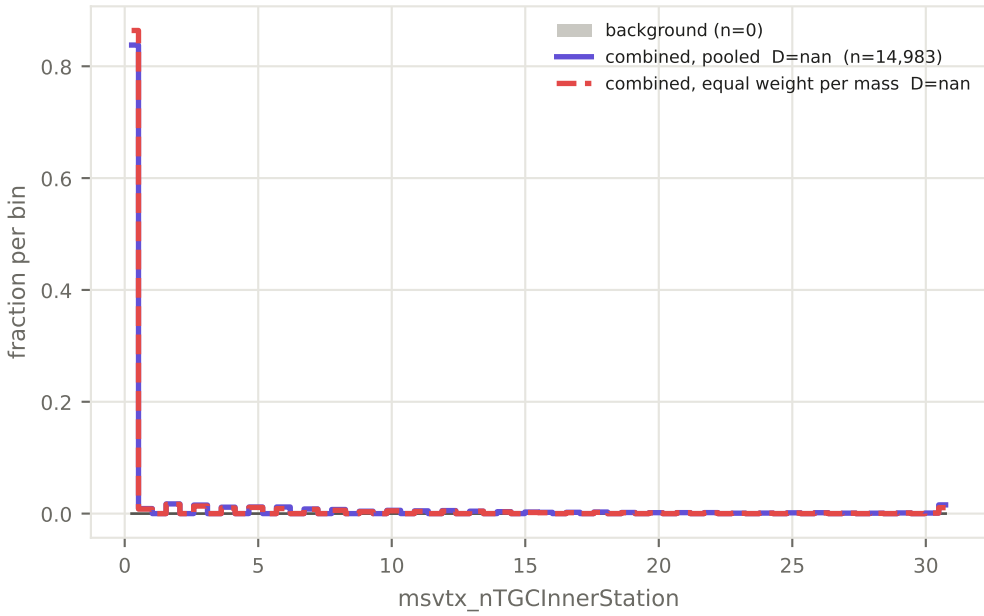

edge bins include under/overflow · NaN and -999 removed

msvtx_nTGCInnerStation

region: ALL · background only: below vs at/above the cut (htmiss_NOSYS >= 40 GeV, signal and background) · rank 74 / 98

D(below vs above) nan n below = 36,059 n above = 0 large D = background shape changes across the cut

