

BT1:

```
public person class person {  
    private String name;  
    private Date birthday;
```

```
    public void setName (String name) {  
        this.name = name;  
    }
```

```
    public void setBirthday (Date birthday) {  
        this.birthday = birthday;  
    }
```

```
    public String getDetails () {  
        return "Name : " + name + ", Birthday : "  
+ birthday;  
    }
```

```
}
```

```
public class employee extends person {  
    private double salary;
```

```
    public void setSalary (double salary) {  
        this.salary = salary;
```

```
@Override
```



```

public String getDetails() {
    return super.getDetails() + ", Salary: "
    + salary;
}
}

```

```

public class Manager extends Employee {
    private Employee assistant;
    public void setAssistant(Employee
    assistant) {
        this.assistant = assistant;
    }
}

```

@ override

```

public String getDetails()
    String assistantName = (assistant != null)?
    assistant.getDetails() : "None";
    return super.getDetails() + ", Assistant: "
    + assistantName;
}
}

```



```
public class Main {  
    public static void main (String [] args) {  
        Person person1 = new Employee ();  
        person1.setName ("Nguyen Van A");  
        person1.setBirthday (new Date ());
```

```
        Person person2 = new Manager ();  
        person2.setName ("Tran Van B");  
        person2.setBirthday (new Date ());
```


```
        System.out.println ("--- Up casting Employee");  
        System.out.println (person1.getDetails ());
```

```
        System.out.println ("--- Up casting Manager ---");  
        System.out.println (person2.getDetails ());
```

```
    }
```

```
}
```


BT 2

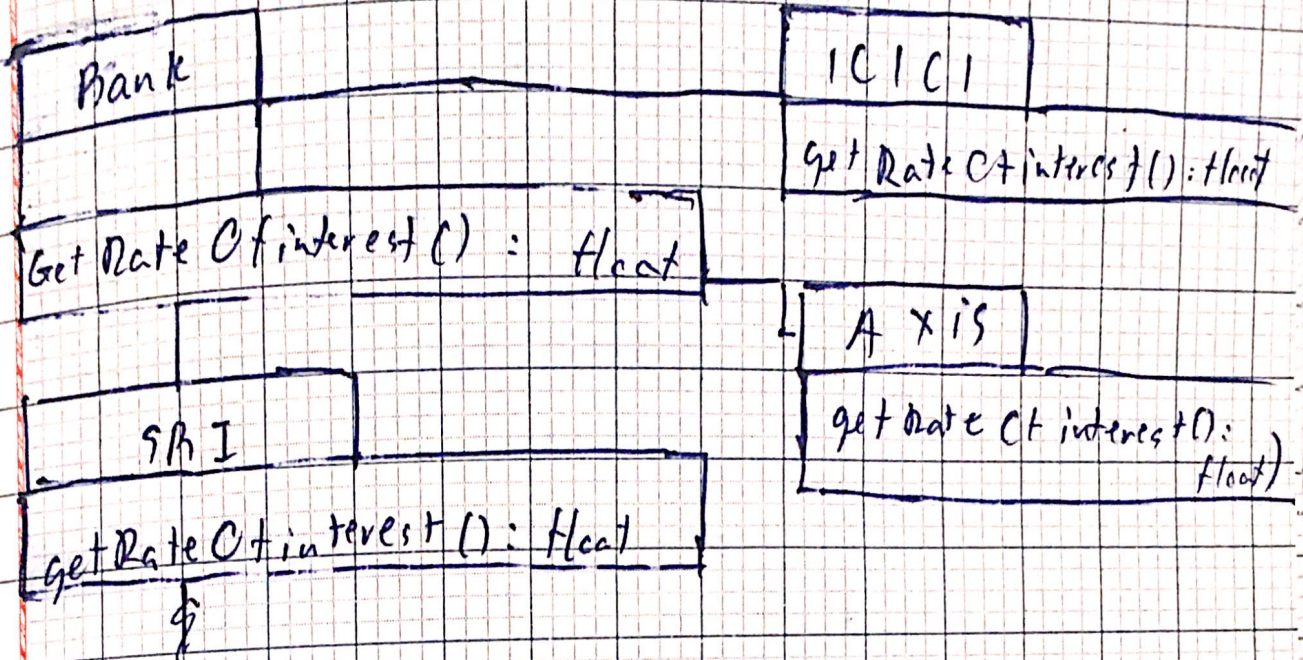

class

```

public class Bank {
    float getRateOfInterest() {
        return 0;
    }
}
  
```

```

public SBI extends Bank {
    @Override
    float getRateOfInterest() {
        return 8.0f;
    }
}
  
```



```

        extends Bank
public class ICICI {
    float getRateOfInterest () {
        return 7.0f;
    }
}

```

```

public class AXIS extends Bank {
    float getRateInterest () {
        return 9.0f;
    }
}

```

```

public class Main {
    public static void main (String[] args) {
        Bank bank1 = new SBI();
        Bank bank2 = new ICICI();
        Bank bank3 = new AXIS();

        bank1.ShowInterestRate();
        bank2.ShowInterestRate();
        bank3.ShowInterestRate();
    }
}

```


BT 3:

```
public class NhanVien {  
    protected String ten;  
    protected Long luong;  
  
    public NhanVien () {}  
    public NhanVien (String ten) {  
        this.ten = ten;  
    }  
    protected String loaiNhanVien () {  
        return "Nhân Viên";  
    }  
    public void tinhLuong () {  
    }  
    public void xuatThongTin () {  
        System.out.println (" + ten + " );  
        System.out.println (" loai NV: " + loaiNhanVien () );  
        System.out.println (" luong: " + luong + " VND" );  
    }  
}
```



```
public class NhanVienFullTime extends NhanVien {  
    private int loai chuc vu;  
    private int ngay lam them;
```

```
    public NhanVienFullTime (String ten, int ngay  
        lam them, int loai chuc vu) {  
        super (ten);  
        this. ngay lam them = ngay lam them;  
        this. loai chuc vu = loai chuc vu;  
    }
```

② Override

```
public protected String loai NhanVien () {  
    return "Full Time";  
}
```

② Override

```
public void tinh lương () {  
}
```

```
public class NhanVienPartTime extends NhanVien {  
    private int gio lam viec;  
    public NhanVienPartTime (String ten, int  
        gio lam viec) {
```



```
Super (ten);  
this.gio lam viec = gio lam viec;  
}
```

@Override

```
protected String loi Nhan vien () {  
    return "Part Time";  
}
```

@Override

```
public void tinh luong () {  
}  
}
```

```
public class Nhan vien part time extends Nhan  
vien {
```

```
    private int gio lam viec;  
    public Nhan vien part time = gio lam viec;  
}
```

@Override

```
protected String loi Nhan vien () {  
    return "Part Time";  
}
```

@Override


```

        public void tinh luong () {
        }
    }

import java.util. Scanner;

public class Main {
    public static void main (String [] args) {
        Scanner scanner = new Scanner (System.in);
        System.out.println("Thầy Tin NV Full-Time");
        System.out.print ("Nhập tên: ");
        System.out.print
        String ten FT = scanner.nextLine();
        System.out.print ("Nhập số ngày làm
        then:");
        int ngay them = scanner.nextInt();
        System.out.print ("Nhập loại chác va:");
        int chac va = scanner.nextInt();
        scanner.nextLine();
        NhanVien Full Time nv FT = new NhanVien Full Time
        (ten FT, ngay them, chac va);
        nv. tinh luong ();
        nv. xuat they tin ();
    }
}

```



```
system.out.println("Nhập tên NV  
part-time");
```

```
system.out.print("Nhập tên: ");  
String cat.print("Nhập số giờ: ");  
int gia lam = scanner.nextInt();
```

```
Nhà viên PartTime nv PT = new Nhà viên  
partTime(ten PT, gia lam);
```

```
nv PT.lichLam();
```

```
nv PT.xuatThongTin();
```

```
scanner.close();
```

```
}
```

```
}
```

```
PT
```