

Algorithm Problems

Nathan Gremillion

September 17, 2026

Chapter 2 (Getting Started)

Section 2.1 (Insertion sort)

2.1-4

Consider the searching problem:

Input: A sequence of n numbers $\langle a_1, a_2, \dots, a_n \rangle$ stored in array $A[1:n]$ and a value x .

Output: An index i that x equals $A[i]$ or the special value *NIL* if x doesn't appear in A .

Write pseudocode for linear search, which scans through the array from beginning to end, looking for x . Using a loop invariant, prove that your algorithm is correct. Make sure that your loop invariant fulfills the three necessary properties.

```
# give the index of the x target or else -1 if not found
```

```
def find_val(x: int, array: list[int]) -> int:
```

```
    n: int = len(array)
```

```
    res: int = -1
```

```
    for i in range(n):
```

```
        if (array[i] == x):
```

```
            res = i
```

```
            break
```

```
    return res
```

```
array: list[int] = [1,2,3,4,5,6,7]
```

```
index: int = find_val(100, array)
```

```
print(f"Index: {index}")
```

Note: Loop invariant properties include:

- **Initialization:** The invariant is true prior to the first iteration of the loop.
- **Maintenance:** If the invariant is true before an iteration of the loop, it remains true before the next iteration.
- **Termination:** The loop eventually terminates. When it does, the invariant—together with the reason the loop terminated—gives a useful property that helps prove the algorithm is correct.

Proof. Initialization: Before the first iteration, the loop variable i is set to 0. At this point, the subarray $A[0 : i]$ contains no elements. Therefore, no index $j < i$ exists such that $A[j] = x$. The loop invariant holds because we have not yet examined any elements, so it is correct that x has not been found in the subarray. Thus we return Nil (-1) which is a valid solution in this scenerio.

Maintenance: Next, we show that each iteration maintains the loop invariant. This means that if the invariant holds for the n th iteration, then it also holds for the $(n+1)$ th iteration

Assume that at the start of the n th iteration the invariant holds. That is, we have already checked all indices $i \in [0, n - 1]$ and found that $A[i] \neq x$. Therefore the value x has not been found in the first n element.

During the next iteration we check at index n . If $A[n] == x$ then the algorithm returns the index n . Otherwise we continue to the next iteration and we know that $A[0:n]$ does not contain x

Thus loop invariant holds for the next iteration. And thus we have shown Maintenance holds for the algorithm.

Termination The loop terminates when either the element x is found or when the index i reaches n , the length of the array. Since the loop increments i each iteration and $0 \leq i \leq n$, the algorithm must terminate.

If the algorithm terminate because $A[i] == x$, then it correctly returns the index i .

If the loop terminates because $i == n$, then by the loop invariant we know that x is not in $A[0:n-1]$. Therefore, the element x does not appear in the array, and we return -1 indicating this. $\square$

2.1-5

Consider the problem of adding two n -bit binary integers a and b , stored in two n -element arrays $A[0:n-1]$ and $B[0:n-1]$, where each element is either 0 or 1, $a = \sum_{i=0}^{n-1} A[i] * 2^i$, and $b = \sum_{i=0}^{n-1} B[i] * 2^i$. The sum $c = a + b$ of the two integers should be stored in binary form in an $(n + 1)$ -element array $C[0:n]$, where $c = \sum_{i=0}^n C[i] * 2^i$. Write a procedure ADD-BINARY-INTEGERS that takes as input arrays A and B , along with the length n , and returns array C holding the sum.

```
def add_binary_arrays(binary1: list[str], binary2: list[str]) -> list[str]:
    # keep pointers for binary 1 and binary 2
    # from the question they have the same len so
    # it is fair to say len(binary1) == len(binary2) == n
    n: int = len(binary1)
    i: int = n-1
    carry: bool = False
    C: list[str] = ['0'] * (n + 1)

    while (i >= 0):
        bit1: str = binary1[i]
        bit2: str = binary2[i]
```

```

if (bit1 == '1' and bit2 == '1'):
    if (carry):
        C[i+1] = '1'
        carry = True

elif ((bit1 == '1' and bit2 == '0')
      or (bit1 == '0' and bit2 == '1')):
    if (not carry):
        C[i+1] = '1'
        carry = False
    else:
        carry = True

else: # both are 0
    if (carry):
        C[i+1] = '1'
        carry = False

i -= 1

# check carry for the last bit
if (carry):
    C[0] = '1'

return C

```

Section 2.2 (Analyzing algorithms)

2.2-1

Express the function $n^3/1000 + 100n^2 - 100n + 3$ in terms of θ -notation.

So we have $c_1n^3 + c_2n^2 - c_3n$ we know the we can cancel out the constant terms since they are negligible for large vlaues of n and we know n^3 grows the fastest since it is a cubic. $\theta(n^3)$ is the answer

2.2-2

Consider sorting n numbers stored in array A[1:n] by first finding the smallest element of A[1:n] and exchanging it with the element in A[1]. Then find the smalles element of A[2:n], and exchange it with A[2]. Then find the smallest element of A[3:n], and exchange it with A[3]. Continue this for the first n-1 elements of A. Write the code for this algorithm (this is selection sort). What loop invariant does this algorithm maintain? Why does it need to run for only the first n-1 elements, rantehr than all n? Give the worst-case running time of selection sort in θ - notation. Is the best-case run time any better?

```

# selection sort code (in place)
def selectionSort(array: list[int]) -> None:

```

```

MAX_INT: int = 1000000000

n: int = len(array)
i: int = 0

while (i < n-1):
    cur_min: int = MAX_INT
    min_i: int = 0

    for j in range(i, n):
        num: int = array[j]

        if (num < cur_min):
            cur_min = num
            min_i = j

    temp: int = array[i]
    array[i] = array[min_i]
    array[min_i] = temp
    i += 1

```

The loop invariant that this algorithm maintains (the property that holds true before and after every iteration of the loop). $A[0:i-1]$ contains the $i-1$ smallest elements of the array and they are in sorted order

The algorithm only needs to run for the first $n-1$ elements because of the way it works it selects the smallest element for the current subarray being checked $A[i:n]$ it then places that in the lowest position in subarray and does this $\forall i \in [0 : n - 1]$ so by the time i gets to $n-1$ this sub array is $A[n-1:n]$ which only contains 1 element and thus is already sorted.

The worst case runtime of selection sort would be $\theta(n^2)$

The best case runtime of selection sort would be $\theta(n^2)$ which is the same. There is no mechanism to check if the subarray being checked is already sorted.

2.2-3

Consider linear search again (see Exercise 2.1-4). How many elements of the input array need to be checked on the average, assuming that the element being searched for is equally likely to be any element in the array? How about in the worst case? Using θ – notation, give the average-case and worst-case run times of linear search. Justify your answers.

Let x be the element we are searching for. Let n be the number of elements in the array.

Assuming that x exists in the array then statistically on average we should have to check roughly $n/2$ elements to find x . Since x is equally likely to be at each index the average would look like $\frac{(1+2+\dots+n)}{n}$ and we know $1 + 2 + \dots + n = \frac{n(n+1)}{2}$ thus using substitution we get an average runtime of $\frac{n(n+1)}{2n} = \frac{n+1}{2} = \frac{n}{2} + \frac{1}{2}$

In the worst cast the element would be at the last index in the array so at $A[n-1]$ in this scenerio we have to check all n elements to find x .

Notice: the dominant term for both the average and worst case remains $\theta(n)$ the only thing that changes is the constants.

2.2-4

How can you modify any sorting algorithm to have a good best-case running time?

You can add a way to check if the subarray you are currently finding the min for is already sorted. so maybe somthing like this

```
# selection sort code (in place)
def selectionSort(array: list[int]) -> None:

    n: int = len(array)
    i: int = 0

    while (i < n-1):
        cur_min: int = array[i]
        min_i: int = 0
        already_sorted: bool = True

        for j in range(i, n):
            num: int = array[j]

            if (j != n-1 and array[j + 1] < num):
                already_sorted = False

            if (num < cur_min):
                cur_min = num
                min_i = j


        if (already_sorted):
            return

        temp: int = array[i]
        array[i] = array[min_i]
        array[min_i] = temp
        i += 1
```

Section 2.3 (Designing algorithms)

2.3-1 Using Figure 2.4 as a model, illustrate the operation of merge sort on an array initially containing the sequence $\langle 3, 41, 52, 26, 38, 57, 9, 49 \rangle$.

2.3-2

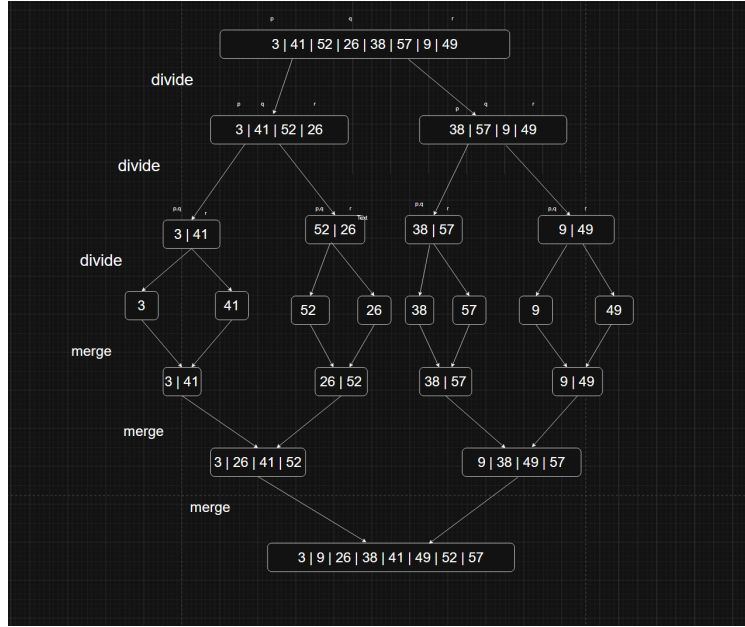

This test in line 1 of the MERGE-SORT procedure reads “if $p \geq r$ ” rather than “if $p \neq r$.” If MERGE-SORT is called with $p > r$, then the subarray $A[p : r]$ is empty. Argue that as long as the initial call of $\text{MERGE-SORT}(A, 1, n)$ has $n \geq 1$, the test “if $p \neq r$ ” suffices to ensure that no recursive call has $p > r$.

Given that the initial call of MERGE-SORT has $p = 1$ and $r = n$ where $n \geq 1$, we must show that the test $p \neq r$ suffices to ensure that no recursive call has $p > r$. From the initial call there are two cases:

1. $n = 1$

In this scenario, the function would not return since $1 \neq 1$ is false. It would compute

$$q = \frac{1 + 1}{2} = 1$$

It then calls two more MERGE-SORT operations:

$$\text{MERGE-SORT}(A, 1, 1)$$

(which is the same as the initial call, causing infinite recursion), and

$$\text{MERGE-SORT}(A, 2, 1)$$

which has $p > r$. Therefore the claim that no recursive call has $p > r$ is false, and thus we have shown that $p \neq r$ does not suffice.

2. $n > 1$

There is no need to explore this case since case 1 already disproves the argument.

2.3-3

State a loop invariant for the while loop of lines 12-18 of the MERGE procedure. Show how to use it, along with the while loops of lines 20-23 and 24-27, to prove that the MERGE procedure is correct.

Loop Invariant Statment: At the start of each iteration of the loop (lines 12-18): The subarray $A[p..k-1]$ contains the $k-p$ smallest elements of L and R in sorted order.

Initialization: Before the first iteration: $k=p$. The subarray $A[p..k-1]$ is empty. An empty array is trivially sorted and contains the 0 smallest elements of L and R . Therefore the invariant holds before the loop begins.

Maintenance: Assume the invariant holds at the start of an iteration. The algorithm compares: $L[i]$ and $R[j]$

This causes 2 cases:

Case 1 if $L[i] \leq R[j]$ $A[k] = L[i]$ increment i . Since $L[i]$ is the smallest remaining element, placing it next preserves the sorted order.

Case 2 if $R[j] < L[i]$ $A[k] = R[j]$ increment j

Since the smallest remaining element is placed next.

Then after either case: k is incremented. $A[p..k-1]$ still contains the smallest elements in sorted order. Thus the invariant is preserved.

Termination: The loop stops when either $i = nL$ (left array exhausted) or $j = nR$ (right array exhausted). At this moment: $A[p..k-1]$ contains the smallest elements from L and R in sorted order, but one subarray may still contain remaining elements.

The Clean Up: Two loops copy the remaining elements:

If left array remains Lines 20-23 copy remaining $L[i..nL-1]$ into A . If right array remains Lines 24-27 copy remaining $R[j..nR-1]$ into A . Because: L and R are already sorted. All remaining elements are greater than the elements already placed. Thus appending them preserves the sorted order.

2.3-4

Use mathematical induction to show that when $n \geq 2$ is an exact power of 2, the solution of the recurrence

$$T(n) = \begin{cases} 2 & : n = 2, \\ 2T(n/2) + n & : n > 2 \end{cases}$$

is $T(n) = n \lg n$.

Base Case: $n = 2$ so $T(2) = 2$ and $2 \lg 2 = 2(1) = 2$ so this case holds.

Inductive Hypothesis: Assume that for the $n = k$ case that $T(k) = \begin{cases} 2 & : k = 2, \\ 2T(k/2) + k & : k > 2 \end{cases}$

is $T(k) = k \lg k$.

Inductive Step: Now we have to prove for the $n = 2k$ case since when $n \geq 2$ is an exact power of 2 is the restriction so logically the next step from $n = k$ that is an exact power of 2 is $n = 2k$

$$T(n) = \begin{cases} 2 & : n = 2, \\ 2T(n/2) + n & : n > 2 \end{cases}$$

we know that $T(k) = k \lg k$ by inductive Hypothesis

if this is the base case we have already prove it so we now need to prove it in the case that $n > 2$ or $2k > 2$ so we need to show

$$2T\left(\frac{2k}{2}\right) + 2k = (2k) \lg(2k) \rightarrow 2(T(k) + k) = 2(k \lg(2k))$$

$$\text{and using the logarithmic product rule} \rightarrow 2(T(k) + k) = 2(k(\lg(2) + \lg(k)))$$

$$\rightarrow 2(T(k) + k) = 2(k(1 + \lg(k)))$$

$$\text{communative property of addition} \rightarrow 2(T(k) + k) = 2(k(\lg(k) + 1))$$

$$\text{distributive property of multiplication} \rightarrow 2(T(k) + k) = 2(k \lg(k) + k)$$

$$\text{using inductive hypothesis} \rightarrow 2(T(k) + k) = 2(T(k) + k)$$

thus I have show using induction that when $n \geq 2$ is an exact power of 2, the solution of the recurrence

$$T(n) = \begin{cases} 2 & : n = 2, \\ 2T(n/2) + n & : n > 2 \end{cases}$$

is $T(n) = n \lg n$.

2.3-5

You can also think of insertion sort as a recursive algorithm. In order to sort $A[1:n]$, recursively sort the subarray $A[1:n-1]$ and then insert $A[n]$ into the sorted subarray $A[1:n-1]$. Write the code for this recursive version of insertion sort. Give a recurrence for its worst-case run time.

```
def recursiveInsertionSort(array: list[int], n: int):
    if n <= 1:
        return

    # sort first n-1 elements
    recursiveInsertionSort(array, n-1)

    # insert last element into sorted part
    key = array[n-1]
    j = n-2

    while j >= 0 and array[j] > key:
        array[j+1] = array[j]
        j -= 1

    array[j+1] = key
```

2.3-6

Referring back to the searching problem (see Exercise 2.1-4), observe that if the subarray being searched is already sorted, the searching algorithm can check the midpoint of the subarray against v and eliminate half of the subarray from further consideration. The binary search algorithm repeats this procedure, halving the size of the remaining portion of the subarray each time. Write pseudocode, either iterative or recursive, for binary search. Argue that the worst-case running time of binary search is $\theta(\lg n)$.

```
def search(target, a):
    n: int = len(a)
    l: int = 0
    r: int = n-1

    print(a)

    while (l <= r):
        m: int = (l+r) // 2
        print(m)
        val: int = a[m]

        if val == target:
            return m
        elif target > val:
            l = m+1
        else:
            r = m-1

    return -1
```

The reason that the worst case is $\theta(\lg n)$ is because of the way binary search works so every time you check for the target you split the array you are searching in in half. this creates a tree that splits as it goes doewn so say you have an array with 10 elements then on the first iterations you check the middle at index 4. you then can either go left our right depending on the target either way you end up with a new array of either 4 or 5 (half or a little less thann half) you continue this untill you hit a array of 1 element. so it would shrink like $10- > 5- > 2- > 1$ and $\theta(\lg n(10)) = 3-4$

2.3-7

The while loop of lines 5-7 of the INSERTION-SORT procedure in Section 2.1 uses a linear search to scan (backward) throught the sorted subarray $A[1:j-1]$. What if insertion sort used a binary search (Exercise 2.3-6) instead of a linear search? Whould that improve the overall worst-case run time to $\theta(n \lg n)$?

No, because while binary search reduces the number of comparisons needed to find the correct position from $\theta(n)$ to $\theta(\lg n)$, the shifting of elements in the inner loop is still $\theta(n)$ per iteration in the worst case. Since the shifting dominates, the overall worst case runtime remains $\theta(n^2)$

2.3-8

Write the algorithm that, given a set S of n integers and another integer x , determines whether S contains two elements that sum to exactly x . Your algorithm should take $\theta(n \lg n)$ time in the worst case.

```
from xmlrpc.client import boolean

def mergeSort(nums: list[int], l: int, r: int) -> list[int]:
    if not nums or l > r:
        return []
    if l == r:
        return [nums[l]]

    m: int = (l+r) // 2
    leftNums: list[int] = mergeSort(nums, l, m)
    rightNums: list[int] = mergeSort(nums, m+1, r)
    return merge(leftNums, rightNums)

def merge(nums1: list[int], nums2: list[int]) -> list[int]:
    # nums1
    i: int = 0
    n: int = len(nums1)

    # nums2
    j: int = 0
    m: int = len(nums2)

    res: list[int] = []

    while (i < n and j < m):
        if (nums1[i] <= nums2[j]):
            res.append(nums1[i])
            i += 1
        else:
            res.append(nums2[j])
            j += 1

    if i >= n:
        res.extend(nums2[j:m])
    else:
        res.extend(nums1[i:n])

    return res

# assumes a sorted array (if num at i then doesn't count cuz that is the other num's index)
def binarySearch(nums: list[int], i: int, x: int) -> bool:
    l: int = 0
```

```

r: int = len(nums)-1

while(l < r):
    m: int = (l+r)//2
    num: int = nums[m]

    if (num == x and i != m):
        return True
    elif (num == x and i == m):
        left = nums[i-1] if i > 0 else None
        right = nums[i+1] if i < r else None
        if left == num or right == num:
            return True
        else:
            return False
    elif (num > x):
        r = m
    else:
        l = m+1

return False

# function that determines if nums contains 2 elements that sum to x
def containsTwoElementsSum(nums: list[int], x: int) -> boolean:
    n: int = len(nums)

    if n < 2:
        return False

    sortedNums: list[int] = mergeSort(nums, 0, len(nums)-1)
    for i in range(len(nums)):
        num: int = nums[i]
        if (binarySearch(sortedNums, i, x-num)):
            return True

    return False

array: list[int] = [100, 43, 54, 23, 67, 1, 9, 413, 456, 21, 46, 80, 70]
sortedArray: list[int] = mergeSort(array, 0, len(array)-1)

print(array)
print(sortedArray)
print(containsTwoElementsSum(sortedArray, 18))

```

Chapter 2 Questions

2-1 Insertion sort on small arrays in merge sort

Although merge sort runs in $\theta(n \lg n)$ worst-case time and insertion sort runs in $\theta(n^2)$ worst-case ,

the constant factors in insertion sort can make it faster in practice for small problem sizes on many machines. Thus it makes sense to coarsen the leaves of the recursion by using insertion sort within merge sort when subproblems become sufficiently small. Consider a modification to merge sort in which n/k sublists of length k are sorted using insertion sort and then merged using the standard merging mechanism, where k is a value to be determined.

- a. Show that insertion sort can sort the n/k sublists, each of length k , in $\theta(nk)$ worst-case time.

CODE FOR THIS SECTION

```
from xmlrpc.client import boolean

def insertionSort(nums: list[int]) -> list[int]:
    n: int = len(nums)

    res: list[int] = []

    for num in nums:
        res.append(num)

    if n == 0:
        return []
    if n == 1:
        return [nums[0]]

    i: int = 1

    while (i < n):
        j: int = i-1
        while (res[j] > res[j+1] and j >= 0):
            temp: int = res[j+1]
            res[j+1] = res[j]
            res[j] = temp
            j = j-1
        i += 1

    return res

def mergeSort(nums: list[int], l: int, r: int, k: int) -> list[int]:

    def merge(nums1: list[int], nums2: list[int]) -> list[int]:
        # nums1
        i: int = 0
        n: int = len(nums1)

        # nums2
        j: int = 0
        m: int = len(nums2)
```

```

res: list[int] = []

while (i < n and j < m):
    if (nums1[i] <= nums2[j]):
        res.append(nums1[i])
        i += 1
    else:
        res.append(nums2[j])
        j += 1

if i >= n:
    res.extend(nums2[j:m])
else:
    res.extend(nums1[i:n])

return res

if not nums or l > r:
    return []
if l == r:
    return [nums[l]]
if len(nums) <= k:
    return insertionSort(nums)

m: int = (l+r) // 2
leftNums: list[int] = mergeSort(nums, l, m, k)
rightNums: list[int] = mergeSort(nums, m+1, r, k)
return merge(leftNums, rightNums)

array: list[int] = [100, 43, 54, 23, 67, 1, 9, 413, 456, 21, 46, 80, 70]
sortedArray: list[int] = mergeSort(array, 0, len(array)-1, 3)

print(array)
print(sortedArray)

```

So given n/k sublists each of length k I need to show the worst case will be $\theta(nk)$ let $x = n/k$ which is the number of sublists then we would be calling the sorting algorithm x times so the worst case run time would be $x \cdot (\text{worst case run time of insertion sort on array of len } k)$

Examine:

```

def insertionSort(nums: list[int]) -> list[int]:
    n: int = len(nums)                (1)
    i: int = 1                        (2)

    while (i < n):                    (3)

```

```

j: int = i-1                                (4)
while (res[j] > res[j+1] and j >= 0):      (5)
    temp: int = res[j+1]                    (6)
    res[j+1] = res[j]                      (7)
    res[j] = temp                          (8)
    j = j-1                                (9)
i += 1                                     (10)

return nums                                (11)

```

Proof. (1) (costs c_1 , times 1)

(2) (costs c_2 , times 1)

(3) (costs c_3 , times k)

(4) (costs c_4 , times $k-1$)

(5) (costs c_5 , times $(\sum_{i=1}^{k-1} (i+1))$)

(6-9) (costs c_6, c_7, c_8, c_9 — times $(\sum_{i=1}^{k-1} i)$)

(10) (costs c_{10} , times $k-1$)

(11) (costs c_{11} , times 1) □

We know by Gauss sum that: $\sum_{i=1}^m i = \frac{m(m+1)}{2}$

So we now have as the summation of all the lines for insertion sort:

$$\begin{aligned}
& c_1 + c_2 + kc_3 + (k-1)c_4 + \left(\frac{(k-1)k}{2} + k-1 \right) c_5 + \frac{(k-1)k}{2} (c_6 + c_7 + c_8 + c_9) + (k-1)c_{10} + c_{11} \\
\Rightarrow & 1(c_1 + c_2 + c_{11}) + (k-1)(c_4 + c_{10}) + kc_3 + \frac{(k-1)k}{2} (c_6 + c_7 + c_8 + c_9) + \frac{(k-1)k}{2} c_5 + kc_5 - c_5 \\
\Rightarrow & 1(c_1 + c_2 + c_{11} - c_4 - c_5 - c_{10}) + k(c_3 + c_4 + c_5 + c_{10}) + \frac{(k-1)k}{2} (c_6 + c_7 + c_8 + c_9 + c_5) \\
\Rightarrow & c_1 + c_2k + (k^2 - k)(c_3) \\
\Rightarrow & c_1 + (c_2 - c_3)k + c_3k^2
\end{aligned}$$

so insertion sort costs $O(k^2)$ per sub list and there are n/k sublists so the total cost is $O(k^2 * n/k) = O(nk)$

b. Show how to merge the sublists in $\theta(n \lg(n/k))$ worst-case time.

if you were to use merge sort for the n/k sub lists then you could get a runtime of $\theta(n \lg(n/k))$

so you have n/k sorted sublists you then use merge sort so you are calling merge sort on n/k items and we know the runtime of merge sort is

c. Given that the modified algorithm runs in $\theta(nk + n \lg(n/k))$ worst-case time, what is the largest value of k as a function of n for which the modified algorithm has the same running time as standard merge sort, in terms of θ — notation?

d. How should you choose k in practice?

2-2 Correctness of bubblesort

Bubblesort is a popular, but inefficient, sorting algorithm. It works by repeatedly swapping adjacent elements that are out of order. The procedure BUBBLESORT sorts array $A[i:n]$.

```
def bubblesort(array: list[int], n: int):
    for i in range(n):
        for j in range(n, i, -1):
            if (array[j] < array[j - 1]):
                temp: int = array[j]
                array[j] = array[j-1]
                array[j-1] = temp
```

a. Let A' denote the array A after $\text{bubblesort}(A, n)$ is executed. To prove that bubblesort is correct, you need to prove that it terminates and that $A'[1] \leq A'[2] \leq \dots \leq A'[n]$. (2.5)
In order to show that bubblesort actually sorts, what else do you need to prove?

b. State precisely a loop invariant for the for loop in lines 2-4, and prove that this loop invariant holds. Your proof should use the structure of the loop-invariant proof presented in this chapter.

c. Using the termination condition of the loop invariant proved in part (b), state a loop invariant for the for loop in lines 1-4 that allows you to prove inequality (2.5). Your proof should use the structure of the loop-invariant proof presented in this chapter.

d. What is the worst-case running time of BUBBLESORT? How does it compare with the running time of INSERTION-SORT?

2-3 Correctness of Horner's rule

You are given the coefficients $a_0, a_1, a_2, \dots, a_n$ of a polynomial

$$P(x) = \sum_{k=0}^n a_k x^k = a_0 + a_1 x + a_2 x^2 + \dots + a_{n-1} x^{n-1} + a_n x^n,$$

and you want to evaluate this polynomial for a given value of x . Horner's rule says to evaluate the polynomial according to this parenthesization:

$$P(x) = a_0 + x(a_1 + x(a_2 + \dots + x(a_{n-1} + x a_n) \dots))$$

The procedure HORNER implements Horner's rule to evaluate $P(x)$, given the coefficients $a_0, a_1, a_2, \dots, a_n$ in an array $A[0:n]$ and the value of x .

```
def horner(array, n, x):
    p = 0
    for i in range(n-1, -1, -1):
        p = a[i] + x*p
    return p
```

a. In terms of θ -notation, what is the run time of this procedure?

b. Write code to implement the naive polynomial-evaluation algorithm that computes each term of the polynomial from scratch. What is the running time of this algorithm? How does it compare with HORNER?

c. Consider the following loop invariant for the procedure horner: At the start of each iteration of the for loop of line 2-3, $p = \sum_{k=0}^{n-(i+1)} A[k+i+1] * x^k$. Interpret a summation with no terms as equaling 0. Following the structure of the loop-invariant proof presented in this chapter, use this loop invariant to show that, at termination, $p = \sum_{k=0}^n A[k] * x^k$.

2-4 Inversions

Let $A[1:n]$ be an array of n distinct numbers. If $i < j$ and $A[i] > A[j]$, then the pair (i,j) is called an inversion of A .

a. List the five inversions of the array $\langle 2, 3, 8, 6, 1 \rangle$.

b. What array with elements form the set $1, 2, \dots, n$ has the most inversions?
How many does it have?

c. What is the relationship between the running time of insertion sort and the number of inversions in the input array? Justify your answer.

d. Give an algorithm that determines the number of inversions in any permutation on n elements in $\theta(n \lg n)$ worst-case time. (Hint: Modify merge sort.)

Chapter 3 (Characterizing Running Times)

Chapter 4 (Divide-and-Conquer)

Chapter 5 (Probabilistic Analysis and Randomized Algorithms)

Chapter 6 (Heapsort)

Chapter 7 (Quicksort)

Chapter 8 (Sorting in Linear Time)

Chapter 9 (Medians and Order Statistics)

Chapter 10 (Elementary Data Structures)

Chapter 11 (Hash Tables)

Chapter 12 (Binary Search Trees)

Chapter 13 (Red-Black Trees)

Chapter 14 (Dynamic Programming)

Chapter 15 (Greedy Algorithms)

Chapter 16 (Amortized Analysis)

Chapter 17 (Augmenting Data Structures)

Chapter 18 (B-Trees)

Chapter 19 (Data Structures for Disjoint Sets)

Chapter 20 (Elementary Graph Algorithms)

Chapter 21 (Minimum Spanning Trees)

Chapter 22 (Single-Source Shortest Paths)

Chapter 23 (All-Pairs Shortest Paths)

Chapter 24 (Maximum Flow)

Chapter 25 (Matchings in Bipartite Graphs)

Chapter 26 (Parallel Algorithms)

Chapter 27 (Online Algorithms)

Chapter 28 (Matrix Operations)

Chapter 29 (Linear Programming)

Chapter 30 (Polynomials and the FFT)

Chapter 31 (Number-Theoretic Algorithms)

Chapter 32 (String Matching)

Chapter 33 (Machine-Learning Algorithms)

Chapter 34 (NP-Completeness)

Chapter 35 (Approximation Algorithms)