
Lab 12 PL/SQL

CSE 4308 DATABASE MANAGEMENT SYSTEMS LAB

Consider the following schema for a Banking database:

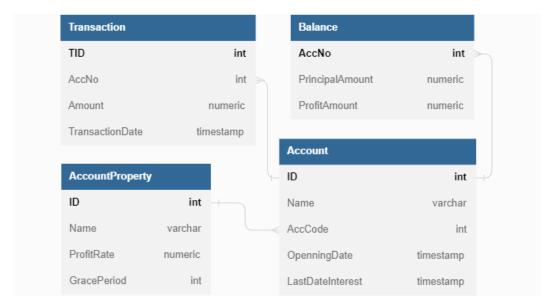

Create the necessary tables and insert some values.

Table 1: Account Property.

ID	Name	ProfitRate(per month)	GracePeriod (month)
2002	monthly	2.8	1
3003	quarterly	4.2	4
4004	biyearly	6.8	6
5005	yearly	8	12

1. Write a function to generate the Account id according to the following structure.

Account_id Format: TTTTYYYYMMDD.NNN.XXXXXX

where, TTTT = AccCode;

YYYYMMDD = OpenningDate;

NNN = First three letters of Name;

XXXXXX = Serial No [Use sequence];

The function will take 3 IN parameters such as Name, AccCode, and OpenningDate. And it will return Varchar as the new Account_id.

- 2. Modify the previous DDLs to accumulate the new Account_id where Account_id will replace the ID of the Account table and also the other dependencies.
- 3. Write a trigger to automate the assignment of Account_id while inserting any new account.
- 4. Write another trigger that will automatically insert a new entry in the Balance table after successfully registering an account. The initial PrincipalAmount will be 5000 and the ProfitAmount will be 0;
- 5. Finally another trigger will update the PrincipalAmount = Priveous PrincipalAmount+Amount when there will be any new transaction made for an account.