

Chapter 3

Structured Program Development in C

An introduction to structured programming

Chapter Targets

- Use basic problem-solving techniques.
- Develop algorithms through the process of top-down, stepwise refinement.
- Use the if selection statement and the if ... else selection statement to select actions.
- Use the while iteration statement to execute statements in a program repeatedly.
- Use counter-controlled iteration and sentinel-controlled iteration.
- Learn structured programming.
- Use increment, decrement and assignment operators.

Algorithms

- The solution to any computing problem involves executing a series of actions in a specific order.
- A **procedure** for solving a problem in terms of
 - the **actions** to be executed, and
 - the **order** in which these actions are to be executedis called algorithm.
- Correctly specifying the order in which the actions are to be executed is important.

Algorithms (cont'd)

- Consider the “rise-and-shine algorithm” followed by one junior executive for getting out of bed and going to work:
 - 1) Get out of bed
 - 2) Take off pajamas
 - 3) Take a shower
 - 4) Get dressed
 - 5) Eat breakfast
 - 6) Carpool to work
- This routine gets the executive to work well prepared to make critical decisions.

Algorithms.

- Suppose that the same steps are performed in a slightly different order
 - 1) Get out of bed
 - 2) Take off pajamas
 - 3) Get dressed
 - 4) Take a shower
 - 5) Eat breakfast
 - 6) Carpool to work
- In this case, our junior executive shows up for work soaking wet.
- Specifying the order in which statements are to be executed in a computer program is called **program control**.

Pseudocode

- **Pseudocode** is an artificial and informal language that helps you develop algorithms.
- Pseudocode is similar to everyday English; it's convenient and user friendly although it's not an actual computer programming language.
- Pseudocode programs are not executed on computers.
- Rather, they merely help you “think out” a program before attempting to write it in a programming language like C.
- Pseudocode consists purely of characters, so you may conveniently type pseudocode programs into a computer using an editor program.

Pseudocode (cont'd)

- A carefully prepared pseudocode program may be converted easily to a corresponding C program.
- Pseudocode only consists of **action** and **decision** statements—those that are executed when the program has been converted from pseudocode to C and is run in C.
- **Definitions are not executable** statements.
- They're simply messages to the compiler.

Pseudocode.

- For example, the definition

```
int i;
```

tells the compiler the type of variable `i` and instructs the compiler to reserve space in memory for the variable.

- But this definition does not cause any action—such as input, output, a calculation or a comparison—to occur when the program is executed.
- Some programmers choose to list each variable and briefly mention the purpose of each at the beginning of a pseudocode program.

Control Structures

- Sequential execution
 - Normally, statements in a program are **executed one after the other** in the order in which they're written.
- Transfer of control
 - Various C statements we'll soon discuss enable you to specify that the **next statement to be executed** may be **other than the next one in sequence**.
- During the 1960s, it became clear that the indiscriminate use of transfers of control was the **root of** a great deal of **difficulty** experienced by software development groups.

Control Structures (cont'd)


- The finger of blame was pointed at the `goto statement` that allows you to specify a transfer of control to one of many possible destinations in a program.
- Structured programming became almost synonymous with “`goto elimination`.”
- Research had demonstrated that programs `could be written without any goto` statements.
- The challenge of the era was for programmers to shift their styles to “`goto-less programming`.”

Control Structures (cont'd)

- The results were impressive, as software development groups reported **reduced development times**, more frequent **on-time delivery of systems** and more frequent **within-budget completion** of software projects.
- Programs produced with structured techniques were **clearer, easier to debug** and **modify** and more likely to be bug free in the first place.
- Research had demonstrated that all programs could be written in terms of only three **control structures**, namely the **sequence structure**, the **selection structure** and the **iteration structure**.

Control Structures (cont'd)

- The **sequence structure** is simple—unless directed otherwise, the computer **executes C statements one after the other** in the order in which they're written.
- C allows us to have as many actions as we want in a sequence structure.

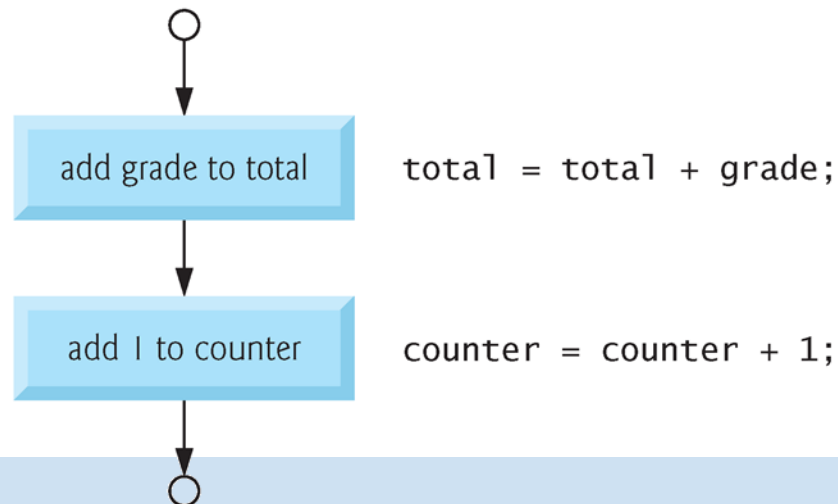

Control Structures (cont'd)

- Flowcharts

- A graphical representation of an algorithm or of a portion of an algorithm.
- Flowcharts are drawn using certain special-purpose symbols
 - ◆ Rectangles  : action symbol
 - ◆ Diamonds  : decision symbol
 - ◆ Rounded rectangles with  : the first symbol
 - ◆ Rounded rectangles with  : the last symbol
 - ◆ Small circles  : connector symbol (the first symbol in a portion of algorithm)
- These symbols are connected by arrows called flowlines indicating the order in which the actions are performed.

Control Structures (cont'd)

- Selection statements in C

- The `if` selection statement

- ◆ Either selects (performs) an action if a condition is true or skips the action if the condition is false
- ◆ **Single-selection** statement: it selects or ignores a single action.

- The `if...else` selection statement

- ◆ Performs an action if a condition is true and performs a different action if the condition is false.
- ◆ **Double-selection** statement: it selects between two different actions.

- The `switch` selection statement

- ◆ Performs one of many different actions depending on the value of an expression.
- ◆ **Multiple-selection** statement: it selects among many different actions

Control Structures (cont'd)

- Iteration Statements in C
 - Three types of iteration structures in the form of statements: `while`, `do...while`, and `for`.
 - Described later
- C has only **seven control statements**: sequence, three types of selection and three types of iteration.
- The flowchart representation of each control statement has **two small circle** symbols, one at the **entry** point to the control statement and one at the **exit** point.
 - These **single-entry/single-exit control statements** make it easy to build clear programs.

Control Structures (cont'd)

- Control-statement stacking

- The control-statement flowchart segments can be attached to one another by connecting the exit point of one control statement to the entry point of the next.
- Similar as stacking building blocks

- Control-statement nesting

- One other way control statements may be connected
- Described later.

- The essence of simplicity

- Any C program we'll ever need to build can be constructed from only seven different types of control statements combined in only two ways.

The if Selection Statement

- Selection statements are used to choose among alternative courses of action.

- The pseudocode statement

If student's grade is greater than or equal to 60
Print "Passed"

- Determines whether the condition "student's grade is greater than or equal to 60" is true or false.
- If the condition is true, then "Passed" is printed, and the next pseudocode statement in order is "performed".


The if Selection Statement (cont'd)

- If the condition is **false**, the printing is **ignored**, and the next pseudocode statement in order is performed.
- The second line of this selection structure is indented.
- Such **indentation** is optional, but it's **highly recommended** as it helps emphasize the inherent structure of structured programs.
- The C compiler ignores white-space characters such as blanks, tabs and newlines used for indentation and vertical spacing.

The if Selection Statement (cont'd)

- The preceding pseudocode If statement may be written in C as

```
if ( grade >= 60 ) {  
    printf( "Passed\n" );  
} // end if
```

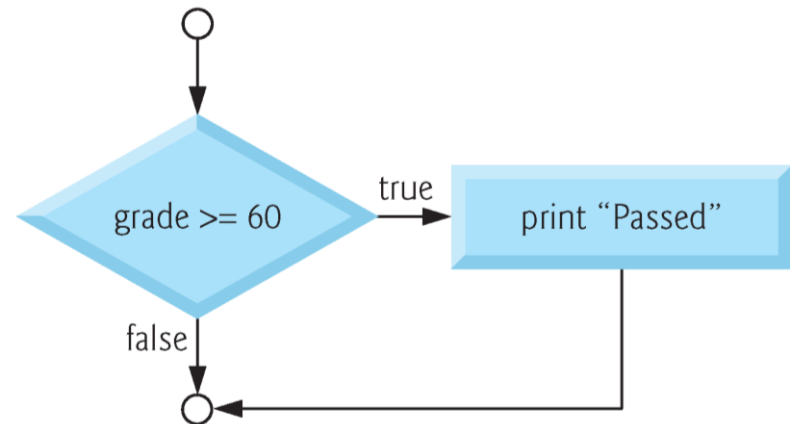

- Notice that the C code corresponds closely to the pseudocode (of course you'll also need to declare the `int` variable `grade`).

The if Selection Statement (cont'd)

- This flowchart contains what is perhaps the most important flowcharting symbol—the **diamond symbol**, also called the **decision symbol**, which indicates that a decision is to be made.
- The decision symbol **contains an expression**, such as a **condition**, that can be either true or false.

The if Selection Statement (cont'd)

- The decision symbol has **two flowlines** emerging from it.
- One indicates the direction to take when the expression in the symbol is true and the other the direction to take when the expression is false.
- Decisions can be based on **conditions** containing **relational** or **equality operators**.
- In fact, a decision can be based on **any expression**—if the expression evaluates to **zero**, it's treated **as false**, and if it evaluates to **nonzero**, it's treated **as true**.

The if Selection Statement (cont'd)

- The `if` statement, too, is a **single-entry/single-exit** statement.
- We can envision **seven bins**, each containing only **control-statement** flowcharts of one of the seven types.
- These flowchart **segments are empty**—nothing is written in the rectangles and nothing is written in the diamonds.
- Your task, then, is **assembling** a program from as many of each type of **control statement** as the algorithm demands, combining them **in** only two possible ways (**stacking or nesting**), and then **filling in** the **actions** and **decisions** in a manner appropriate for the algorithm.



Good Programming Practice 3.1

Indent both body statements of an if...else statement (in both pseudocode and C).



Good Programming Practice 3.2


If there are several levels of indentation, each level should be indented the same additional amount of space.

- The `if...else` selection statement allows you to specify that different actions are to be performed when the condition is true and when it's false.
- For example, the pseudocode statement
 - If student's grade is greater than or equal to 60
 Print "Passed"
else
 Print "Failed"
 - prints Passed if the student's grade is greater than or equal to 60 and Failed if the student's grade is less than 60.
- In either case, after printing occurs, the next pseudocode statement in sequence is "performed."

The if...else Selection Statement (cont'd)

- The preceding pseudocode `if...else` statement may be written in C as

```
if ( grade >= 60 ) {  
    printf( "Passed\n" );  
} // end if  
else {  
    printf( "Failed\n" );  
} // end else
```

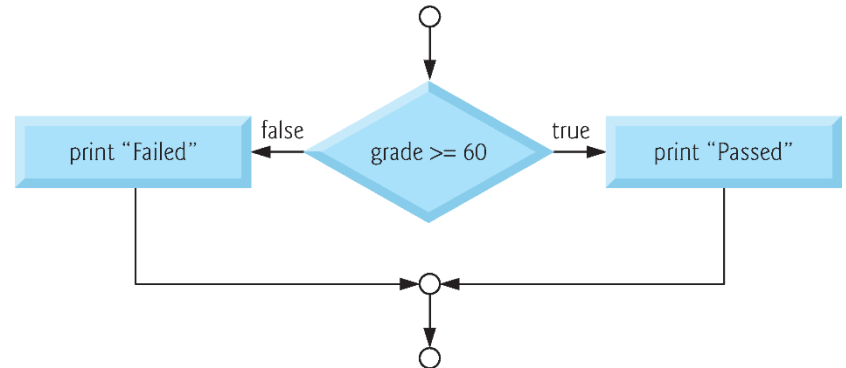

- Once again, besides small circles and arrows, the only symbols in the flowchart are rectangles for actions and a diamond for a decision.

The if...else Selection Statement (cont'd)

● Conditional Operator

- C provides the **conditional operator** (**? :**) which is closely related to the if...else statement.
- The conditional operator is **C's only ternary operator**—it takes **three operands**. These together with the conditional operator form a conditional expression.
 - ◆ The **first** operand is a **condition**.
 - ◆ The **second operand** is **the value** for the entire conditional expression if the condition is **true** and the **third operand** is **the value** for the entire conditional expression if the condition is **false**.

The if...else Selection Statement (cont'd)

- For example, the puts statement

```
puts( grade >= 60 ? "Passed" : "Failed" );
```

- ◆ contains as its second argument a conditional expression that evaluates to the string "Passed" if the condition `grade >= 60` is true and to the string "Failed" if the condition is false.
- The puts statement performs in essentially the same way as the preceding `if...else` statement.

The if...else Selection Statement (cont'd)

- The second and third operands in a conditional expression can also be actions to be executed.
 - ◆ For example, the conditional expression
`grade >= 60 ? puts( "Passed" ) : puts( "Failed" );`
is read, “If grade is greater than or equal to 60 then puts("Passed"), otherwise puts("Failed").” This, too, is comparable to the preceding `if...else` statement.
 - ◆ We'll see that conditional operators can be used in some places where `if...else` statements cannot.

The if...else Selection Statement (cont'd)

● Nested if...else Statements

- Test for multiple cases by placing if...else statements inside if...else statements.
- For example, consider the following pseudocode statement
 - ◆ Print A for exam grades greater than or equal to 90, B for grades greater than or equal to 80 (but less than 90), C for grades greater than or equal to 70 (but less than 80), D for grades greater than or equal to 60 (but less than 70) and F for all other grades.

The if...else Selection Statement (cont'd)

```
◆ If student's grade is greater than or equal to 90
  Print "A"
else
  If student's grade is greater than or equal to 80
    Print "B"
  else
    If student's grade is greater than or equal to 70
      Print "C"
    else
      If student's grade is greater than or equal to 60
        Print "D"
      else
        Print "F"
```

The if...else Selection Statement (cont'd)

- This pseudocode may be written in C as

```
if ( grade >= 90 )
    puts( "A" );
else
    if ( grade >= 80 )
        puts("B");
    else
        if ( grade >= 70 )
            puts("C");
        else
            if ( grade >= 60 )
                puts( "D" );
            else
                puts( "F" );
```

The if...else Selection Statement (cont'd)

- If the variable grade is greater than or equal to 90, all four conditions will be true, but only the puts statement after the first test will be executed.
- After that puts is executed, the else part of the “outer” if...else statement is skipped.

The if...else Selection Statement (cont'd)

- You may prefer to write the preceding if statement as

```
if ( grade >= 90 )  
    puts( "A" );  
else if ( grade >= 80 )  
    puts( "B" );  
else if ( grade >= 70 )  
    puts( "C" );  
else if ( grade >= 60 )  
    puts( "D" );  
else  
    puts( "F" );
```

The if...else Selection Statement (cont'd)

- As far as the C compiler is concerned, both forms are equivalent.
- The latter form is popular because it avoids the deep indentation of the code to the right.
- The if selection statement expects only one statement in its body—if you have only one statement in the if's body, you do not need to enclose it in braces.
- To include several statements in the body of an if, you must enclose the set of statements in braces ({ and }).

The if...else Selection Statement (cont'd)

- Compound statement

- A set of statements contained within a pair of braces or a block
- The following example includes a compound statement in the else part of an if...else statement.

```
if ( grade >= 60 ) {  
    puts( "Passed. " );  
} // end if  
else {  
    puts( "Failed. " );  
    puts( "You must take this course again. " );  
} // end else
```

The if...else Selection Statement (cont'd)

- In this case, if grade is less than 60, the program executes both puts statements in the body of the else and prints
Failed.
You must take this course again.
- The braces surrounding the two statements in the else are important. Without them, the statement
`puts( "You must take this course again." );`
would be outside the body of the else part of the if and would execute regardless of whether the grade was less than 60.

The if...else Selection Statement (cont'd)

- Empty statement

- Just as a compound statement can be placed anywhere a single statement can be placed, it's also possible to have no statement at all, i.e., the empty statement.
- The **empty statement** is represented by placing a semicolon (;) where a statement would normally be.

- Two types of error

- A **syntax error** is caught by the **compiler**.
- A **logic error** has its **effect at execution** time.
 - ◆ A **fatal** logic error causes a **program** to fail and **terminate** prematurely.
 - ◆ A **nonfatal** logic error allows a program to continue executing but to **produce incorrect results**.

The if...else Selection Statement.



Error-Prevention Tip 3.1

Use expressions of the same type for the second and third operands of the conditional operator (?:) to avoid subtle errors.



Software Engineering Observation 3.1

A compound statement can be placed anywhere in a program that a single statement can be placed.



Error-Prevention Tip 3.2

Always include your control statements' bodies in braces ({ and }), even if those bodies contain only a single statement. This solves the "dangling-else" problem, which we discuss in Exercises 3.30–3.31.



Common Programming Error 3.1

Placing a semicolon after the condition in an if statement as in `if ( grade >= 60 );` leads to a logic error in single-selection if statements and a syntax error in double-selection if statements.



Error-Prevention Tip 3.3

Typing the beginning and ending braces of compound statements before typing the individual statements within the braces helps avoid omitting one or both of the braces, preventing syntax errors and logic errors (where both braces are indeed required).

The while Iteration Statement

- An **iteration statement** allows you to specify that an **action is to be repeated while some condition remains true**.
- The pseudocode statement
 While there are more items on my shopping list
 Purchase next item and cross it off my list
describes the iteration occurring during a shopping trip.
- The condition, “there are more items on my shopping list” may be true or false.
- If it’s true, then the action, “Purchase next item and cross it off my list” is performed.
- This action will be performed repeatedly while the condition remains true.

The while Iteration Statement (cont'd)

- The statement(s) contained in the while iteration statement constitute the **body** of the while.
- The `while` statement body **may be a single statement or a compound statement**.
- **Eventually, the condition will become false** (when the last item on the shopping list has been purchased and crossed off the list).
- At this point, the iteration **terminates**, and the first pseudocode statement after the iteration structure is executed.



Common Programming Error 3.2

Not providing in the body of a `while` statement an action that eventually causes the condition in the `while` to become false. Normally, such an iteration structure will never terminate—an error called an “infinite loop.”




Common Programming Error 3.3

*Spelling a keyword (such as `while` or `if`) with any uppercase letters (as in, `While` or `If`) is a compilation error. Remember *C* is case sensitive and keywords contain only lowercase letters.*

The while Iteration Statement (cont'd)


- As an example of a while statement, consider a program segment designed to **find the first power of 3 larger than 100**.
- Suppose the integer variable `product` has been initialized to 3.
- When the following while iteration statement finishes executing, `product` will contain the desired answer:

```
product = 3;  
while ( product <= 100 ) {  
    product = 3 * product;  
} // end while
```

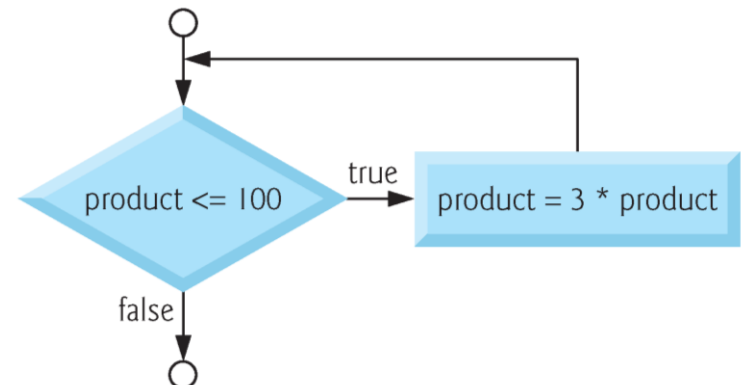


The while Iteration Statement (cont'd)

- Once again, note that (besides small circles and arrows) the flowchart contains only a rectangle symbol and a diamond symbol.
- The flowchart clearly shows the **iteration**.
- The flowline emerging from the rectangle wraps back to the decision, which is tested each time through the loop until the decision eventually becomes false.
- At this point, the while statement is exited and control passes to the next statement in the program.

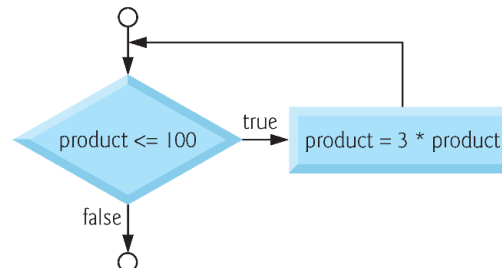

The while Iteration Statement (cont'd)

- When the while statement is entered, the value of product is 3.
- The variable product is repeatedly multiplied by 3, taking on the values 9, 27 and 81 successively.
- When product becomes 243, the condition in the while statement, $\text{product} \leq 100$, becomes false.
- This terminates the iteration, and the final value of product is 243.
- Program execution continues with the next statement after the while.

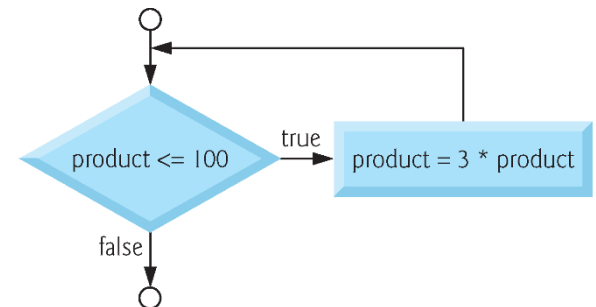

Formulating Algorithms Case Study 1: Counter-Controlled Iteration

- To illustrate how algorithms are developed, we solve several variations of a class-average problem.
- Consider the following problem statement:

A class of ten students took a quiz. The grades (integers in the range 0 to 100) for this quiz are available to you. Determine the class average on the quiz.
- The class average is equal to the sum of the grades divided by the number of students.
- The algorithm for solving this problem on a computer must input each of the grades, perform the average calculation, and print the result.

Formulating Algorithms Case Study 1: Counter-Controlled Iteration (cont'd)

- Let's use pseudocode to list the actions to execute and specify the order in which these actions should execute.
- We use counter-controlled iteration to input the grades one at a time.
- This technique uses a variable called a counter to specify the number of times a set of statements should execute.
- In this example, iteration terminates when the counter exceeds 10.

Formulating Algorithms Case Study 1: Counter-Controlled Iteration (cont'd)

- Counter-controlled iteration is often called definite iteration because the number of iterations is known before the loop begins executing.

Formulating Algorithms Case Study 1: Counter-Controlled Iteration (cont'd)

```
1 // Class average program with counter-controlled iteration
2 #include <stdio.h>
3
4 // function main begins program execution
5 int main( void )
6 {
7     unsigned int counter; // number of grade to be entered next
8     int grade; // grade value
9     int total; // sum of grades entered by user
10    int average; // average of grades
11
12    // initialization phase
13    total = 0; // initialize total
14    counter = 1; // initialize loop counter
15
16    // processing phase
17    while ( counter <= 10 ) { // loop 10 times
18        printf( "%s", "Enter grade: " ); // prompt for input
19        scanf( "%d", &grade ); // read grade from user
20        total = total + grade; // add grade to total
21        counter = counter + 1; // increment counter
22    } // end while
23
24    // termination phase
25    average = total / 10; // integer division
26
27    printf( "Class average is %d\n", average ); // display
28 }
```

Enter grade: 98
Enter grade: 76
Enter grade: 71
Enter grade: 87
Enter grade: 83
Enter grade: 90
Enter grade: 57
Enter grade: 79
Enter grade: 82
Enter grade: 94
Class average is 81

- 1 Set total to zero
- 2 Set grade counter to one
- 3
- 4 While grade counter is less than or equal to ten
- 5 Input the next grade
- 6 Add the grade into the total
- 7 Add one to the grade counter
- 8
- 9 Set the class average to the total divided by ten
- 10 Print the class average

Formulating Algorithms Case Study 1: Counter-Controlled Iteration (cont'd)

- The algorithm mentions a total and a counter.
 - A total is a variable used to accumulate the sum of a series of values.
 - A counter is a variable used to count—in this case, to count the number of grades entered.
 - Because the counter variable is used to count from 1 to 10 in this program (all positive values), we declared the variable as an unsigned int, which can store only non-negative values (that is, 0 and higher).

Formulating Algorithms Case Study 1: Counter-Controlled Iteration (cont'd)

- Variables used to store totals should normally be initialized to zero before being used in a program; otherwise the sum would include the previous value stored in the total's memory location.
 - Counter variables are normally initialized to zero or one, depending on their use.
 - An **uninitialized** variable contains a “**garbage**” value—the value last stored in the memory location reserved for that variable.



Common Programming Error 3.4

*If a counter or total isn't initialized, the results of your program will probably be incorrect.
This is an example of a logic error.*



Error-Prevention Tip 3.4

Initialize all counters and totals.

Formulating Algorithms Case Study 1: Counter-Controlled Iteration (cont'd)

- The average calculation in the program produced an integer result of 81.
 - Actually, the sum of the grades in this example is 817, which when divided by 10 should yield 81.7, i.e., a number with a decimal point.
 - We'll see how to deal with such numbers (called floating-point numbers) in the next section.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration

- Let's **generalize** the class-average problem.
- Consider the following problem:
 - Develop a class-average program that will process an arbitrary number of grades each time the program is run.
- In the first class-average example, the number of grades (10) was known in advance.
- In this example, the program must process an **arbitrary number of grades**.
- How can the program determine **when to stop** the input of grades? How will it know when to calculate and print the class average?

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- One way to solve this problem is to use a special value called a **sentinel value** (also called a **signal value**, a **dummy value**, or a **flag value**) to indicate “end of data entry.”
- The user types in grades until all legitimate grades have been entered.
- The user then types the sentinel value to indicate “the last grade has been entered.”
- **Sentinel-controlled iteration** is often called **indefinite iteration** because the number of iterations isn’t known before the loop begins executing.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- Clearly, the sentinel value must be chosen so that it cannot be confused with an acceptable input value.
- Because grades on a quiz are normally nonnegative integers, **-1 is an acceptable sentinel value** for this problem.
- Thus, a run of the class-average program might process a stream of inputs such as 95, 96, 75, 74, 89 and -1.
- The program would then compute and print the class average for the grades 95, 96, 75, 74, and 89 (-1 is the sentinel value, so it should not enter into the average calculation).

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- Top-Down, Stepwise Refinement

- We approach the class-average program with a technique called top-down, stepwise refinement, a technique that is essential to the development of well-structured programs.
- We begin with a pseudocode representation of the top:
 - ◆ Determine the class average for the quiz
- The top is a single statement that conveys the program's overall function.
- As such, the top is, in effect, a complete representation of a program.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- Unfortunately, the **top rarely conveys** a sufficient amount of **detail** for writing the C program.
- So we now begin the **refinement process**.
- We **divide the top into a series of smaller tasks** and **list** these **in** the **order** they need to be performed.
- This results in the following first refinement.
 - ◆ **Initialize variables**
Input, sum, and count the quiz grades
Calculate and print the class average
- Here, only the sequence structure has been used—the steps listed are to be executed in order, one after the other.



Software Engineering Observation 3.2

Each refinement, as well as the top itself, is a complete specification of the algorithm; only the level of detail varies.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

■ Second Refinement

- ◆ To proceed to the next level of refinement, i.e., the second refinement, we commit to specific variables.
- ◆ We need a running total of the numbers, a count of how many numbers have been processed, a variable to receive the value of each grade as it's input and a variable to hold the calculated average.
- ◆ The pseudocode statement
 - Initialize variables
- ◆ may be refined as follows:
 - Initialize total to zero
 - Initialize counter to zero

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- Only the total and counter need to be initialized; the variables average and grade (for the calculated average and the user input, respectively) need not be initialized because their values will be written over by the process of destructive read-in discussed in Chapter 2.
- The pseudocode statement
Input, sum, and count the quiz grades
requires an iteration structure that successively inputs each grade.
- Because we do not know in advance how many grades are to be processed, we'll use sentinel-controlled iteration.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- The user will enter legitimate grades in one at a time.
- After the last legitimate grade is typed, the user will type the sentinel value.
- The program will test for this value after each grade is input and will terminate the loop when the sentinel is entered.
- The refinement of the preceding pseudocode statement is then
 - Input the first grade
 - While the user has not as yet entered the sentinel
 - Add this grade into the running total
 - Add one to the grade counter
 - Input the next grade (possibly the sentinel)

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- Notice that in **pseudocode**, we do **not use braces** around the set of statements that form the body of the while statement.
- We simply **indent** all these statements under the while to show that they all belong to the while.
- Again, pseudocode is an informal program development aid.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- The pseudocode statement
 - Calculate and print the class average
 - may be refined as follows:
 - If the counter is not equal to zero
 - Set the average to the total divided by the counter
 - Print the average
 - else
 - Print “No grades were entered”
- Notice that we’re being careful here to test for the possibility of division by zero—a fatal error that if undetected would cause the program to fail (often called “crashing”).

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- We include some completely blank lines in the pseudocode for readability.
- Actually, the blank lines separate these programs into their various phases.



Common Programming Error 3.5

An attempt to divide by zero causes a fatal error.



Good Programming Practice 3.3

When performing division by an expression whose value could be zero, explicitly test for this case and handle it appropriately in your program (such as by printing an error message) rather than allowing the fatal error to occur.



Software Engineering Observation 3.3

Many programs can be divided logically into three phases: an initialization phase that initializes the program variables; a processing phase that inputs data values and adjusts program variables accordingly; and a termination phase that calculates and prints the final results.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- The pseudocode algorithm solves the more general class-average problem.
- This algorithm was developed after only two levels of refinement.
- Sometimes more levels are necessary.

Initialize total to zero

Initialize counter to zero

Input the first grade (possibly the sentinel)

While the user has not as yet entered the sentinel

Add this grade into the running total

Add one to the grade counter

Input the next grade (possibly the sentinel)

If the counter is not equal to zero

Set the average to the total divided by the counter

Print the average

else

Print "No grades were entered"



Software Engineering Observation 3.4

You terminate the top-down, stepwise refinement process when the pseudocode algorithm is specified in sufficient detail for you to be able to convert the pseudocode to C. Implementing the C program is then normally straightforward.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- Although only integer grades are entered, the average calculation is likely to produce a number with a **decimal point**.
- The type `int` cannot represent such a number.
- The program introduces the data type `float` to handle numbers with decimal points (called floating-point numbers) and introduces a special operator called a cast operator to handle the average calculation.
- These features are explained after the program is presented.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2:

```
1 // Class average program with sentinel-controlled iteration
2 #include <stdio.h>
3
4 // function main begins program execution
5 int main( void )
6 {
7     unsigned int counter; // number of grades entered
8     int grade; // grade value
9     int total; // sum of grades
10
11     float average; // number with decimal point for average
12
13     // initialization phase
14     total = 0; // initialize total
15     counter = 0; // initialize loop counter
16
17     // processing phase
18     // get first grade from user
19     printf( "%s", "Enter grade, -1 to end: " ); // prompt for input
20     scanf( "%d", &grade ); // read grade from user
21
22     // loop while sentinel value not yet read from user
23     while ( grade != -1 ) {
24         total = total + grade; // add grade to total
25         counter = counter + 1; // increment counter
26
27         // get next grade from user
28         printf( "%s", "Enter grade, -1 to end: " ); // prompt for input
29         scanf( "%d", &grade ); // read next grade
30     } // end while
31
32     // termination phase
33     // if user entered at least one grade
34     if ( counter != 0 ) {
35
36         // calculate average of all grades entered
37         average = ( float ) total / counter; // avoid truncation
38
39         // display average with two digits of precision
40         printf( "Class average is %.2f\n", average );
41     } // end if
42     else { // if no grades were entered, output message
43         puts( "No grades were entered" );
44     } // end else
45 } // end function main
```

Enter grade, -1 to end: 75
Enter grade, -1 to end: 94
Enter grade, -1 to end: 97
Enter grade, -1 to end: 88
Enter grade, -1 to end: 70
Enter grade, -1 to end: 64
Enter grade, -1 to end: 83
Enter grade, -1 to end: 89
Enter grade, -1 to end: -1
Class average is 82.50

Enter grade, -1 to end: -1
No grades were entered

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- In the `while` loop, the **braces** are necessary to ensure that all statements execute within the loop.
- Without the braces, the last three statements in the body of the loop would fall outside the loop, causing the computer to interpret this code incorrectly as follows.

```
while ( grade != -1 )
    total = total + grade; // add grade to
total
counter = counter + 1; // increment counter
printf( "Enter grade, -1 to end: " ); //
prompt for input
scanf( "%d", &grade ); // read next grade
```

- Cause an infinite loop if -1 is not the first grade.



Error-Prevention Tip 3.5

In a sentinel-controlled loop, explicitly remind the user what the sentinel value is in prompts requesting data entry.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- Converting Between Types **Explicitly** and **Implicitly**
 - Averages do not always evaluate to integer values.
 - Often, an average is a value such as 7.2 or -93.5 that contains a fractional part.
 - These values are referred to as floating-point numbers and can be represented by the data type float.
 - The variable average is defined to be of type float to capture the fractional result of our calculation.
 - However, the **result** of the calculation
$$\text{total} / \text{counter}$$
is an **integer** because total and counter are both integer variables.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- Dividing two integers results in integer division in which any fractional part of the calculation is truncated (i.e., lost).
- Because the calculation is performed first, the fractional part is lost before the result is assigned to average.
- To produce a floating-point calculation with integer values, we must create temporary values that are floating-point numbers.
- C provides the unary cast operator to accomplish this task.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- The statement

```
average = ( float ) total / counter;
```

includes the **cast operator** `(float)`, which creates **a temporary floating-point copy of its operand**, `total`.

- The value stored in `total` is still an integer.
- Using a cast operator in this manner is called **explicit conversion**.
- The calculation now consists of a floating-point value (the temporary float version of `total`) divided by the `unsigned int` value stored in `counter`.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- C **evaluates arithmetic** expressions only in which the **data types** of the operands are **identical**.
- To ensure that the operands are of the same type, the **compiler performs** an operation called **implicit conversion** on selected operands.
- For example, in an expression containing the data types `unsigned int` and `float`, copies of `unsigned int` operands are made and converted to `float`.
- In our example, after a copy of `counter` is made and converted to `float`, the calculation is performed and the result of the floating-point division is assigned to `average`.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- C provides a set of rules for conversion of operands of different types.
 - We discuss this further in later chapter.
- **Cast** operators are available for most data types—they're formed by placing **parentheses around a type name**.
- Each cast operator is a unary operator, i.e., an operator that takes only one operand.
- C also supports unary versions of the **plus (+)** and **minus (-)** operators, so you can write expressions such as -7 or +5.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- Cast operators **associate from right to left** and have the same precedence as other unary operators such as unary + and unary -.
- This precedence is one level higher than that of the multiplicative operators *, / and %.
- Formatting Floating-Point Numbers
 - Uses the `printf` conversion specifier `%.2f` to print the value of `average`.
 - The `f` specifies that a floating-point value will be printed.
 - The `.2` is the precision with which the value will be displayed—with 2 digits to the right of the decimal point.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)

- If the `%f` conversion specifier is used (without specifying the precision), the **default precision of 6** is used—exactly as if the conversion specifier `%.6f` had been used.
- When floating-point values are printed with precision, **the printed value is rounded** to the indicated number of decimal positions.
- The **value in memory is unaltered**.
- When the following statements are executed, the values 3.45 and 3.4 are printed.

```
printf( "%.2f\n", 3.446 ); // prints 3.45
printf( "%.1f\n", 3.446 ); // prints 3.4
```

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 2: Sentinel-Controlled Iteration (cont'd)



Common Programming Error 3.6

Using precision in a conversion specification in the format control string of a `scanf` statement is an error. Precisions are used only in `printf` conversion specifications.



Common Programming Error 3.7

Using floating-point numbers in a manner that assumes they're represented precisely can lead to incorrect results. Floating-point numbers are represented only approximately by most computers.



Error-Prevention Tip 3.6

Do not compare floating-point values for equality.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements

- Let's work another complete problem.
 - We'll once again formulate the algorithm using pseudocode and top-down, stepwise refinement, and write a corresponding C program.
 - We've seen that control statements may be stacked on top of one another (in sequence) just as a child stacks building blocks.
 - In this case study we'll see the only other structured way control statements may be connected in C, namely through nesting of one control statement within another.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- Consider the following problem statement:
 - *A college offers a course that prepares students for the state licensing exam for real estate brokers. Last year, 10 of the students who completed this course took the licensing examination. Naturally, the college wants to know how well its students did on the exam. You've been asked to write a program to summarize the results. You've been given a list of these 10 students. Next to each name a 1 is written if the student passed the exam and a 2 if the student failed.*

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- *Your program should analyze the results of the exam as follows:*
 - ◆ *Input each test result (i.e., a 1 or a 2). Display the prompting message “Enter result” each time the program requests another test result.*
 - ◆ *Count the number of test results of each type.*
 - ◆ *Display a summary of the test results indicating the number of students who passed and the number who failed.*
 - ◆ *If more than eight students passed the exam, print the message “Bonus to instructor!”*

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- After reading the problem statement carefully, we make the following observations:
 - The program must process 10 test results. A counter-controlled loop will be used.
 - Each test result is a number—either a 1 or a 2. Each time the program reads a test result, the program must determine whether the number is a 1 or a 2. We test for a 1 in our algorithm. If the number is not a 1, we assume that it's a 2. (An exercise at the end of the chapter considers the consequences of this assumption.)
 - Two counters are used—one to count the number of students who passed the exam and one to count the number of students who failed the exam.
 - After the program has processed all the results, it must decide whether more than 8 students passed the exam.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- Let's proceed with **top-down, stepwise refinement**.
- We begin with a pseudocode representation of the top:
 - **Analyze exam results and decide if instructor should receive a bonus**
- Once again, it's important to emphasize that the top is a complete representation of the program, but several refinements are likely to be needed before the pseudocode can be naturally evolved into a C program.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- Our first refinement is
 - Initialize variables
Input the ten quiz grades and count passes and failures
Print a summary of the exam results and decide if instructor should receive a bonus
- Here, too, even though we have a complete representation of the entire program, further refinement is necessary.
- We now commit to specific variables.
- Counters are needed to record the passes and failures, a counter will be used to control the looping process, and a variable is needed to store the user input.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- The pseudocode statement
 - Initialize variables
 - may be refined as follows:
 - Initialize passes to zero
 - Initialize failures to zero
 - Initialize student to one
- Notice that only the counters and totals are initialized.
- The pseudocode statement
 - Input the ten quiz grades and count passes and failures
 - requires a loop that successively inputs the result of each exam.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- Here it's known in advance that there are precisely ten exam results, so counter-controlled looping is appropriate.
- Inside the loop (i.e., nested within the loop) a double-selection statement will determine whether each exam result is a pass or a failure and will increment the appropriate counters accordingly.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- The refinement of the preceding pseudocode statement is then
 - While student counter is less than or equal to ten
Input the next exam result

If the student passed
Add one to passes
else
Add one to failures

Add one to student counter
- Notice the use blank lines to set off the If...else to improve program readability.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- The pseudocode statement
 - Print a summary of the exam results and decide if instructor should receive a bonus
- may be refined as follows:
 - Print the number of passes
 - Print the number of failures
 - If more than eight students passed
 - Print “Bonus to instructor!”
- We use blank lines to set off the while statement for program readability.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

- This pseudocode is now sufficiently refined for conversion to C.
- We've taken advantage of a feature of C that allows `initialization` to be `incorporated into definitions`.
- Such initialization `occurs at compile time`.
- Also, notice that when you output an `unsigned int` you use the `%u` conversion specifier.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)

Initialize passes to zero

Initialize failures to zero

Initialize student to one

While student counter is less than or equal to ten

Input the next exam result

If the student passed

Add one to passes

else

Add one to failures

Add one to student counter

Print the number of passes

Print the number of failures

If more than eight students passed

Print "Bonus to instructor!"

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3: Nested Control Statements (cont'd)



Software Engineering Observation 3.5

Experience has shown that the most difficult part of solving a problem on a computer is developing the algorithm for the solution. Once a correct algorithm has been specified, the process of producing a working C program is normally straightforward.



Software Engineering Observation 3.6

Many programmers write programs without ever using program-development tools such as pseudocode. They feel that their ultimate goal is to solve the problem on a computer and that writing pseudocode merely delays the production of final outputs.

Formulating Algorithms with Top-Down, Stepwise Refinement Case Study 3:

```
1 // Analysis of examination results
2 #include <stdio.h>
3
4 // function main begins program execution
5 int main( void )
6 {
7     // initialize variables in definitions
8     unsigned int passes = 0; // number of passes
9     unsigned int failures = 0; // number of failures
10    unsigned int student = 1; // student counter
11    int result; // one exam result
12
13    // process 10 students using counter-controlled loop
14    while ( student <= 10 ) {
15
16        // prompt user for input and obtain value from user
17        printf( "%s", "Enter result ( 1=pass,2=fail ): " );
18        scanf( "%d", &result );
19
20        // if result 1, increment passes
21        if ( result == 1 ) {
22            passes = passes + 1;
23        } // end if
24        else { // otherwise, increment failures
25            failures = failures + 1;
26        } // end else
27
28        student = student + 1; // increment student counter
29    } // end while
30
31    // termination phase; display number of passes and failures
32    printf( "Passed %u\n", passes );
33    printf( "Failed %u\n", failures );
34
35    // if more than eight students passed, print "Bonus to inst
36    if ( passes > 8 ) {
37        puts( "Bonus to instructor!" );
38    } // end if
39 }
```

```
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 2
Enter Result (1=pass,2=fail): 2
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 2
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 2
Passed 6
Failed 4
```

```
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 2
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 1
Enter Result (1=pass,2=fail): 1
Passed 9
Failed 1
Bonus to instructor!
```

Assignment Operators

- C provides several assignment operators for abbreviating assignment expressions.

- For example, the statement

```
c = c + 3;
```

- can be abbreviated with the addition assignment operator `+=` as

```
c += 3;
```

- The `+=` operator adds the value of the expression on the right of the operator to the value of the variable on the left of the operator and stores the result in the variable on the left of the operator.

Assignment Operators (cont'd)

- Any statement of the form

variable = variable operator expression;

- where operator is one of the binary operators $+$, $-$, $*$, $/$ or $\%$ (or others we'll discuss in Chapter 10), can be written in the form

variable operator= expression;

- Thus the assignment `c += 3` adds 3 to `c`.

Assignment Operators (cont'd)

- The arithmetic assignment operators, sample expressions using these operators and explanations

Assignment operator	Sample expression	Explanation	Assigns
<i>Assume: int c = 3, d = 5, e = 4, f = 6, g = 12;</i>			
+=	c += 7	c = c + 7	10 to c
-=	d -= 4	d = d - 4	1 to d
*=	e *= 5	e = e * 5	20 to e
/=	f /= 3	f = f / 3	2 to f
%=	g %= 9	g = g % 9	3 to g

Increment and Decrement Operators

- C also provides the **unary increment operator**, `++`, and the **unary decrement operator**, `--`.
- If a variable `c` is to be incremented by 1, the increment operator `++` can be used rather than the expressions `c = c + 1` or `c += 1`.
- If increment or decrement operators are placed before a variable (i.e., prefixed), they're referred to as the preincrement or predecrement operators, respectively.
- If increment or decrement operators are placed after a variable (i.e., postfix), they're referred to as the postincrement or postdecrement operators, respectively.

Increment and Decrement Operators (cont'd)

- Preincrementing (predecrementing) a variable causes
 - The variable to be **incremented** (**decremented**) by 1
 - Then the new value of the variable is **used** in the expression in which it appears.
- Postincrementing (postdecrementing) the variable causes
 - The current value of the variable to be **used** in the expression in which it appears
 - Then the variable value is **incremented** (**decremented**) by 1.

Increment and Decrement Operators (cont'd)

Operator	Sample expression	Explanation
++	++a	Increment a by 1, then use the new value of a in the expression in which a resides.
++	a++	Use the current value of a in the expression in which a resides, then increment a by 1.
--	--b	Decrement b by 1, then use the new value of b in the expression in which b resides.
--	b--	Use the current value of b in the expression in which b resides, then decrement b by 1.

Increment and Decrement Operators (cont'd)

```
1 // Preincrementing and postincrementing
2 #include <stdio.h>
3
4 // function main begins program execution
5 int main( void )
6 {
7     int c; // define variable
8
9     // demonstrate postincrement
10    c = 5; // assign 5 to c
11    printf( "%d\n", c ); // print 5
12    printf( "%d\n", c++ ); // print 5 then postincrement
13    printf( "%d\n\n", c ); // print 6
14
15    // demonstrate preincrement
16    c = 5; // assign 5 to c
17    printf( "%d\n", c ); // print 5
18    printf( "%d\n", ++c ); // preincrement then print 6
19    printf( "%d\n", c ); // print 6
20 }
```

5
5
6
5
6
6

Increment and Decrement Operators (cont'd)

- The program displays the value of `c` before and after the `++` operator is used.
- The decrement operator (`--`) works similarly.



Good Programming Practice 3.4

Unary operators should be placed directly next to their operands with no intervening spaces.

Increment and Decrement Operators (cont'd)

- The three assignment statements

```
passes = passes + 1;  
failures = failures + 1;  
student = student + 1;
```

- can be written more concisely with assignment operators as

```
passes += 1;  
failures += 1;  
student += 1;
```

- with preincrement operators as

```
++passes;  
++failures;  
++student;
```

- or with postincrement operators as

```
passes++;  
failures++;  
student++;
```

Increment and Decrement Operators (cont'd)

- It's important to note here that when incrementing or decrementing a variable in a statement by itself, the preincrement and postincrement forms have the same effect.
 - It's only when a variable appears in the context of a larger expression that preincrementing and postincrementing have different effects (and similarly for predecrementing and postdecrementing).

Increment and Decrement Operators (cont'd)

- Of the expressions we've studied thus far, only a simple variable name may be used as the operand of an increment or decrement operator.



Common Programming Error 3.8

Attempting to use the increment or decrement operator on an expression other than a simple variable name is a syntax error, e.g., writing `++(x + 1)`.



Error-Prevention Tip 3.7

C generally does not specify the order in which an operator's operands will be evaluated (although we'll see exceptions to this for a few operators in Chapter 4). Therefore you should use increment or decrement operators only in statements in which one variable is incremented or decremented by itself.

Increment and Decrement Operators (cont'd)

- The conditional operator (`? :`), the unary operators increment (`++`), decrement (`--`), plus (`+`), minus (`-`) and casts, and the assignment operators `=`, `+=`, `-=`, `*=`, `/=` and `%=` associate from right to left.

Operators	Associativity	Type
<code>++</code> (<i>postfix</i>) <code>--</code> (<i>postfix</i>)	right to left	postfix
<code>+</code> <code>-</code> (<i>type</i>) <code>++</code> (<i>prefix</i>) <code>--</code> (<i>prefix</i>)	right to left	unary
<code>*</code> <code>/</code> <code>%</code>	left to right	multiplicative
<code>+</code> <code>-</code>	left to right	additive
<code><</code> <code><=</code> <code>></code> <code>>=</code>	left to right	relational
<code>==</code> <code>!=</code>	left to right	equality
<code>?:</code>	right to left	conditional
<code>=</code> <code>+=</code> <code>-=</code> <code>*=</code> <code>/=</code> <code>%=</code>	right to left	assignment

Secure C Programming

- Arithmetic Overflow

- An addition program which calculated the sum of two int values with the statement

```
sum = integer1 + integer2; // assign total to sum
```

- Even this simple statement has a potential problem—adding the integers could result in a value that's too large to store in an int variable.
- This is known as arithmetic overflow and can cause undefined behavior, possibly leaving a system open to attack.

Secure C Programming (cont'd)

- The maximum and minimum values that can be stored in an int variable are represented by the constants `INT_MAX` and `INT_MIN`, respectively, which are defined in the header `<limits.h>`.
- You can see your platform's values for these constants by opening the header `<limits.h>` in a text editor.
- It's considered a good practice to **ensure** that before you perform arithmetic calculations, they will **not overflow**.
- The code for doing this is shown on the CERT website www.securecoding.cert.org—just search for guideline “INT32-C.”
- The code uses the `&&` (logical AND) and `||` (logical OR) operators, which are introduced in the Chapter 4.

Secure C Programming (cont'd)

- Unsigned Integers

- In general, counters that should store only **non-negative values** should be declared with unsigned before the integer type.
- Variables of unsigned types can represent values from 0 to approximately twice the positive range of the corresponding signed integer types.
- You can determine your platform's maximum unsigned int value with the constant `UINT_MAX` from `<limits.h>`.

Exercises

- What are the two components in a pseudocode?
- What are the three control structures and the corresponding seven control statements in C?

Exercises

- Give the four rules for forming structured programs.
- What are the two rules of connecting control statements? Using the simplest flow chart to explain the two ways of connection.

Exercises

- Give the statements to print “Passed” if the student’s grade is greater than or equal to 60 and “Failed” if the student’s grade is less than 60.
- Use conditional operator to print “Passed” if grade is greater than or equal to 60 and print “Failed”, otherwise.

Exercises

- List the values of `x`, `y`, and `z` after performing the following statement (9%)

```
int x = 4, y, z;  
y = ++x;  
z = x++;
```

- Given the statements “`double x = 4.467`”, what are the results of the following statements?
 - a) `printf("%f", x);`
 - b) `printf("%.2f", x);`

Exercises

- Considering the following scenario: if *a* is greater than or equal to *b* then *c* is zero; otherwise, *c* is one.
 - Write the corresponding C statements using double selection statement.
 - Write the corresponding C statements using conditional operator.

Exercises

- Write a complete C program to sum up ten floating-point numbers entered from keyboard.
- Write a complete C program to sum up an arbitrary number of floating-point values entered from keyboard.

Exercises

- Distinguish between preincrementing (predecrementing) and postincrementing (postdecrementing) a variable.