


Git Practice Project :

Name: Angular Project
Emp Name: Nandeesh N

Git commands:

1.created a repository in github: <https://github.com/NANDEESH-N/practice>

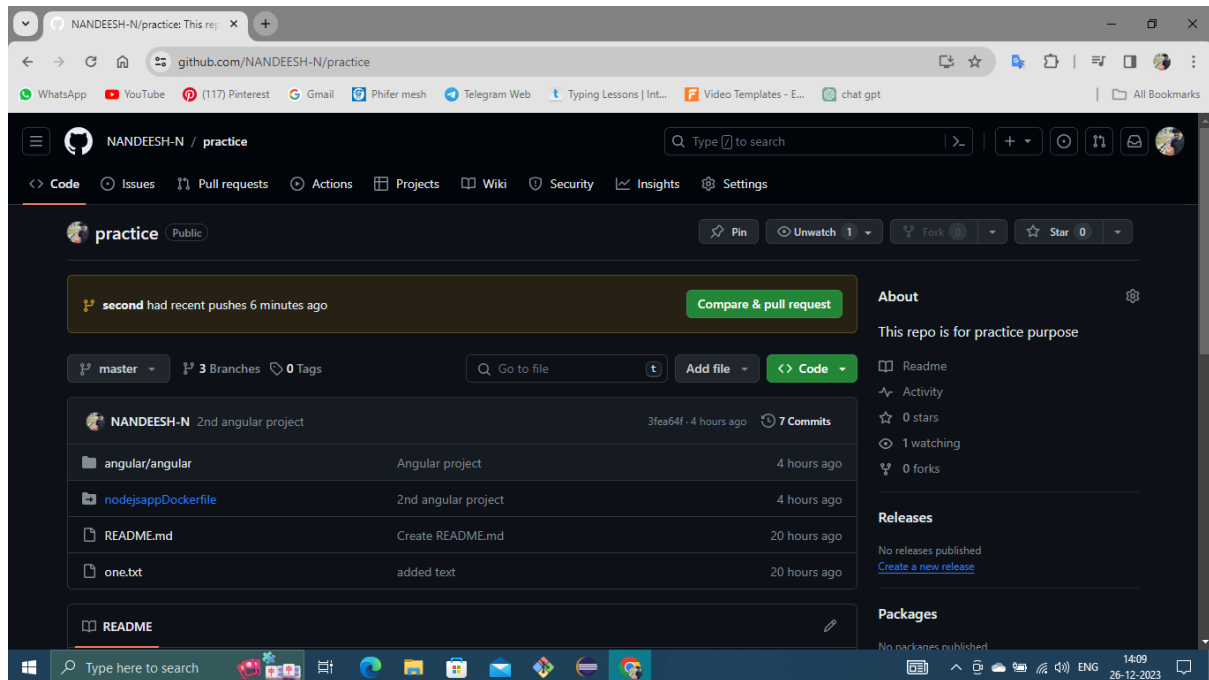

2. Git init

```
thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/practice/project2/myproject25dec-Sonal (master)
$ cd ..

thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/practice/project2 (master)
$ cd ..

thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/practice (master)
$ ls
2/ README.md angular/ nodejsappDockerfile/ one.txt project/ project2/

thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/practice (master)
$ cd ..

thisi@DESKTOP-H339IFJ MINGW64 ~/downloads (master)
$ ls
ChromeSetup.exe* Project/ ZoomInstallerFull.exe* angular/ desktop.ini practice/ '~WRL2067.tmp'

thisi@DESKTOP-H339IFJ MINGW64 ~/downloads (master)
$ cd Project

thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/Project (master)
$ git init
Initialized empty Git repository in C:/Users/thisi/Downloads/Project/.git/
```

3. git add .

```
thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/Project (master)
$ git init
Initialized empty Git repository in C:/Users/thisi/Downloads/Project/.git/

thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/Project (master)
$ git add .
```

4. git commit -m "message"

```
thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/Project (master)
$ git commit -m "first commit"
[master (root-commit) 86f2d55] first commit
10 files changed, 9 insertions(+)
create mode 100644 myproject25dec-Sonal/.gitignore
create mode 100644 myproject25dec-Sonal/Drey-Payment
create mode 100644 myproject25dec-Sonal/Marc-File1
create mode 100644 myproject25dec-Sonal/Sonal-File-26dec
create mode 100644 myproject25dec-Sonal/filehima
create mode 100644 myproject25dec-Sonal/index1.html
create mode 100644 myproject25dec-Sonal/index2.html
create mode 100644 myproject25dec-Sonal/login
create mode 100644 myproject25dec-Sonal/login2
create mode 100644 myproject25dec-Sonal/login3
```

5. git remote add origin url:

```
thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/Project (master)
$ git remote add origin https://github.com/NANDEESH-N/practice
```

6. git push origin master:

```
thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/Project (second)
$ git push origin
fatal: The current branch second has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin second

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.

thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/Project (second)
$ git push --set-upstream origin second
Everything up-to-date
branch 'second' set up to track 'origin/second'.

thisi@DESKTOP-H339IFJ MINGW64 ~/downloads/Project (second)
$ git push origin
Everything up-to-date
```