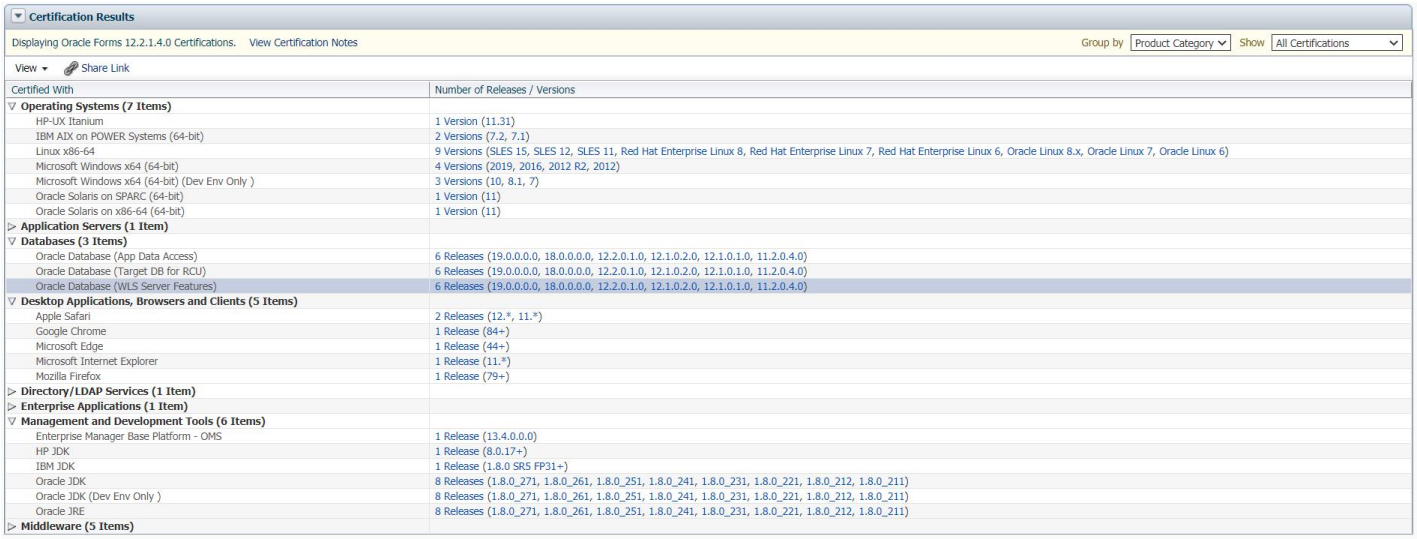
FORMS & REPORTS SERVICES 12C (NOVIEMBRE 2020)

12.2.1.4.0

Certificación de Productos

1- Certificación de Fusion Middleware con Base de Datos



Certification Results

Displaying Oracle Forms 12.2.1.4.0 Certifications. View Certification Notes

Group by: Product Category | Show: All Certifications

View | Share Link

Certified With	Number of Releases / Versions
Operating Systems (7 Items)	
HP-UX Itanium	1 Version (11.31)
IBM AIX on POWER Systems (64-bit)	2 Versions (7.2, 7.1)
Linux x86-64	9 Versions (SLES 15, SLES 12, SLES 11, Red Hat Enterprise Linux 8, Red Hat Enterprise Linux 7, Red Hat Enterprise Linux 6, Oracle Linux 8.x, Oracle Linux 7, Oracle Linux 6)
Microsoft Windows x64 (64-bit)	4 Versions (2019, 2016, 2012 R2, 2012)
Microsoft Windows x64 (64-bit) (Dev Env Only)	3 Versions (10, 8.1, 7)
Oracle Solaris on SPARC (64-bit)	1 Version (11)
Oracle Solaris on x86-64 (64-bit)	1 Version (11)
Application Servers (1 Item)	
Databases (3 Items)	
Oracle Database (App Data Access)	6 Releases (19.0.0.0.0, 18.0.0.0.0, 12.2.0.1.0, 12.1.0.2.0, 12.1.0.1.0, 11.2.0.4.0)
Oracle Database (Target DB for RCU)	6 Releases (19.0.0.0.0, 18.0.0.0.0, 12.2.0.1.0, 12.1.0.2.0, 12.1.0.1.0, 11.2.0.4.0)
Oracle Database (WLS Server Features)	6 Releases (19.0.0.0.0, 18.0.0.0.0, 12.2.0.1.0, 12.1.0.2.0, 12.1.0.1.0, 11.2.0.4.0)
Desktop Applications, Browsers and Clients (5 Items)	
Apple Safari	2 Releases (12.*, 11.*)
Google Chrome	1 Release (84+)
Microsoft Edge	1 Release (44+)
Microsoft Internet Explorer	1 Release (11.*)
Mozilla Firefox	1 Release (79+)
Directory/LDAP Services (1 Item)	
Enterprise Applications (1 Item)	
Management and Development Tools (6 Items)	
Enterprise Manager Base Platform - OMS	1 Release (13.4.0.0.0)
HP JDK	1 Release (8.0.17+)
IBM JDK	1 Release (1.8.0 SR5 FP31+)
Oracle JDK	8 Releases (1.8.0_271, 1.8.0_261, 1.8.0_251, 1.8.0_241, 1.8.0_231, 1.8.0_221, 1.8.0_212, 1.8.0_211)
Oracle JDK (Dev Env Only)	8 Releases (1.8.0_271, 1.8.0_261, 1.8.0_251, 1.8.0_241, 1.8.0_231, 1.8.0_221, 1.8.0_212, 1.8.0_211)
Oracle JRE	8 Releases (1.8.0_271, 1.8.0_261, 1.8.0_251, 1.8.0_241, 1.8.0_231, 1.8.0_221, 1.8.0_212, 1.8.0_211)
Middleware (5 Items)	

Link de acceso a la matriz de certificación de Fusion Middleware

https://www.oracle.com/middleware/technologies/internet-application-server/fusion-requirements-and-specifications.html

- Verificar los paquetes según el Sistema Operativo, certificados Linux 6.6+,7.5+ ,8x+
- Verificar la certificación del SO a utilizar con la BD repositorio.

Master Note of Linux OS Requirements for Database Server (Doc ID 851598.1)

- 12.2.0 - Document 2197176.1 Requirements for Installing Oracle 12.2 RDBMS on OL7 or RHEL7 64-bit (x86-64)
- 18c - Requirements for Installing Oracle Database **18c** on OL7 or RHEL7 64-bit (x86-64) (Doc ID 2426806.1)
- Requirements for Installing Oracle Database **19c** on OL7 or RHEL7 64-bit (x86-64) (Doc ID 2551169.1)

Note: Aplicar el último parche (Combo Of OJVM Update 19.9.0.0.201020 + DB Update 19.9.0.0.201020) disponible para la versión a instalar

Master Note for Database Proactive Patch Program (Doc ID 756671.1)

- **Download Java Cryptography Extension (JCE) Unlimited Strength Jurisdiction Policy Files**

  http://www.oracle.com/technetwork/java/javase/downloads/jce8-download-2133166.html

- **Admin Server is Going to Warning State Due to Stuck Threads at RMI Call (Doc ID 2404546.1)**

  https://support.oracle.com/epmos/faces/ui/patch/PatchDetail.jspx?parent=DOCUMENT&sourceId=2404546.1&patchId=27184424

- **JDK Archive**

  https://www.oracle.com/java/technologies/oracle-java-archive-downloads.html

Verificación de Sistema Operativo

- Hostname

  Ejemplo :

  [root@weblogic ~]# hostname

  weblogic.coopluque.com.py

  [root@weblogic ~]# hostnamectl

  Static hostname: weblogic.coopluque.com.py

  Icon name: computer-vm

  Chassis: vm

  Machine ID: 2e4d5b10258140329d77ec2193bdd5e3

  Boot ID: 369080ac91fa4530b3dc21bd5b7ab21e

  Virtualization: xen

  Operating System: Red Hat Enterprise Linux Server 7.5 (Maipo)

  CPE OS Name: cpe:/o:redhat:enterprise_linux:7.5:GA:server

  Kernel: Linux 3.10.0-862.el7.x86_64

  Architecture: x86-64

  [root@weblogic ~]#

- Firewalld

  Ejemplo:

  [root@weblogic ~]# **systemctl status firewalld**

  firewalld.service - firewalld - dynamic firewall daemon

  Loaded: loaded (/usr/lib/systemd/system/firewalld.service; enabled; vendor preset: enabled)

  Active: active (running) since Thu 2020-10-29 02:31:47 -03; 5 days ago

  Docs: man:firewalld(1)

  Main PID: 819 (firewalld)

  Tasks: 2

  CGroup: /system.slice/firewalld.service

  └─819 /usr/bin/python -Es /usr/sbin/firewalld --nofork --nopid

  Oct 29 02:31:46 forms.coopluque.com.py systemd[1]: Starting firewalld - dynamic firewall daemon...

  Oct 29 02:31:47 forms.coopluque.com.py systemd[1]: Started firewalld - dynamic firewall daemon.

  [root@weblogic ~]#

[root@weblogic ~]# **systemctl stop firewalld**

[root@weblogic ~]# **systemctl disable firewalld**

Removed symlink /etc/systemd/system/dbus-org.fedoraproject.FirewallD1.service.

Removed symlink /etc/systemd/system/multi-user.target.wants/firewalld.service.

[root@weblogic ~]# **systemctl status firewalld**

firewalld.service - firewalld - dynamic firewall daemon

Loaded: loaded (/usr/lib/systemd/system/firewalld.service; disabled; vendor preset: enabled)

Active: inactive (dead)

Docs: man:firewalld(1)

Oct 29 02:31:46 forms.coopluque.com.py systemd[1]: Starting firewalld - dynamic firewall daemon...

Oct 29 02:31:47 forms.coopluque.com.py systemd[1]: Started firewalld - dynamic firewall daemon.

Nov 03 10:09:20 weblogic.coopluque.com.py systemd[1]: Stopping firewalld - dynamic firewall daemon...

Nov 03 10:09:21 weblogic.coopluque.com.py systemd[1]: Stopped firewalld - dynamic firewall daemon.

[root@weblogic ~]#

- Extensiones ext4 para SO 6,7 y 8 (comando: df -hT)

  Ejemplo:

  [root@weblogic ~]# df -hT

Filesystem	**Type**	Size	Used	Avail	Use%	**Mounted on**
/dev/mapper/VolGroupU01-LogVolU01	**ext4**	148G	61M	140G	1%	**/u01**
/dev/mapper/VolGroupU02-LogVolU02	**ext4**	99G	61M	94G	1%	**/u02**

- SElinux

  Modificar SELINUX a “disabled”

  [root@weblogic ~]# vi /etc/selinux/config

  SELINUX=enforcing

  [root@weblogic ~]# cat /etc/selinux/config

  SELINUX=disabled

- /etc/hosts

  Ejemplo

  [root@weblogic ~]# cat /etc/hosts

  127.0.0.1 localhost localhost.localdomain localhost4 localhost4.localdomain4

  ::1 localhost localhost.localdomain localhost6 localhost6.localdomain6

Agregar el hostname y la IP correspondiente

[root@weblogic ~]# cat /etc/hosts

127.0.0.1 localhost localhost.localdomain localhost4 localhost4.localdomain4

#::1 localhost localhost.localdomain localhost6 localhost6.localdomain6

198.198.198.109 weblogic.coopluque.com.py weblogic

Instalación de Paquetes para el Forms&Reports 12.2.1.4

Fuente:https://docs.oracle.com/en/middleware/fusion-middleware/12.2.1.4/sysrs/system-requirements-and-specifications.html#GUID-37C51062-3732-4A4B-8E0E-003D9DFC8C26

Paquetes para Oracle Linux 7 (UL0+) and Red Hat Linux 7 (UL0+)

binutils-2.23.52.0.1
compat-libcap1-1.10
compat-libstdc++-33-3.2.3.x86_64
compat-libstdc++-33-3.2.3.i686
gcc-4.8.2
gcc-c++-4.8.2
glibc-2.17.x86_64
glibc-2.17.i686
glibc-devel-2.17.x86_64
libaio-0.3.109.x86_64
libaio-devel-0.3.109.x86_64
libgcc-4.8.2.x86_64
libgcc-4.8.2.i686
libstdc++-4.8.2.x86_64
libstdc++-4.8.2.i686
libstdc++-devel-4.8.2.x86_64
dejavu-serif-fonts
ksh
make-3.82
sysstat-10.1.5
numactl-2.0.9 for x86_641
numactl-devel-2.0.9 for x86_642
motif-2.3.4-7 for x86_643
motif-devel-2.3.4-7 for x86_644
redhat-lsb-4.1-27.0.1.el7 for x86_64
redhat-lsb-core-4.1-27.0.1.el7 for x86_64
openssl-1.0.1e

Paquetes adicionales requeridos para una instalación con base de datos 19c
bc
elfutils-libelf
elfutils-libelf-devel
fontconfig-devel
libdtrace-ctf-devel
libXrender
libXrender-devel
libX11
libXau
libXi
libXtst
libxcb
smartmontools

Paquetes de Oracle Preinstall 19c en Linux 7 (oracle-database-preinstall-19c-1.0-1.el7.x86_64.rpm)

Obs: Para instalaciones con RedHat se debe descargar los siguientes paquetes :

- compat-libstdc++-33-3.2.3-72.el7.x86_64.rpm
- compat-libstdc++-33-3.2.3-72.el7.i686.rpm
- oracle-database-preinstall-19c-1.0-1.el7.x86_64.rpm

[root@weblogic Packages]# pwd
/media/Packages

[root@weblogic Packages]# rpm -ivh /u02/installer/oracle-database-preinstall-19c-1.0-1.el7.x86_64.rpm /u02/installer/compat-libstdc++-33-3.2.3-72.el7.x86_64.rpm compat-libcap1-1.10-7.el7.x86_64.rpm glibc-devel-2.17-222.el7.x86_64.rpm ksh-20120801-137.el7.x86_64.rpm libaio-devel-0.3.109-13.el7.x86_64.rpm libstdc++-devel-4.8.5-28.el7.x86_64.rpm glibc-headers-2.17-222.el7.x86_64.rpm kernel-headers-3.10.0-862.el7.x86_64.rpm

Control de Paquetes

Ejemplo:
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep **glibc-devel**
glibc-devel-2.12-1.7.el6 (x86_64)
glibc-devel-2.12-1.7.el6 (i686)

rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep binutils-2

binutils-2.23.52.0.1
compat-libcap1-1.10
compat-libstdc++-33-3.2.3.x86_64
compat-libstdc++-33-3.2.3.i686
gcc-4.8.2
gcc-c++-4.8.2
glibc-2.17.x86_64
glibc-2.17.i686
glibc-devel-2.17.x86_64
libaio-0.3.109.x86_64
libaio-devel-0.3.109.x86_64
libgcc-4.8.2.x86_64
libgcc-4.8.2.i686
libstdc++-4.8.2.x86_64
libstdc++-4.8.2.i686
libstdc++-devel-4.8.2.x86_64

dejavu-serif-fonts
ksh
make-3.82
sysstat-10.1.5
numactl-2.0.9 for x86_641
numactl-devel-2.0.9 for x86_642
motif-2.3.4-7 for x86_643
openssl-1.0.1e
bc
elfutils-libelf
libXrender
libXrender-devel
libX11
libXau
libXi
libXtst
libxcb
smartmontools

```
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep binutils-2
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep compat-libcap1
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep compat-libstdc++-33
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep gcc-4
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep gcc-c++
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep glibc-2
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep glibc-devel
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libaio
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libgcc
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libstdc++-4
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libstdc++-devel-4.8.5-28.el7.
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep dejavu
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep ksh
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep make
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep sysstat
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep numactl
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep numactl-devel
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep motif-2
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep motif-devel
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep bc
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep elfutils
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep elfutils
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep elfutils-libelf-devel
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep fontconfig
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libdtrace
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libXredner
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libXrender
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libXrender-devel
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libX11
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libX
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libXau
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libXi
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libXtst
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep libxcb
rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep smartmontools
```

rpm -qa --queryformat "%{NAME}-%{VERSION}-%{RELEASE} (%{ARCH})\n" | grep openssl

Paquetes no instalados con el oracle-database-preinstall-19c-1.0-1.el7.x86_64.rpm

rpm -ivh /u02/installer/compat-libstdc++-33-3.2.3-72.el7.i686.rpm glibc-2.17-222.el7.i686.rpm libgcc-4.8.5-28.el7.i686.rpm nss-softokn-freebl-3.34.0-2.el7.i686.rpm
rpm -ivh gcc-4.8.5-28.el7.x86_64.rpm cpp-4.8.5-28.el7.x86_64.rpm libmpc-1.0.1-3.el7.x86_64.rpm
rpm -ivh gcc-c++-4.8.5-28.el7.x86_64.rpm
rpm -ivh libstdc++-4.8.5-28.el7.i686.rpm
rpm -ivh numactl-devel-2.0.9-7.el7.x86_64.rpm
rpm -ivh motif-2.3.4-12.el7.x86_64.rpm libXp-1.0.2-2.1.el7.x86_64.rpm xorg-x11-xbitmaps-1.1.1-6.el7.noarch.rpm
rpm -ivh libXrender-devel-0.9.10-1.el7.x86_64.rpm

Requieren YUM porque tiene miles de dependencias
yum install -y motif-devel*.x86-64
yum install redhat-lsb*.x86_64
yum install elfutils-libelf-devel.*x86_64

Note:
redhat-lsb-core-4*.x86_64 (ya instalado con el redhat-lsb)
fontconfig-devel (ya instalado con motif-devel)
libdtrace-ctf-devel (no hay en redhat 7.5)

Pre Configuración de parámetros para base de datos 19c (Con la utilización del paquete oracle-database-preinstall-19c-1.0-1.el7.x86_64.rpm)

- Ajustes de Parámetros
  [root@weblogic ~]# vi /etc/security/limits.d/oracle-database-preinstall-19c.conf
  Modificar lo siguiente:
  oracle soft nofile **1024** por oracle soft nofile **4096**

  [root@weblogic ~]# vi /etc/pam.d/login
  Agregar al final del archivo lo siguiente:
  session required pam_limits.so

Preconfiguración de SO para Forms&Reports

- **Modifying the SHMMAX Parameter on Linux Operating Systems**

  To set the SHMMAX kernel parameter:

1. Validar como está configurado:
   [root@frm ~]# sysctl -a | grep shmmax
   = 4398046511104

   Obs: Solo modificar si el valor configurado es menor de lo especificado a continuación.
2. Change the value of SHMMAX to 4294967295 by including the following line in /etc/sysctl.conf:

   kernel.shmmax = 4294967295

3. Activate the new SHMMAX setting by running the command:
   /sbin/sysctl -p

- **Creación de Grupos, Usuarios y Directorios**

Obs: Las contraseñas para todos lo usuarios deben ser Oracle123

[root@frm ~]# useradd -g oinstall weblogic

[root@frm ~]# passwd oracle

[root@frm ~]# passwd weblogic

[root@frm ~]# mkdir -p /u01/app/weblogic/Middleware

[root@frm ~]# mkdir -p /u01/app/weblogic/logs

[root@frm ~]# chown -R weblogic:oinstall /u01/app/weblogic

- **To change the Open File Limit:**

Login as root and edit the following file: /etc/security/limits.conf

1. Add the following lines to the limits.conf file.

   weblogic soft nofile 65536

   weblogic hard nofile 65536

   weblogic soft nproc 16384

   weblogic hard nproc 16384

   Observación Importante: Estos valores fueron ajustados según casos reales presentados.

   The nofiles values represent the open file limit; the nproc values represent the number of processes limit.

2. Save the changes, close the limits.conf file.
3. If you are running Oracle Enterprise Linux 6 or Red Hat Linux 6, locate the following operating system configuration file: /etc/security/limits.d/90-nproc.conf
4. Make sure the same values are added to the 90-nproc.conf file; otherwise, the values in the 90-nproc.conf file can override the values in the limits.conf file.
5. Reboot the host computer.

Running Oracle Database Setup Wizard to Install Oracle Database.

[root@frm ~]# mkdir -p /u01/app/oracle

[root@frm ~]# chown oracle:oinstall /u01/app

[root@frm ~]# su - oracle

$ mkdir -p /u01/app/oracle/product/19.3.0/dbhome_1

$ chgrp oinstall /u01/app/oracle/product/19.3.0/dbhome_1

$ cd /u01/app/oracle/product/19.3.0/dbhome_1

$ unzip -q /u02/installer/db/LINUX.X64_193000_db_home.zip

$ cd /u01/app/oracle/product/19.3.0/dbhome_1

$ ./runInstaller

- **Configuración de bash_profile oracle**

  export ORACLE_BASE=/u01/app/oracle

  export ORACLE_HOME=$ORACLE_BASE/product/19.3.0/dbhome_1

  export ORACLE_SID=fr12c

  export LD_LIBRARY_PATH=$ORACLE_HOME/lib

  export PATH=$ORACLE_HOME/bin:$ORACLE_HOME/OPatch:$PATH

Configuración de repositorio para Forms&Reports 12c

Aplicar los últimos parches de la base de datos

- Edición de base de datos Standard 2
- Custom Database
- DB_NAME = fr12c
- SGA = 3GB
- PGA = 1GB
- BlOCK_SIZE = 8kb
- CHARACTER_SET: AMERICAN_AMERICA.AL32UTF8
- Redologs size = 500MB

Parameter	Minimum Required Value
SHARED_POOL_SIZE	147,456 KB
SGA_MAX_SIZE	147,456 KB
DB_BLOCK_SIZE	8 KB
session_cached_cursors	100
processes	500
open_cursors	800
db_files	600

- alter system set open_cursors=800 scope=spfile;
- alter system set db_files=600 scope=spfile;
- alter system set session_cached_cursors=100 scope=spfile;
- alter profile default limit password_life_time unlimited

Instalación de JDK 251

[weblogic@weblogic weblogic]$ pwd
/u01/app/weblogic
[weblogic@weblogic]$ tar xvf /u02/installer/web/jdk-8u251-linux-x64.tar.gz

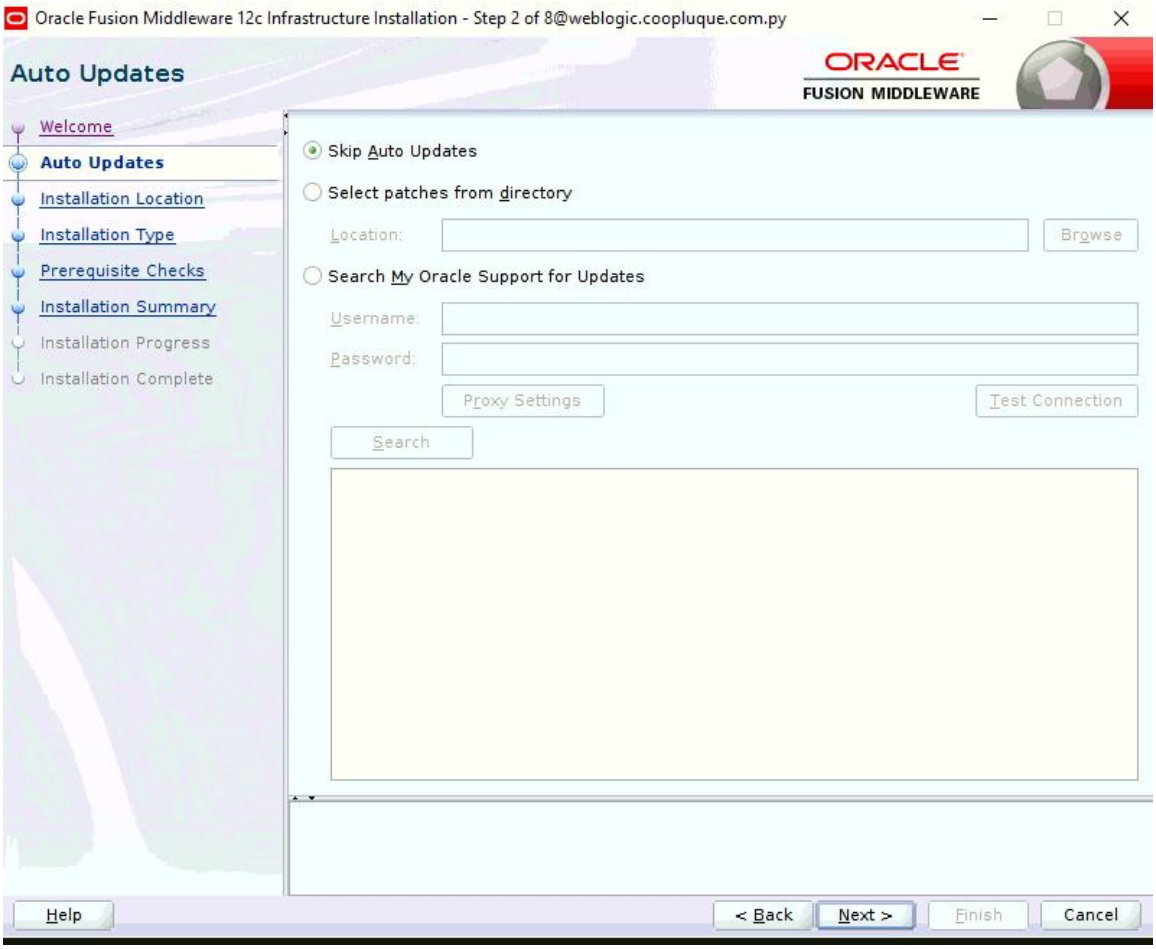
Instalación de Infraestructura Weblogic

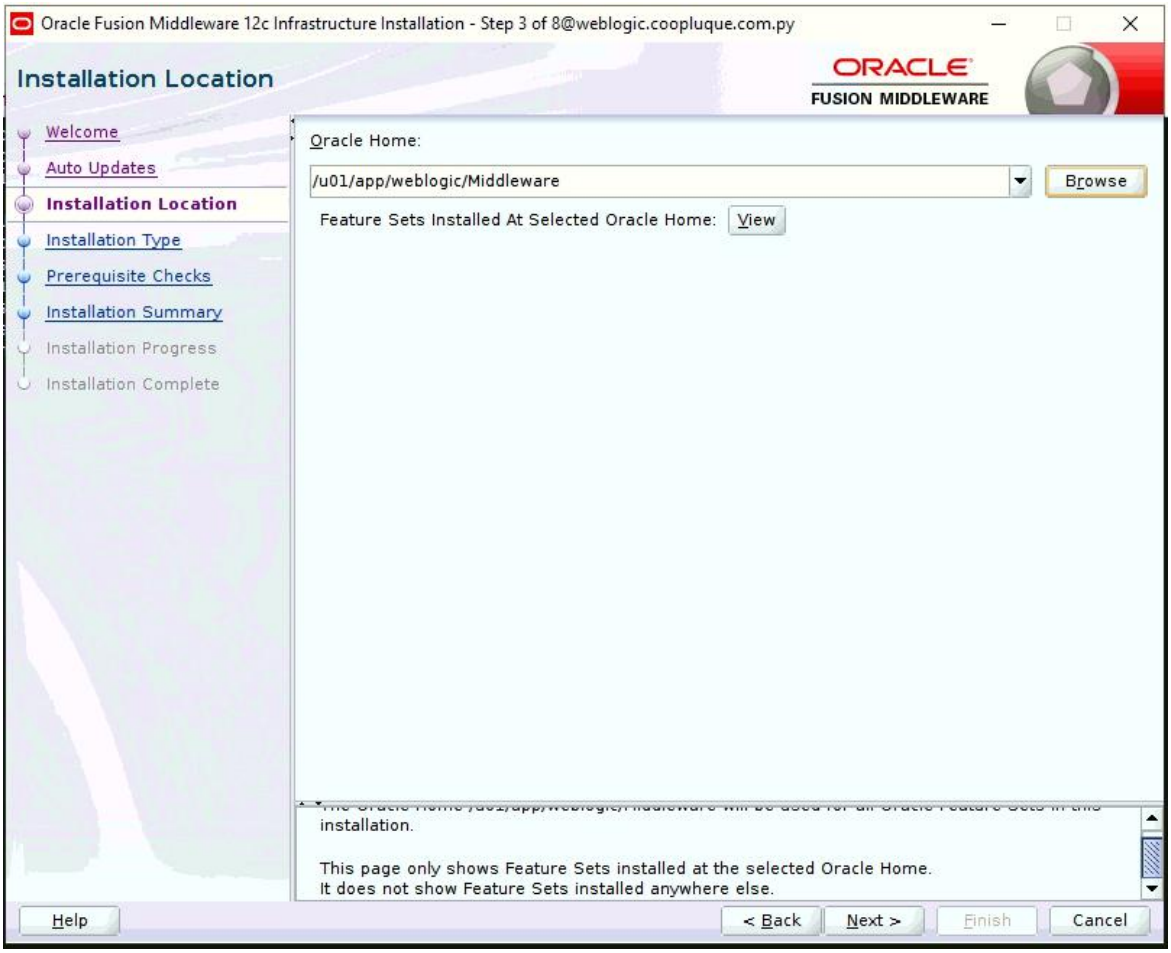
[weblogic@weblogic web]$ pwd

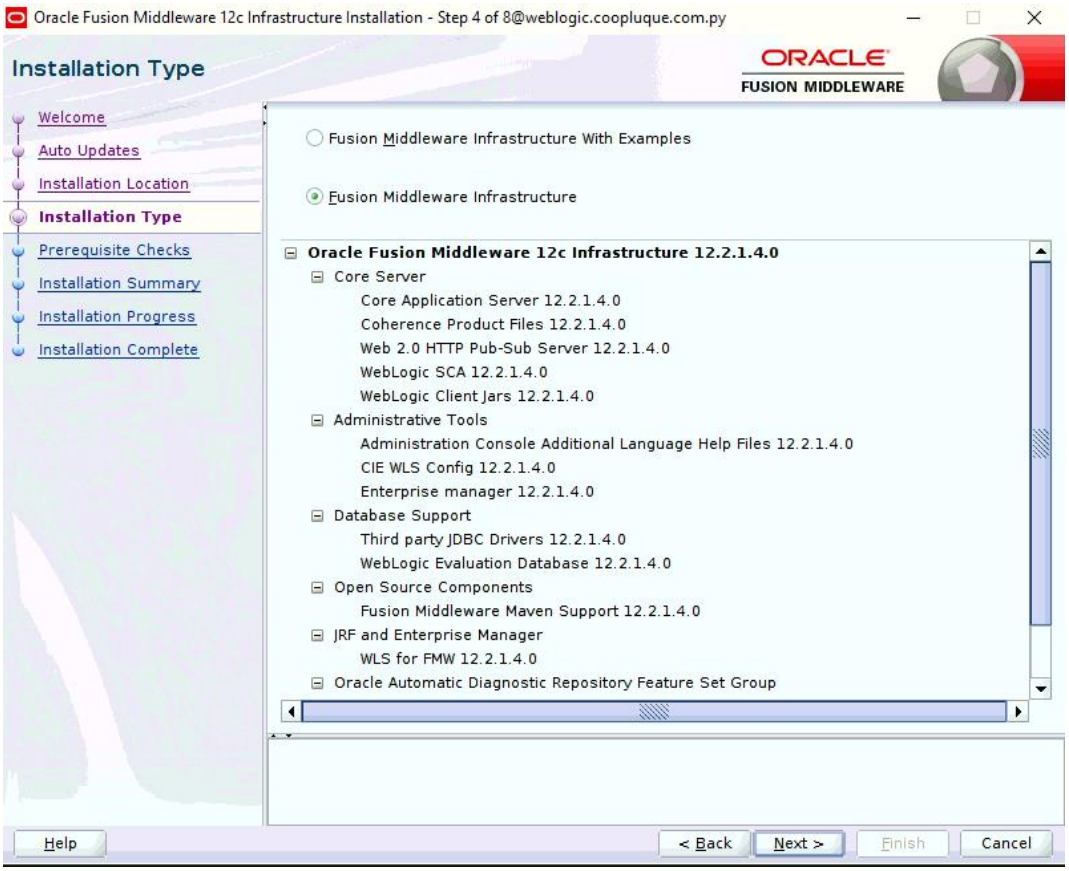
/u02/installer/web

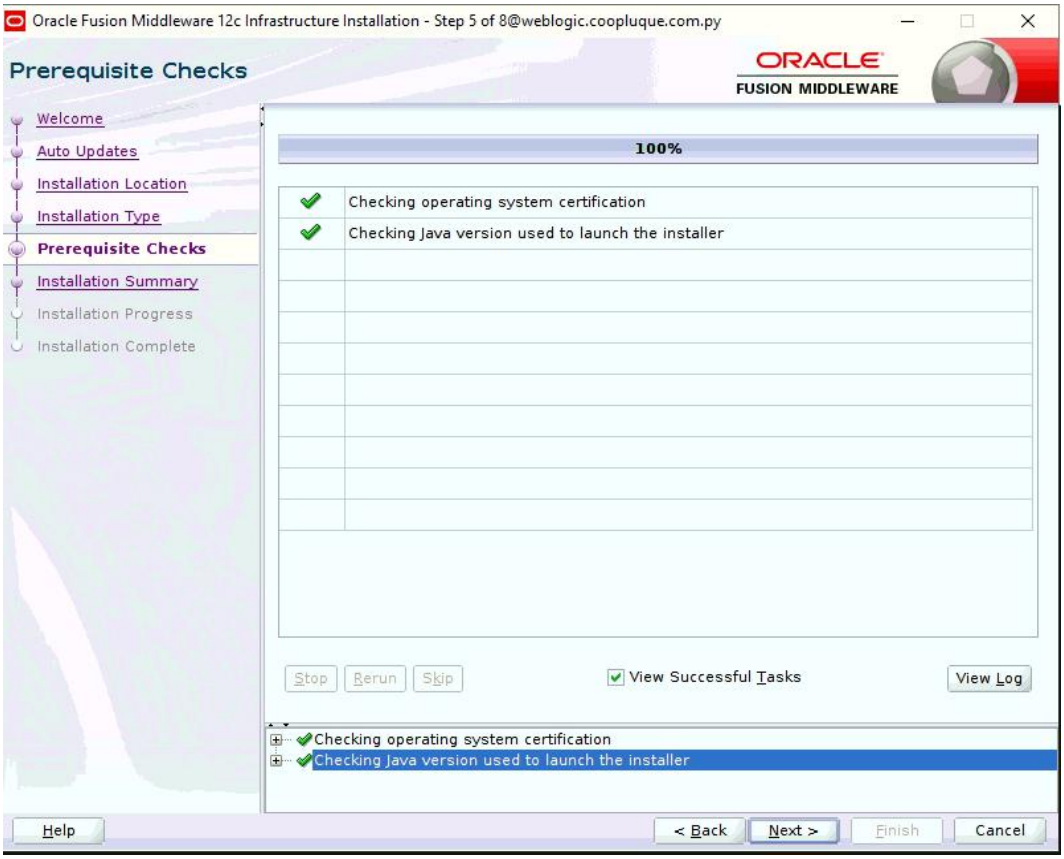
[weblogic@weblogic web]$ **/u01/app/weblogic/jdk1.8.0_251/bin/java -d64 -jar fmw_12.2.1.4.0_infrastructure.jar**

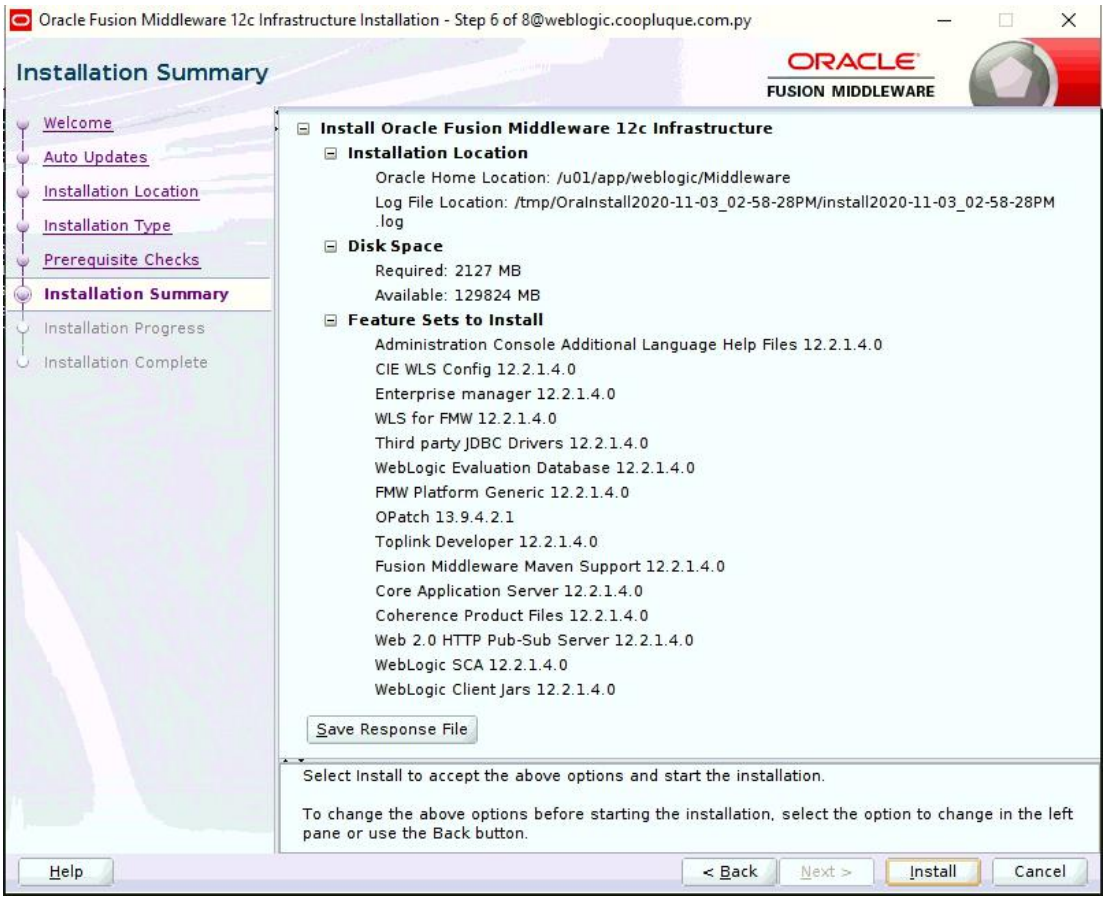


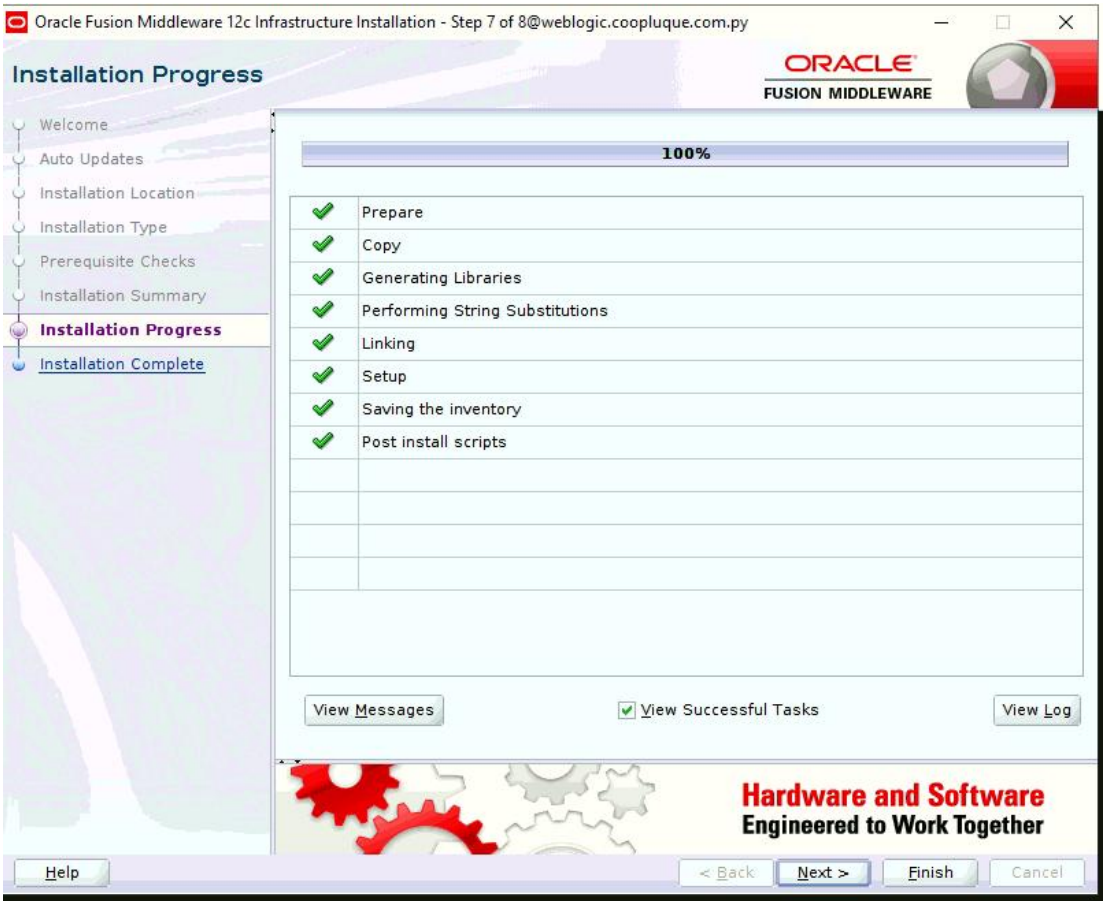

Oracle Fusion Middleware 12c Infrastructure Installation - Step 2 of 8@weblogic.coopluque.com.py
Auto Updates
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
Skip Auto Updates
Select patches from directory
Location:
Browse
Search My Oracle Support for Updates
Username:
Password:
Proxy Settings
Test Connection
Search
Help
< Back
Next >
Finish
Cancel

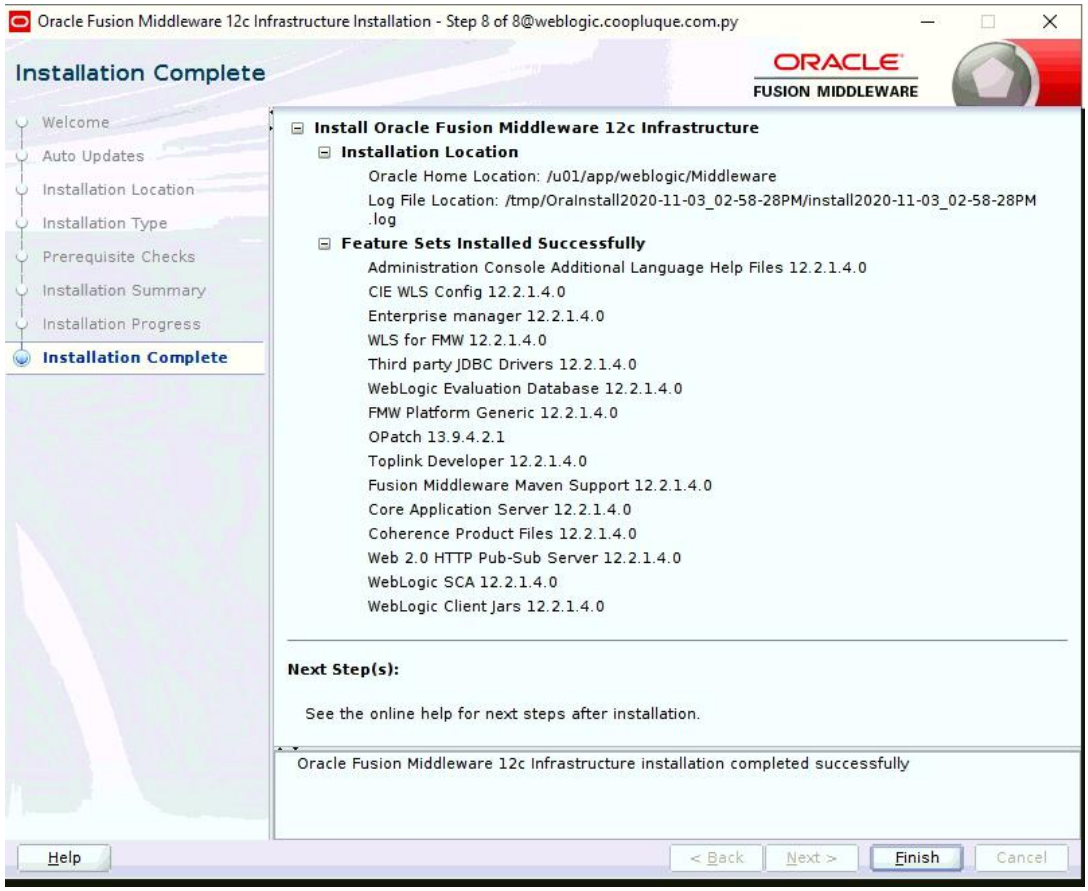

Oracle Fusion Middleware 12c Infrastructure Installation - Step 3 of 8@weblogic.coopluque.com.py
Installation Location
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
Oracle Home:
/u01/app/weblogic/Middleware
Browse
Feature Sets Installed At Selected Oracle Home:
View
installation.
This page only shows Feature Sets installed at the selected Oracle Home.
It does not show Feature Sets installed anywhere else.
Help
< Back
Next >
Finish
Cancel


Oracle Fusion Middleware 12c Infrastructure Installation - Step 4 of 8@weblogic.coopluque.com.py
Installation Type
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
Fusion Middleware Infrastructure With Examples
Fusion Middleware Infrastructure
Oracle Fusion Middleware 12c Infrastructure 12.2.1.4.0
Core Server
Core Application Server 12.2.1.4.0
Coherence Product Files 12.2.1.4.0
Web 2.0 HTTP Pub-Sub Server 12.2.1.4.0
WebLogic SCA 12.2.1.4.0
WebLogic Client Jars 12.2.1.4.0
Administrative Tools
Administration Console Additional Language Help Files 12.2.1.4.0
CIE WLS Config 12.2.1.4.0
Enterprise manager 12.2.1.4.0
Database Support
Third party JDBC Drivers 12.2.1.4.0
WebLogic Evaluation Database 12.2.1.4.0
Open Source Components
Fusion Middleware Maven Support 12.2.1.4.0
JRF and Enterprise Manager
WLS for FMW 12.2.1.4.0
Oracle Automatic Diagnostic Repository Feature Set Group
Help
< Back
Next >
Finish
Cancel


Oracle Fusion Middleware 12c Infrastructure Installation - Step 5 of 8@weblogic.coopluque.com.py
Prerequisite Checks
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
100%
Checking operating system certification
Checking Java version used to launch the installer
Stop
Rerun
Skip
View Successful Tasks
View Log
Checking operating system certification
Checking Java version used to launch the installer
Help
< Back
Next >
Finish
Cancel


Oracle Fusion Middleware 12c Infrastructure Installation - Step 6 of 8@weblogic.coopluque.com.py
Installation Summary
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
Install Oracle Fusion Middleware 12c Infrastructure
Installation Location
Oracle Home Location: /u01/app/weblogic/Middleware
Log File Location: /tmp/OraInstall2020-11-03_02-58-28PM/install2020-11-03_02-58-28PM.log
Disk Space
Required: 2127 MB
Available: 129824 MB
Feature Sets to Install
Administration Console Additional Language Help Files 12.2.1.4.0
CIE WLS Config 12.2.1.4.0
Enterprise manager 12.2.1.4.0
WLS for FMW 12.2.1.4.0
Third party JDBC Drivers 12.2.1.4.0
WebLogic Evaluation Database 12.2.1.4.0
FMW Platform Generic 12.2.1.4.0
OPatch 13.9.4.2.1
Toplink Developer 12.2.1.4.0
Fusion Middleware Maven Support 12.2.1.4.0
Core Application Server 12.2.1.4.0
Coherence Product Files 12.2.1.4.0
Web 2.0 HTTP Pub-Sub Server 12.2.1.4.0
WebLogic SCA 12.2.1.4.0
WebLogic Client Jars 12.2.1.4.0
Save Response File
Select Install to accept the above options and start the installation.
To change the above options before starting the installation, select the option to change in the left pane or use the Back button.
Help
< Back
Next >
Install
Cancel

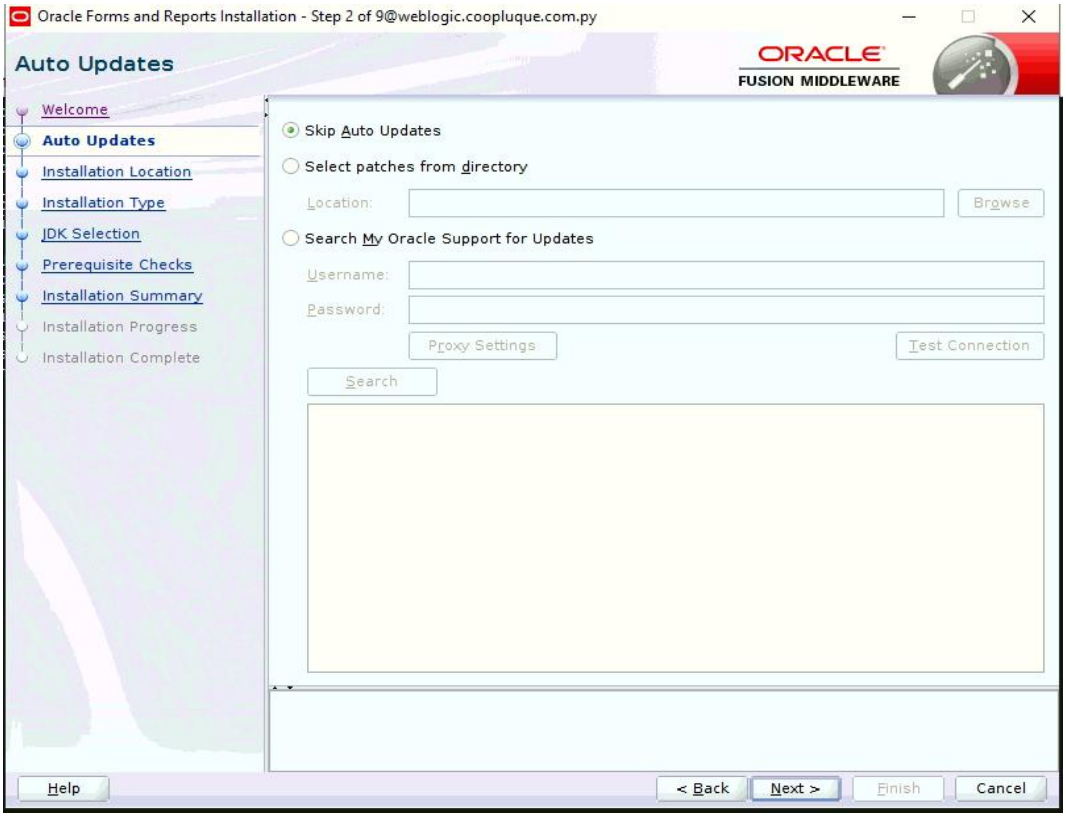

Oracle Fusion Middleware 12c Infrastructure Installation - Step 7 of 8@weblogic.coopluque.com.py
Installation Progress
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
100%
Prepare
Copy
Generating Libraries
Performing String Substitutions
Linking
Setup
Saving the inventory
Post install scripts
View Messages
View Successful Tasks
View Log
Hardware and Software
Engineered to Work Together
Help
< Back
Next >
Finish
Cancel

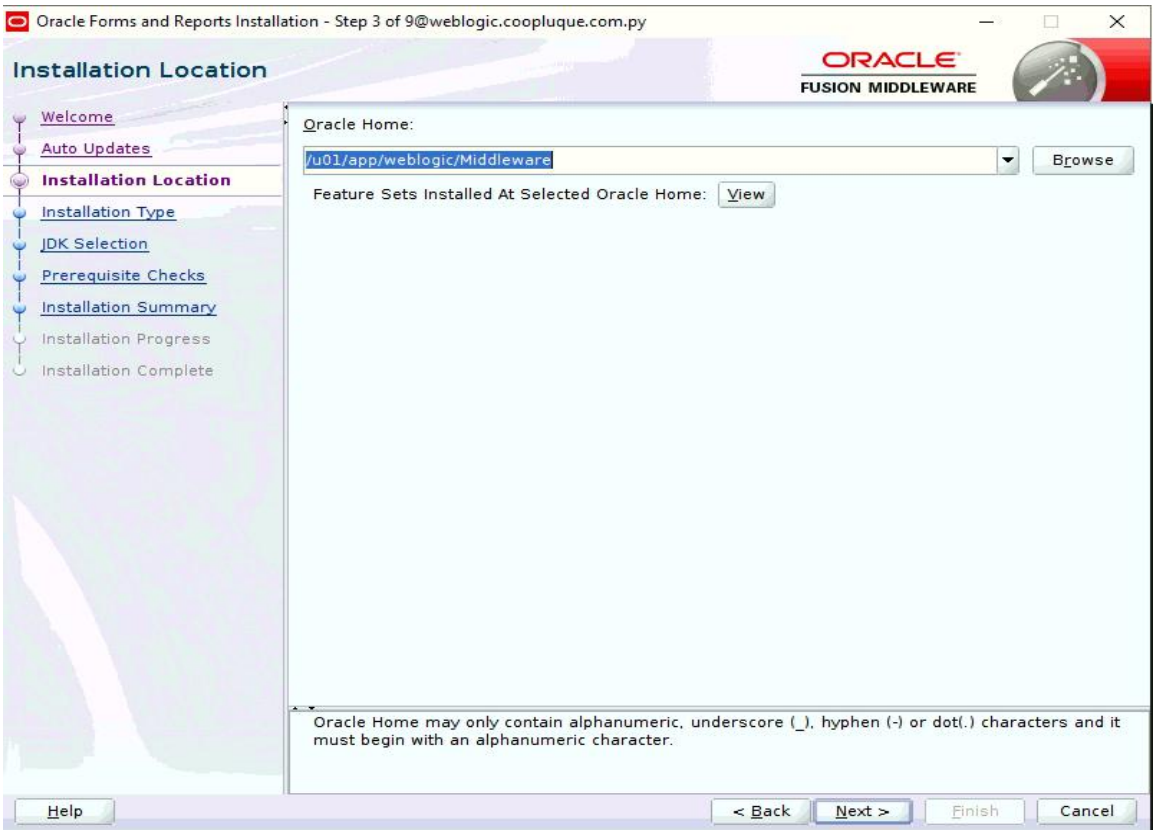
1. 
Oracle Fusion Middleware 12c Infrastructure Installation - Step 8 of 8@weblogic.coopluque.com.py
Installation Complete
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
Install Oracle Fusion Middleware 12c Infrastructure
Installation Location
Oracle Home Location: /u01/app/weblogic/Middleware
Log File Location: /tmp/OraInstall2020-11-03_02-58-28PM/install2020-11-03_02-58-28PM.log
Feature Sets Installed Successfully
Administration Console Additional Language Help Files 12.2.1.4.0
CIE WLS Config 12.2.1.4.0
Enterprise manager 12.2.1.4.0
WLS for FMW 12.2.1.4.0
Third party JDBC Drivers 12.2.1.4.0
WebLogic Evaluation Database 12.2.1.4.0
FMW Platform Generic 12.2.1.4.0
OPatch 13.9.4.2.1
Toplink Developer 12.2.1.4.0
Fusion Middleware Maven Support 12.2.1.4.0
Core Application Server 12.2.1.4.0
Coherence Product Files 12.2.1.4.0
Web 2.0 HTTP Pub-Sub Server 12.2.1.4.0
WebLogic SCA 12.2.1.4.0
WebLogic Client Jars 12.2.1.4.0
Next Step(s):
See the online help for next steps after installation.
Oracle Fusion Middleware 12c Infrastructure installation completed successfully
Help
< Back
Next >
Finish
Cancel

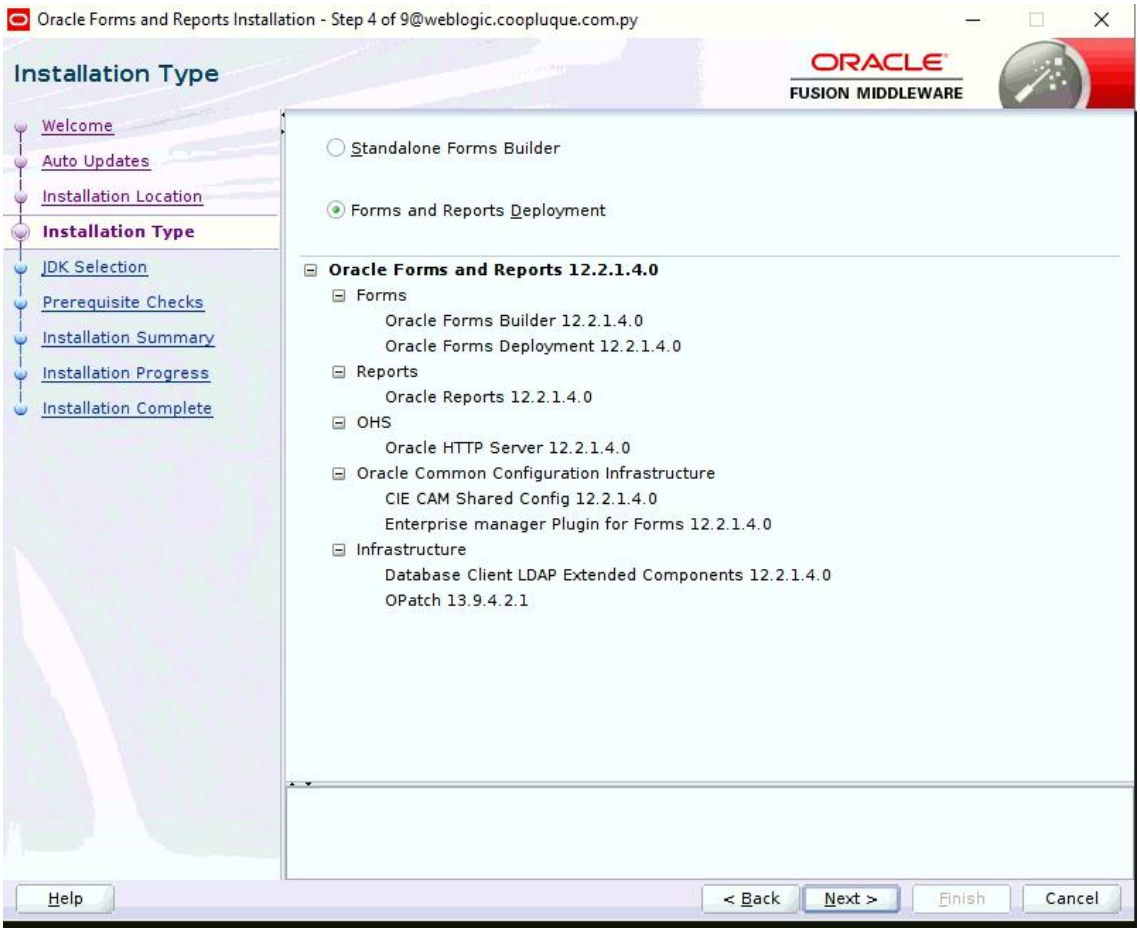
Instalación de Forms y Reports Services

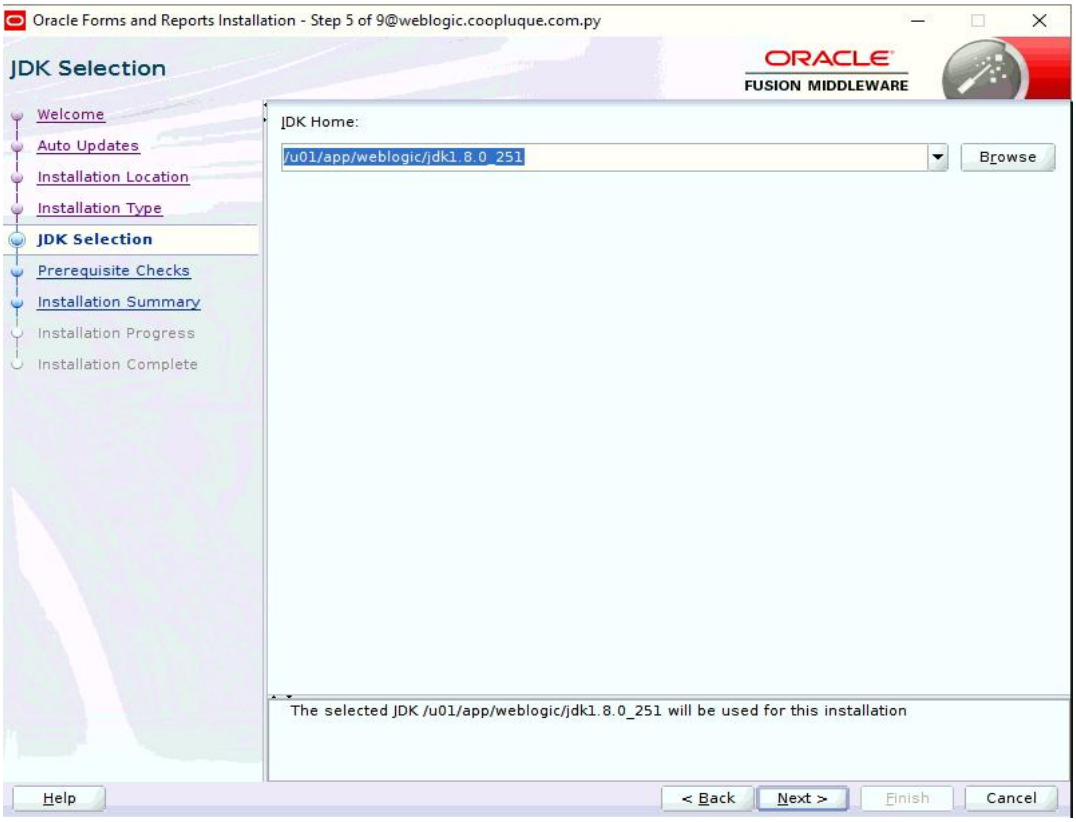
[weblogic@weblogic web]$ ./fmw_12.2.1.4.0_fr_linux64.bin

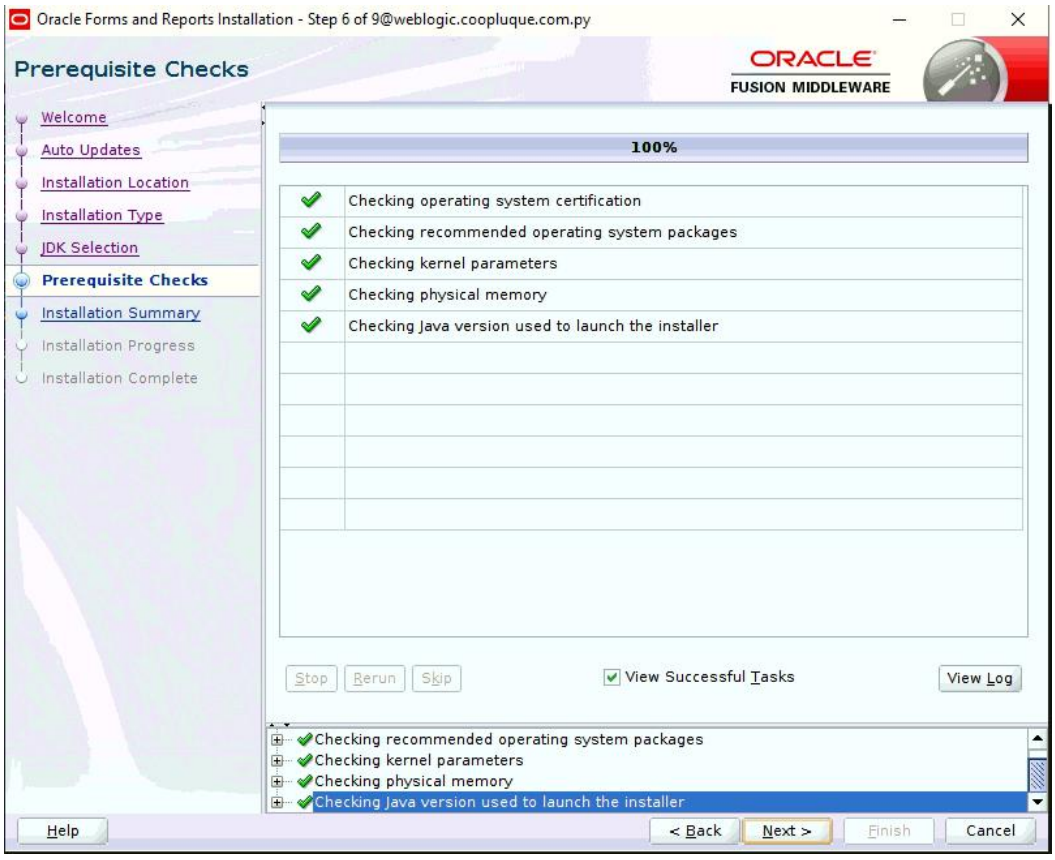





Oracle Forms and Reports Installation - Step 3 of 9@weblogic.coopluque.com.py
Installation Location
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
JDK Selection
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
Oracle Home:
/u01/app/weblogic/Middleware
Browse
Feature Sets Installed At Selected Oracle Home:
View
Oracle Home may only contain alphanumeric, underscore (_), hyphen (-) or dot(.) characters and it must begin with an alphanumeric character.
Help
< Back
Next >
Finish
Cancel


Oracle Forms and Reports Installation - Step 4 of 9@weblogic.coopluque.com.py
Installation Type
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
JDK Selection
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
Standalone Forms Builder
Forms and Reports Deployment
Oracle Forms and Reports 12.2.1.4.0
Forms
Oracle Forms Builder 12.2.1.4.0
Oracle Forms Deployment 12.2.1.4.0
Reports
Oracle Reports 12.2.1.4.0
OHS
Oracle HTTP Server 12.2.1.4.0
Oracle Common Configuration Infrastructure
CIE CAM Shared Config 12.2.1.4.0
Enterprise manager Plugin for Forms 12.2.1.4.0
Infrastructure
Database Client LDAP Extended Components 12.2.1.4.0
OPatch 13.9.4.2.1
Help
< Back
Next >
Finish
Cancel


Oracle Forms and Reports Installation - Step 5 of 9@weblogic.coopluque.com.py
JDK Selection
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
JDK Selection
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
JDK Home:
/u01/app/weblogic/jdk1.8.0_251
Browse
The selected JDK /u01/app/weblogic/jdk1.8.0_251 will be used for this installation
Help
< Back
Next >
Finish
Cancel

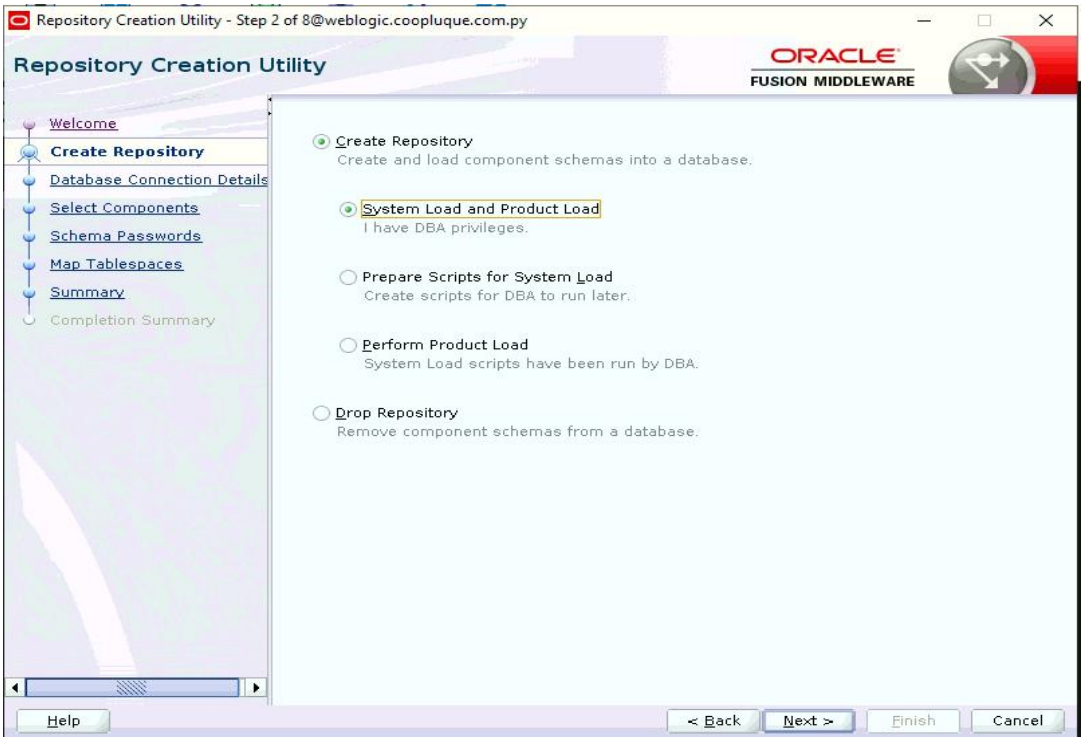

Oracle Forms and Reports Installation - Step 6 of 9@weblogic.coopluque.com.py
Prerequisite Checks
ORACLE
FUSION MIDDLEWARE
Welcome
Auto Updates
Installation Location
Installation Type
JDK Selection
Prerequisite Checks
Installation Summary
Installation Progress
Installation Complete
100%
Checking operating system certification
Checking recommended operating system packages
Checking kernel parameters
Checking physical memory
Checking Java version used to launch the installer
Stop
Rerun
Skip
View Successful Tasks
View Log
Checking recommended operating system packages
Checking kernel parameters
Checking physical memory
Checking Java version used to launch the installer
Help
< Back
Next >
Finish
Cancel

Creación del Metadata Repository

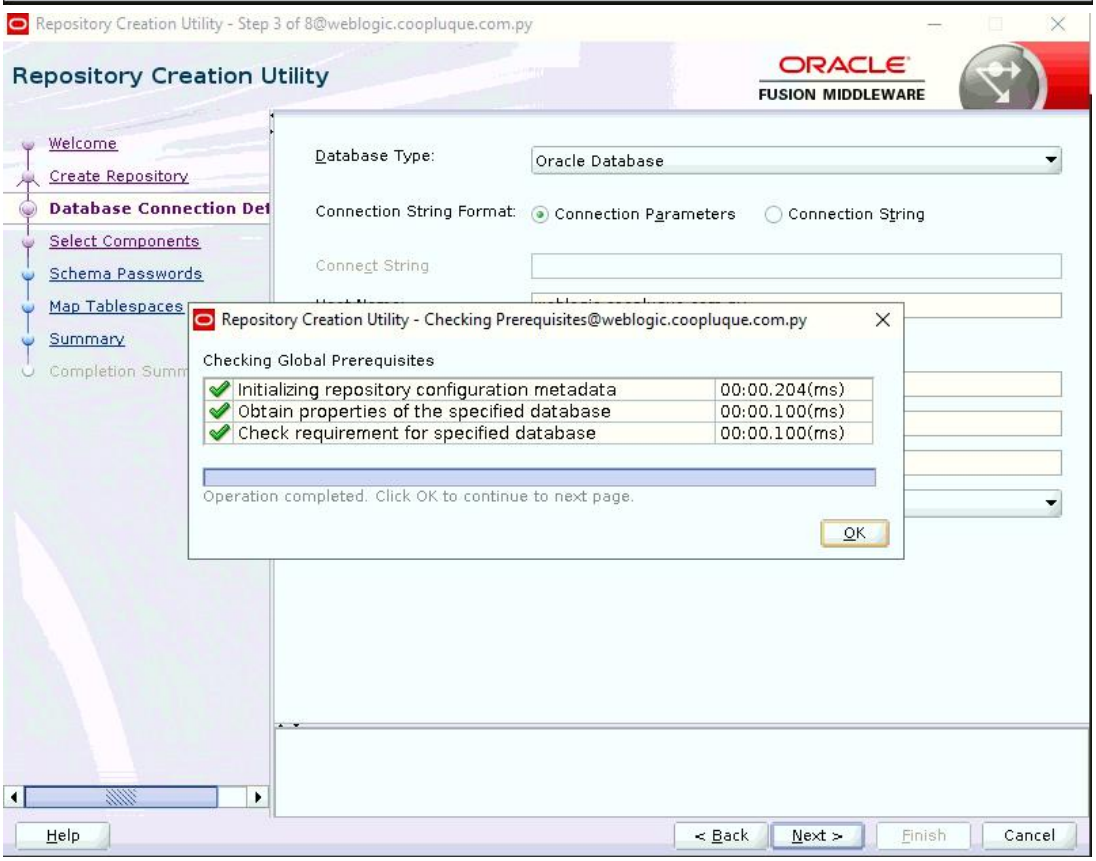
cd /u01/app/weblogic/Middleware/oracle_common/bin/

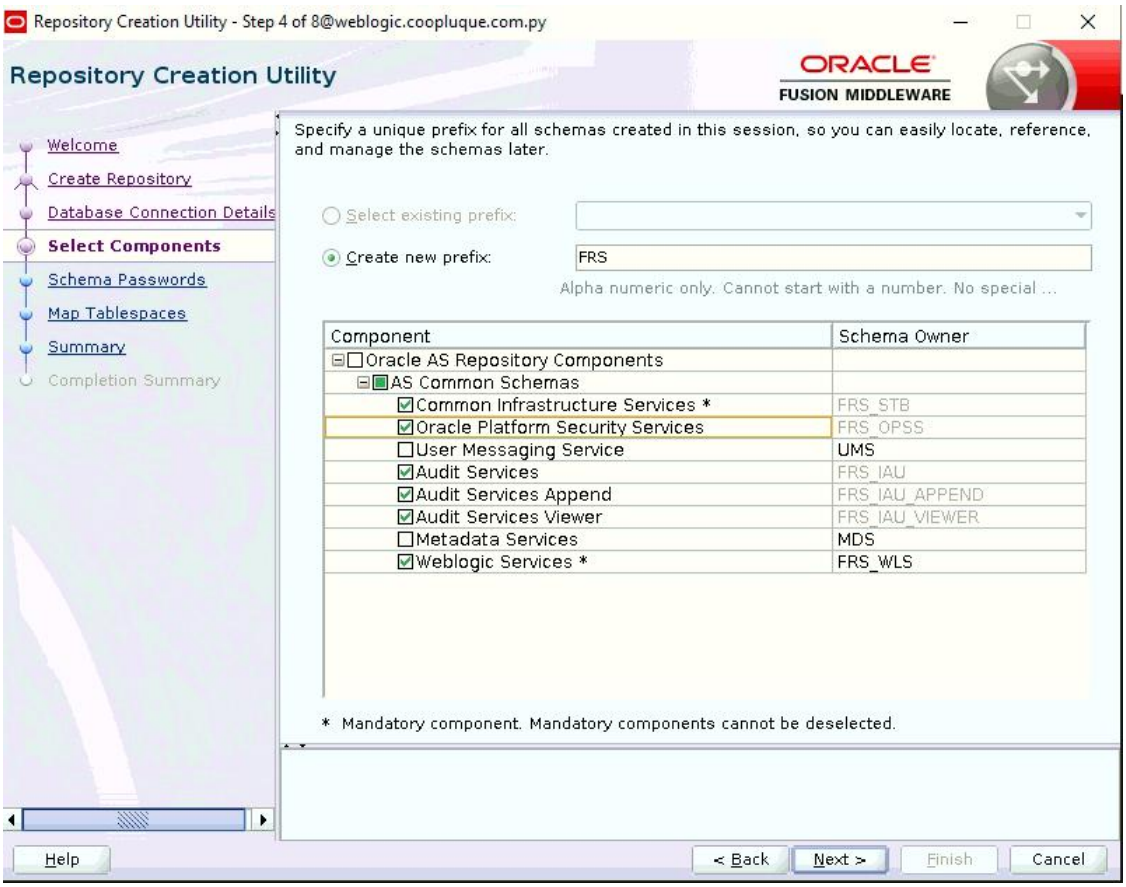
./rcu

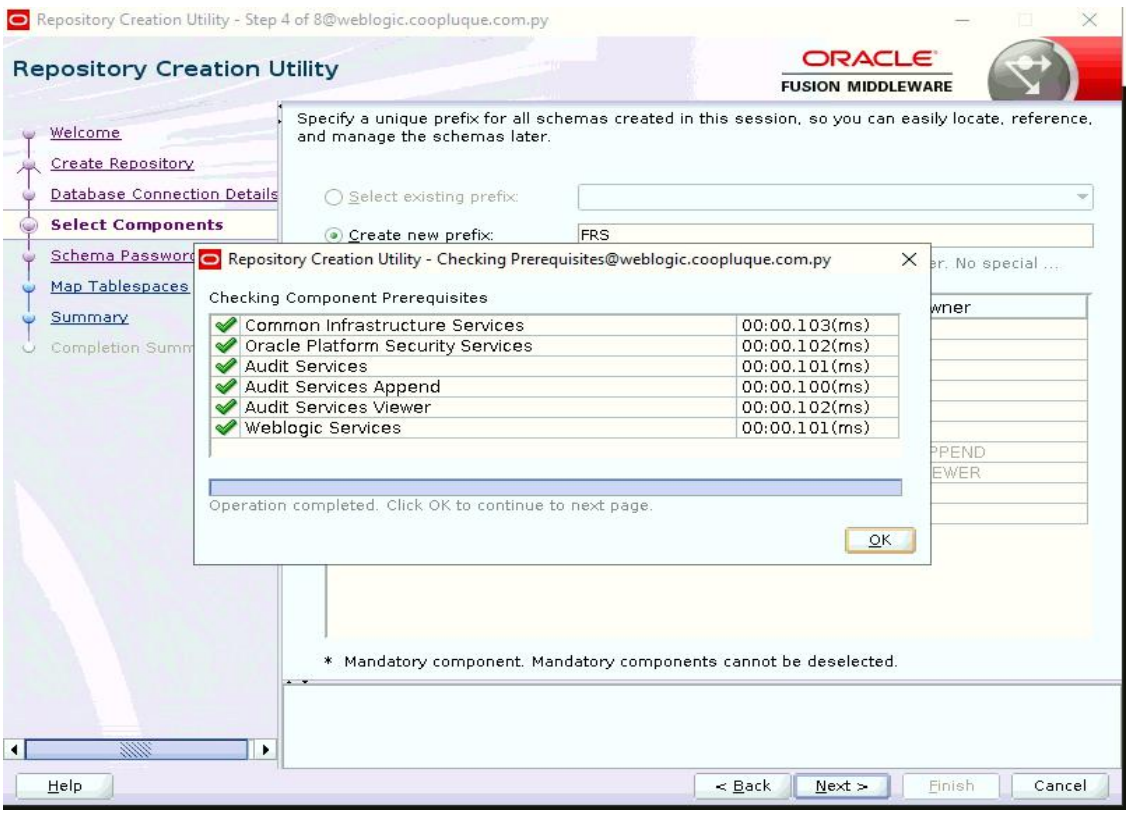


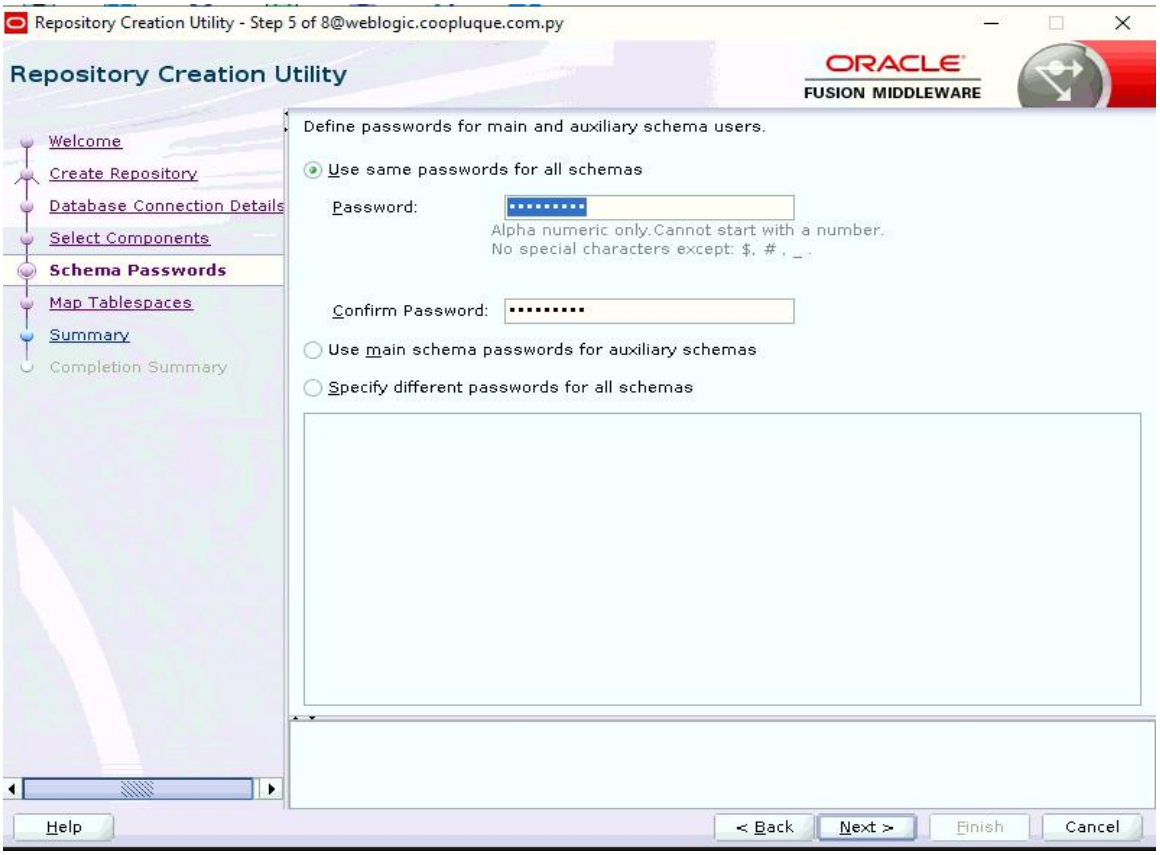


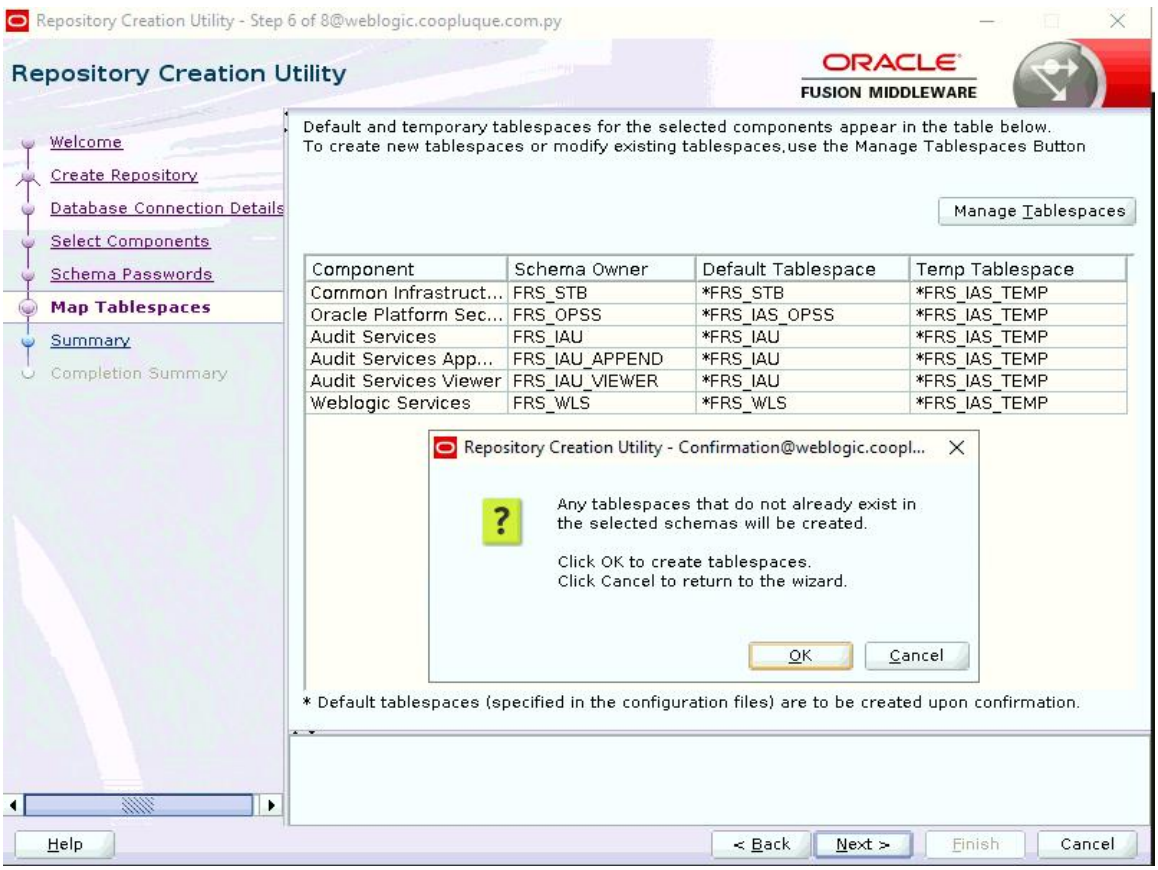

Repository Creation Utility - Step 3 of 8@weblogic.coopluque.com.py
Repository Creation Utility
ORACLE
FUSION MIDDLEWARE
Welcome
Create Repository
Database Connection Det
Select Components
Schema Passwords
Map Tablespaces
Summary
Completion Summary
Database Type:
Oracle Database
Connection String Format:
Connection Parameters
Connection String
Connect String
Host Name:
weblogic.coopluque.com.py
Port:
1521
Service Name:
fr12c
Username:
sys
Password:
Role:
SYSDBA
Help
< Back
Next >
Finish
Cancel

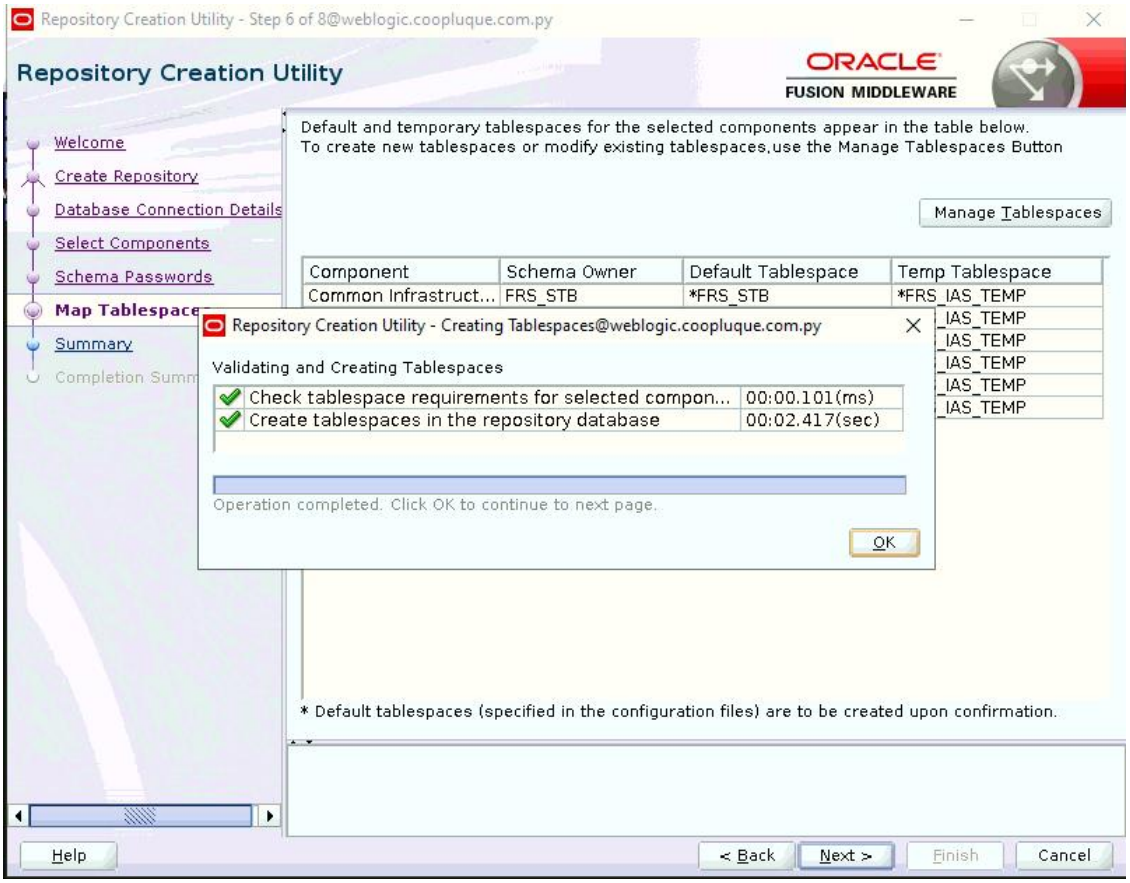

Repository Creation Utility - Step 3 of 8@weblogic.coopluque.com.py
Repository Creation Utility
ORACLE
FUSION MIDDLEWARE
Welcome
Create Repository
Database Connection Det
Select Components
Schema Passwords
Map Tablespaces
Summary
Completion Summ
Database Type:
Oracle Database
Connection String Format:
Connection Parameters
Connection String
Connect String
Repository Creation Utility - Checking Prerequisites@weblogic.coopluque.com.py
Checking Global Prerequisites
Initializing repository configuration metadata
00:00.204(ms)
Obtain properties of the specified database
00:00.100(ms)
Check requirement for specified database
00:00.100(ms)
Operation completed. Click OK to continue to next page.
OK
Help
< Back
Next >
Finish
Cancel

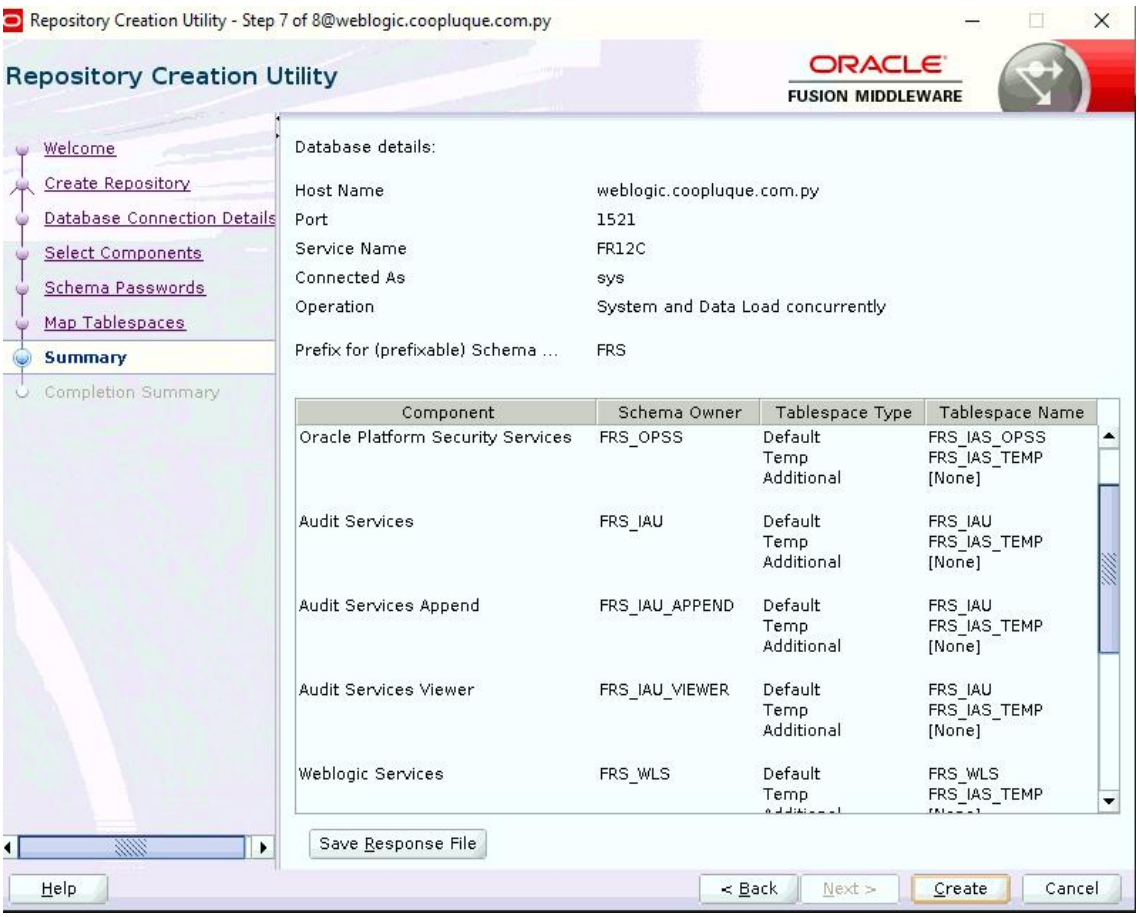

Repository Creation Utility - Step 4 of 8@weblogic.coopluque.com.py
Repository Creation Utility
ORACLE
FUSION MIDDLEWARE
Welcome
Create Repository
Database Connection Details
Select Components
Schema Passwords
Map Tablespaces
Summary
Completion Summary
Specify a unique prefix for all schemas created in this session, so you can easily locate, reference, and manage the schemas later.
Select existing prefix:
Create new prefix:
FRS
Alpha numeric only. Cannot start with a number. No special ...
Component
Schema Owner
Oracle AS Repository Components
AS Common Schemas
Common Infrastructure Services *
FRS_STB
Oracle Platform Security Services
FRS_OPSS
User Messaging Service
UMS
Audit Services
FRS_IAU
Audit Services Append
FRS_IAU_APPEND
Audit Services Viewer
FRS_IAU_VIEWER
Metadata Services
MDS
Weblogic Services *
FRS_WLS
* Mandatory component. Mandatory components cannot be deselected.
Help
< Back
Next >
Finish
Cancel


Repository Creation Utility - Step 4 of 8@weblogic.coopluque.com.py
Repository Creation Utility
ORACLE
FUSION MIDDLEWARE
Welcome
Create Repository
Database Connection Details
Select Components
Schema Passwords
Map Tablespaces
Summary
Completion Summ
Specify a unique prefix for all schemas created in this session, so you can easily locate, reference, and manage the schemas later.
Select existing prefix:
Create new prefix:
FRS
Repository Creation Utility - Checking Prerequisites@weblogic.coopluque.com.py
Checking Component Prerequisites
Common Infrastructure Services
00:00.103(ms)
Oracle Platform Security Services
00:00.102(ms)
Audit Services
00:00.101(ms)
Audit Services Append
00:00.100(ms)
Audit Services Viewer
00:00.102(ms)
Weblogic Services
00:00.101(ms)
Operation completed. Click OK to continue to next page.
OK
* Mandatory component. Mandatory components cannot be deselected.
Help
< Back
Next >
Finish
Cancel


Repository Creation Utility - Step 5 of 8@weblogic.coopluque.com.py
Repository Creation Utility
ORACLE
FUSION MIDDLEWARE
Welcome
Create Repository
Database Connection Details
Select Components
Schema Passwords
Map Tablespaces
Summary
Completion Summary
Define passwords for main and auxiliary schema users.
Use same passwords for all schemas
Password:
Alpha numeric only.Cannot start with a number.
No special characters except: $, # , _ .
Confirm Password:
Use main schema passwords for auxiliary schemas
Specify different passwords for all schemas
Help
< Back
Next >
Finish
Cancel


Repository Creation Utility - Step 6 of 8@weblogic.coopluque.com.py
Repository Creation Utility
ORACLE
FUSION MIDDLEWARE
Welcome
Create Repository
Database Connection Details
Select Components
Schema Passwords
Map Tablespaces
Summary
Completion Summary
Default and temporary tablespaces for the selected components appear in the table below.
To create new tablespaces or modify existing tablespaces,use the Manage Tablespaces Button
Manage Tablespaces
Component
Schema Owner
Default Tablespace
Temp Tablespace
Common Infrastruct...
FRS_STB
*FRS_STB
*FRS_IAS_TEMP
Oracle Platform Sec...
FRS_OPSS
*FRS_IAS_OPSS
*FRS_IAS_TEMP
Audit Services
FRS_IAU
*FRS_IAU
*FRS_IAS_TEMP
Audit Services App...
FRS_IAU_APPEND
*FRS_IAU
*FRS_IAS_TEMP
Audit Services Viewer
FRS_IAU_VIEWER
*FRS_IAU
*FRS_IAS_TEMP
Weblogic Services
FRS_WLS
*FRS_WLS
*FRS_IAS_TEMP
Repository Creation Utility - Confirmation@weblogic.coopl...
Any tablespaces that do not already exist in the selected schemas will be created.
Click OK to create tablespaces.
Click Cancel to return to the wizard.
OK
Cancel
* Default tablespaces (specified in the configuration files) are to be created upon confirmation.
Help
< Back
Next >
Finish
Cancel

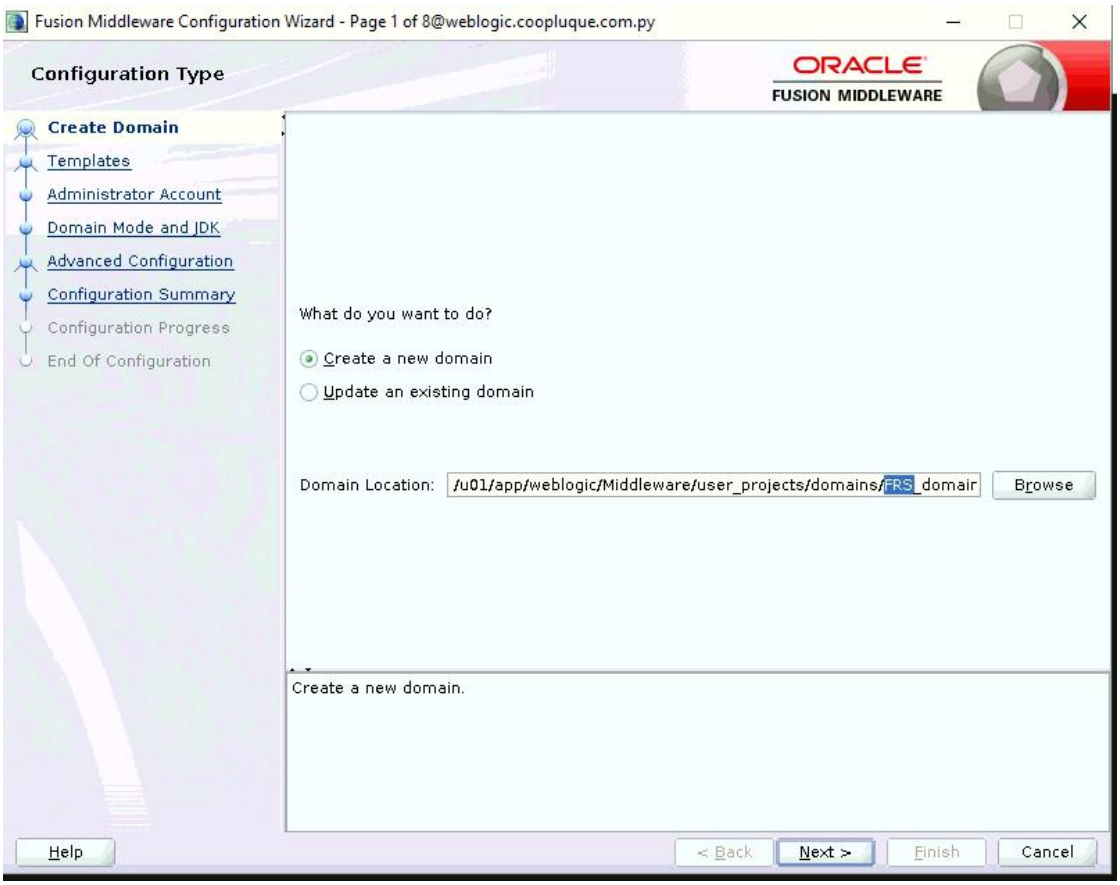

Repository Creation Utility - Step 6 of 8@weblogic.coopluque.com.py
Repository Creation Utility
ORACLE
FUSION MIDDLEWARE
Welcome
Create Repository
Database Connection Details
Select Components
Schema Passwords
Map Tablespace
Summary
Completion Summ
Default and temporary tablespaces for the selected components appear in the table below.
To create new tablespaces or modify existing tablespaces,use the Manage Tablespaces Button
Manage Tablespaces
Component
Schema Owner
Default Tablespace
Temp Tablespace
Common Infrastruct...
FRS_STB
*FRS_STB
*FRS_IAS_TEMP
_IAS_TEMP
_IAS_TEMP
_IAS_TEMP
_IAS_TEMP
_IAS_TEMP
Repository Creation Utility - Creating Tablespaces@weblogic.coopluque.com.py
Validating and Creating Tablespaces
Check tablespace requirements for selected compon...
00:00.101(ms)
Create tablespaces in the repository database
00:02.417(sec)
Operation completed. Click OK to continue to next page.
OK
* Default tablespaces (specified in the configuration files) are to be created upon confirmation.
Help
< Back
Next >
Finish
Cancel

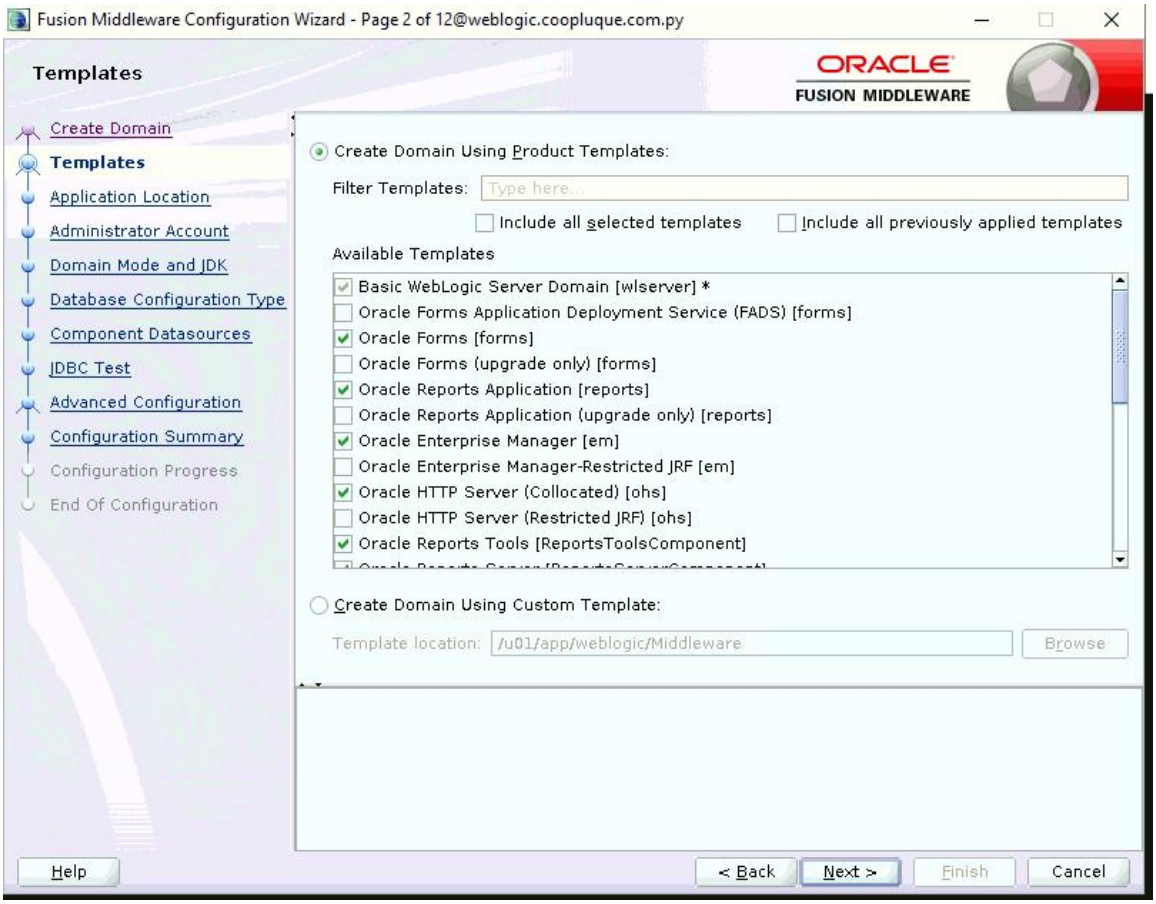

Repository Creation Utility - Step 7 of 8@weblogic.coopluque.com.py
Repository Creation Utility
ORACLE
FUSION MIDDLEWARE
Welcome
Create Repository
Database Connection Details
Select Components
Schema Passwords
Map Tablespaces
Summary
Completion Summary
Database details:
Host Name
weblogic.coopluque.com.py
Port
1521
Service Name
FR12C
Connected As
sys
Operation
System and Data Load concurrently
Prefix for (prefixable) Schema ...
FRS
Component
Schema Owner
Tablespace Type
Tablespace Name
Oracle Platform Security Services
FRS_OPSS
Default
Temp
Additional
FRS_IAS_OPSS
FRS_IAS_TEMP
[None]
Audit Services
FRS_IAU
Default
Temp
Additional
FRS_IAU
FRS_IAS_TEMP
[None]
Audit Services Append
FRS_IAU_APPEND
Default
Temp
Additional
FRS_IAU
FRS_IAS_TEMP
[None]
Audit Services Viewer
FRS_IAU_VIEWER
Default
Temp
Additional
FRS_IAU
FRS_IAS_TEMP
[None]
Weblogic Services
FRS_WLS
Default
Temp
FRS_WLS
FRS_IAS_TEMP
Save Response File
Help
< Back
Next >
Create
Cancel

Configuración de Forms y Reports Services.

cd /u01/app/weblogic/Middleware/oracle_common/common/bin/

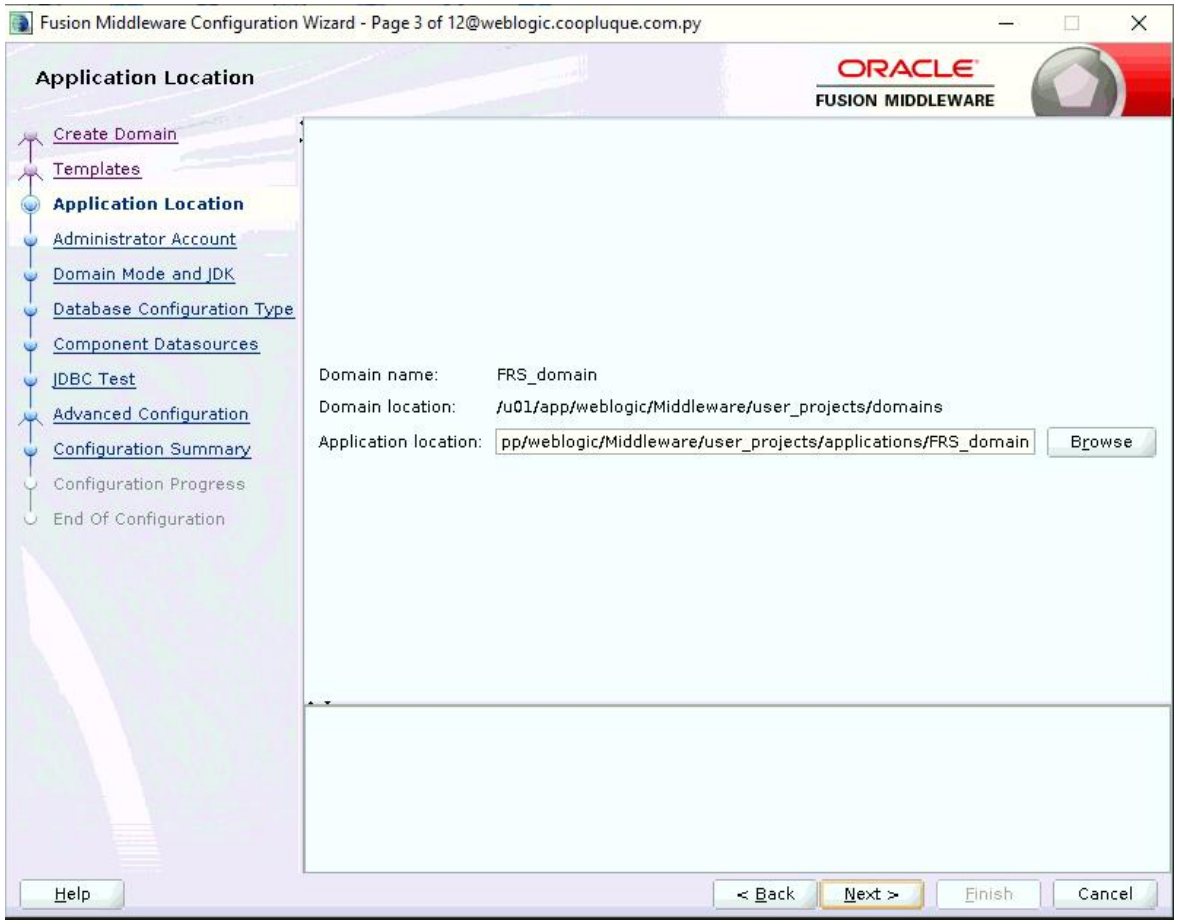
./config.sh

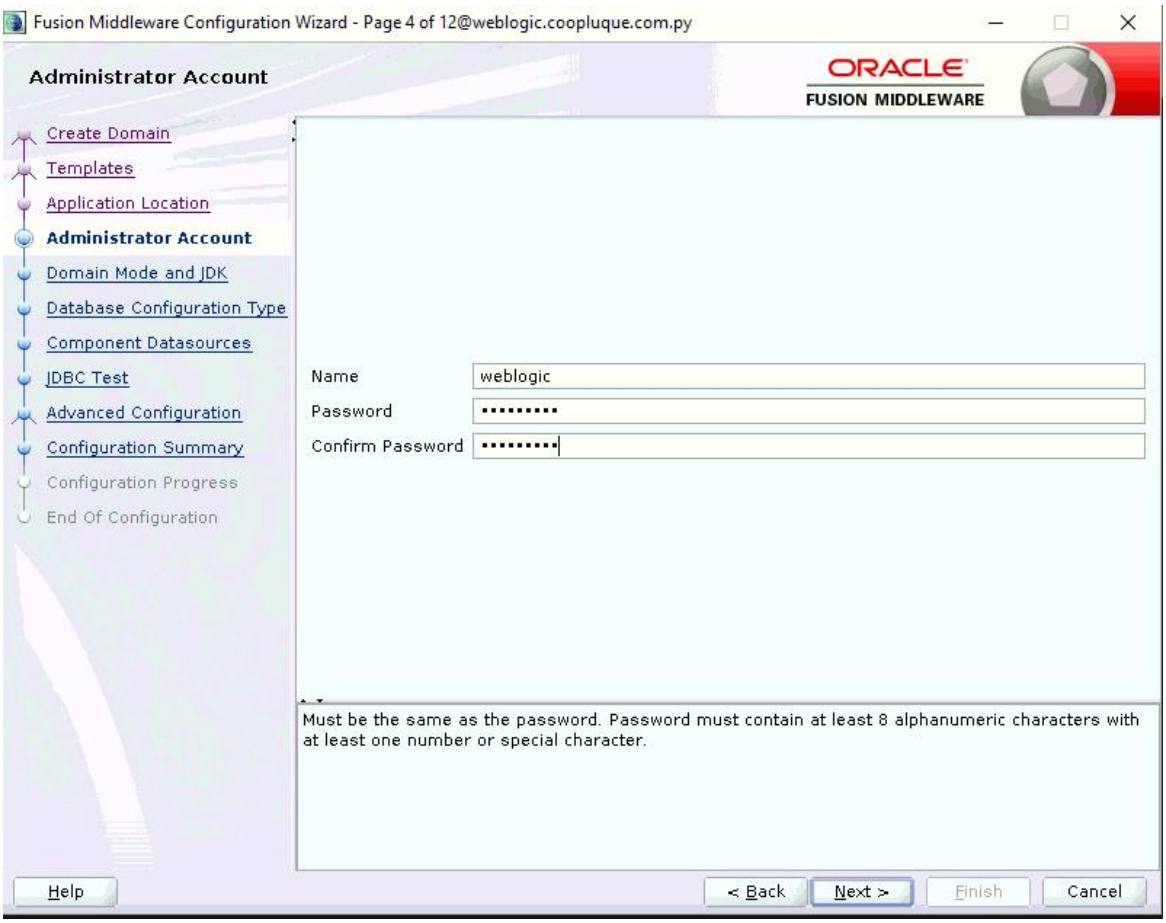


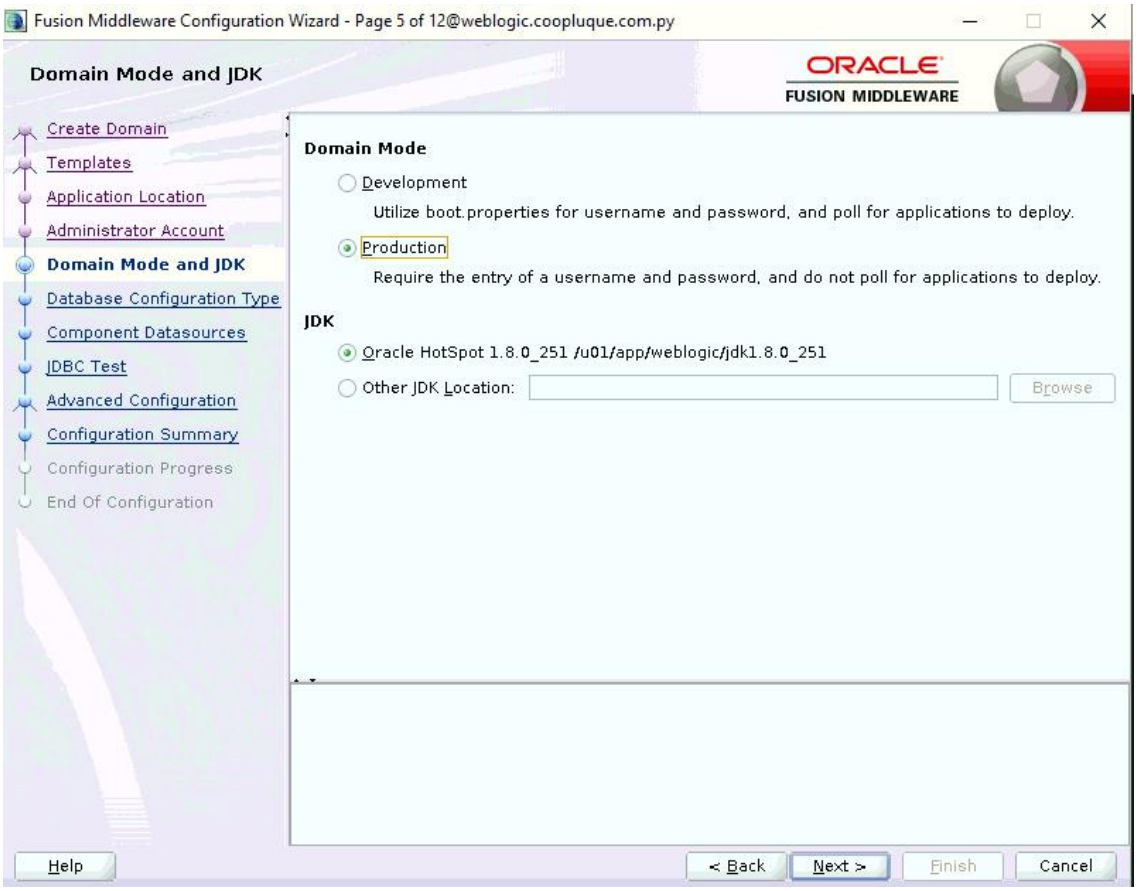


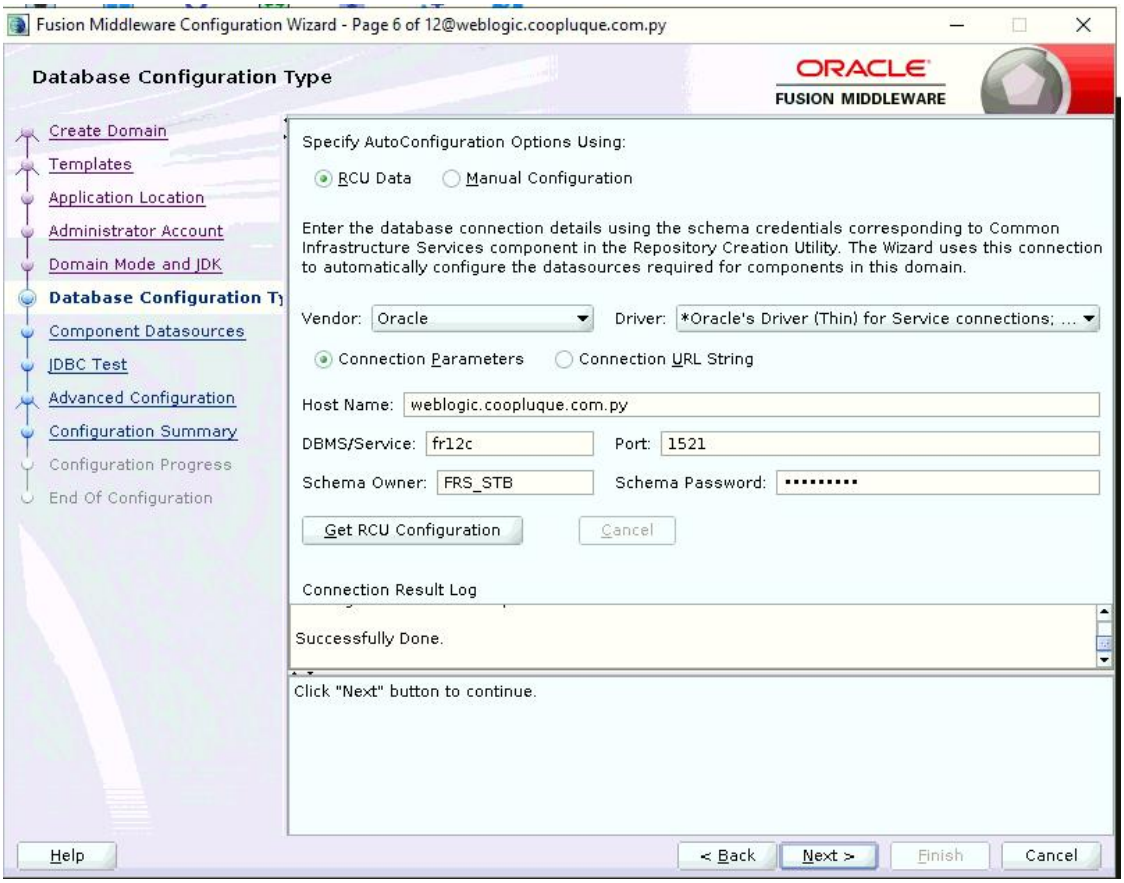
Seleccionados:

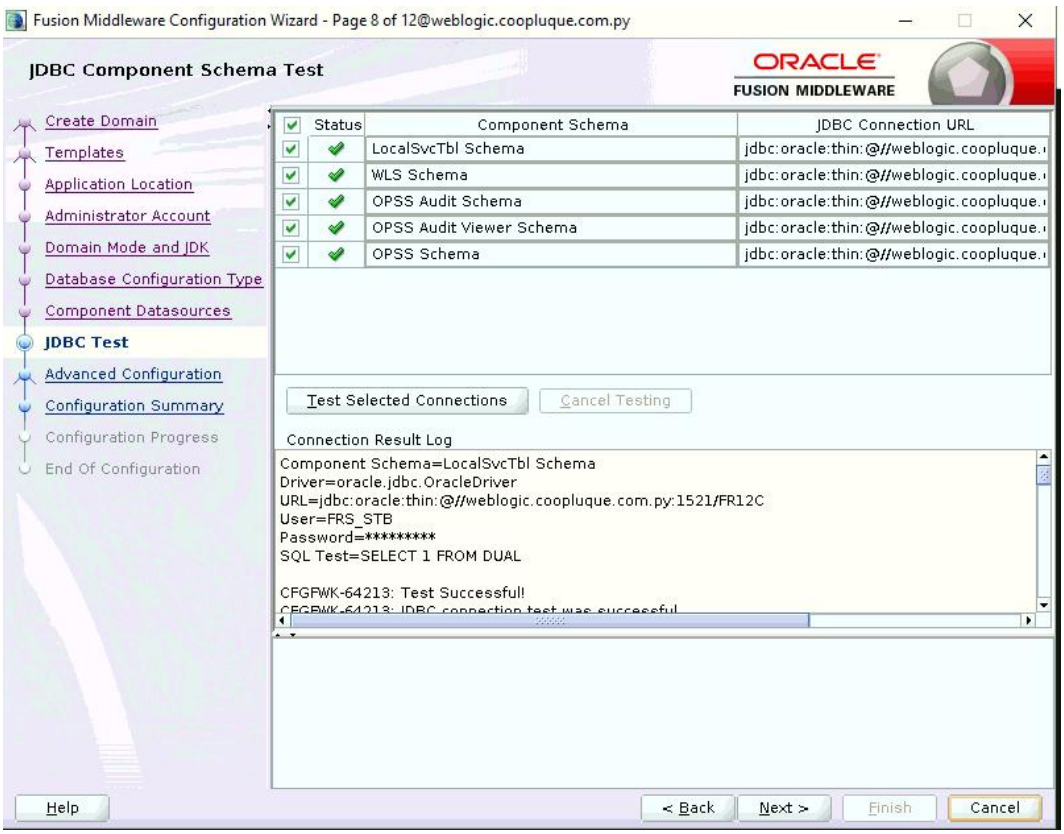
- ✔ Basic Weblogic Server Domain [wlserver]*
- ✔ Oracle Forms [forms]
- ✔ Oracle Reports Application [reports]
- ✔ Oracle Enterprise Manager [em]
- ✔ Oracle HTTP Server (Collocated) [ohs]
- ✔ Oracle Reports Tools [ReportsToolsComponent]
- ✔ Oracle Reports Server [ReportsServerComponent]
- ✔ Oracle Reports Bridge [ReportsBridgeComponent]
- ✔ Oracle JRF [oracle_common]
- ✔ Weblogic Coherence Cluster Extension [wlserver]

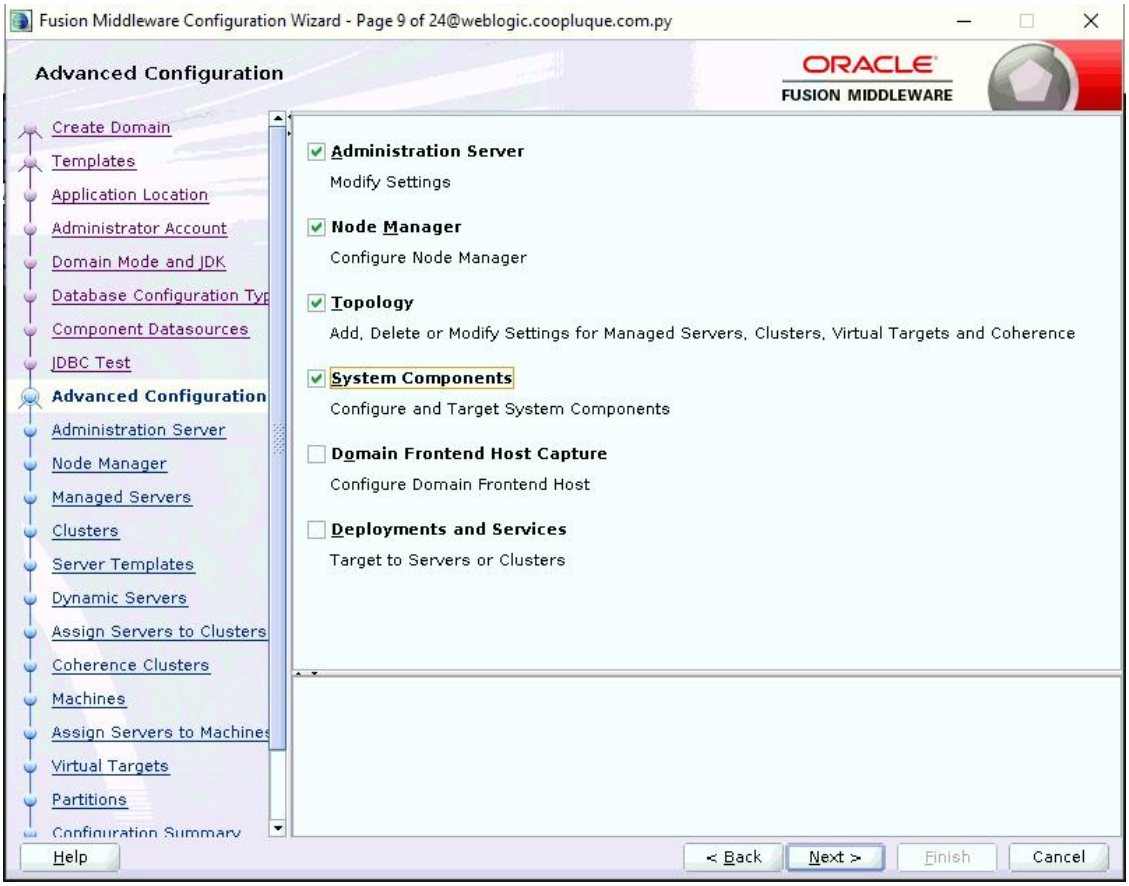

Fusion Middleware Configuration Wizard - Page 3 of 12@weblogic.coopluque.com.py
Application Location
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Type
Component Datasources
JDBC Test
Advanced Configuration
Configuration Summary
Configuration Progress
End Of Configuration
Domain name: FRS_domain
Domain location: /u01/app/weblogic/Middleware/user_projects/domains
Application location: pp/weblogic/Middleware/user_projects/applications/FRS_domain
Browse
Help
< Back
Next >
Finish
Cancel

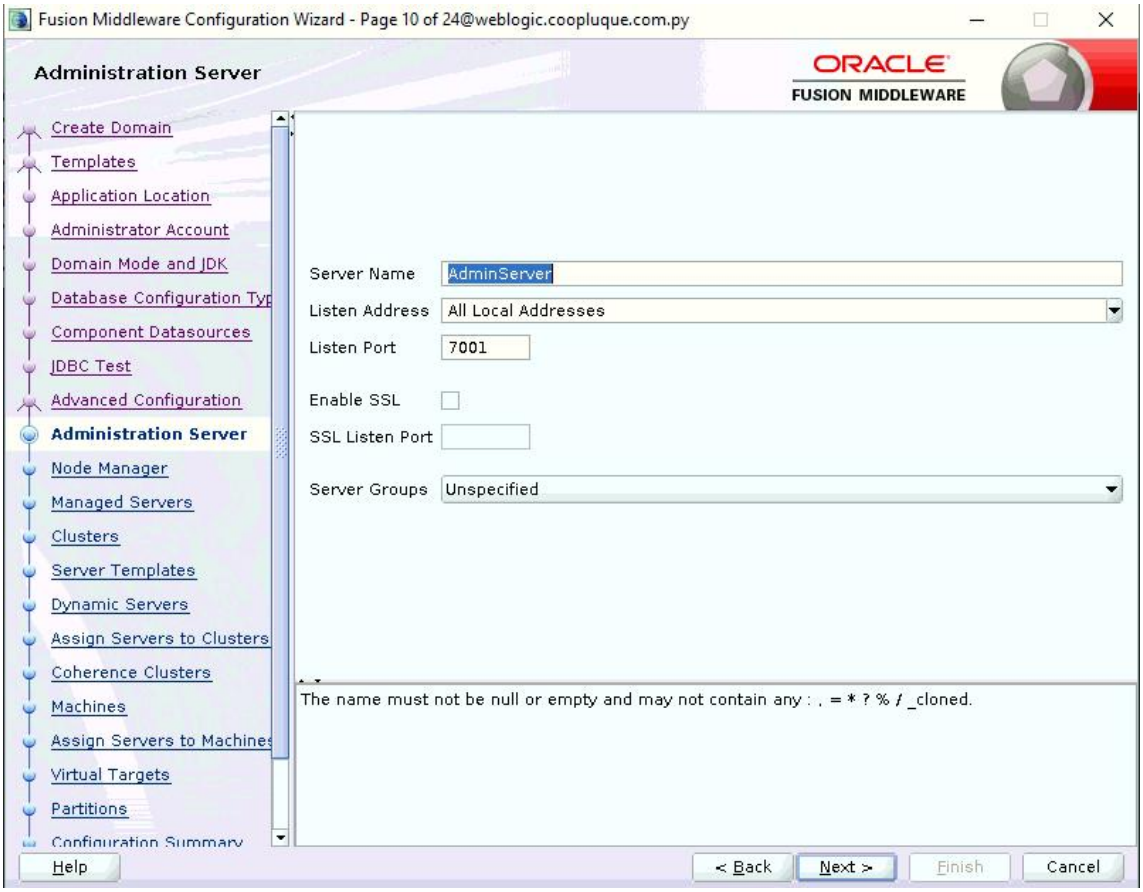

Fusion Middleware Configuration Wizard - Page 4 of 12@weblogic.coopluque.com.py
Administrator Account
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Type
Component Datasources
JDBC Test
Advanced Configuration
Configuration Summary
Configuration Progress
End Of Configuration
Name
weblogic
Password
Confirm Password
Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.
Help
< Back
Next >
Finish
Cancel

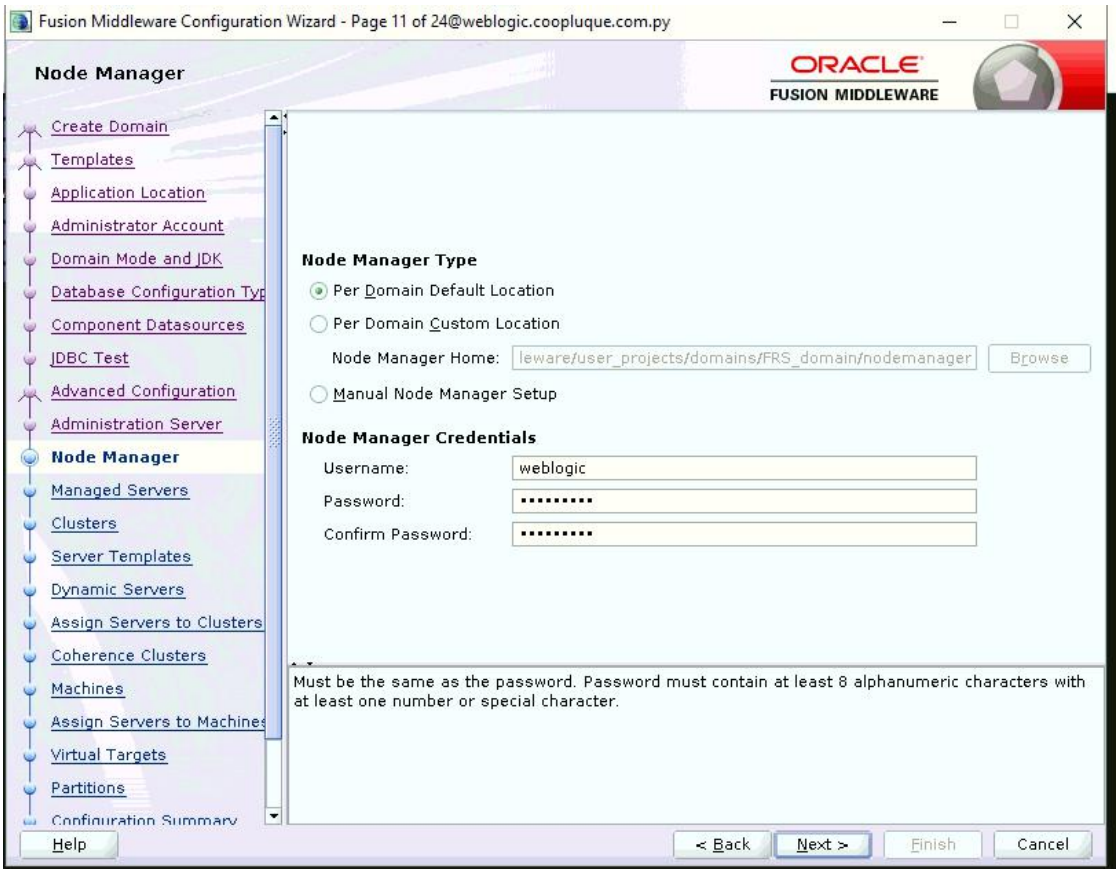

Fusion Middleware Configuration Wizard - Page 5 of 12@weblogic.coopluque.com.py
Domain Mode and JDK
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Type
Component Datasources
JDBC Test
Advanced Configuration
Configuration Summary
Configuration Progress
End Of Configuration
Domain Mode
Development
Utilize boot.properties for username and password, and poll for applications to deploy.
Production
Require the entry of a username and password, and do not poll for applications to deploy.
JDK
Oracle HotSpot 1.8.0_251 /u01/app/weblogic/jdk1.8.0_251
Other JDK Location:
Browse
Help
< Back
Next >
Finish
Cancel

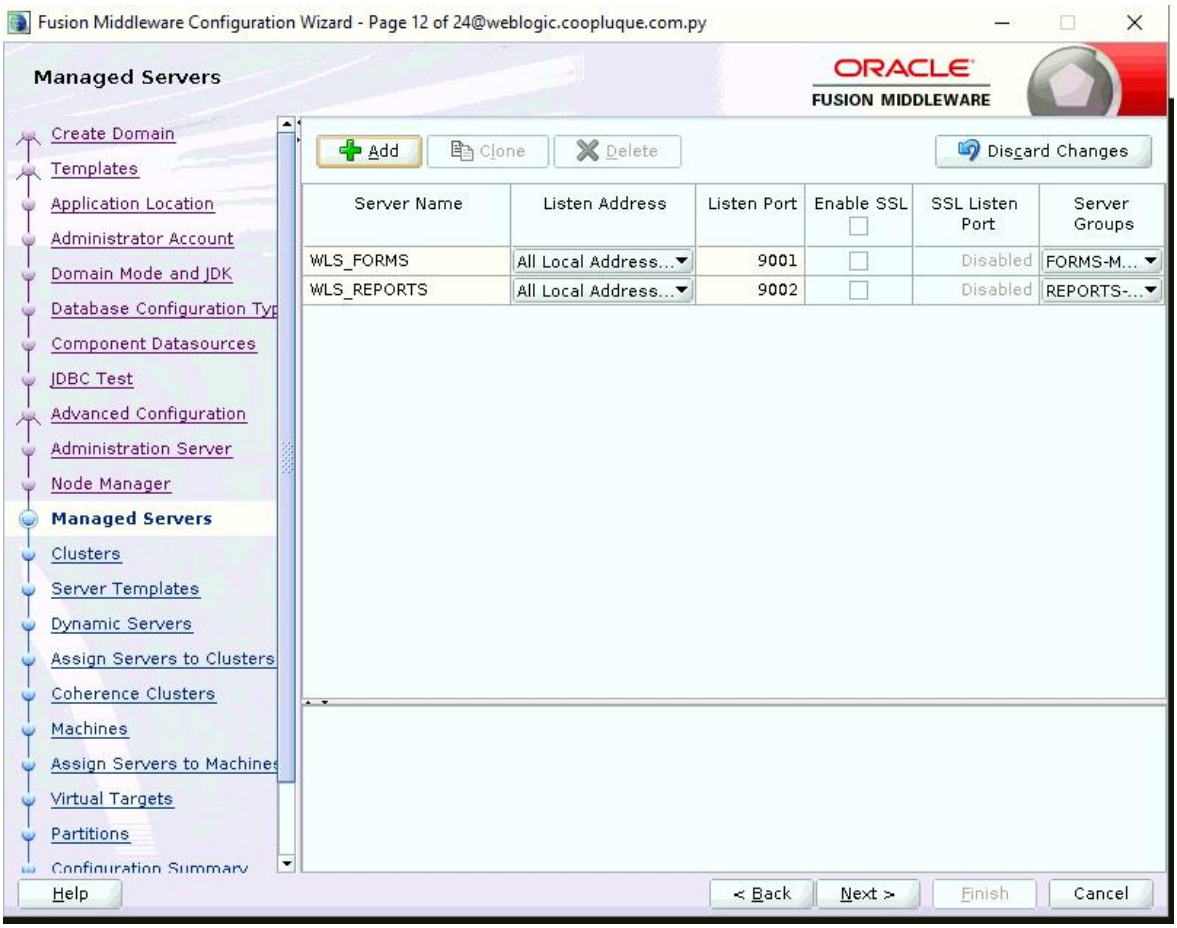

Fusion Middleware Configuration Wizard - Page 6 of 12@weblogic.coopluque.com.py
Database Configuration Type
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Ty
Component Datasources
JDBC Test
Advanced Configuration
Configuration Summary
Configuration Progress
End Of Configuration
Specify AutoConfiguration Options Using:
RCU Data
Manual Configuration
Enter the database connection details using the schema credentials corresponding to Common Infrastructure Services component in the Repository Creation Utility. The Wizard uses this connection to automatically configure the datasources required for components in this domain.
Vendor: Oracle
Driver: *Oracle's Driver (Thin) for Service connections; ...
Connection Parameters
Connection URL String
Host Name: weblogic.coopluque.com.py
DBMS/Service: fr12c
Port: 1521
Schema Owner: FRS_STB
Schema Password: ••••••••••
Get RCU Configuration
Cancel
Connection Result Log
Successfully Done.
Click "Next" button to continue.
Help
< Back
Next >
Finish
Cancel

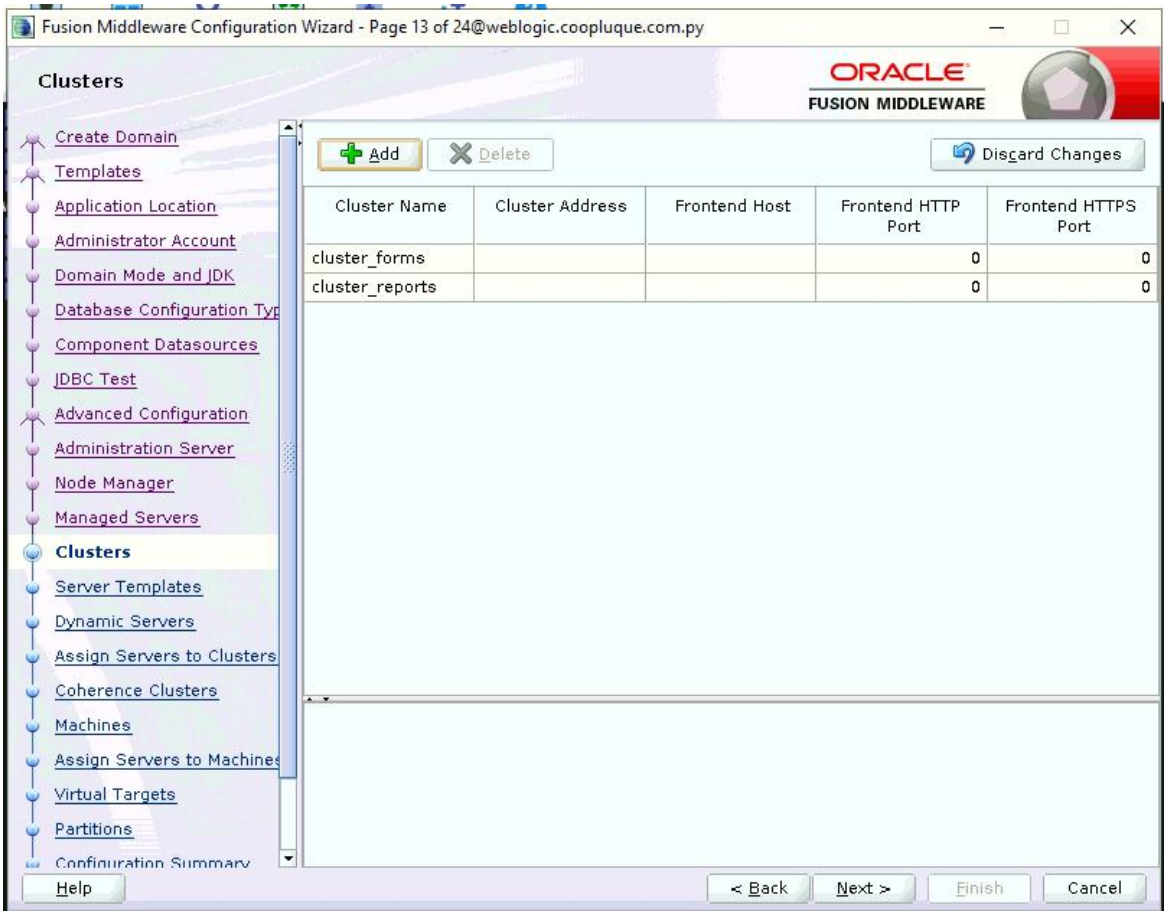

Fusion Middleware Configuration Wizard - Page 8 of 12@weblogic.coopluque.com.py
JDBC Component Schema Test
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Type
Component Datasources
JDBC Test
Advanced Configuration
Configuration Summary
Configuration Progress
End Of Configuration
Status
Component Schema
JDBC Connection URL
LocalSvcTbl Schema
WLS Schema
OPSS Audit Schema
OPSS Audit Viewer Schema
OPSS Schema
jdbc:oracle:thin:@//weblogic.coopluque.
Test Selected Connections
Cancel Testing
Connection Result Log
Component Schema=LocalSvcTbl Schema
Driver=oracle.jdbc.OracleDriver
URL=jdbc:oracle:thin:@//weblogic.coopluque.com.py:1521/FR12C
User=FRS_STB
Password=*********
SQL Test=SELECT 1 FROM DUAL
CFGFWK-64213: Test Successful!
Help
< Back
Next >
Finish
Cancel

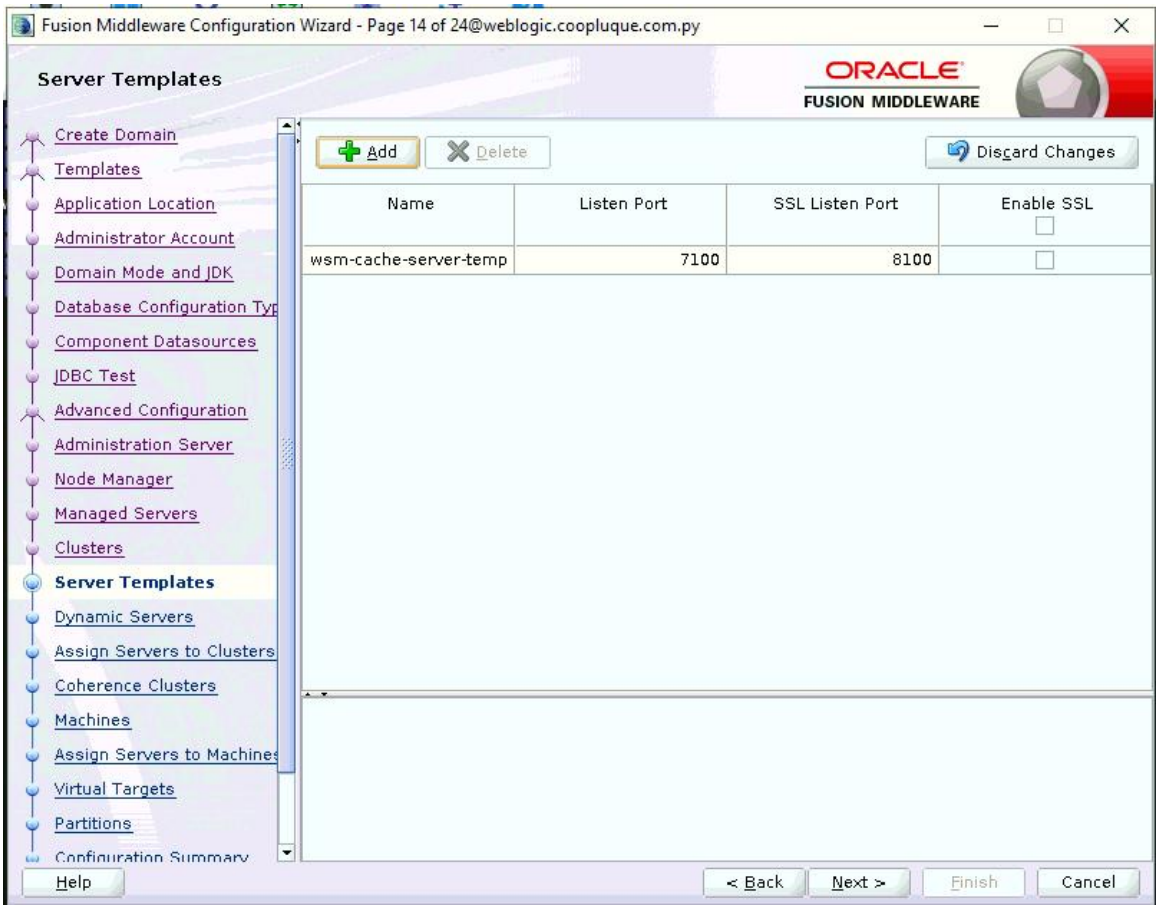

Fusion Middleware Configuration Wizard - Page 9 of 24@weblogic.coopluque.com.py
Advanced Configuration
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Administration Server
Modify Settings
Node Manager
Configure Node Manager
Topology
Add, Delete or Modify Settings for Managed Servers, Clusters, Virtual Targets and Coherence
System Components
Configure and Target System Components
Domain Frontend Host Capture
Configure Domain Frontend Host
Deployments and Services
Target to Servers or Clusters
Help
< Back
Next >
Finish
Cancel

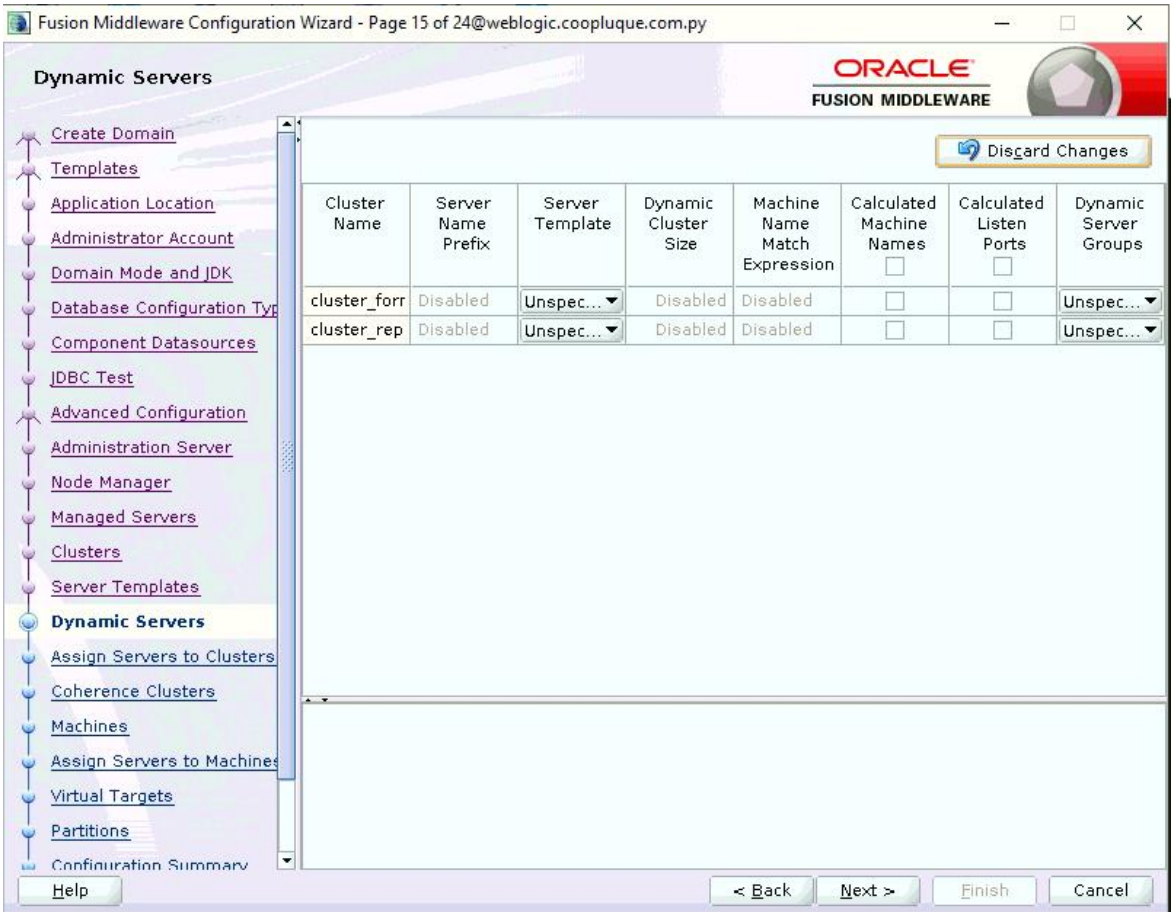

Fusion Middleware Configuration Wizard - Page 10 of 24@weblogic.coopluque.com.py
Administration Server
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Server Name
AdminServer
Listen Address
All Local Addresses
Listen Port
7001
Enable SSL
SSL Listen Port
Server Groups
Unspecified
The name must not be null or empty and may not contain any : , = * ? % / _cloned.
Help
< Back
Next >
Finish
Cancel

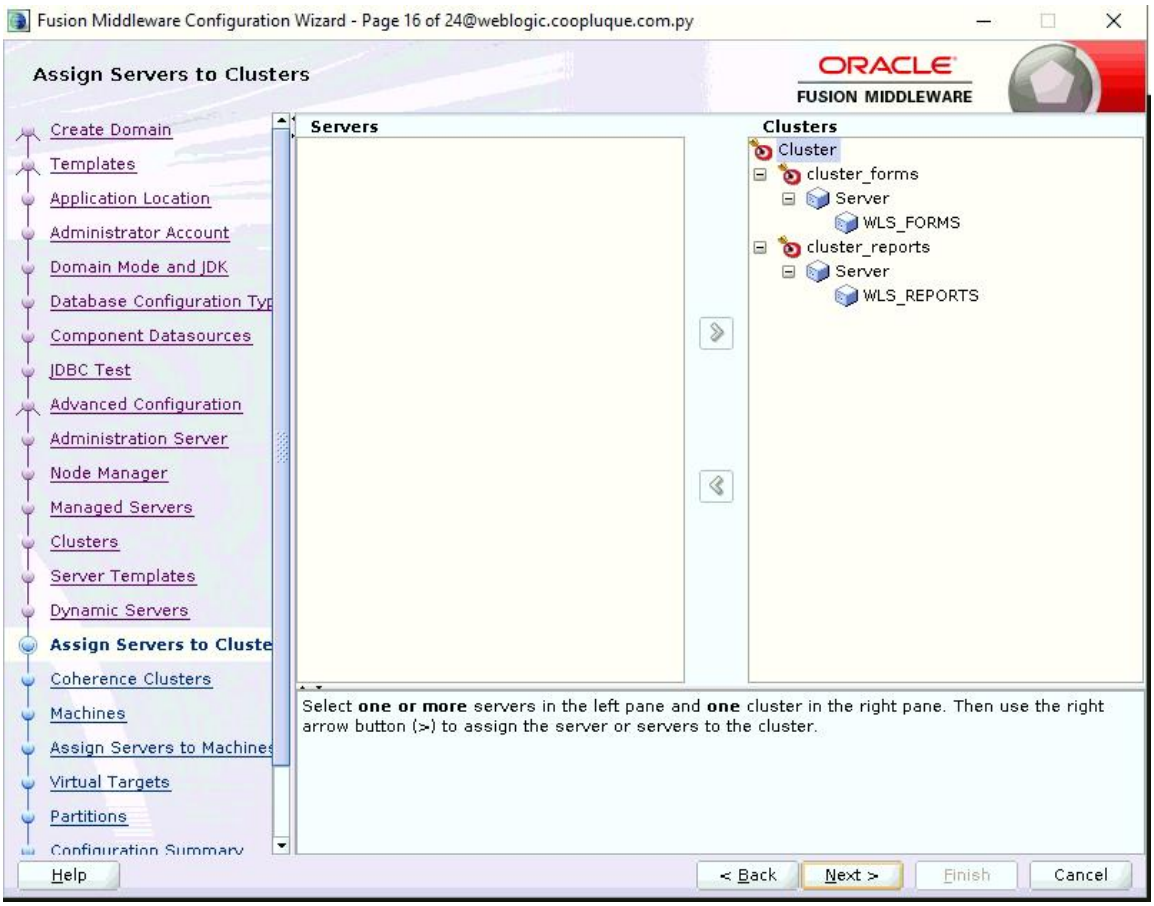

Fusion Middleware Configuration Wizard - Page 11 of 24@weblogic.coopluque.com.py
Node Manager
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Node Manager Type
Per Domain Default Location
Per Domain Custom Location
Node Manager Home:
leware/user_projects/domains/FRS_domain/nodemanager
Browse
Manual Node Manager Setup
Node Manager Credentials
Username:
weblogic
Password:
Confirm Password:
Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.
Help
< Back
Next >
Finish
Cancel

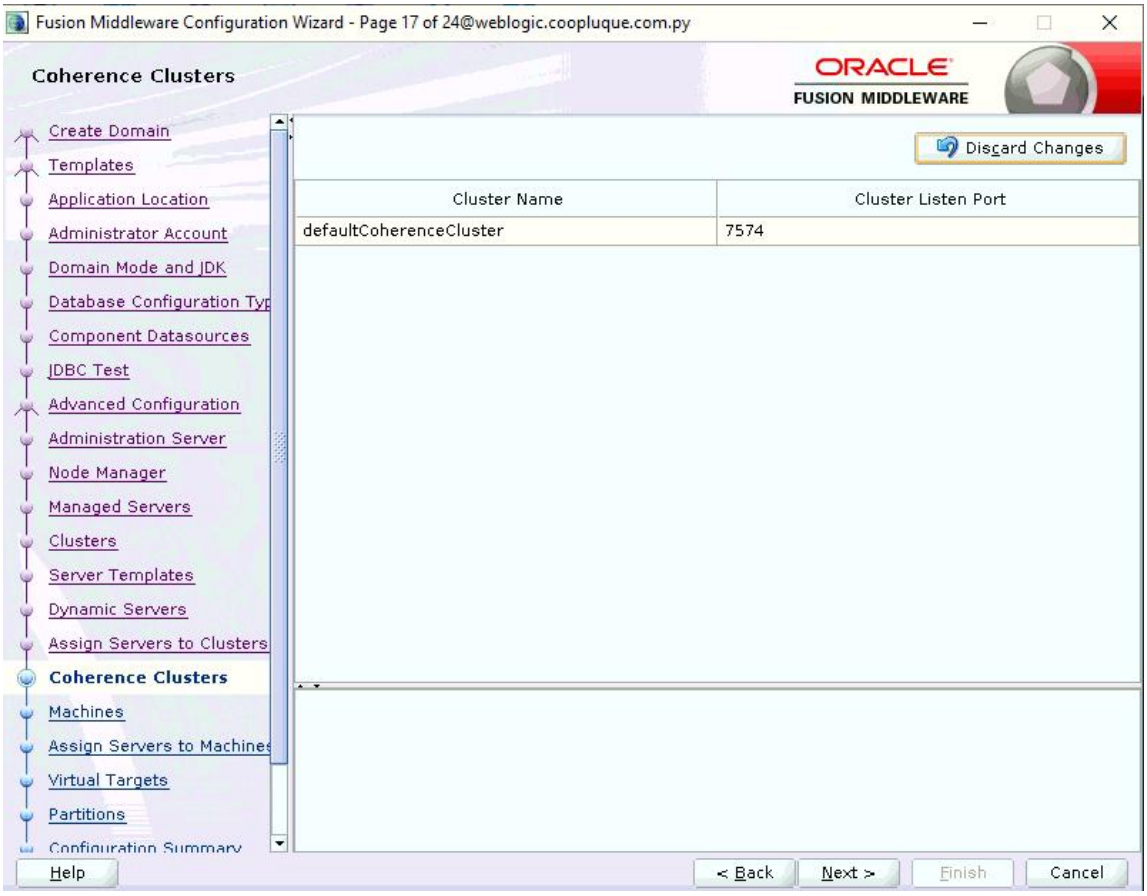

Fusion Middleware Configuration Wizard - Page 12 of 24@weblogic.coopluque.com.py
Managed Servers
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Add
Clone
Delete
Discard Changes
Server Name
Listen Address
Listen Port
Enable SSL
SSL Listen Port
Server Groups
WLS_FORMS
All Local Address...
9001
Disabled
FORMS-M...
WLS_REPORTS
All Local Address...
9002
Disabled
REPORTS-...
Help
< Back
Next >
Finish
Cancel

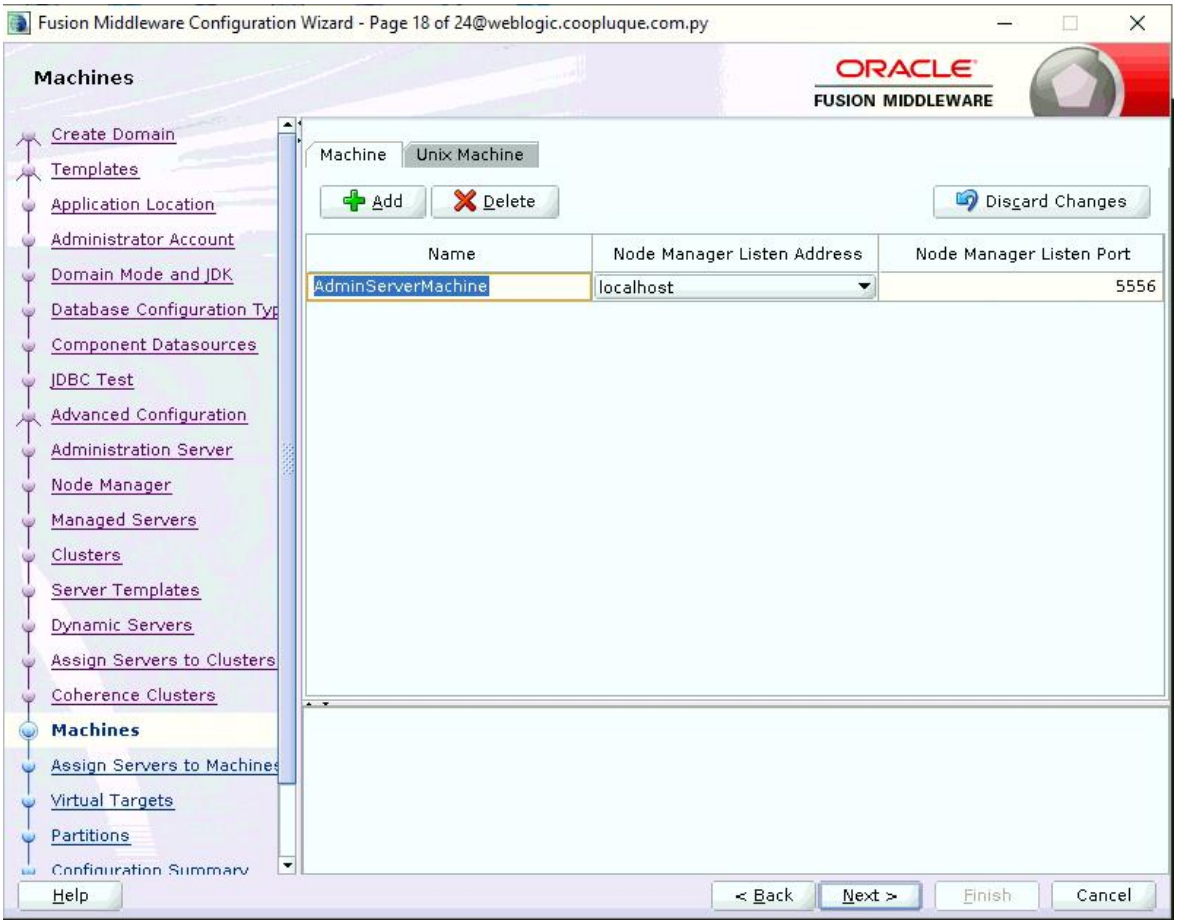

Fusion Middleware Configuration Wizard - Page 13 of 24@weblogic.coopluque.com.py
Clusters
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Add
Delete
Discard Changes
Cluster Name
Cluster Address
Frontend Host
Frontend HTTP Port
Frontend HTTPS Port
cluster_forms
0
0
cluster_reports
0
0
Help
< Back
Next >
Finish
Cancel

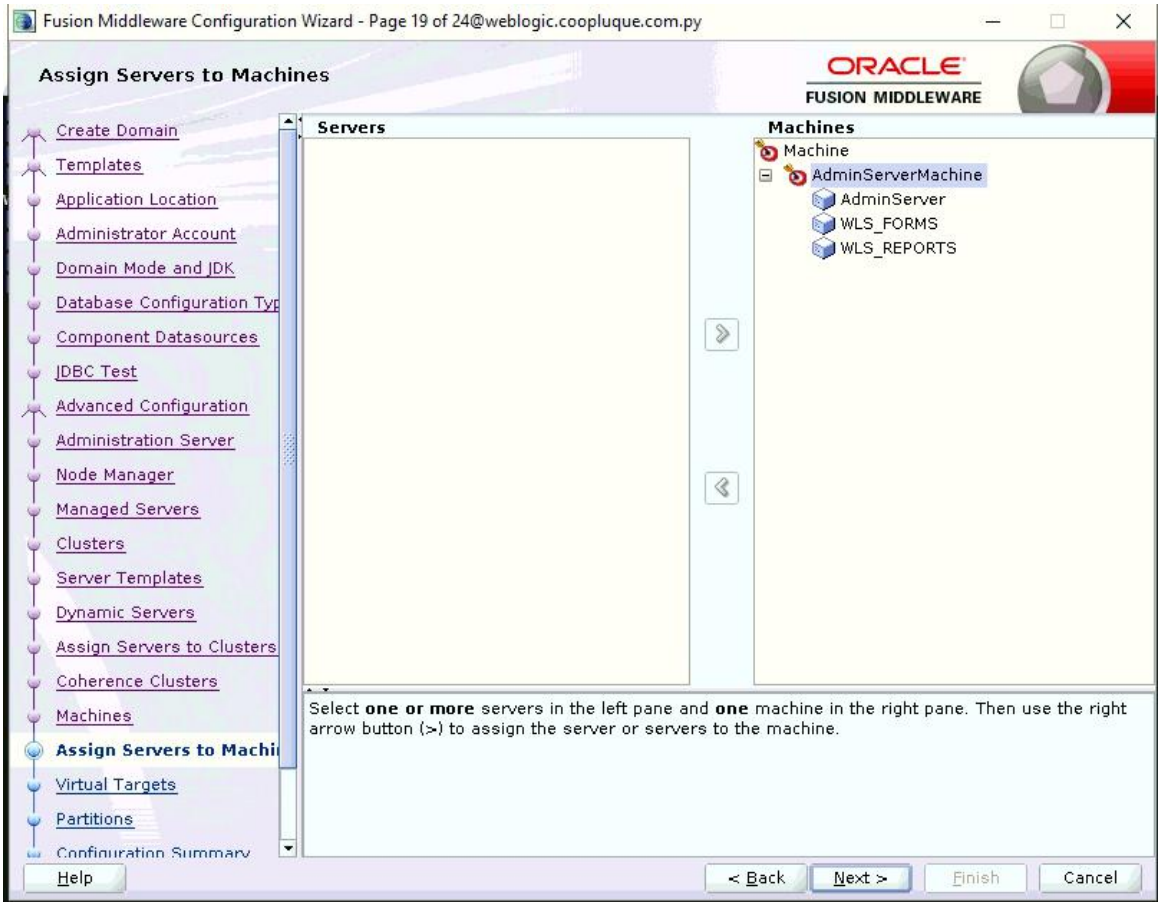

Fusion Middleware Configuration Wizard - Page 14 of 24@weblogic.coopluque.com.py
Server Templates
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Add
Delete
Discard Changes
Name
Listen Port
SSL Listen Port
Enable SSL
wsm-cache-server-temp
7100
8100
Help
< Back
Next >
Finish
Cancel

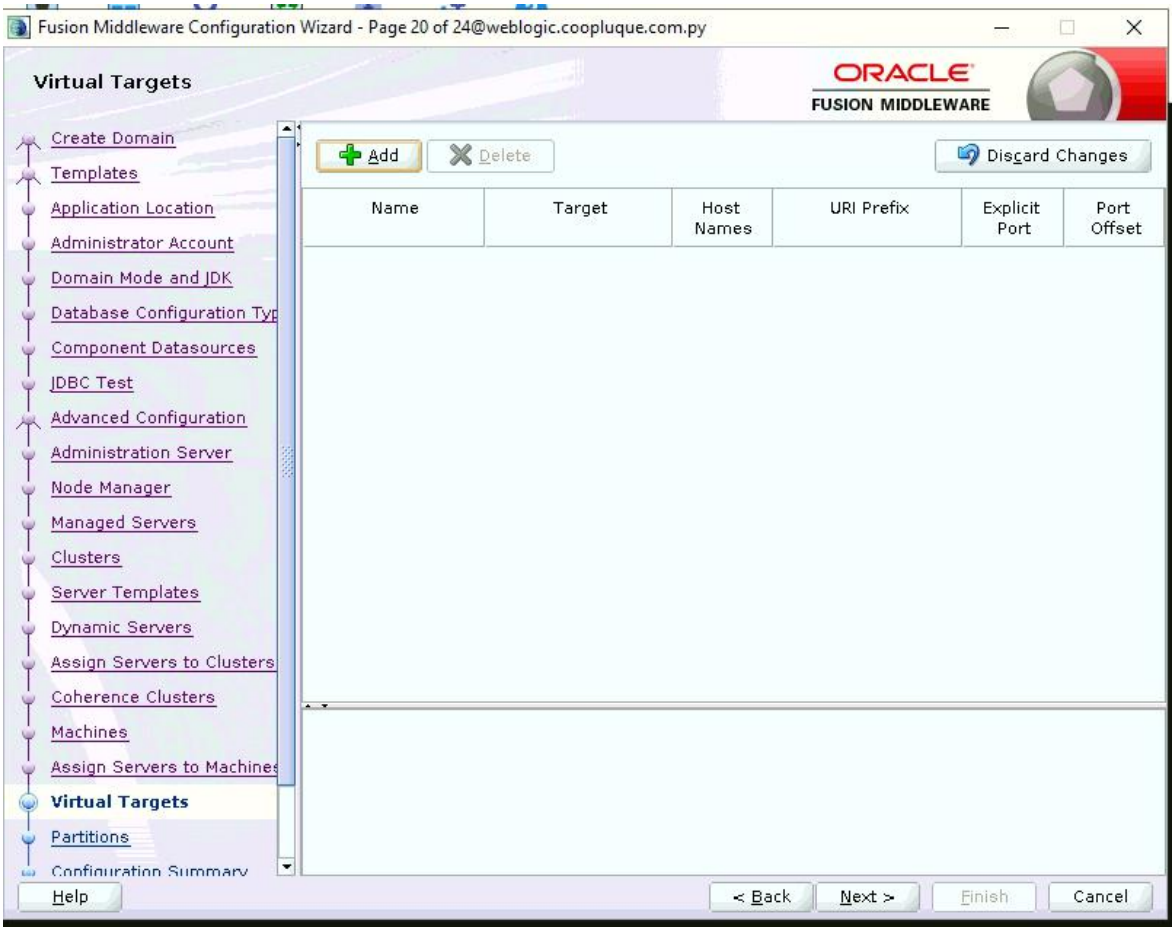

Fusion Middleware Configuration Wizard - Page 15 of 24@weblogic.coopluque.com.py
Dynamic Servers
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Discard Changes
Cluster Name
Server Name Prefix
Server Template
Dynamic Cluster Size
Machine Name Match Expression
Calculated Machine Names
Calculated Listen Ports
Dynamic Server Groups
cluster_forr
Disabled
Unspec...
Disabled
Disabled
Unspec...
cluster_rep
Disabled
Unspec...
Disabled
Disabled
Unspec...
Help
< Back
Next >
Finish
Cancel

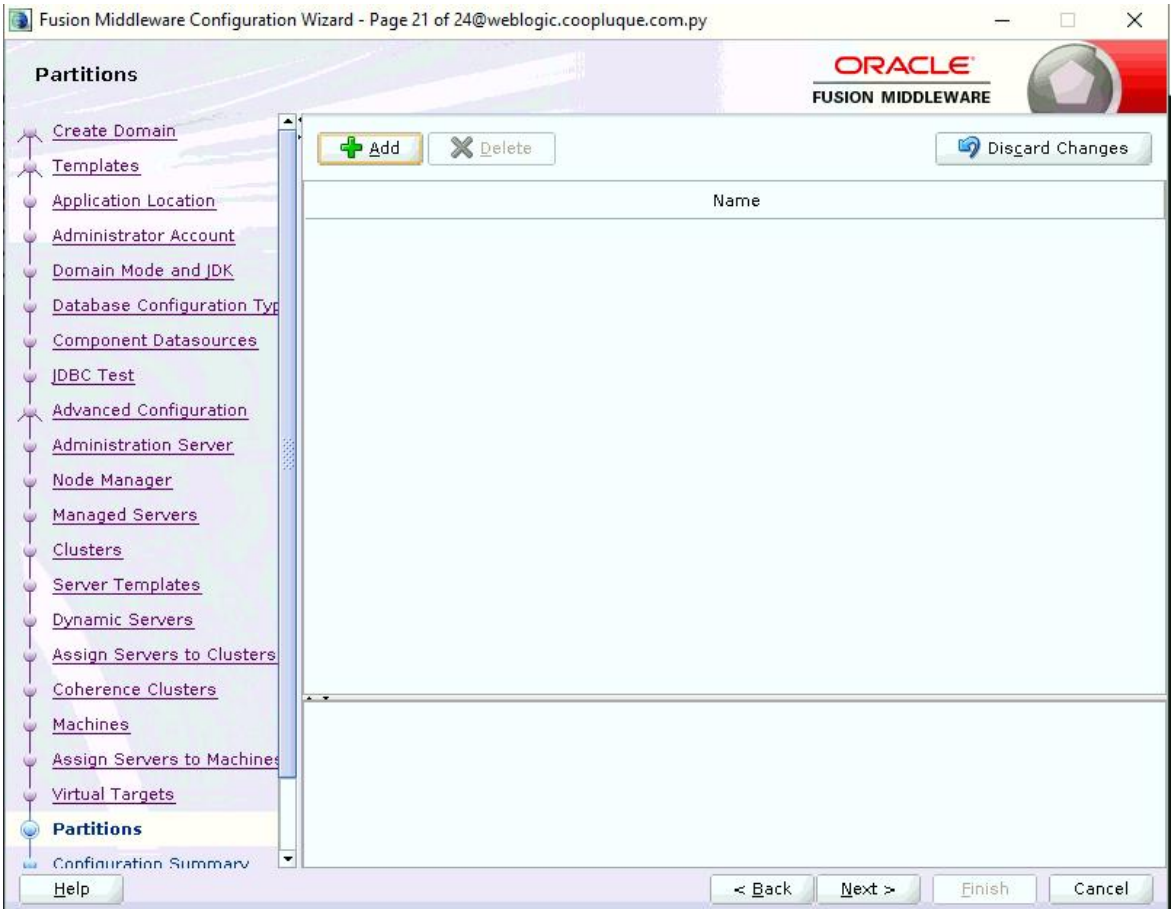

Fusion Middleware Configuration Wizard - Page 16 of 24@weblogic.coopluque.com.py
Assign Servers to Clusters
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Cluste
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Servers
Clusters
Cluster
cluster_forms
Server
WLS_FORMS
cluster_reports
Server
WLS_REPORTS
Select one or more servers in the left pane and one cluster in the right pane. Then use the right arrow button (>) to assign the server or servers to the cluster.
Help
< Back
Next >
Finish
Cancel

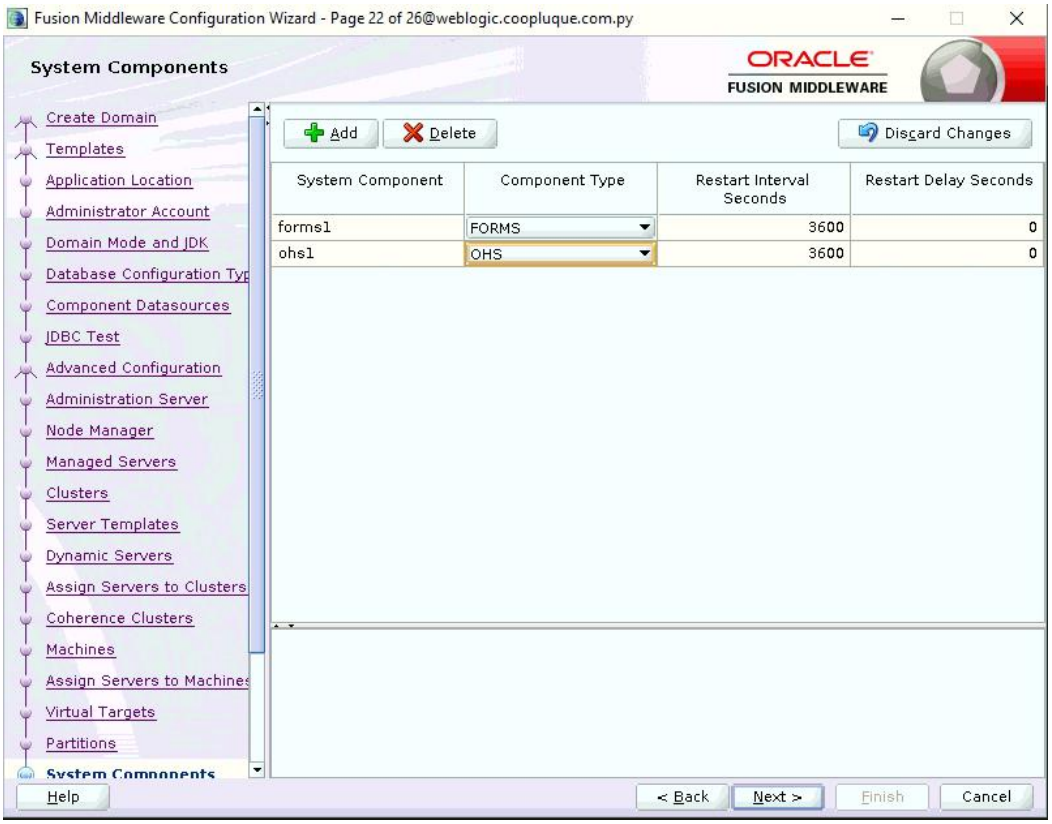

Fusion Middleware Configuration Wizard - Page 17 of 24@weblogic.coopluque.com.py
Coherence Clusters
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Discard Changes
Cluster Name
Cluster Listen Port
defaultCoherenceCluster
7574
Help
< Back
Next >
Finish
Cancel

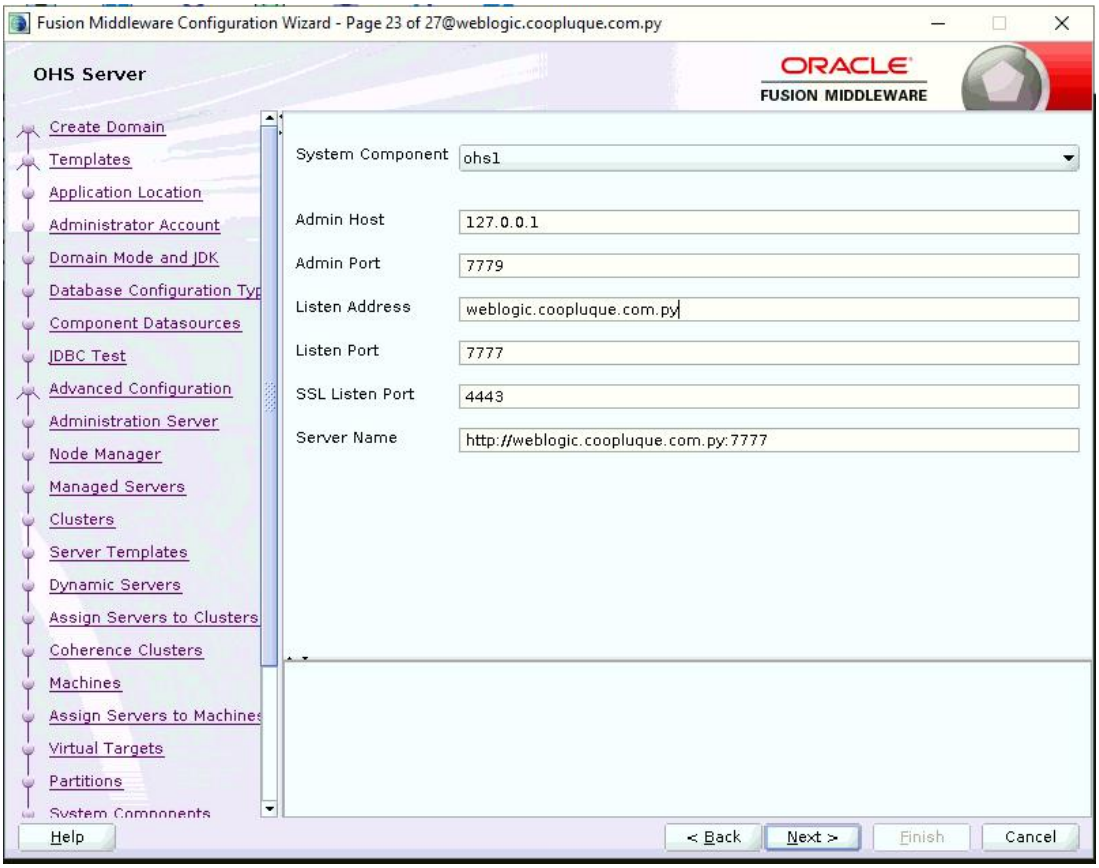

Fusion Middleware Configuration Wizard - Page 18 of 24@weblogic.coopluque.com.py
Machines
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Machine
Unix Machine
Add
Delete
Discard Changes
Name
Node Manager Listen Address
Node Manager Listen Port
AdminServerMachine
localhost
5556
Help
< Back
Next >
Finish
Cancel

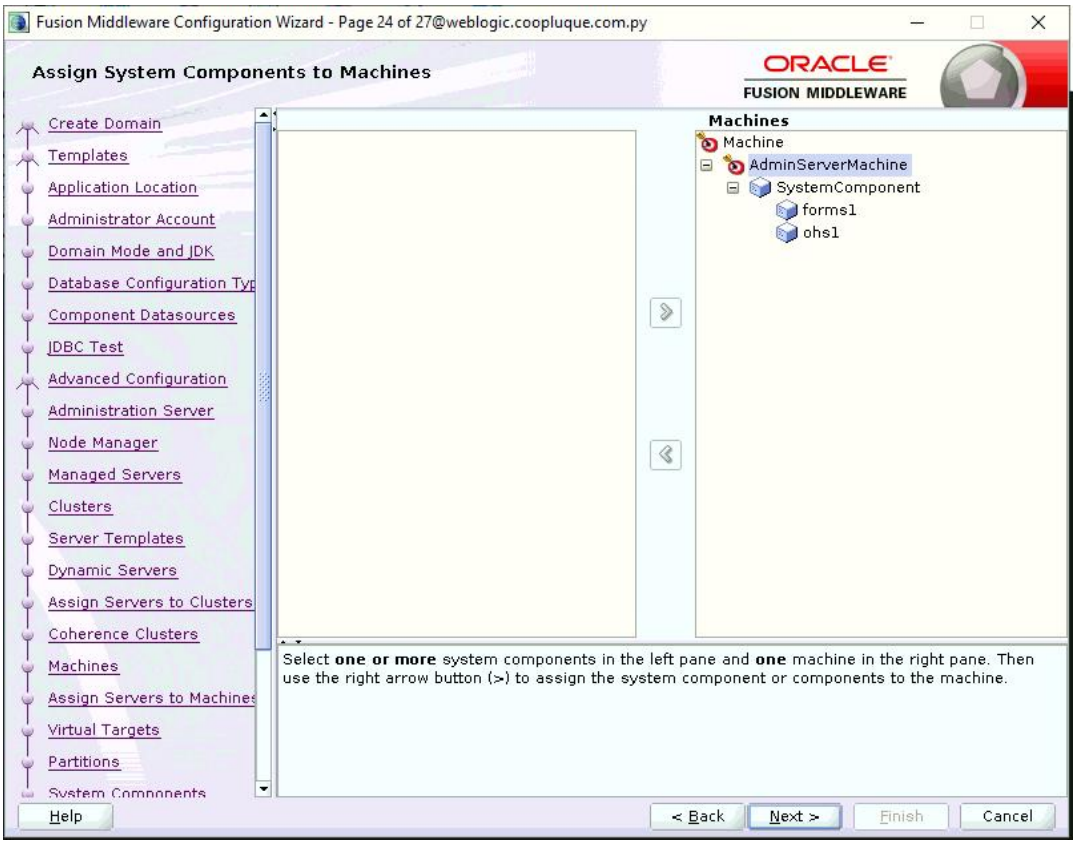

Fusion Middleware Configuration Wizard - Page 19 of 24@weblogic.coopluque.com.py
Assign Servers to Machines
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machi
Virtual Targets
Partitions
Configuration Summary
Servers
Machines
Machine
AdminServerMachine
AdminServer
WLS_FORMS
WLS_REPORTS
Select one or more servers in the left pane and one machine in the right pane. Then use the right arrow button (>) to assign the server or servers to the machine.
Help
< Back
Next >
Finish
Cancel

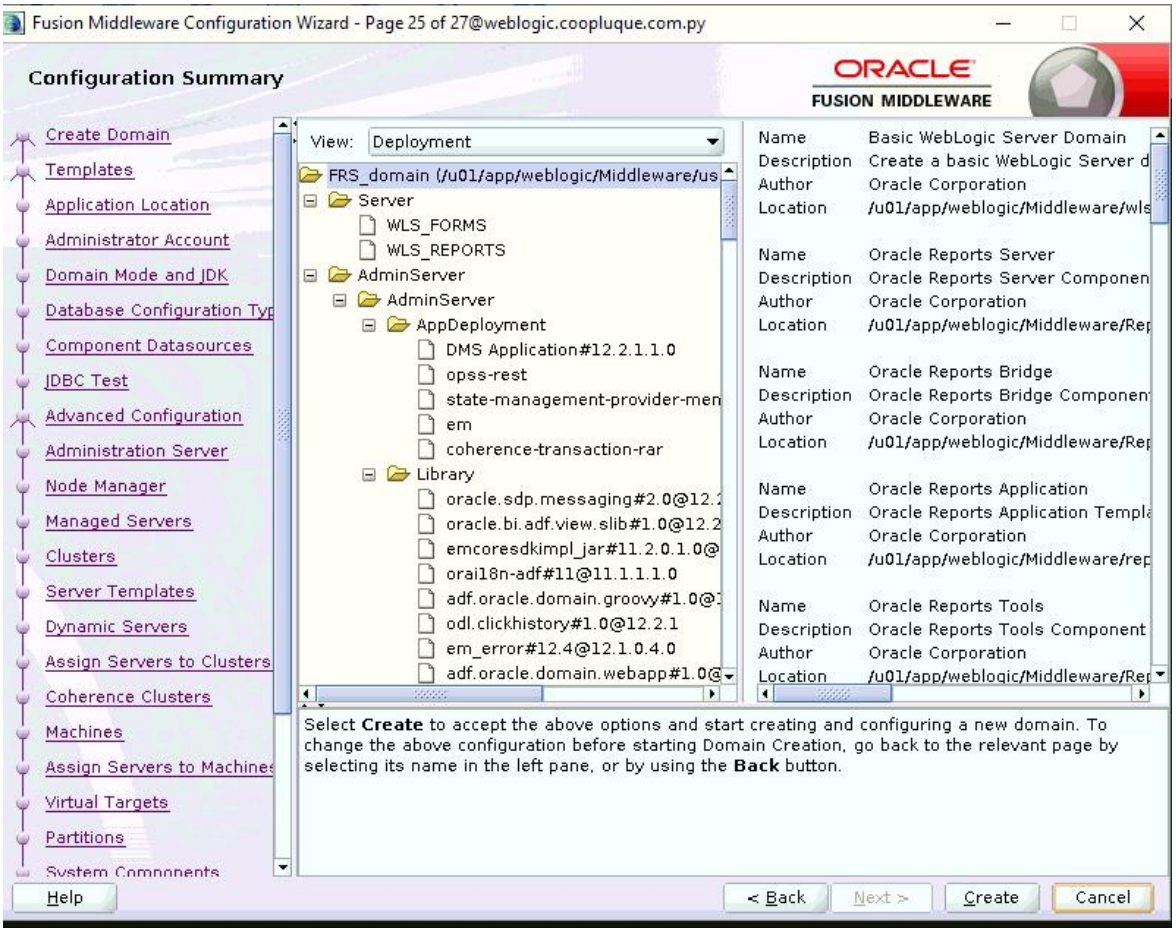

Fusion Middleware Configuration Wizard - Page 20 of 24@weblogic.coopluque.com.py
Virtual Targets
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Add
Delete
Discard Changes
Name
Target
Host Names
URI Prefix
Explicit Port
Port Offset
Help
< Back
Next >
Finish
Cancel

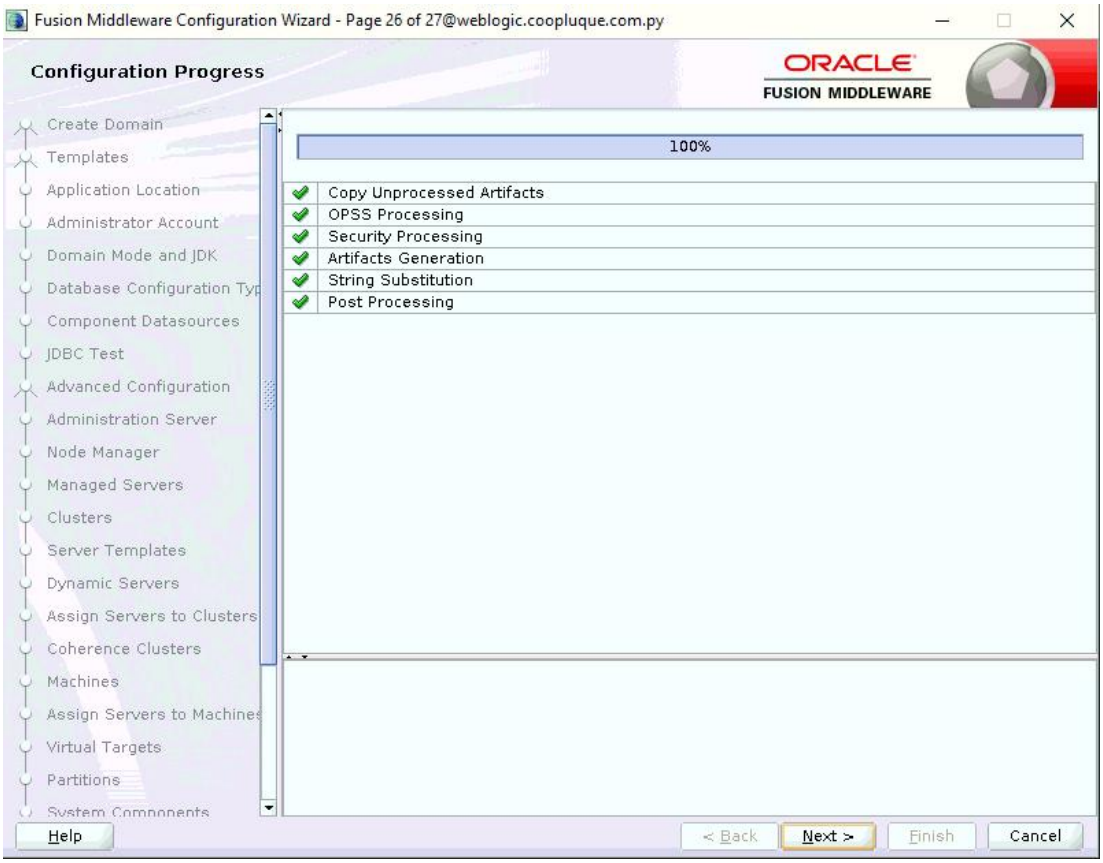

Fusion Middleware Configuration Wizard - Page 21 of 24@weblogic.coopluque.com.py
Partitions
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
Configuration Summary
Add
Delete
Discard Changes
Name
Help
< Back
Next >
Finish
Cancel

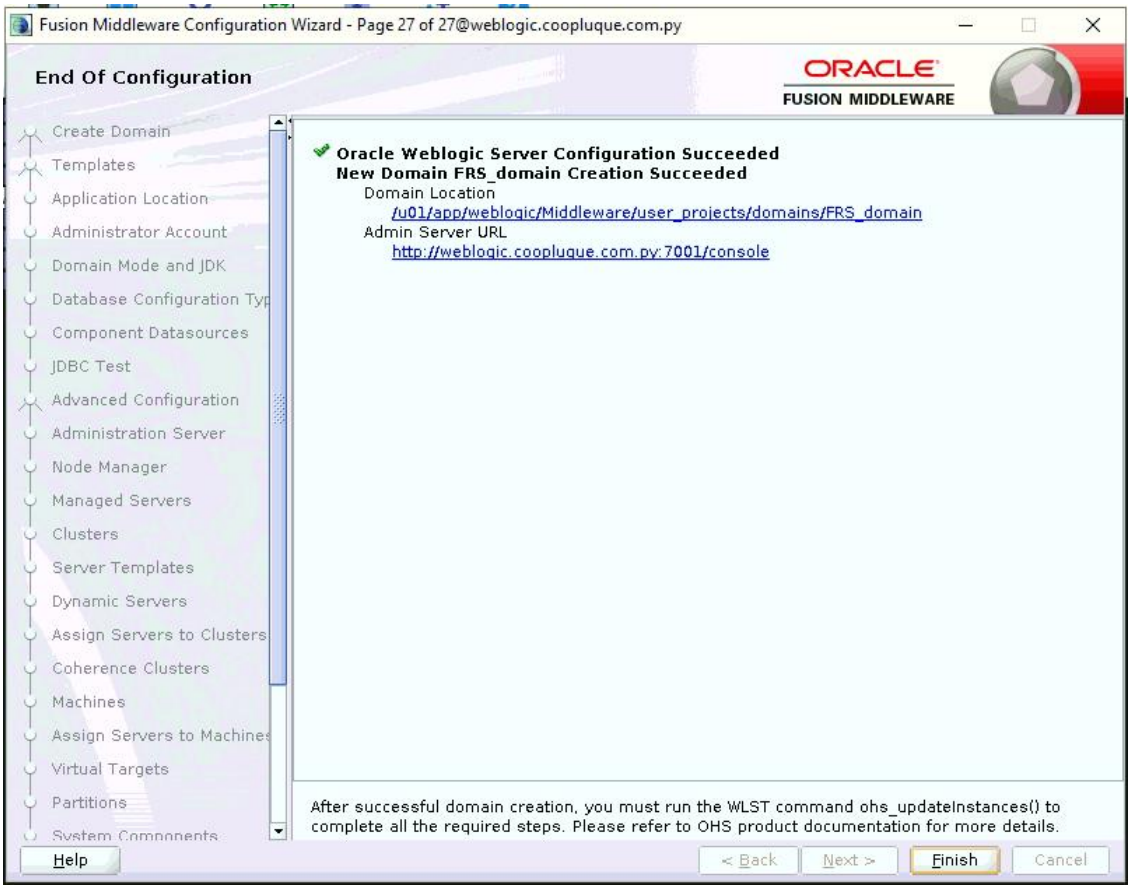

Fusion Middleware Configuration Wizard - Page 22 of 26@weblogic.coopluque.com.py
System Components
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
System Components
Add
Delete
Discard Changes
System Component
Component Type
Restart Interval Seconds
Restart Delay Seconds
forms1
FORMS
3600
0
ohs1
OHS
3600
0
Help
< Back
Next >
Finish
Cancel


Fusion Middleware Configuration Wizard - Page 23 of 27@weblogic.coopluque.com.py
OHS Server
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
System Components
System Component
ohs1
Admin Host
127.0.0.1
Admin Port
7779
Listen Address
weblogic.coopluque.com.py
Listen Port
7777
SSL Listen Port
4443
Server Name
http://weblogic.coopluque.com.py:7777
Help
< Back
Next >
Finish
Cancel


Fusion Middleware Configuration Wizard - Page 24 of 27@weblogic.coopluque.com.py
Assign System Components to Machines
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
System Components
Machines
Machine
AdminServerMachine
SystemComponent
forms1
ohs1
Select one or more system components in the left pane and one machine in the right pane. Then use the right arrow button (>) to assign the system component or components to the machine.
Help
< Back
Next >
Finish
Cancel


Fusion Middleware Configuration Wizard - Page 25 of 27@weblogic.coopluque.com.py
Configuration Summary
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
System Components
View: Deployment
FRS_domain (/u01/app/weblogic/Middleware/us
Server
WLS_FORMS
WLS_REPORTS
AdminServer
AdminServer
AppDeployment
DMS Application#12.2.1.1.0
opss-rest
state-management-provider-men
em
coherence-transaction-rar
Library
oracle.sdp.messaging#2.0@12.
oracle.bi.adf.view.slib#1.0@12.2
emcoresdkimpl_jar#11.2.0.1.0@
orai18n-adf#11@11.1.1.1.0
adf.oracle.domain.groovy#1.0@
odl.clickhistory#1.0@12.2.1
em_error#12.4@12.1.0.4.0
adf.oracle.domain.webapp#1.0@
Name Basic WebLogic Server Domain
Description Create a basic WebLogic Server d
Author Oracle Corporation
Location /u01/app/weblogic/Middleware/wls
Name Oracle Reports Server
Description Oracle Reports Server Componen
Author Oracle Corporation
Location /u01/app/weblogic/Middleware/Rep
Name Oracle Reports Bridge
Description Oracle Reports Bridge Componen
Author Oracle Corporation
Location /u01/app/weblogic/Middleware/Rep
Name Oracle Reports Application
Description Oracle Reports Application Templ
Author Oracle Corporation
Location /u01/app/weblogic/Middleware/rep
Name Oracle Reports Tools
Description Oracle Reports Tools Component
Author Oracle Corporation
Location /u01/app/weblogic/Middleware/Rep
Select Create to accept the above options and start creating and configuring a new domain. To change the above configuration before starting Domain Creation, go back to the relevant page by selecting its name in the left pane, or by using the Back button.
Help
< Back
Next >
Create
Cancel


Fusion Middleware Configuration Wizard - Page 26 of 27@weblogic.coopluque.com.py
Configuration Progress
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
System Components
100%
Copy Unprocessed Artifacts
OPSS Processing
Security Processing
Artifacts Generation
String Substitution
Post Processing
Help
< Back
Next >
Finish
Cancel


Fusion Middleware Configuration Wizard - Page 27 of 27@weblogic.coopluque.com.py
End Of Configuration
ORACLE
FUSION MIDDLEWARE
Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Typ
Component Datasources
JDBC Test
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Dynamic Servers
Assign Servers to Clusters
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
System Components
Oracle Weblogic Server Configuration Succeeded
New Domain FRS_domain Creation Succeeded
Domain Location
/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain
Admin Server URL
http://weblogic.coopluque.com.py:7001/console
After successful domain creation, you must run the WLST command ohs_updateInstances() to complete all the required steps. Please refer to OHS product documentation for more details.
Help
< Back
Next >
Finish
Cancel

Generar Scripts de Subida y bajada y poblar el Bash_profile de weblogic

[weblogic@weblogic ~]$ vi /home/weblogic/genscritps.sh

```
#!/bin/bash

echo 'export ORACLE_BASE=/u01/app/weblogic' >> /home/weblogic/.bash_profile
echo 'export ORACLE_HOME=$ORACLE_BASE/Middleware' >> /home/weblogic/.bash_profile
echo 'export DOMAIN_HOME=$ORACLE_HOME/user_projects/domains/FRS_domain' >> /home/weblogic/.bash_profile
echo 'export WLS_HOME=$ORACLE_HOME/wlserver' >> /home/weblogic/.bash_profile
echo 'export WL_HOME=$WLS_HOME' >> /home/weblogic/.bash_profile
echo 'export FORMS_INSTANCE=$DOMAIN_HOME/config/fmwconfig/components/FORMS/instances/forms1' >>
/home/weblogic/.bash_profile
echo 'export JAVA_HOME=$ORACLE_BASE/jdk1.8.0_251' >> /home/weblogic/.bash_profile
echo 'export
LD_LIBRARY_PATH=/u01/app/weblogic/Middleware/lib:/u01/app/weblogic/Middleware/oracle_common/jdk/jre/lib/amd64:/u
01/app/weblogic/Middleware/oracle_common/jdk/jre/lib/amd64/server:/u01/app/weblogic/Middleware/oracle_common/jdk
/jre/lib/amd64/native_threads' >> /home/weblogic/.bash_profile

echo 'export PATH=$ORACLE_HOME/bin:$DOMAIN_HOME/bin:$PATH' >> /home/weblogic/.bash_profile
echo 'export TNS_ADMIN=$DOMAIN_HOME/config/fmwconfig' >> /home/weblogic/.bash_profile

mkdir -p /home/weblogic/bin
cd /home/weblogic/bin

echo 'nohup sh $DOMAIN_HOME/bin/startNodeManager.sh >> $ORACLE_BASE/logs/strNode.log &' >> 0startNode.sh
echo 'tail -f $ORACLE_BASE/logs/strNode.log' >> 0startNode.sh

echo 'nohup sh $DOMAIN_HOME/bin/startWebLogic.sh >> $ORACLE_BASE/logs/strWeblogic.log &' >> 1startWeblogic.sh
echo 'tail -f $ORACLE_BASE/logs/strWeblogic.log' >> 1startWeblogic.sh

echo 'nohup sh $DOMAIN_HOME/bin/startManagedWebLogic.sh WLS_FORMS >> $ORACLE_BASE/logs/strFORMS.log &' >>
2startFORMS.sh
echo 'tail -f $ORACLE_BASE/logs/strFORMS.log' >> 2startFORMS.sh

echo 'nohup sh $DOMAIN_HOME/bin/startManagedWebLogic.sh WLS_REPORTS >> $ORACLE_BASE/logs/strREPORTS.log &' >>
3startREPORTS.sh
echo 'tail -f $ORACLE_BASE/logs/strREPORTS.log' >> 3startREPORTS.sh

echo '$DOMAIN_HOME/bin/startComponent.sh ohs1' >> 4startComponents.sh
echo '# $DOMAIN_HOME/bin/startComponent.sh rep_' >> 4startComponents.sh

echo '$DOMAIN_HOME/bin/stopComponent.sh ohs1' >> 5stopComponents.sh
echo '# $DOMAIN_HOME/bin/stopComponent.sh rep_' >> 5stopComponents.sh

echo '$DOMAIN_HOME/bin/stopManagedWebLogic.sh WLS_REPORTS' >> 6stopREPORTS.sh

echo '$DOMAIN_HOME/bin/stopManagedWebLogic.sh WLS_FORMS' >> 7stopFORMS.sh

echo '$DOMAIN_HOME/bin/stopWebLogic.sh' >> 8stopWeblogic.sh

echo '$DOMAIN_HOME/bin/stopNodeManager.sh' >> 9stopNode.sh

chmod 700 *
```

```
echo 'username=weblogic' >> /home/weblogic/bin/boot.properties

echo 'password=Oracle123' >> /home/weblogic/bin/boot.properties

. /home/weblogic/.bash_profile
```

Correr el script

```
[weblogic@weblogic ~]$ /home/weblogic/genscritps.sh
```

Luego de correr el script y verificar, borrar el mismo.

Levantar el Node Manager
[weblogic@weblogic bin]$ 0startNode.sh

En otra terminal con usuario weblogic
[weblogic@weblogic]$ $DOMAIN_HOME/bin/startWebLogic.sh

Ingresar las contraseñas seteadas:
Usuario : weblogic
pass : Oracle123

En otra terminal con usuario weblogic
[weblogic@weblogic bin]$ $DOMAIN_HOME/bin/startManagedWebLogic.sh WLS_FORMS

Ingresar las contraseñas seteadas:
Usuario : weblogic
pass : Oracle123

Si inicia correctamente las últimas líneas mostrarán un mensaje parecido a esto:
<Dec 21, 2018 5:32:10,224 PM PYST> <Notice> <WebLogicServer> <BEA-000360> <The server started in RUNNING mode.>
<Dec 21, 2018 5:32:10,238 PM PYST> <Notice> <WebLogicServer> <BEA-000365> <Server state changed to RUNNING.>

En otra terminal con usuario weblogic
[weblogic@weblogic bin]$ $DOMAIN_HOME/bin/startManagedWebLogic.sh WLS_REPORTS

Ingresar las contraseñas seteadas:
Usuario : weblogic
pass : Oracle123

Si inicia correctamente las últimas líneas mostrarán un mensaje parecido a esto:
<Dec 21, 2018 5:21:22,662 PM PYST> <Notice> <WebLogicServer> <BEA-000360> <The server started in RUNNING mode.>
<Dec 21, 2018 5:21:22,672 PM PYST> <Notice> <WebLogicServer> <BEA-000365> <Server state changed to RUNNING.>

En otra terminal con usuario weblogic realizar lo sgte:

[weblogic@weblogic ~]$ cd $DOMAIN_HOME
[weblogic@weblogic FRS_domain]$ cd servers/
[weblogic@weblogic servers]$ cd AdminServer/
[weblogic@weblogic AdminServer]$ mkdir security
[weblogic@weblogic AdminServer]$ cd security/
[weblogic@weblogic security]$ cp /home/weblogic/bin/boot.properties .
[weblogic@weblogic security]$ ls
boot.properties
[weblogic@weblogic security]$ cd ..
[weblogic@weblogic AdminServer]$ cp -rp security ../WLS_FORMS/
[weblogic@weblogic AdminServer]$ cp -rp security ../WLS_REPORTS/

Levantar el ohs1
[weblogic@weblogic ~] $DOMAIN_HOME/bin/startComponent.sh ohs1 storeUserConfig
(Ingresar la Contraseña proveída al Node Manager)

Crear Reports Components de prueba

/u01/app/weblogic/Middleware/oracle_common/common/bin/wlst.sh
connect("weblogic","Oracle123", "localhost:7001")
createReportsToolsInstance(instanceName='reptools', machine='AdminServerMachine')
createReportsServerInstance(instanceName='reptest', machine='AdminServerMachine')
exit()

Levantar el componente reptools
[weblogic@weblogic ~]$ cd $DOMAIN_HOME
[weblogic@weblogic FRS_domain]$ cd bin/
[weblogic@weblogic bin]$ ./startComponent.sh reptools

….
Successfully Connected to Node Manager.
Starting server reptools ...
Successfully started server reptools ...
Successfully disconnected from Node Manager.
Exiting WebLogic Scripting Tool.
Done

Levantar el componente reptest
[weblogic@weblogic ~]$ cd $DOMAIN_HOME
[weblogic@weblogic FRS_domain]$ cd bin/
[weblogic@frm bin]$ ./startComponent.sh reptest

Successfully Connected to Node Manager.
Starting server reptest ...
Successfully started server reptest ...
Successfully disconnected from Node Manager.
Exiting WebLogic Scripting Tool.

Done

EJEMPLO de como borrar ReportServer
deleteReportsServerInstance(instanceName='reptest',machine='AdminServerMachine')

Configurar la cola

/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/servers/WLS_REPORTS/applications/reports_12.2.1/configuration/rwservlet.properties

From
<inprocess>yes</inprocess>
To
<inprocess>yes</inprocess>
<webcommandaccess>L2</webcommandaccess>

Configuracion de OHS1 port directory

cd
/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/components/OHS/instances/ohs1/moduleconf

cp /u01/app/weblogic/Middleware/forms/templates/config/forms.conf .

<Location /forms/>
SetHandler weblogic-handler
WebLogicHost <hostname>
WeblogicPort 9001
</Location>

cp /u01/app/weblogic/Middleware/reports/conf/reports_ohs.conf .

<Location /reports>
SetHandler weblogic-handler
WebLogicHost <hostname>
WebLogicPort 9002
</Location>

Configuraciones del Entorno y Web en el Enterprise Manager

Ingresar al Enterprise Manager: http://<IP>:7001/em

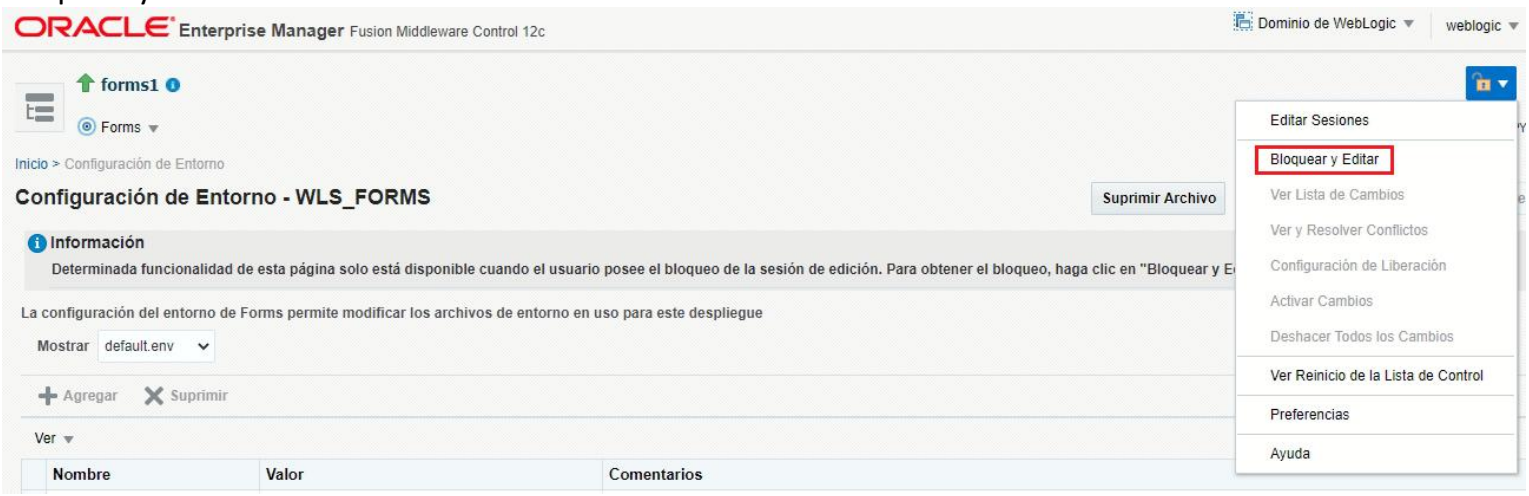
Click en  para desplegar la “Navegación de Destino”, luego ingresar al **forms1**



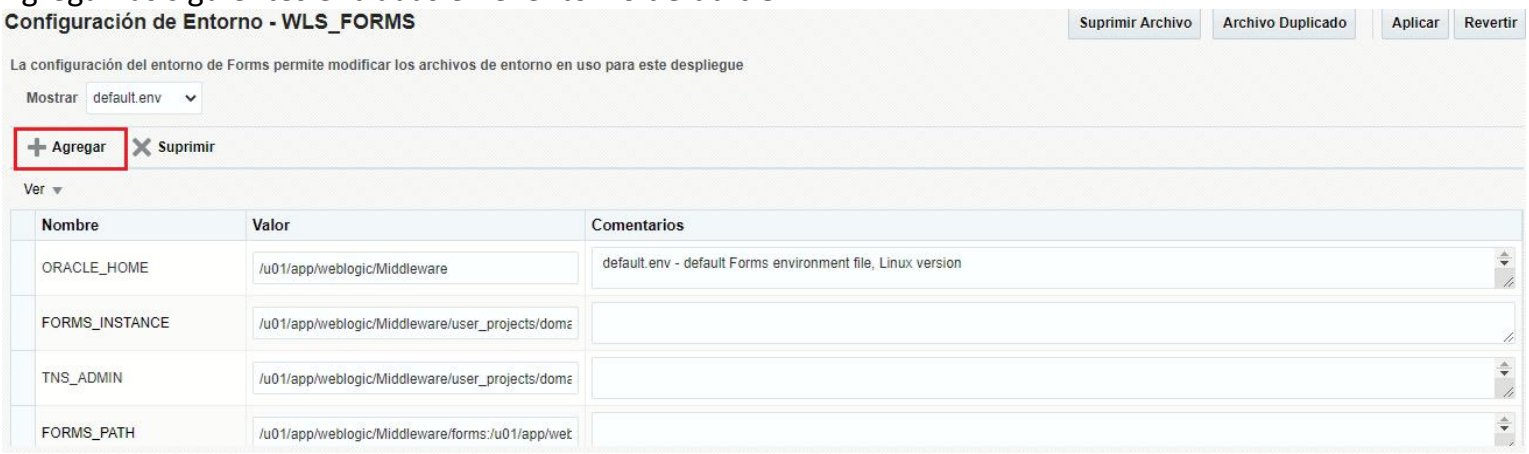
Ingresar a la configuración de Entorno



Bloquear y Editar



Agregar las siguientes entradas en el entorno **default.env**



Agregar lo siguiente:

COMPONENT_CONFIG_PATH :
/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/components/ReportsToolsComponent/reptools
(Ruta de configuración de reptools creado previamente)



Realizar lo mismo con las siguientes variables

Nombre: FORMS_DATETIME_LOCAL_TZ
Valor: GMT

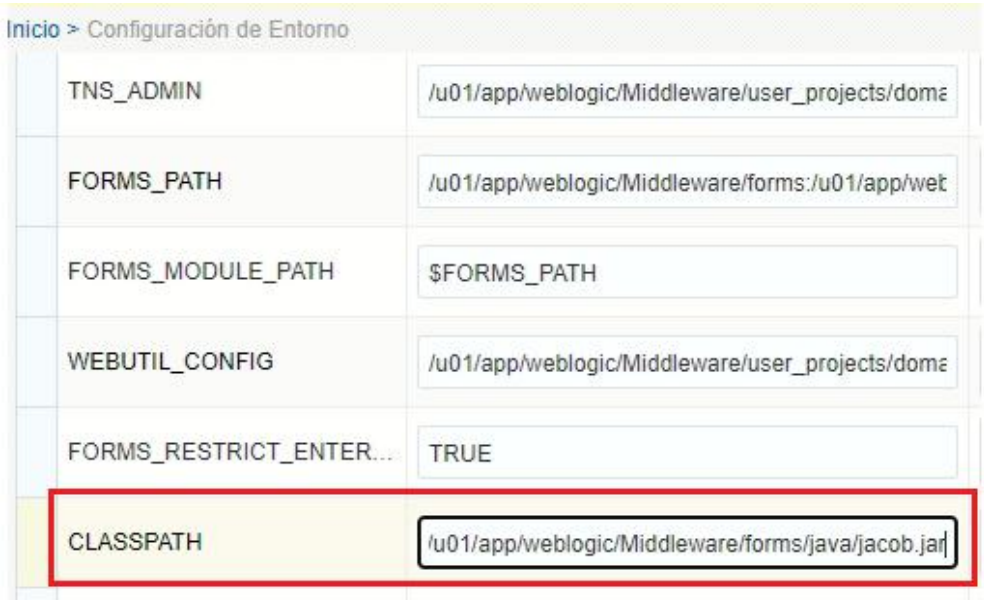
Nombre: FORMS_ABTERM_CLEANUP
Valor: 0

Nombre: FORMS_TIMEOUT
Valor: 15

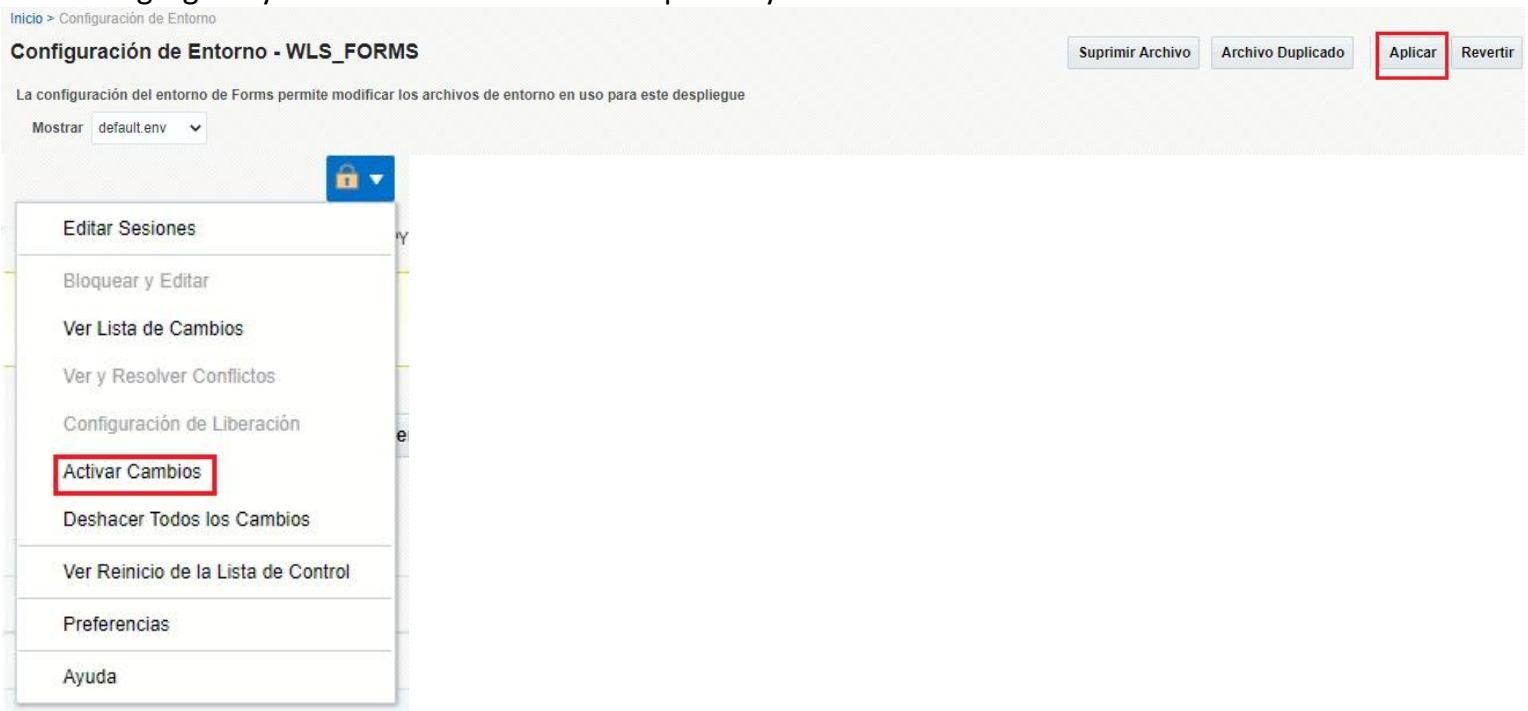
Modificar la entrada del CLASSPATH

Obs: Tener cuidado de no sobreescribir lo que ya está

Agregar al final--
> :/u01/app/weblogic/Middleware/forms/java/frmall.jar:/u01/app/weblogic/Middleware/forms/java/jacob.jar



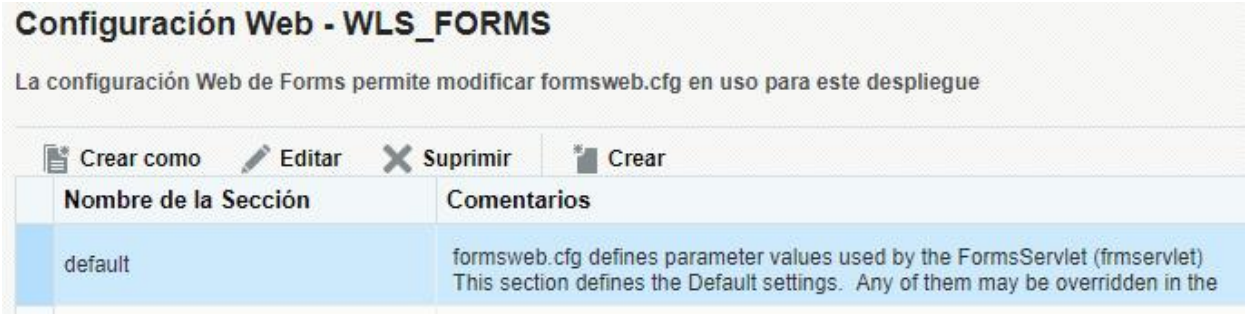
Una vez agregado y modificado las variables “Aplicar” y “Activar los cambios”



Ingresar a la configuración Web



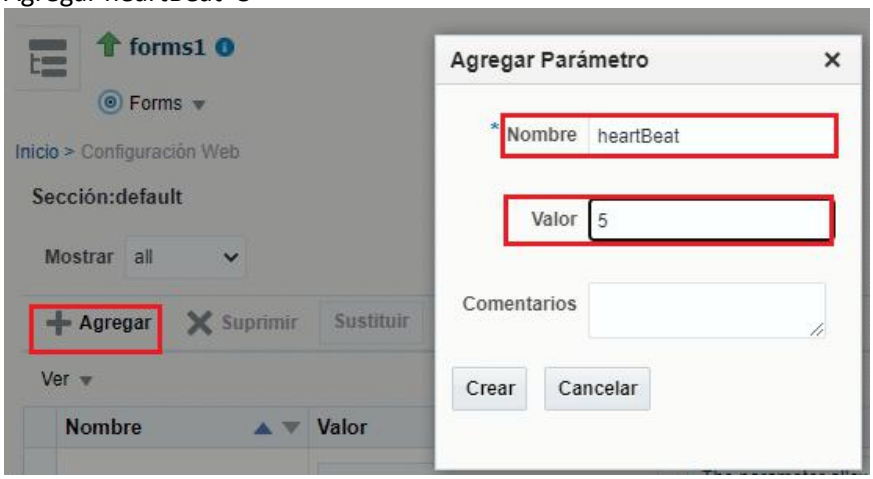
Seleccionar default



Dirigirse al panel de abajo, verificar que la sección sea **default, Mostrar=**all y el **Nombre** esté ordenado (a - z)



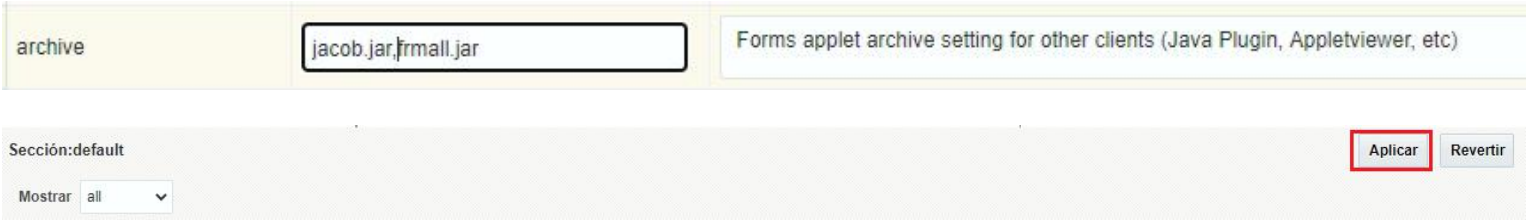
Agregar heartBeat=5



Luego de agregar o modificar un parámetro: Aplicar



Modificar archive(agregar el jacob.jar entre comas y sin espacios) =jacob.jar,frmall.jar





Información de las ubicaciones de las variables del entorno

TNS_ADMIN=/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig

FORMS_INSTANCE=
/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/components/FORMS/instances/forms1

LD_LIBRARY_PATH= /u01/app/weblogic/Middleware/lib:
/u01/app/weblogic/jdk1.8.0_251/jre/lib/amd64:
/u01/app/weblogic/jdk1.8.0_251/jre/lib/amd64/server:
/u01/app/weblogic/jdk1.8.0_251/jre/lib/amd64/native_threads

WEBUTIL_CONFIG=
/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/components/FORMS/instances/forms1/server/webutil.cfg

.Configuración de acceso seguro a la cola del report Server Link para verificar las tareas de reportes:

http://host:9002/reports/rwservlet/showjobs?server=reptest

REP-51019: System user authentication is missing.

Realizamos un backup del siguiente archivo antes de modificarlo

cd /u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig
cp system-jazn-data.xml system-jazn-data.xml.bkp
vi system-jazn-data.xml

##FROM

```
<jazn-realm default="jazn.com">
        <realm>
                <name>jazn.com</name>
                <users/>
                <roles/>
        </realm>
</jazn-realm>
```

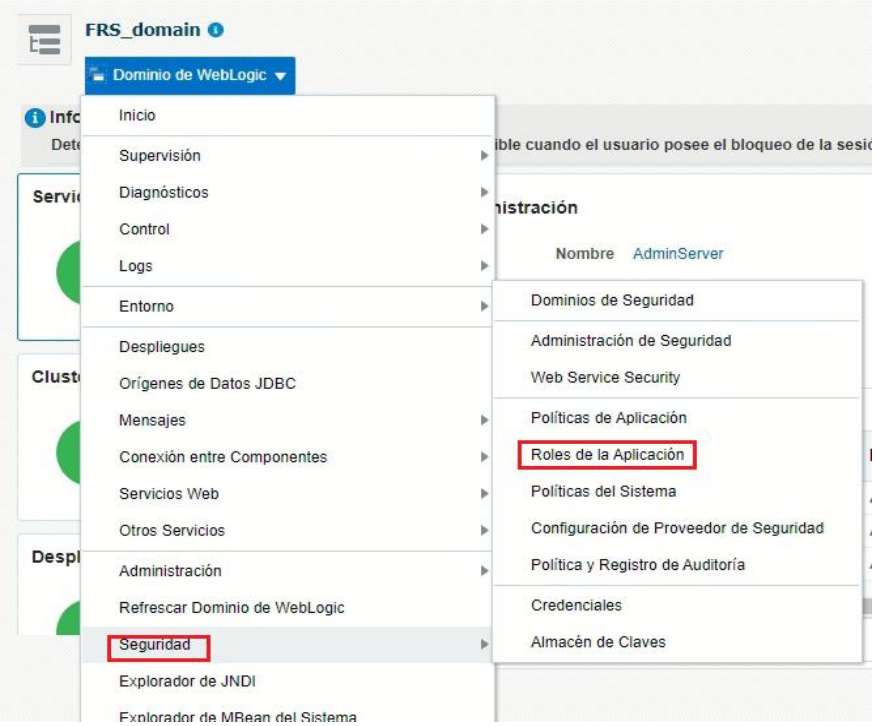
##TO

```
<jazn-realm default="jazn.com">
        <realm>
                <name>jazn.com</name>
                <users>
                        <user>
                                <name>weblogic</name>
                                <credentials>!Oracle123</credentials>
                        </user>
                </users>
                <roles/>
        </realm>
</jazn-realm>
```

A continuación se detallan los pasos realizados:

Ingresar al EM: http://hostname:7001/em

WebLogic Domain > Security > Application Roles >
Search > Application Stripe : reports [>]

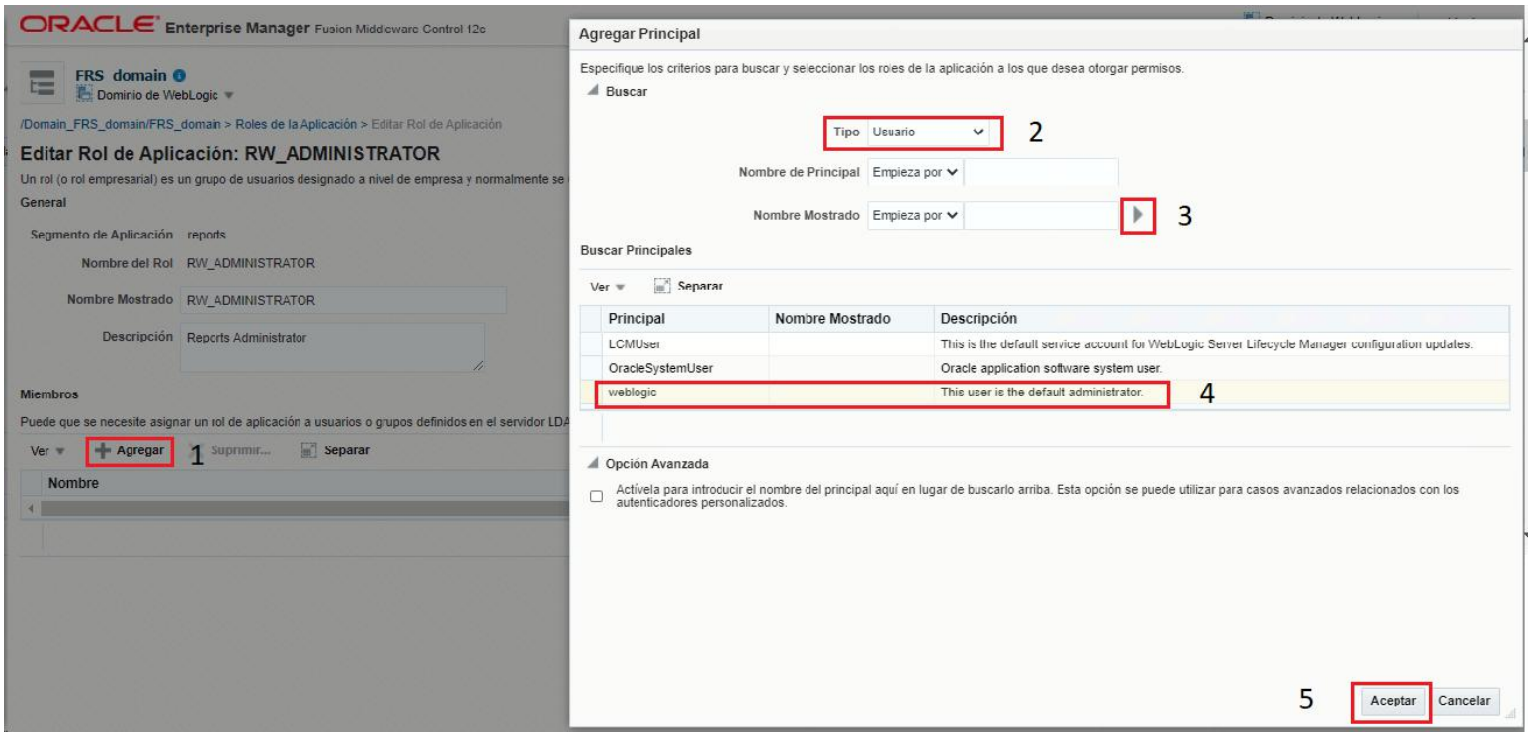


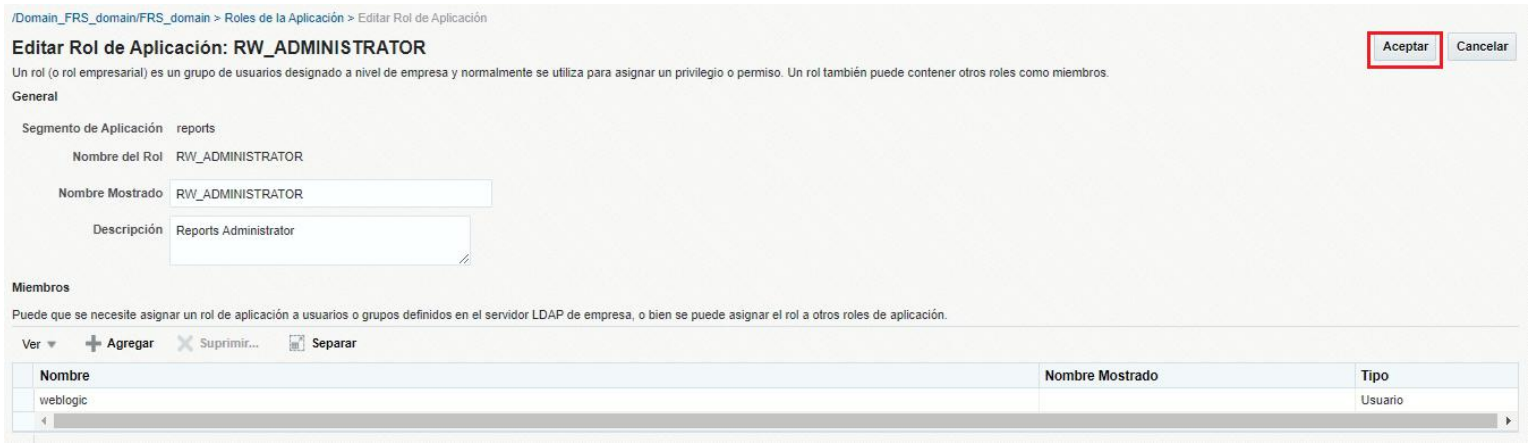
1.Segmento de aplicación: reports
2.Buscar
3.Seleccionar RW_ADMINISTRATOR
4.Editar



1.Agregar

2.Tipo: Usuario
3.Buscar
4.Seleccionar Weblogic
5.Aceptar





}Configuración de acceso no seguro a la cola del report Server Link para verificar las tareas de reportes (Solo para Desarrollo):

How to Disable Security for the Reports Server 12C and Execute Webcommands (Doc ID 2108256.1)
To Disable security for the Reports Server 12c follow step as.
* Start target reports server before following step.
1. Log in to Oracle Enterprise Manager.
2. Navigate to the EM MBean browser Weblogic Domain > System MBean Browser
3. Navigate to reports server mbean
  Standalone server - Folder: Configuration Beans --> Folder:oracle.reports.serverconfig --> type=ReportsServer, name=rwserver-<componentName>, ReportsServer.Job
  Inprocess server - Folder: Application Defined MBeans --> Folder:oracle.reportsApp.config --> Server:<managedServername>,Application=reports, type=ReportsApp, name=rwserver, ReportsApp.Job
4. Click child mbean ReportsServerJob.
5. Change SecurityId of rwEngrwJaznSec from rwJaznSec to empty.

- Note:

In Standalone server the SecurityID is gray out and can't modify.
Need to click [Lock & Edit] -> [Change SecurityId of rwEngrwJaznSec from rwJaznSec to empty] -> Click [Apply] -> Click [Activate Changes] (* Inprocess server don't need this step)

After changing the SecurityId value of rwEngrwJaznSec to "empty" the bean name of rwEngrwJaznSec will become rwEngnull.

6. Restart WLS_REPORTS or Reports Server.

"**Bloquear y Editar**" y iuna vez modificado el rwEngrwJaznSec "**Aplicar" y "Activar Cambios"**



Configuración JACOB

[weblogic@weblogic web]$ pwd

/u02/installer/web

[weblogic@weblogic web]$ unzip jacob-1.18-M2.zip

[weblogic@weblogic web]$ cd jacob-1.18-M2/

[weblogic@weblogic jacob-1.18-M2]$ cp jacob-1.18-M2-x86.dll /u01/app/weblogic/Middleware/forms/webutil/win32/

[weblogic@weblogic jacob-1.18-M2]$ chmod 750 /u01/app/weblogic/Middleware/forms/webutil/win32/jacob-1.18-M2-x86.dll

[weblogic@weblogic jacob-1.18-M2]$ cp jacob-1.18-M2-x64.dll /u01/app/weblogic/Middleware/forms/webutil/win64/

[weblogic@weblogic jacob-1.18-M2]$ chmod 750 /u01/app/weblogic/Middleware/forms/webutil/win64/jacob-1.18-M2-x64.dll

Creación de Keystore

- $JAVA_HOME/bin/keytool -genkey -keyalg rsa -keystore /u01/app/weblogic/Middleware/forms/webutil/.keystore12c -alias webutil12 -keysize 2048 -validity 3600

Enter keystore password: Oracle123
Re-enter new password: Oracle123
What is your first and last name?
  [Unknown]: FormsReports
What is the name of your organizational unit?
  [Unknown]: Tecnologia
What is the name of your organization?
  [Unknown]: CooperativaLuque
What is the name of your City or Locality?
  [Unknown]: Luque
What is the name of your State or Province?
  [Unknown]: Central
What is the two-letter country code for this unit?
  [Unknown]: PY
Is CN=FormsReports, OU=Tecnologia, O=CooperativaUniversitaria, L=Asuncion, ST=Central, C=PY correct?
  [no]: yes

Enter key password for <webutil12>
	(RETURN if same as keystore password):
Re-enter new password:

Warning:
The JKS keystore uses a proprietary format. It is recommended to migrate to PKCS12 which is an industry standard format using "keytool -importkeystore -srckeystore /u01/app/weblogic/Middleware/forms/webutil.keystore12c -destkeystore /u01/app/weblogic/Middleware/forms/webutil.keystore12c -deststoretype pkcs12".

Firma JACOB

[weblogic@weblogic web]$ pwd
/u02/installer/web

[weblogic@weblogic web]$ mkdir firma

[weblogic@weblogic web]$ cd jacob-1.18-M2/

[weblogic@weblogic jacob-1.18-M2]$ cp jacob.jar ../firma/

[weblogic@weblogic jacob-1.18-M2]$ cd ..

[weblogic@weblogic web]$ cd firma/

[weblogic@weblogic firma]$ $JAVA_HOME/bin/jar xvf jacob.jar

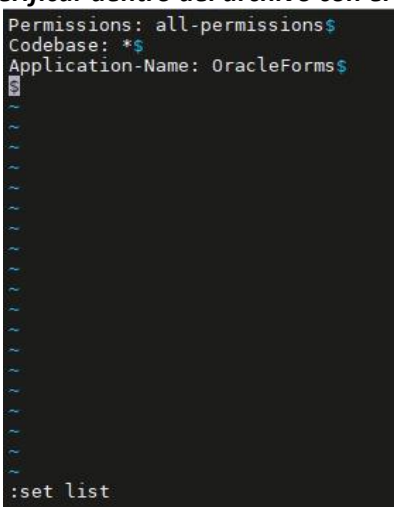
[weblogic@weblogic firma]$ ls
com jacob.jar META-INF

[weblogic@weblogic firma]$ rm -rf META-INF

[weblogic@weblogic firma]$ $JAVA_HOME/bin/jar cvf jacob.jar com

Crear el archivo, y agregar lo siguiente
[weblogic@weblogic firma]$ vi mymanifest.txt
Permissions: all-permissions
Codebase: *
Application-Name: OracleForms

Note: Verificar dentro del archivo con el comando :set list, el espaciado debe quedar de la siguiente manera



[weblogic@weblogic firma]$ $JAVA_HOME/bin/jar -ufm jacob.jar mymanifest.txt

[weblogic@weblogic firma]$ $JAVA_HOME/bin/jarsigner -keystore /u01/app/weblogic/Middleware/forms/webutil/.keystore12c -signedjar sjacob.jar jacob.jar webutil12

 Enter Passphrase cd for keystore:
jar signed.

Warning:
The signer's certificate is self-signed.

[weblogic@weblogic firma]$ cp sjacob.jar $ORACLE_HOME/forms/java/

[weblogic@weblogic firma]$ cd $ORACLE_HOME/forms/java/
[weblogic@weblogic java]$ mv sjacob.jar jacob.jar

JAVA WebStart

[weblogic@weblogic java]$ cp extensions.jnlp extensions.jnlp.bkp

Descomentar jar href="jacob.jar"

[weblogic@weblogic java]$ vi extensions.jnlp

```
 <resources>
<!-- <jar href="ADD YOUR JARS HERE - ONLY ONE PER ENTRY"/> -->
<jar href="jacob.jar"/>
</resources>
```

JAVA HEAP SIZE (Para entornos productivos realizar esta configuración)

[weblogic@weblogic java]$ cd $DOMAIN_HOME/bin/

[weblogic@weblogic java]$ cp setDomainEnv.sh setDomainEnv.sh.bkp

[weblogic@weblogic java]$ vi setDomainEnv.sh

Buscar en el archivo “USER_MEM_ARGS” y copiar lo siguiente debajo mismo:

```
if [ "${SERVER_NAME}" = "WLS_FORMS" ] ; then
      USER_MEM_ARGS="-Xms4096m -Xmx4096m"
      export SERVER_NAME
fi

if [ "${SERVER_NAME}" = "WLS_REPORTS" ] ; then
      USER_MEM_ARGS="-Xms2048m -Xmx2048m"
      export SERVER_NAME
fi
```

Reports Server 12c Failing to Start When Using Java Cryptography Extension (JCE) (Doc ID 2233555.1)

- Download Java Cryptography Extension (JCE) Unlimited Strength Jurisdiction Policy Files from the following link.

Reference http://www.oracle.com/technetwork/java/javase/downloads/jce8-download-2133166.html

- **Backup existing limited policy versions from <JDK_HOME>\jre\lib\security (for WLS environment) and <ORACLE_HOME>\oracle_common\jdk\jre\lib\security locations.**

[weblogic@weblogic ~]$ cd $ORACLE_HOME/oracle_common/jdk/jre/lib/security
[weblogic@weblogic security]$ cp -rp policy policy.original
[weblogic@weblogic security]$ cd policy
[weblogic@weblogic policy]$ cd limited/
[weblogic@weblogic limited]$ cp /u02/installer/web/UnlimitedJCEPolicyJDK8/*.jar .
[weblogic@weblogic limited]$ cd ..
[weblogic@weblogic policy]$ cd unlimited/
[weblogic@weblogic unlimited]$ cp /u02/installer/web/UnlimitedJCEPolicyJDK8/*.jar .

[weblogic@weblogic ~]$ cd $JAVA_HOME/jre/lib/security
[weblogic@weblogic security]$ cp -rp policy policy.original
[weblogic@weblogic security]$ cd policy
[weblogic@weblogic policy]$ cd limited/
[weblogic@weblogic limited]$ cp /u02/installer/web/UnlimitedJCEPolicyJDK8/*.jar .
[weblogic@weblogic limited]$ cd ..
[weblogic@weblogic policy]$ cd unlimited/
[weblogic@weblogic unlimited]$ cp /u02/installer/web/UnlimitedJCEPolicyJDK8/*.jar .

Aplicación del Parche

- Admin Server is Going to Warning State Due to Stuck Threads at RMI Call (Doc ID 2404546.1)
https://support.oracle.com/epmos/faces/ui/patch/PatchDetail.jspx?parent=DOCUMENT&sourceId=2404546.1&patchId=27184424

- Bajar todos los servicios de weblogic con los scripts
- unzipear el parche y aplicar con “opatch apply”

Verificar configuración webutil del equipo productivo

En versiones productivas 10g 11g buscar y validar la configuración del webutil

Ubicación en 12c

/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/components/FORMS/instances/forms1/server/webutil.cfg

Configuraciones de Report Server (En base a lo que el cliente tiene configurado)

- **Copiar la configuración existente del equipo productivo ya sea Forms 10g,11g, 12c en:**

  /u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/reports/bin/reports.sh

  Ejemplo de parámetro usualmente modificados**:**

  NLS_DATE_FORMAT='DD/MM/YYYY'; export NLS_DATE_FORMAT

  NLS_NUMERIC_CHARACTERS=.,; export NLS_NUMERIC_CHARACTERS

  NLS_LANG=AMERICAN_AMERICA.WE8ISO8859P1;

  REPORTS_PATH

- **Consultar puertos de ReportServer**

  Consultar el rwdiag ubicado en el $DOMAIN_HOME Ejemplo:

  [weblogic@weblogic ~]$ $DOMAIN_HOME/reports/bin/rwdiag.sh -findAll
  Reading the rwnetwork.conf
  from :/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/components/ReportsToolsComponent/reptools/rwnetwork.conf

  Broadcast mechanism used to locate servers

  Channel address = 228.5.6.7
  Channel port = 14021
  Obs: Dos servers de Forms&Reports no pueden tener el mismo nombre de reportserver en la misma red sobre el mismo puerto

- **Cambio de puertos de reportserver SI ES NECESARIO**

  Cambiar el puerto con los servicios de ReportServer y ReportTools abajo, se debe realizar para cada report creado en su archivo rwnetwork.conf.
  Puertos recomendados 14021 a 14029

  [weblogic@weblogic Middleware]$ **find $ORACLE_HOME -name rwnetwork.conf**
  /u01/app/weblogic/Middleware/reports/conf/rwnetwork.conf

  /u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/servers/WLS_REPORTS/tmp/_WL_user/reports_12.2.1/4ltj0p/configuration/rwnetwork.conf

/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/components/ReportsToolsComponent/reptools/rwnetwork.conf

/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/components/ReportsServerComponent/reptest/rwnetwork.conf

/u01/app/weblogic/Middleware/user_projects/domains/FRS_domain/config/fmwconfig/servers/WLS_REPORTS/applications/reports_12.2.1/configuration/rwnetwork.conf

- **Configurar motores (Copiar la configuración de producción Ej: mismos nombre de reportserver y mismos parámetros)**

.En la documentación se menciona un cálculo aproximado de 4 engines por core en el server.
.En las versiones 10g la configuración del rwserver.conf está bajo el nombre de "<report_server_name>.conf"
.Validar los parámetros del archivo rwserver.conf antes de modificarlo pertenecientes al report server en cuestión

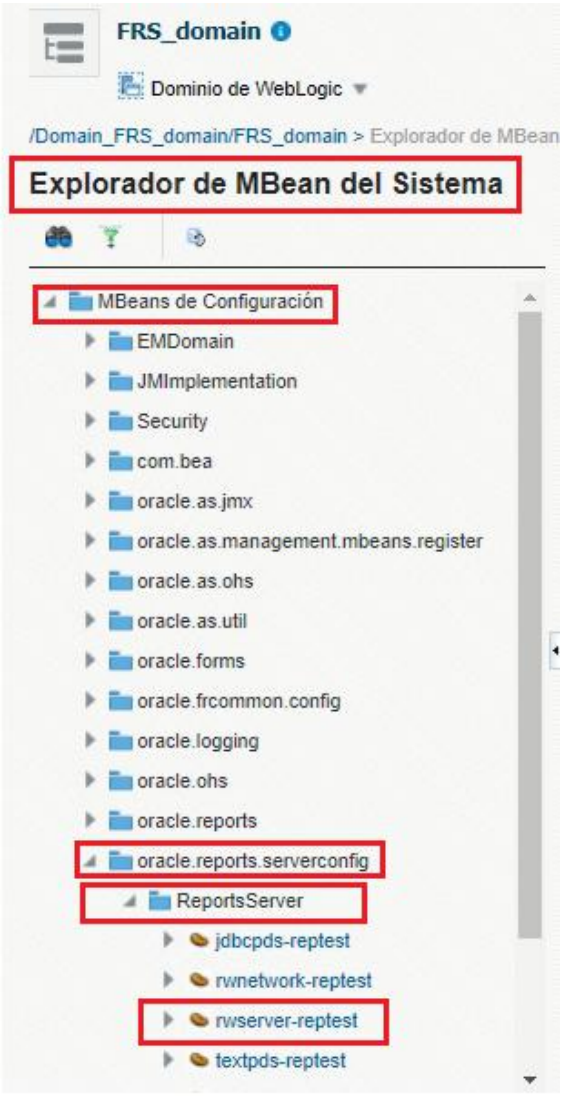
--->Ubicación de un report server en 12c
[weblogic@weblogic bin]$ cd $DOMAIN_HOME
[weblogic@weblogic FRS_domain]$ find -name rwserver.conf
./config/fmwconfig/components/ReportsServerComponent/reptest/rwserver.conf

[weblogic@weblogic FRS_domain]$ cat ./config/fmwconfig/components/ReportsServerComponent/reptest/rwserver.conf

Parámetros de modificación usuales (valores por default presentados)

```
<property name="cacheSize" value="50"/>
<engine id="rwEng" class="oracle.reports.engine.EngineImpl" maxEngine="1" minEngine="1" engLife="50" >
 <!--property name="sourceDir" value="your reports source directory"/→
<connection maxConnect="50" idleTimeOut="15">
<pluginParam name="mailServer" value="%MAILSERVER_NAME%">
 <queue maxQueueSize="1000"/>
```

A través del Enterprise Manager realizar las configuraciones citadas arriba de acuerdo a los requerimientos del cliente



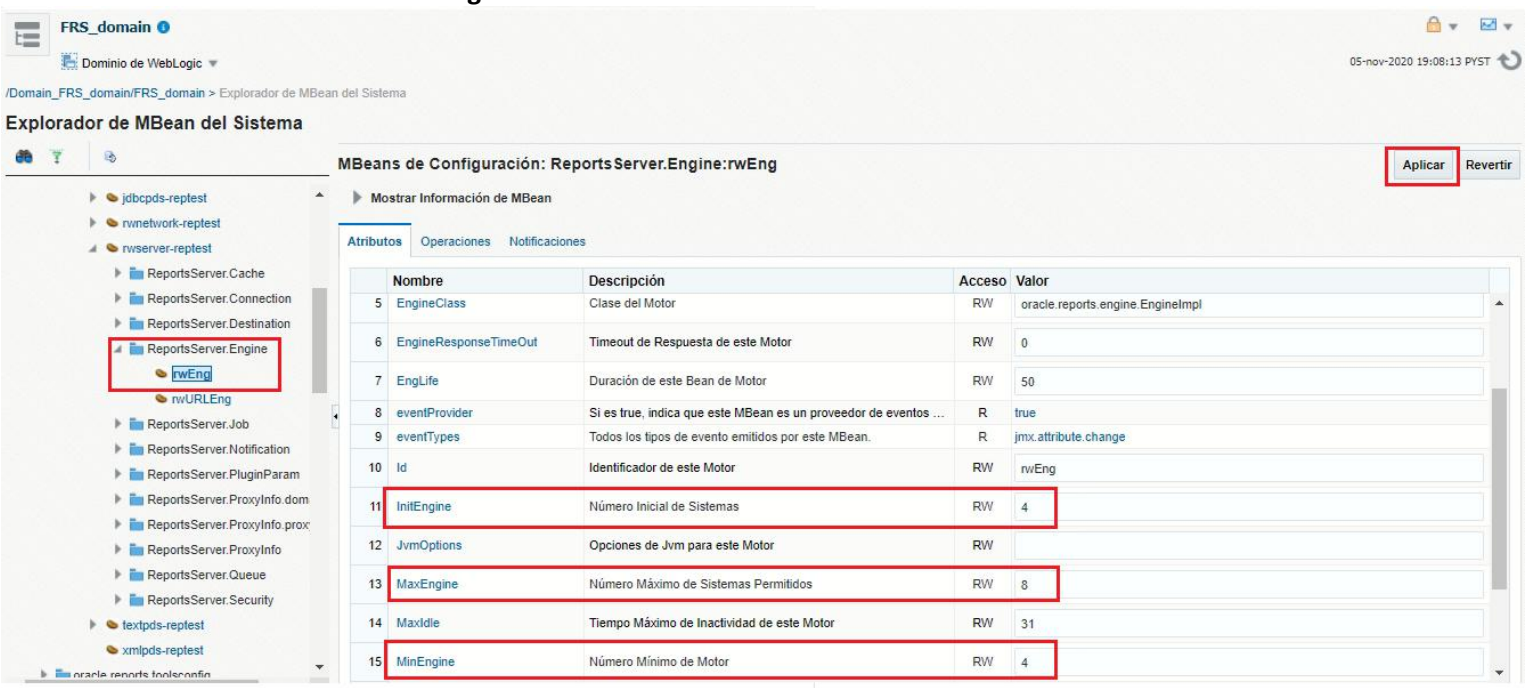
Modificar el valor de cacheSize



Agregar el nombre y el valor y luego “Llamar” o “Invoke” (Luego de realizar todas las configuraciones “Aplicar” y “Activar” los cambios)



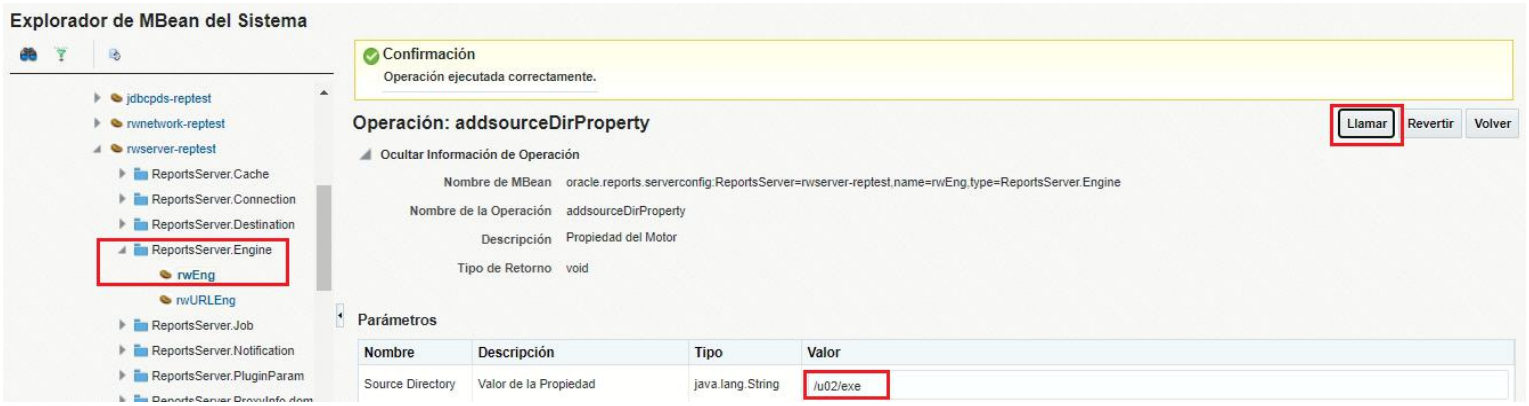
Pasos ParaModificacion del Engine



Pasos para Agregar Source Dir



Aclaración: EL sourceDir solo acepta un directorio



Pasos Para modificar el parámetro MaxQueueSize

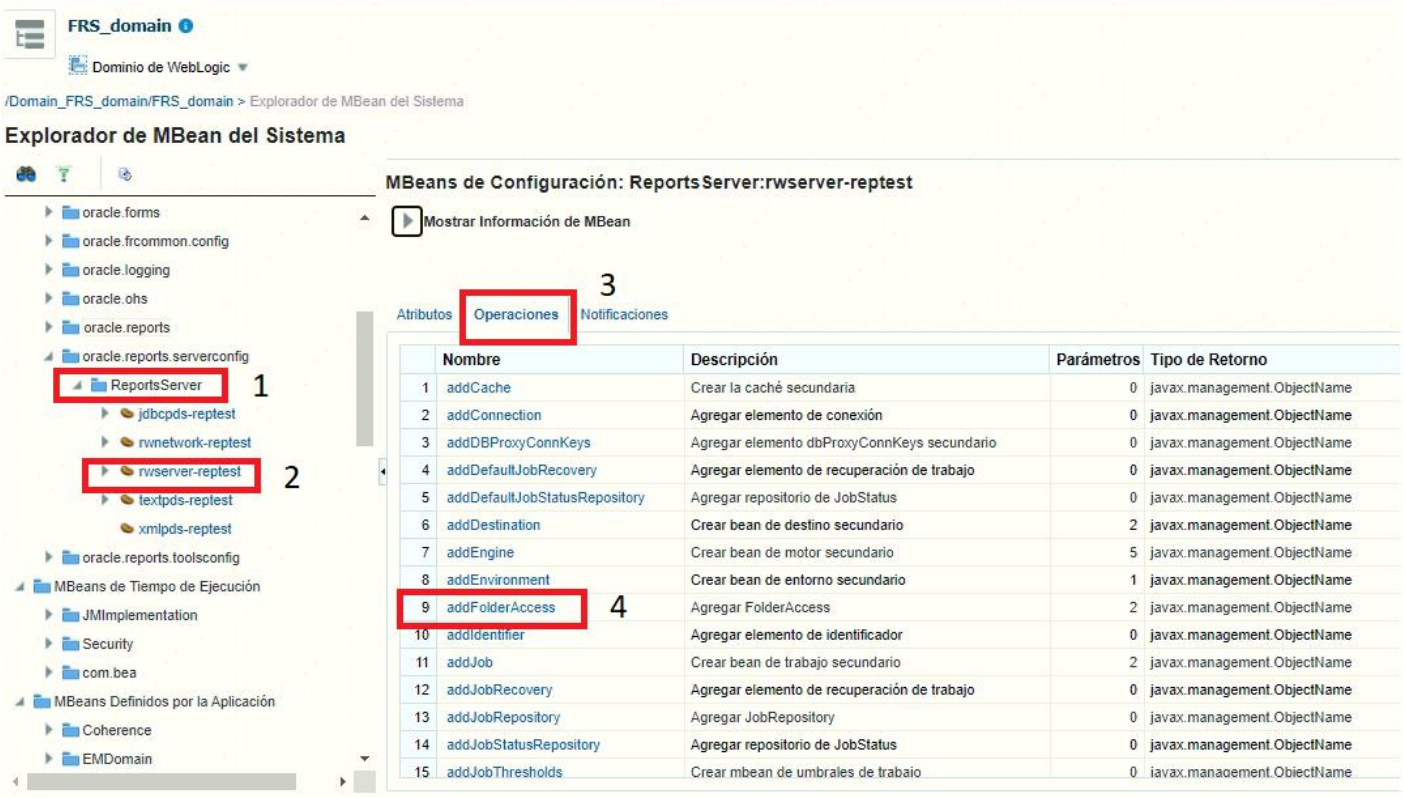


Pasos para modificar los parámetros de conexión (MaxConnect y Idle TimeOut)



Configuración de FolderAccess (Configurar según los requerimientos del cliente)

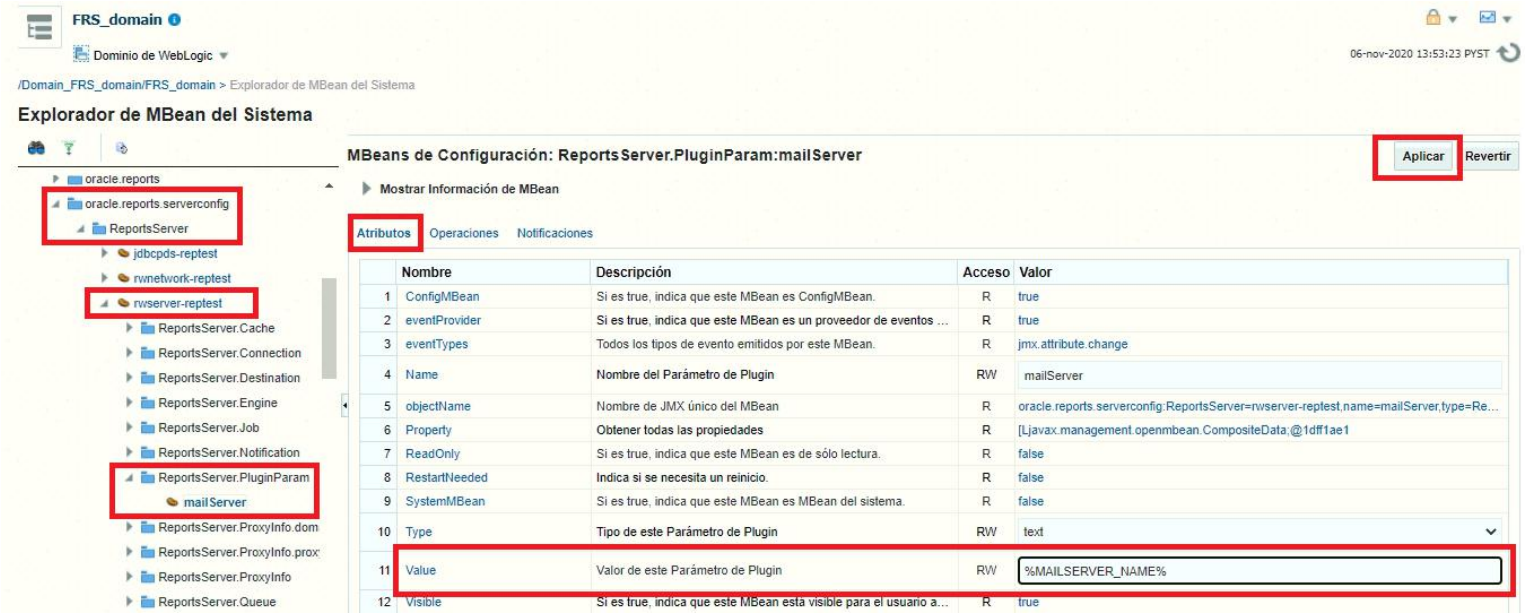
Las ubicaciones para este parámetro deben ser distintas para el campo de “**leer**” y “**escribir**” y deben ir entre ; (punto y coma). Si se requiere agregar una ubicación en algunos de los campos “**leer**” o “**escribir**” deben agregarse todos las ubicaciones previamente cargadas. (verificar el archive rwserver del reportServer en cuestión antes de hacer los cambios)





En algunos clientes su configuración de ReportServer tienen parametrizado el envío por mail (Configurar según los requerimientos del cliente)

Pasos para Agregar Mail



ENLACES DE LA APLICACIÓN

Forms

http://host.excelsis.com.py:7777/forms/frmservlet

http://host.excelsis.com.py:7777/forms/frmservlet?config=webutilDemo

LLamada a un forms

Fuente: https://docs.oracle.com/middleware/1221/formsandreports/deploy-forms/basics.htm#FSDEP135

http://host.excelsis.com.py:9001/forms/frmservlet?config=myapp&form=hrapp

Cola de Reports

http://host.excelsis.com.py:9002/reports/rwservlet/showjobs?server=reptest

Menu Reports

http://host.excelsis.com.py:9002/reports/rwservlet

LLamada a un reports con parametros

http://host.excelsis.com.py:7777/reports/rwservlet?report=reporte_ejemplo.rdf&userid=webutil/Oracle123@fr12c&server=reptest&desformat=html&dest ype=cache

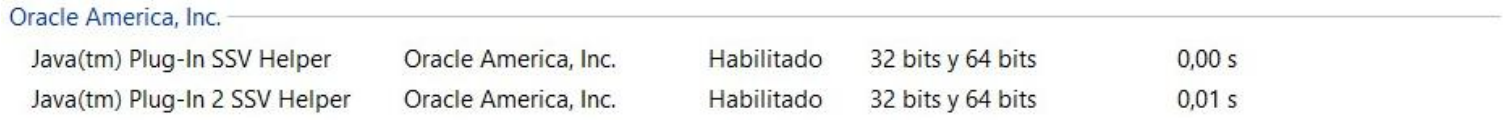
Despliegue de aplicación en Explorer 11

El equipo debe contar con jre de 32 bit con la versión de java utilizado en el servidor Forms&Reports.
En la seguridad de java > Panel de Control > Java > Seguridad > Lista de Secciones de sitios > Editar LIstas de Sitios > Agregar:

http://host:7777 (Ip y puerto del servidor Forms)

Aceptar>Aceptar

Verificar en el Explorer: Opciones de Internet > Programas > Administar Complementos >



El estado debe ser “Habilitado”

FSAL (según requerimientos del cliente)

1. *Instalación del JDK, a la ruta recomendada seria: C:\OracleFRS\Java. El jdk debe ser el mismo que el server*

2. *Copiar el archivo “frmsal.jar” en la ubicación C:\OracleFRS*

3. *El archivo frmsal.jar obtenemos de la siguiente ubicación del Servidor:* ***$ORACLE_HOME/forms/java***

4. En la configuración web que se utilizará con el fsal (**Ejemplo Sección:webutil_standaloneapp**) debe contar con los siguientes parámetros

- fsalcheck = TRUE
- baseSAAfile = webutilsaa.txt

Archivo fsal.bat (Con terminal de log)

start /min "No cerrar esta ventana" *C:\OracleFRS\Java*\bin\java.exe -jar *C:\OracleFRS*\frmsal.jar -url "http://<host>:7777/forms/frmservlet?config=**webutil_standaloneapp**"

Archivo fsal.bat (Sin terminal de log)

start /min "No cerrar esta ventana" *C:\OracleFRS\Java*\bin\javaw.exe -jar *C:\OracleFRS*\frmsal.jar -url "http://<host>:7777/forms/frmservlet?config=**webutil_standaloneapp**"

Notas adicionales para mayor información

- Error "oracle.forms.webutil.cApi.CApiFunctions bean not found" while Trying to Access a Forms Application with Webutil after Upgrading to Forms 12c. (Doc ID 2449031.1)
- Running Form Using Forms Standalone Launch (FSAL) Fails with Error "WEBUTIL_C_API.REBIND_PARAMETER Will Not Work" (Doc ID 2502819.1)
- Webutil Diagnostic Test Form For Checking Webutil Configuration (Doc ID 553849.1)

Java WebStart (según requerimientos del cliente)

En la configuración web que se utilizará con Webstart (**Ejemplo Sección:webutil_webstart**) debe contar con los

siguientes parámetros

- webstart = enabled

Asegurarse que el archivo extensions.jnlp en dirección mencionada abajo, esté modificada correctamente.

[weblogic@weblogic bin]$ cat $ORACLE_HOME/forms/java/extensions.jnlp
<resources>
<!-- <jar href="ADD YOUR JARS HERE - ONLY ONE PER ENTRY"/> -->
<jar href="jacob.jar"/>
</resources>

Archivo webstart.bat

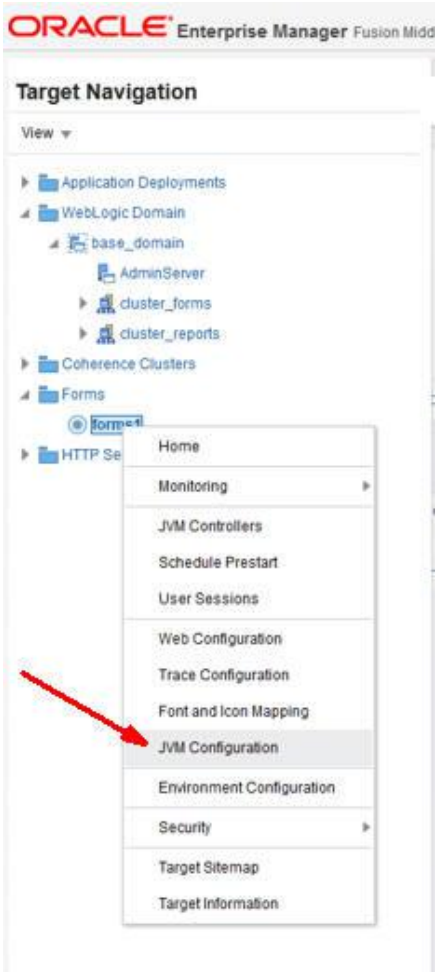
" *C:\OracleFRS*\Java\bin\javaws.exe" http://host:7777/forms/frmservlet?config=webutildemo_webstart

JVM CONTROLLER-CONFIGURACIÓN (según requerimientos del cliente)

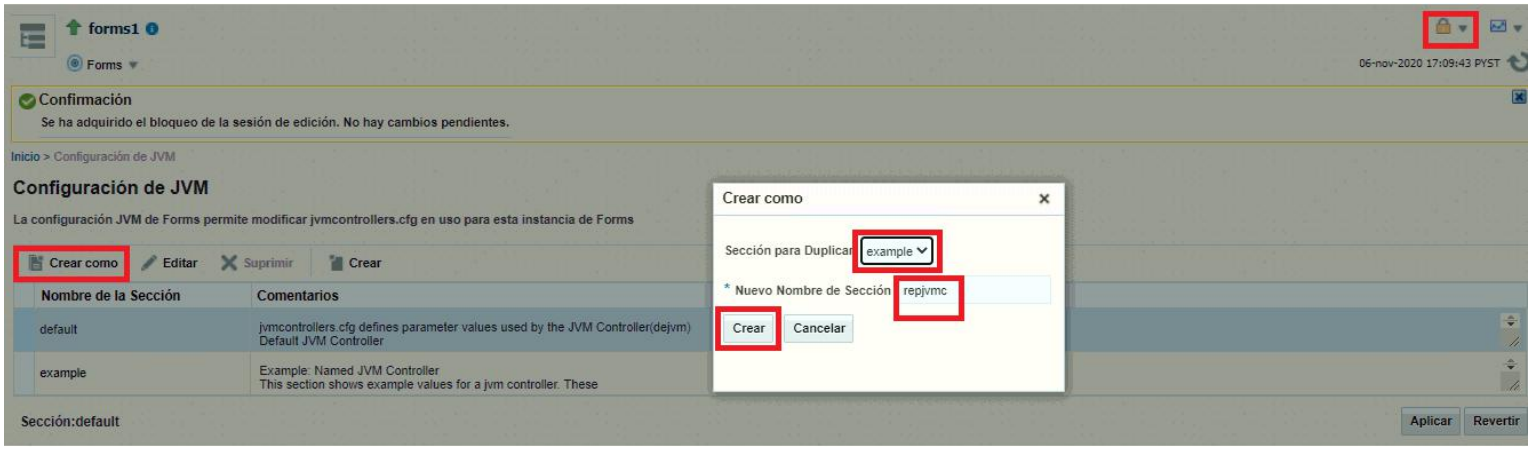
Notas adicional:

New JVM Controller (JVMController) Features in Forms 12c (Doc ID 2183291.1)

1-Acceder al Enterprise Manager. Target Navigation > Forms > forms1(click derecho) > JVM Configuration



2-Bloquear y Editar. Crear Como. Duplicar=example. Nombre=repjvmc. Crear.



3- Editar la seccion repjvmc

JVM controller name = repjvmc
Maximum sessions = 50
Log Dir = /u01/app/weblogic/logs
Logging = info
JVM Options = -Xms512m -Xmx1024m
JVM Classpath = <Classpath utilizado en la configuración de entorno Forms>
JVM Load Balance = random
JVM Auto Removal = moderate



Información adicional de parámetros:

How to Decrease Memory Usage in Forms 12c Using JVM Controllers (JVMControllers) (Doc ID 2343804.1)

New JVM Controller (JVMController) Features in Forms 12c (Doc ID 2183291.1)

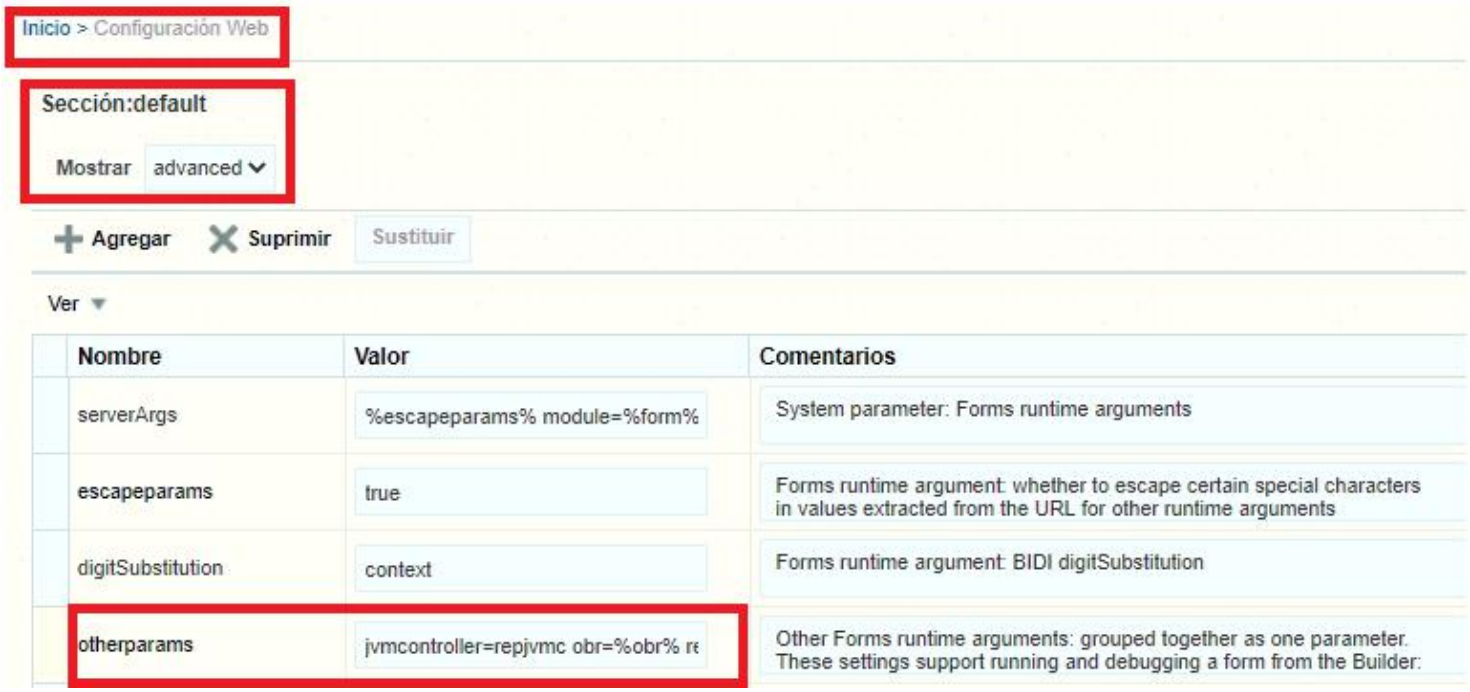
New Logging Parameters

Note that “on” is no longer a valid logging parameter. Valid parameters are:

off - Logging off
info - Reports general information about JVM Controller activity. (default)
warn - Reports potentially harmful conditions that may require further investigation.
error - Reports errors that have occurred. The application may continue running, but functionality may be reduced.
crit - Reports critical failures that resulted in aborting the JVM Controller.
debug - Reports verbose debugging information.

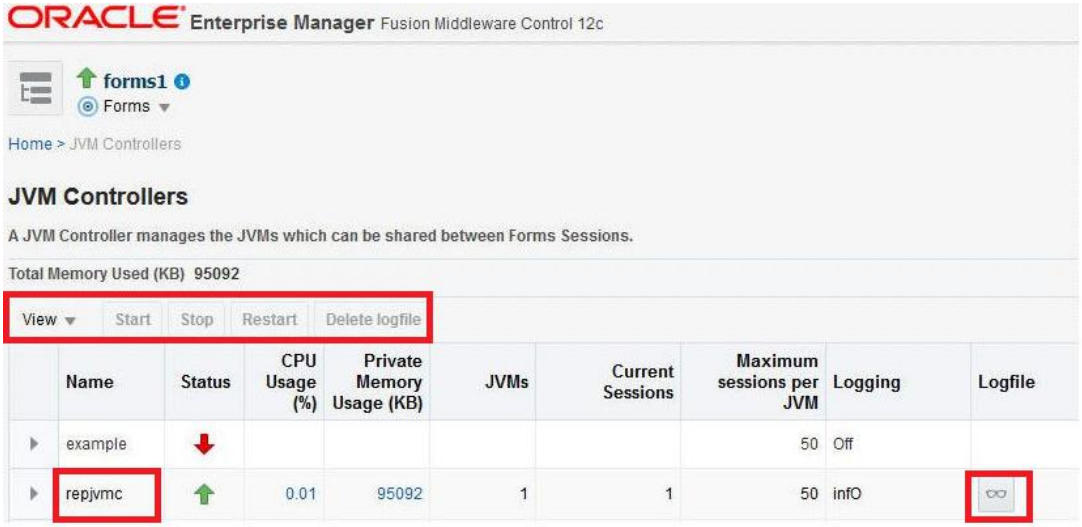
4. In the default section of the formsweb.cfg, add “jvmcontroller=repjvmc” to the value of “otherparams”.

Bloquer y editar



Aplicar. Activar los cambios

5.Levantar el JVM Controller y visualizar logfile



igure 3

. You can click on the eyeglasses icon to the right of your jvmcontroller in Figure 3 and see information like the following:

```
01/10/16 17:31:59 Standard Time::JVM PID 17924: Starting.
01/10/16 17:31:59 Standard Time::JVM PID 17924: JVM Controller version : 12.2.1.2.0
01/10/16 17:31:59 Standard Time::JVM PID 17924: Copyright (c) 1994, 2016, Oracle and/or its affiliates. All rights reserved.
01/10/16 17:31:59 Standard Time::JVM PID 17924: Parameter -- JVM controller name = repjvmc
01/10/16 17:31:59 Standard Time::JVM PID 17924: Parameter -- Maximum sessions = 50
01/10/16 17:31:59 Standard Time::JVM PID 17924: Parameter -- Log Dir = d:\temp
01/10/16 17:31:59 Standard Time::JVM PID 17924: Parameter -- Logging = info
01/10/16 17:31:59 Standard Time::JVM PID 17924: Parameter -- JVM Options = -Xms512m -Xmx1024m
01/10/16 17:31:59 Standard Time::JVM PID 17924: Parameter -- JVM Classpath = d:\middleware\jlib\zrclient.jar;d:\middleware\reports\jlib\rwru
01/10/16 17:31:59 Standard Time::JVM PID 17924: Parameter -- JVM Load Balance = random
01/10/16 17:31:59 Standard Time::JVM PID 17924: Parameter -- JVM Auto Removal = moderate
01/10/16 17:31:59 Standard Time::JVM PID 17924: Scheduled for accepting connection requests.
01/10/16 17:32:00 Standard Time::JVM PID 17924: New connection from Forms Runtime Process (PID:11088)
```

Starting JVM Controller from the Command Line

El .bash_profile debe contar con las siguientes variables

export JAVA_HOME=$ORACLE_BASE/jdk1.8.0_251
export ORACLE_BASE=/u01/app/weblogic
export ORACLE_HOME=$ORACLE_BASE/Middleware
export DOMAIN_HOME=$ORACLE_HOME/user_projects/domains/FRS_domain
export FORMS_INSTANCE=$DOMAIN_HOME/config/fmwconfig/components/FORMS/instances/forms1
export FORMS_INSTANCE_NAME=forms1
export
LD_LIBRARY_PATH=$ORACLE_HOME/lib:$JAVA_HOME/jre/lib/amd64:$JAVA_HOME/jre/lib/amd64/server:$JAVA_HOME/jre/li
b/amd64/native_threads

Scripts JVM controlller

StartJVM.sh

nohup $ORACLE_HOME/bin/dejvm -start jvmcontroller=repjvmc >> $ORACLE_BASE/logs/StarJVM.log &

StopJVM.sh

$ORACLE_HOME/bin/dejvm -stop jvmcontroller=repjvmc

Configuración de WebUtilDemo para probar configuracion (ESTO ES OPCIONAL SOLO A MODO DE PRUEBA)

Descomprimir en el servidor
[weblogic@frm WebUtilDemo]$ unzip 196249.zip Archive: 196249.zip
inflating: ffisamp.dll inflating: ReadMe.pdf inflating: webutil_demo.fmb
inflating: wu_fileupload_db_demo.sql inflating: changes.txt
[weblogic@frm WebUtilDemo]$

Copiar el archivos necesarios
[weblogic@frm WebUtilDemo]$ cp webutil_demo.fmb /u01/app/weblogic/Middleware/forms/ [weblogic@frm WebUtilDemo]$ cp ffisamp.dll /u01/app/weblogic/Middleware/forms/webutil/win32/

Modificar el archivo webutil.cfg Agregar la siguiente entrada:
Configuraciones para demo de weblogic
install.syslib.0.user.1=ffisamp.dll|40960|1.0|true
Modificar las siguientes entradas:
transfer.appsrv.accessControl=TRUE transfer.appsrv.workAreaRoot=c:\temp transfer.database.enabled=TRUE
transfer.appsrv.enabled=TRUE

Archivos afectados:
/u01/app/weblogic/FRS_domain/config/fmwconfig/components/FORMS/forms1/server/webutil.cfg
/u01/app/weblogic/FRS_domain/config/fmwconfig/components/FORMS/instances/forms1/server/webutil.cfg

En la maquina Windows
- Crear la carpeta c:/temp
- Crear luego el archivo downloaded_from_as.txt dentro de c:/temp.
- El archivo debe contener algún texto, en este caso: Hola WebUtils desde Windows

Ejecutar el scrip wu_fileupload_db_demo.sql
[weblogic@frm WebUtilDemo]$ cat wu_fileupload_db_demo.sql drop table wu_fileupdown_demo;
create table wu_fileupdown_demo (blob blob, id number(2)); insert into wu_fileupdown_demo values (NULL,1);
commit;
[weblogic@frm WebUtilDemo]$
[weblogic@frm WebUtilDemo]$ sqlplus webutil/oracle@rep SQL*Plus: Release 12.1.0.2.0 Production on Wed Jan 30 11:17:23 2019 Copyright (c) 1982, 2014, Oracle. All rights reserved.
Last Successful login time: Mon Jan 28 2019 09:09:23 -03:00 Connected to:
Oracle Database 18c Enterprise Edition Release 18.0.0.0.0 - Production SQL> @wu_fileupload_db_demo.sql
drop table wu_fileupdown_demo
*
ERROR at line 1:
ORA-00942: table or view does not exist Table created.
1 row created. Commit complete. SQL> exit
Disconnected from Oracle Database 18c Enterprise Edition Release 18.0.0.0.0 - Production [weblogic@frm WebUtilDemo]$
Obs: El error ORA-00942: table or view does not exist es esperado porque no existe la tabla que se quiere borrar.
Compilar

Necesita interfaz grafica

[weblogic@frm WebUtilDemo]$ frmcmp module=webutil.pll module_type=library userid=webutil/oracle@rep compile_all=yes
[weblogic@frm WebUtilDemo]$ frmcmp module=webutil_demo.fmb module_type=form userid=webutil/oracle@rep compile_all=yes

Link para editar el archivo : https://drive.google.com/file/d/1qOX3jkF2POBgsebLVpPZNSX66S5SlMxq/view?usp=sharing