

Query 1: Retrieve all students

```
CREATE DATABASE IF NOT EXISTS school_db;
```

```
USE school_db;
```

```
DROP TABLE IF EXISTS Student;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES  
(101, 'Navya', 18, 85),  
(102, 'Manya', 20, 96),  
(103, 'Varshii', 15, 65),  
(104, 'Neha', 20, 80),  
(105, 'Tanisha', 18, 75);
```

```
SELECT * FROM Student;
```

OUTPUT

Result Grid				
	Student_ID	Name	Dept_ID	Marks
▶	101	Navya	18	85
	102	Manya	20	96
	103	Varshii	15	65
	104	Neha	20	80
	105	Tanisha	18	75
*	NULL	NULL	NULL	NULL

Query 2: Retrieve selected columns

```
CREATE DATABASE IF NOT EXISTS school_db;
```

```
USE school_db;
```

```
DROP TABLE IF EXISTS Student;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES  
(101, 'Navya', 18, 85),  
(102, 'Manya', 20, 96),  
(103, 'Varshii', 15, 65),  
(104, 'Neha', 20, 80),  
(105, 'Tanisha', 18, 75);
```

```
SELECT Name, Marks  
FROM Student;
```

OUTPUT

Result Grid			Filter Rows:	
	Name	Marks		
▶	Navya	85		
	Manya	96		
	Varshii	65		
	Neha	80		
	Tanisha	75		

Query 3: Find students scoring more than 80

```
CREATE DATABASE IF NOT EXISTS school_db;
```

```
USE school_db;
```


```
DROP TABLE IF EXISTS Student;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES  
(101, 'Navya', 18, 85),  
(102, 'Manya', 20, 96),  
(103, 'Varshii', 15, 65),  
(104, 'Neha', 20, 80),  
(105, 'Tanisha', 18, 75);
```

```
SELECT Student_ID, Name, Dept_ID, Marks  
FROM Student  
WHERE Marks > 80;
```

OUTPUT

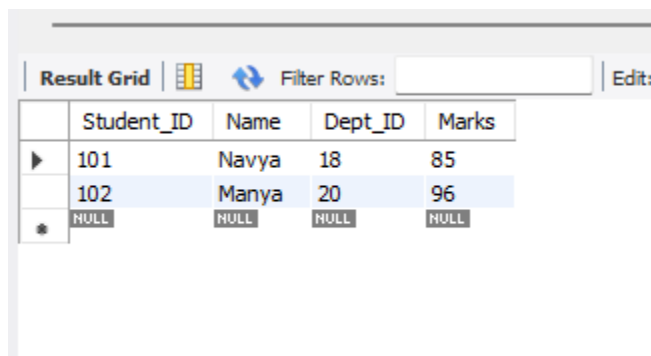

	Student_ID	Name	Dept_ID	Marks
▶	101	Navya	18	85
	102	Manya	20	96
*	NULL	NULL	NULL	NULL

Query 4: Find CSE students

```
CREATE DATABASE IF NOT EXISTS school_db;
```

```
USE school_db;
```

```
DROP TABLE IF EXISTS Student;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES  
(101, 'Navya', 18, 85),  
(102, 'Manya', 20, 96),  
(103, 'Varshii', 15, 65),  
(104, 'Neha', 20, 80),  
(105, 'Tanisha', 18, 75);
```

```
SELECT Name, Marks  
FROM Student  
WHERE Dept_ID = 20;
```

OUTPUT

Result Grid			Filter Rows:	Export:	Wrap Cell Content:
	Name	Marks			
▶	Manya	96			
	Neha	80			

Student 15			
Output			
Action Output			
#	Time	Action	Message
✓ 239	07:26:26	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES (101, 'Navya', 18, 85), (102, 'Manya', 20, 96), (103...	5 row(s) af
✓ 240	07:26:26	SELECT Name, Marks FROM Student WHERE Dept_ID = 20 LIMIT 0, 2000	2 row(s) re

Query 5: Find students from Delhi who scored above 80

```
CREATE DATABASE IF NOT EXISTS school_db;
```

```
USE school_db;
```

```
DROP TABLE IF EXISTS Student;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT,  
    City VARCHAR(50)  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES  
(101, 'Navya', 18, 85, 'Delhi'),  
(102, 'Manya', 20, 96, 'Delhi'),  
(103, 'Varshii', 15, 65, 'Mumbai'),  
(104, 'Neha', 20, 80, 'Bangalore'),  
(105, 'Tanisha', 18, 75, 'Chennai');
```

```
SELECT Name, Marks  
FROM Student  
WHERE City = 'Delhi'  
AND Marks > 80;
```

OUTPUT

The screenshot shows a database management interface. At the top, there's a toolbar with 'Result Grid', 'Filter Rows', 'Export', and 'Wrap Cell Content'. Below this is a table with two columns: 'Name' and 'Marks'. The table contains two rows: 'Navya' with '85' and 'Manya' with '96'. Below the table, there's a tab labeled 'Student 18'. Underneath the tab is an 'Output' section. The 'Output' section has a dropdown menu set to 'Action Output'. Below the dropdown is a table with three columns: '#', 'Time', and 'Action'. There are two entries in this table: a green checkmark, '257', '07:32:18', and 'INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Navya', 18, 85, 'Delhi'), (102, 'Manya' (truncated); and a green checkmark, '258', '07:32:18', and 'SELECT Name, Marks FROM Student WHERE City = 'Delhi' AND Marks > 80 LIMIT 0, 2000'.

	Name	Marks
▶	Navya	85
	Manya	96

Student 18 x

Output

#	Time	Action
✓ 257	07:32:18	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Navya', 18, 85, 'Delhi'), (102, 'Manya'
✓ 258	07:32:18	SELECT Name, Marks FROM Student WHERE City = 'Delhi' AND Marks > 80 LIMIT 0, 2000

Query 6: Find the highest marks

```
CREATE DATABASE IF NOT EXISTS school_db;
```

```
USE school_db;
```

```
DROP TABLE IF EXISTS Student;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT,  
    City VARCHAR(50)  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES  
(101, 'Navya', 18, 85, 'Delhi'),  
(102, 'Manya', 20, 96, 'Delhi'),  
(103, 'Varshii', 15, 65, 'Mumbai'),  
(104, 'Neha', 20, 80, 'Bangalore'),  
(105, 'Tanisha', 18, 75, 'Chennai');
```

```
SELECT MAX(Marks) AS Highest_Marks  
FROM Student;
```

OUTPUT

The screenshot displays a database query execution interface. At the top, there is a toolbar with options like 'Result Grid', 'Filter Rows', 'Export', and 'Wrap Cell Content'. Below the toolbar, a table shows the result of the query:

	Highest_Marks
▶	96

Below the result grid, there is a section labeled 'Result 19' with a close button. Underneath, there is an 'Output' section with a dropdown menu set to 'Action Output'. This section shows a log of executed queries:

#	Time	Action
✓ 263	07:33:59	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Navya', 1
✓ 264	07:33:59	SELECT MAX(Marks) AS Highest_Marks FROM Student LIMIT 0, 2000

Query 7: Find the average marks

```
CREATE DATABASE IF NOT EXISTS school_db;
```

```
USE school_db;
```

```
DROP TABLE IF EXISTS Student;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT,  
    City VARCHAR(50)  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES  
(101, 'Navya', 18, 85, 'Delhi'),  
(102, 'Manya', 20, 96, 'Delhi'),  
(103, 'Varshii', 15, 65, 'Mumbai'),  
(104, 'Neha', 20, 80, 'Bangalore'),  
(105, 'Tanisha', 18, 75, 'Chennai');
```

```
SELECT AVG(Marks) AS Average_Marks  
FROM Student;
```

OUTPUT

Result Grid		Filter Rows:	Export
	Average_Marks		
▶	80.2000		

Result 20		×
Output		
Action Output		
#	Time	Action
✓ 269	07:35:21	INSERT INTO Student (Student_ID, Name, D
✓ 270	07:35:21	SELECT AVG(Marks) AS Average_Marks FRC

