

# ggplot Part II

---

Workshop on Plotting in R

Lokesh Mano • 10-Sep-2021


NBIS, SciLifeLab

# Contents


- Scales - color
- Scales - shape
- facet\_wrap

# Scales • Discrete Colors


- scales: position, color, fill, size, shape, alpha, linetype
- syntax: `scale_<aesthetic>_<type>`

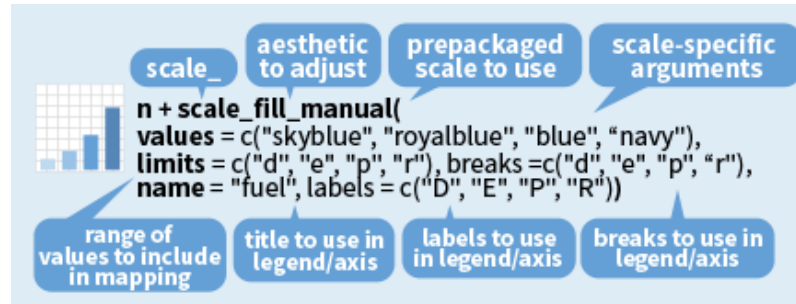

```
p <- ggplot(iris)+geom_point(aes(x=Sepal.Length,  
                                y=Sepal.Width,color=Species))  
p
```

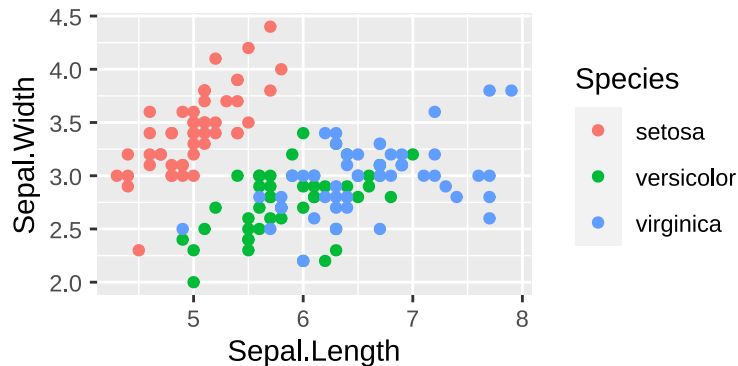


```
p + scale_color_manual(  
  name="Manual",  
  values=c("#5BC0EB", "#FDE74C", "#9BC53D"))
```

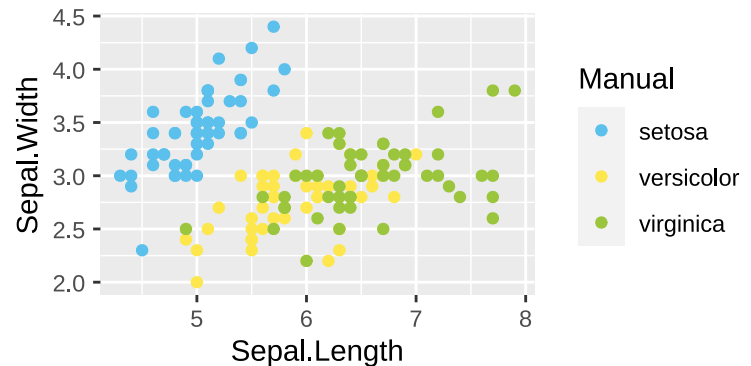


# Scales • Continuous Colors

- In RStudio, type `scale_`, then press **TAB**

```
p <- ggplot(iris)+  
  geom_point(aes(x=Sepal.Length,  
                 y=Sepal.Width,  
                 shape=Species,color=Petal.Length))  
p
```

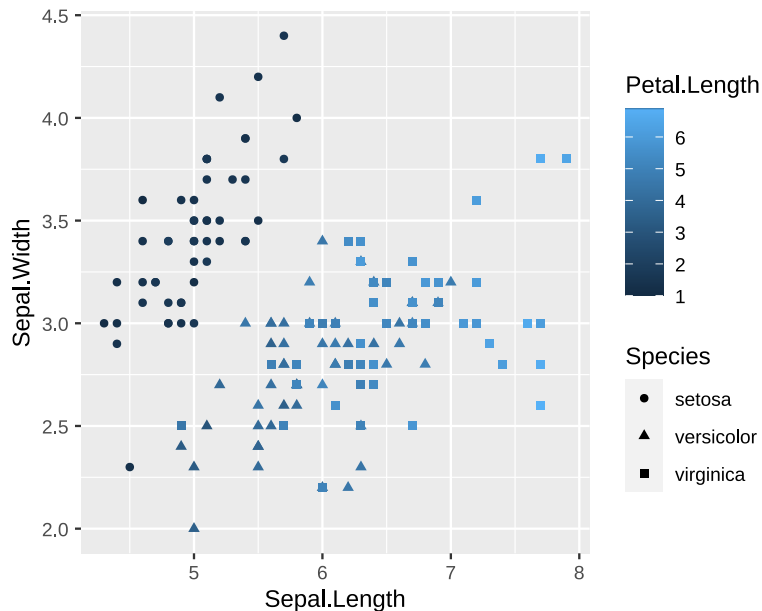

```
p +  
  scale_color_gradient(name="Pet Len",  
                       breaks=range(iris$Petal.Length),  
                       labels=c("Min", "Max"),  
                       low="black", high="red")
```

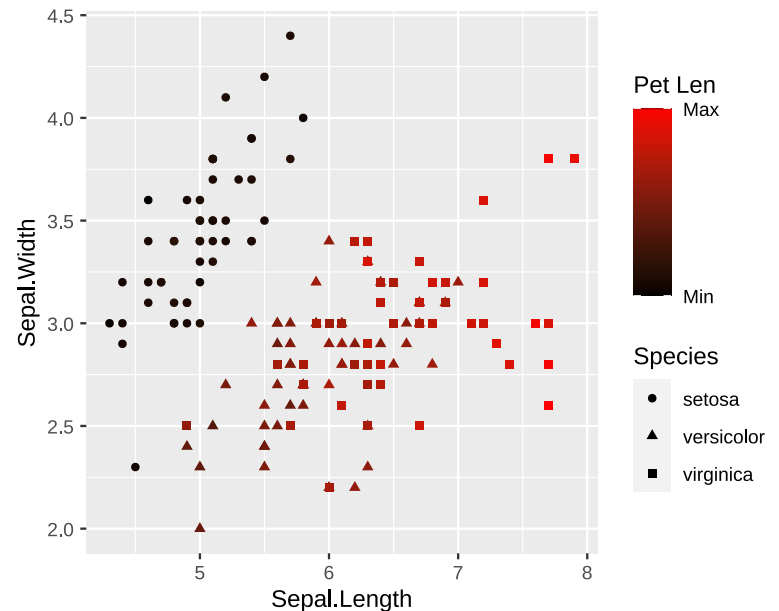


# Scales • Shape

```
p <- ggplot(iris)+  
  geom_point(aes(x=Sepal.Length,  
                 y=Sepal.Width,  
                 shape=Species,color=Species))
```

p



```
p +  
  scale_color_manual(name="New",  
                    values=c("blue","green","red"))+  
  scale_shape_manual(name="Bla",values=c(0,1,
```

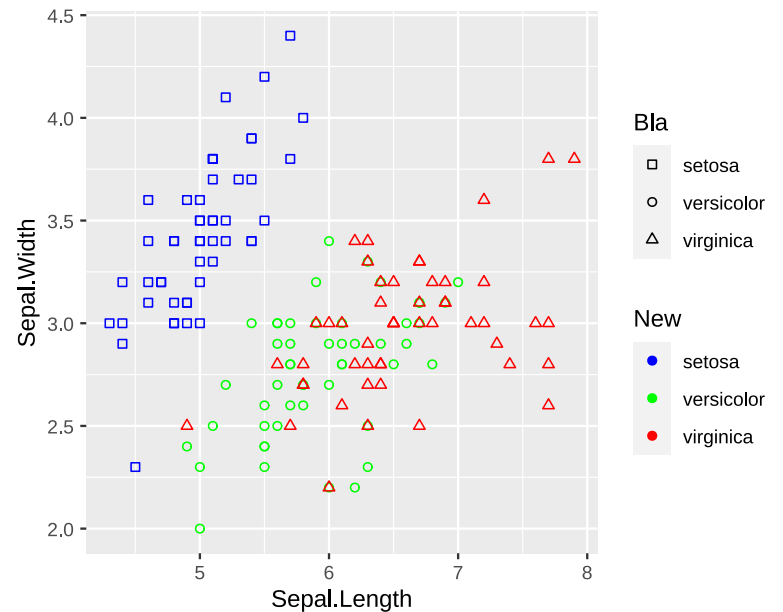


# Facets • **facet\_wrap**


- Split to subplots based on variable(s)
- Facetting in one dimension

```
p <- ggplot(iris)+  
  geom_point(aes(x=Sepal.Length,  
                 y=Sepal.Width,  
                 color=Species))
```


p

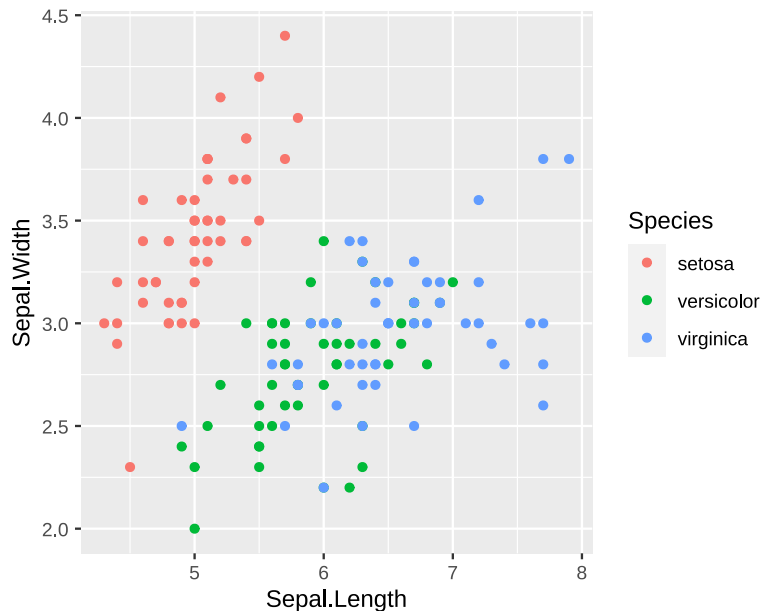

```
p + facet_wrap(~Species)
```

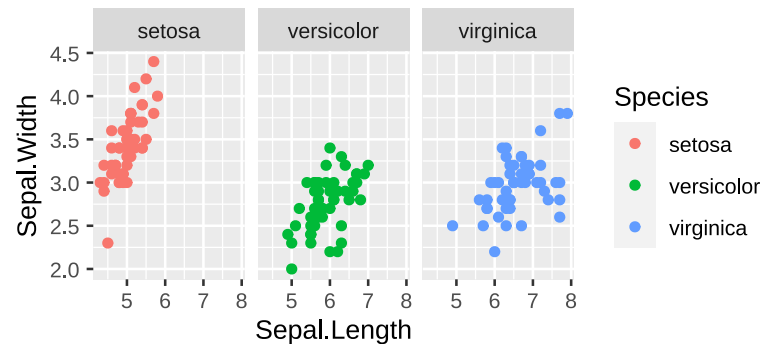

```
p + facet_wrap(~Species, nrow=3)
```

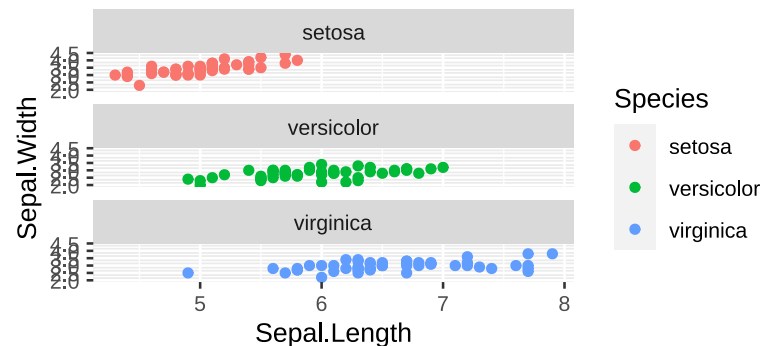





# Thank you. Questions?

R version 4.1.1 (2021-08-10)

Platform: x86\_64-pc-linux-gnu (64-bit)

OS: Ubuntu 18.04.5 LTS

---

Built on: 📅 10-Sep-2021 at 🕒 12:00:25

**2021** • SciLifeLab • NBIS