

Combining Tools for Reproducible Research with Snakemake


Reproducibility is rarer than you think

The results of only 26% out of 204 randomly selected papers in the journal Science could be reproduced.¹

¹ Stodden et. al (2018). "An empirical analysis of journal policy effectiveness for computational reproducibility". PNAS. 115 (11): 2584-2589

Many journals are revising author guidelines to include data and code availability.
(...) an improvement over no policy, but currently insufficient for reproducibility.

Combining Tools for Reproducible Research with Snakemake

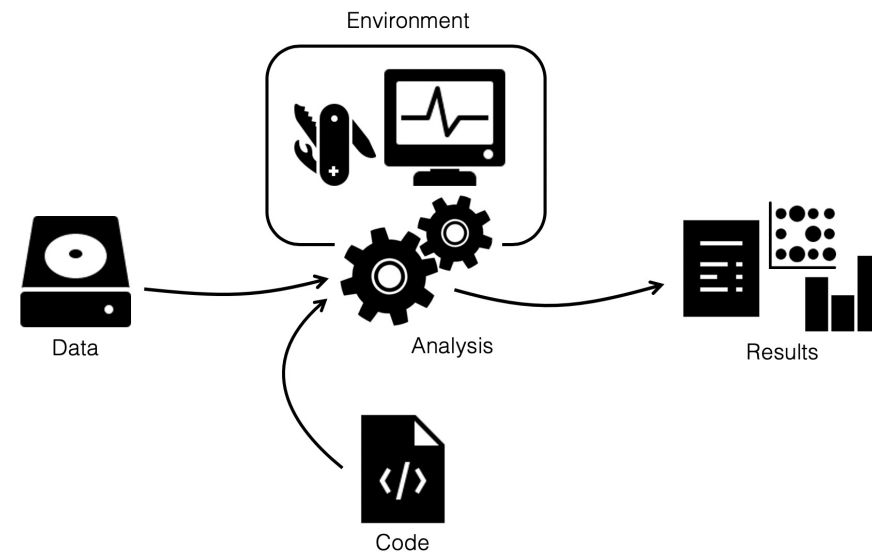

- Track your Snakemake code with **Git** and share it in a remote **repository** on GitHub or BitBucket
- Combine Snakemake with **Conda** and/or **containers** to make the compute environment reproducible
- Integrate foreign workflow management systems such as **Nextflow** pipelines into your Snakemake workflow

Git

- A widely used system for distributed version control to **version, backup and share** your code and documents
- Keeps a complete **history** of the changes you make to your files that can be re-visited & compared
- Git tracks **who contributed what** to your code
- Git is mainly used for **text files**, not large or binary files, so ideal for Snakemake workflows
- You can publish your code along with your research paper by sharing it in a remote repository (e.g. on **GitHub** or **BitBucket**)

Conda

- Is a **package, dependency, and environment** manager

packages: any type of program (e.g. bowtie2, snakemake etc.)

dependency: other software required by a package

environment: a distinct collection of packages

- Keeps track of the dependencies between packages in each environment

Conda

1. Running a Snakemake rule with a Conda environment

- Make sure you have Conda **installed** (Miniconda or Anaconda)
- Find your Conda **package** on <http://anaconda.org>
- Create a Conda **environment file** (e.g. `bwa.yaml`)

```
channels:  
- conda-forge  
- bioconda  
- defaults  
dependencies:  
- bwa=0.7.17
```

source: [best practice example](#)

- Store your `yaml` files in a directory for environments
- For reproducibility, it is important to keep include package **versions** in your environment file

Conda

1. Running a Snakemake rule with a Conda environment

- Add the **path** to the Conda environment **yaml** file to your rule using the **conda** directive

```
rule map_bwa_index:
  output: expand("{{ref}}{ext}", ext=[".amb", ".ann", ".bwt", ".pac", ".sa"])
  input: config["ref"]
  log: "logs/bwa/index/{ref}.log"
  conda: "../envs/bwa.yaml"
  shell:
    "bwa index {input}"
```

modified from: [best practice example](#)

- Start your workflow on the command line with **--use-conda**

```
$ snakemake --use-conda
```

- This doesn't work if you use **run** instead of **shell** (or other directives)

Conda

2. Using one Conda environment for the entire workflow

- Write a Conda **environment file** that includes all tools used by the workflow (save it as e.g. `environment.yaml`)

```
name: best-practice-smk
channels:
- conda-forge
- bioconda
- default
dependencies:
- snakemake=6.8.0
- python=3.8
- pandas=1.3.3
- jupyter=1.0
- jupyter_contrib_nbextensions=0.5.1
- jupyterlab_code_formatter=1.4
- bwa=0.7.17
- multiqc=1.11
- r-ggplot2=3.3.5
- samtools=1.13
```

source: [best practice example](#)

Conda

2. Using one Conda environment for the entire workflow

- **Create** the environment

```
$ conda env create -f environment.yml
```

- **Activate** your Conda environment

```
$ conda activate best-practice-smk
```

- Start your Snakemake workflow

```
(best-practice-smk) [...] $ snakemake
```

Containers

What can I use containers for?

- Run applications securely **isolated** in a container, packaged with **all dependencies and libraries**
- As advanced **environment manager**
- To package your **code** with the environment it needs
- To package a whole **workflow** (e.g. to accompany a manuscript)
- And much more

Docker vs. Singularity

- Docker was developed for **any operating system**, but not for high-performance computing (HPC) clusters
- Singularity is an open source container platform suitable for **HPC clusters**

Containers

Docker nomenclature

- A Docker **file** is a recipe used to build a Docker **image**
- A Docker **image** is a standalone executable package of software
- A Docker **container** is a standard unit of software run on the Docker Engine
- **DockerHub** is an online service for sharing Docker images
- Docker images can be converted into Singularity images

Containers

1. Running Snakemake rules with Singularity

- Snakemake can run a rule **isolated** in a container, using Singularity
- Conda packages are available as Docker and Singularity images (e.g. Conda packages from the **bioconda channel**)
- Many other Docker images are available on **DockerHub**
- Or build your own Docker or Singularity images

Containers

1. Running Snakemake rules with Singularity

- Make sure your system has Singularity **installed**
- Find your Docker or Singularity **image**, e.g. on <http://biocontainers.pro>
- Add the **link** to the container image (or the path to a Singularity `*.sif` file) to your rule using the `container` directive

```
rule NAME:
  input:
    "table.txt"
  output:
    "plots/myplot.pdf"
  container:
    "docker://joseespinoza/docker-r-ggplot2"
  script:
    "scripts/plot-stuff.R"
```

source: [Snakemake documentation](#)

- Start your workflow on the command line with `--use-singularity`

```
$ snakemake --use-singularity
```

Containers

2. Packaging your Snakemake workflow in a Docker container

- Make sure your system has Docker **installed**
- Write a **Docker file**, e.g.
 - Start with the official `Ubuntu` image
 - Install Miniconda and other required tools (e.g. Snakemake)
 - Add the project files (e.g. `Snakefile` , `config.yaml` , `environment.yaml`)
 - Install the Conda environment containing all packages run by the workflow

see this [example](#)

Containers

2. Packaging your Snakemake workflow in a Docker container

- Create a Docker **image** from your Docker file (e.g. called `my_workflow`)

```
$ docker build -t my_workflow .
```

- **Run** your container, e.g.

```
$ docker run my_workflow
```

- **Share** your Docker file on GitHub or BitBucket, or your Docker image on DockerHub

Combinations of Conda and Containers

Combine Conda-based package management with running jobs in containers

- A global container can be specified for the entire workflow in which Snakemake runs jobs with rule-specific Conda environments when run with `--use-conda --use-singularity`

More info: [Snakemake documentation](#) & [best practice example](#)

Containerization of Conda-based workflows

- Snakemake can automatically generate a Docker file that contains all Conda environments used by the rules of the workflow using the flag `--containerize`

More info: [Snakemake documentation](#)

Integrating foreign workflow management systems

- From version 6.2 on, Snakemake can run workflows written in other workflow management systems such as **Nextflow**
- The workflow is run in **Snakemake** until a rule to run the foreign workflow is reached
- In this rule, Snakemake **hands over** to the other workflow management system
- Afterwards, **Snakemake** continues running rules that use the output files of the foreign workflow

```
rule chipseq_pipeline:
    input:
        input="design.csv",
        fasta="data/genome.fasta",
        gtf="data/genome.gtf",
    output:
        "multiqc/broadPeaks/multiqc_report.html",
    params:
        pipeline="nf-core/chipseq",
        revision="1.2.1",
        profile=["conda"],
    handover: True
    wrapper:
        "0.74.0/utils/nextflow"
```

More info & source: [Snakemake documentation](#)

Summary

There are many ways to use other **tools for reproducible research** together with Snakemake:

- Use **Git** to version control, backup and share your code
- Run rules or your entire workflow in **Conda** environments
- Run your rules in isolated Singularity **containers**
- Package your entire workflow in a **Docker container**
- Run pipelines written in **other workflow management systems** in your Snakemake workflow

Questions?

