

rain-days-abs-groupingB

January 23, 2022

1 Find rain days in a specified region, given 8 upper atm variables and respective Gridmet data.

This notebook calculates average rain on a 128x128 grid, it then averages the respective 8 upper atm variables.

- this version loads netcdf files directly via xarray
- “Gridmet data” can now be replaced with any model’s output

1.0.1 TODO items

- better graphs (i.e. include lat/lon scale)

```
[1]: from IPython import display
import numpy as np

#from skimage.metrics import structural_similarity as ssim
import copy
```

```
[2]: # load netcdf files directly via xarray
import xarray as xr
import matplotlib.pyplot as plt
import cartopy.crs as ccrs
import cartopy
```

2 Configuration

```
[3]: # Ordering: nRow ordering: obs, raw, RegCM4, WRF, MPAS, CNN, SDSM, KDDM, MBCn, ↴LOCA
mpi_sigfiles=['/glade/work/mcginnis/DCA/data/gen/final/gridmet/hist/prec.hist.
              ↴gridMET.obs.day.1980-2005.NAM-22i.SGP.x098.y36.nc',
              '/glade/work/mcginnis/DCA/data/gen/final/mpi/hist/prec.hist.MPI-ESM-LR.raw.day.
              ↴1980-2005.NAM-22i.SGP.x098.y36.nc',
              '/glade/work/mcginnis/DCA/data/gen/final/mpi/rcp85/prec.rcp85.MPI-ESM-LR.raw.day.
              ↴2075-2100.NAM-22i.SGP.x098.y36.nc',
```

```

'./glade/work/mcginnis/DCA/data/gen/final/regcm4/hist/prec.hist.MPI-ESM-LR.RegCM4.
→day.1980-2005.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/regcm4/rcp85/prec.rcp85.MPI-ESM-LR.
→RegCM4.day.2075-2100.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/wrf/hist/prec.hist.MPI-ESM-LR.WRF.day.
→1980-2005.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/wrf/rcp85/prec.rcp85.MPI-ESM-LR.WRF.day.
→2075-2100.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/mpas/hist/prec.hist.MPI-ESM-LR.MPAS.day.
→1980-2005.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/mpas/rcp85/prec.rcp85.MPI-ESM-LR.MPAS.
→day.2075-2100.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/cnn/hist/prec.hist.MPI-ESM-LR.CNN.day.
→1980-2005.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/cnn/rcp85/prec.rcp85.MPI-ESM-LR.CNN.day.
→2075-2100.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/sdsdm/hist/prec.hist.MPI-ESM-LR.SDSM.day.
→1976-2005.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/sdsdm/rcp85/prec.rcp85.MPI-ESM-LR.SDSM.day.
→2070-2099.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/kddm/hist/prec.hist.MPI-ESM-LR.KDDM.day.
→1980-2005.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/kddm/rcp85/prec.rcp85.MPI-ESM-LR.KDDM.
→day.2075-2100.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/mbcn/hist/prec.hist.MPI-ESM-LR.MBCn.day.
→1980-2005.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/mbcn/rcp85/prec.rcp85.MPI-ESM-LR.MBCn.
→day.2075-2100.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/loca/hist/prec.hist.MPI-ESM-LR.LOCA.day.
→1980-2005.NAM-22i.SGP.x098.y36.nc',
'./glade/work/mcginnis/DCA/data/gen/final/loca/rcp85/prec.rcp85.MPI-ESM-LR.LOCA.
→day.2075-2100.NAM-22i.SGP.x098.y36.nc']

```

3 Compact configuration

```

[4]: sigdir = './glade/work/mcginnis/DCA/data/gen/final'
def model2absfilepath(mn, exp, x, y):
    if mn == 'obs' or mn == 'gridMET':
        mn = 'gridMET'
        filename = 'prec.{}.gridMET.{}.day.1980-2005.NAM-22i.SGP.x{}{}.y{}{}.nc'.
→format(exp, 'obs', x, y)
    elif mn == 'raw' or mn == 'mpi':
        mn = 'mpi'
        if exp == 'hist':

```

```

        filename = 'prec.{}.MPI-ESM-LR.{}.day.1980-2005.NAM-22i.SGP.x0{}.y{}.'
→nc'.format(exp, 'raw', x, y)
    elif exp == 'rcp85':
        filename = 'prec.{}.MPI-ESM-LR.{}.day.2075-2100.NAM-22i.SGP.x0{}.y{}.'
→nc'.format(exp, 'raw', x, y)
    else: print("Unknown experiment!")
elif mn == 'SDSM': # starts at 1976
    if exp == 'hist':
        filename = 'prec.{}.MPI-ESM-LR.{}.day.1976-2005.NAM-22i.SGP.x0{}.y{}.'
→nc'.format(exp, mn, x, y)
    elif exp == 'rcp85':
        filename = 'prec.{}.MPI-ESM-LR.{}.day.2070-2099.NAM-22i.SGP.x0{}.y{}.'
→nc'.format(exp, mn, x, y)
    else: print("Unknown experiment!")

    elif exp == 'hist':
        filename = 'prec.{}.MPI-ESM-LR.{}.day.1980-2005.NAM-22i.SGP.x0{}.y{}.nc'.
→format(exp, mn, x, y)
    elif exp == 'rcp85':
        filename = 'prec.{}.MPI-ESM-LR.{}.day.2075-2100.NAM-22i.SGP.x0{}.y{}.nc'.
→format(exp, mn, x, y)
    else: print("Unknown experiment!")
return sigdir + '/' + mn.lower() + '/' + exp + '/' + filename

```

[5]: # test single file
model2absfilepath('RegCM4', 'rcp85', 98, 36)

[5]: '/glade/work/mcginnis/DCA/data/gen/final/regcm4/rcp85/prec.rcp85.MPI-ESM-LR.RegCM4.day.2075-2100.NAM-22i.SGP.x098.y36.nc'

[6]: # create list of abs filepaths
[model2absfilepath(ff, 'hist', 98, 36) for ff in
['obs', 'raw', 'RegCM4', 'WRF', 'MPAS', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]

[6]: ['/glade/work/mcginnis/DCA/data/gen/final/gridmet/hist/prec.hist.gridMET.obs.day.1980-2005.NAM-22i.SGP.x098.y36.nc',
'/glade/work/mcginnis/DCA/data/gen/final/mpi/hist/prec.hist.MPI-ESM-LR.raw.day.1980-2005.NAM-22i.SGP.x098.y36.nc',
'/glade/work/mcginnis/DCA/data/gen/final/regcm4/hist/prec.hist.MPI-ESM-LR.RegCM4.day.1980-2005.NAM-22i.SGP.x098.y36.nc',
'/glade/work/mcginnis/DCA/data/gen/final/wrf/hist/prec.hist.MPI-ESM-LR.WRF.day.1980-2005.NAM-22i.SGP.x098.y36.nc',
'/glade/work/mcginnis/DCA/data/gen/final/mpas/hist/prec.hist.MPI-ESM-LR.MPAS.day.1980-2005.NAM-22i.SGP.x098.y36.nc',
'/glade/work/mcginnis/DCA/data/gen/final/cnn/hist/prec.hist.MPI-ESM-LR.CNN.day.1980-2005.NAM-22i.SGP.x098.y36.nc',

```
'/glade/work/mcginnis/DCA/data/gen/final/sdsm/hist/prec.hist_MPI-ESM-LR.SDSDM.day.1976-2005.NAM-22i.SGP.x098.y36.nc',
 '/glade/work/mcginnis/DCA/data/gen/final/kddm/hist/prec.hist_MPI-ESM-LR.KDDM.day.1980-2005.NAM-22i.SGP.x098.y36.nc',
 '/glade/work/mcginnis/DCA/data/gen/final/mbcn/hist/prec.hist_MPI-ESM-LR.MBCn.day.1980-2005.NAM-22i.SGP.x098.y36.nc',
 '/glade/work/mcginnis/DCA/data/gen/final/loca/hist/prec.hist_MPI-ESM-LR.LOCA.day.1980-2005.NAM-22i.SGP.x098.y36.nc']
```

3.0.1 Load model output data

```
[7]: #####
## LOAD GRIDMET ##
#####
# 1980-1989
istart = 365
#ndays = 3653 # 1980-1989
ndays = 13515 # 1980-2016

dv1 = xr.open_dataset('/glade/work/dkorytin/srgan_data/
→prec128_gridmetA_1979-2016.nc')['prec'][istart:istart+ndays]
# dv2 = xr.open_dataset('/glade/work/dkorytin/srgan_data/
→tmax128_gridmetA_1979-2016.nc')['tmax'][istart:istart+ndays]
# dv3 = xr.open_dataset('/glade/work/dkorytin/srgan_data/
→tmin128_gridmetA_1979-2016.nc')['tmin'][istart:istart+ndays]
# dv4 = xr.open_dataset('/glade/work/dkorytin/srgan_data/
→uas128_gridmetA_1979-2016.nc')['uas'][istart:istart+ndays]
# dv5 = xr.open_dataset('/glade/work/dkorytin/srgan_data/
→vas128_gridmetA_1979-2016.nc')['vas'][istart:istart+ndays]
# dv6 = xr.open_dataset('/glade/work/dkorytin/srgan_data/
→huss128_gridmetA_1979-2016.nc')['huss'][istart:istart+ndays]
# dv7 = xr.open_dataset('/glade/work/dkorytin/srgan_data/
→rsds128_gridmetA_1979-2016.nc')['rsds'][istart:istart+ndays]
# dv8 = xr.open_dataset('/glade/work/dkorytin/srgan_data/
→miss128_gridmetB_1979-2016.nc')['miss'][istart:istart+ndays]
```

3.0.2 Load UATM data

```
[8]: #####
## LOAD ERAI data: daily ##
#####
def load_uatm_erai():
    global mdv1,mdv2,mdv3,mdv4,mdv5,mdv6,mdv7,mdv8,mnvars

    # load eraionmpi
    #mndays = 11688      # 1979-2010
```

```

mstart = 365
mndays = 13515      # 1980-2016
mnvars = 8*1
mdv1 = xr.open_dataset('/glade/scratch/dkorytin/erai-on-mpigrid/U850.ERA1.
→MPIGRID.1979-2018.nc')['U'][mstart:mstart+mndays*1]
mdv2 = xr.open_dataset('/glade/scratch/dkorytin/erai-on-mpigrid/V850.ERA1.
→MPIGRID.1979-2018.nc')['V'][mstart:mstart+mndays*1]
mdv3 = xr.open_dataset('/glade/scratch/dkorytin/erai-on-mpigrid/Q850.ERA1.
→MPIGRID.1979-2018.nc')['Q'][mstart:mstart+mndays*1]
mdv4 = xr.open_dataset('/glade/scratch/dkorytin/erai-on-mpigrid/T700.ERA1.
→MPIGRID.1979-2018.nc')['T'][mstart:mstart+mndays*1]
mdv5 = xr.open_dataset('/glade/scratch/dkorytin/erai-on-mpigrid/Z700.ERA1.
→MPIGRID.1979-2018.nc')['Z'][mstart:mstart+mndays*1]
mdv6 = xr.open_dataset('/glade/scratch/dkorytin/erai-on-mpigrid/Z500.ERA1.
→MPIGRID.1979-2018.nc')['Z'][mstart:mstart+mndays*1]
mdv7 = xr.open_dataset('/glade/scratch/dkorytin/erai-on-mpigrid/U250.ERA1.
→MPIGRID.1979-2018.nc')['U'][mstart:mstart+mndays*1]
mdv8 = xr.open_dataset('/glade/scratch/dkorytin/erai-on-mpigrid/V250.ERA1.
→MPIGRID.1979-2018.nc')['V'][mstart:mstart+mndays*1]

print("Days loaded", len(mdv7))

```

```

[9]: #####
## LOAD MPI      ##
#####
def load_uatm_mpi_hist():
    global mdv1,mdv2,mdv3,mdv4,mdv5,mdv6,mdv7,mdv8,mnvars

    mnvars = 8

    d='/glade/p/ral/risc/rmccrary/CMIP5_CORDEX/NAmerica/MPI-ESM-LR/native/
→historical/'

    mdv1 = xr.
→open_dataset(d+'U_MPI-ESM-LR_historical_r1i1p1_NAmerica_p850_19500101-20051231_dayavg_mpigrid
→nc')['U'].sel(time=slice('1976-01-01T00:00:00', '2006-01-01T00:00:00'),l
→lat=slice(23,56), lon=slice(-113,-80))
    mdv2 = xr.
→open_dataset(d+'V_MPI-ESM-LR_historical_r1i1p1_NAmerica_p850_19500101-20051231_dayavg_mpigrid
→nc')['V'].sel(time=slice('1976-01-01T00:00:00', '2006-01-01T00:00:00'),l
→lat=slice(23,56), lon=slice(-113,-80))
    mdv3 = xr.
→open_dataset(d+'Q_MPI-ESM-LR_historical_r1i1p1_NAmerica_p850_19500101-20051231_dayavg_mpigrid
→nc')['Q'].sel(time=slice('1976-01-01T00:00:00', '2006-01-01T00:00:00'),l
→lat=slice(23,56), lon=slice(-113,-80))

```

```

mdv4 = xr.
→open_dataset(d+'T_MPI-ESM-LR_historical_r1i1p1_NAmerica_p700_19500101-20051231_dayavg_mpigrid.
→nc')['T'].sel(time=slice('1976-01-01T00:00:00', '2006-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv5 = xr.
→open_dataset(d+'Z_MPI-ESM-LR_historical_r1i1p1_NAmerica_p700_19500101-20051231_dayavg_mpigrid.
→nc')['Z'].sel(time=slice('1976-01-01T00:00:00', '2006-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv6 = xr.
→open_dataset(d+'Z_MPI-ESM-LR_historical_r1i1p1_NAmerica_p500_19500101-20051231_dayavg_mpigrid.
→nc')['Z'].sel(time=slice('1976-01-01T00:00:00', '2006-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv7 = xr.
→open_dataset(d+'U_MPI-ESM-LR_historical_r1i1p1_NAmerica_p250_19500101-20051231_dayavg_mpigrid.
→nc')['U'].sel(time=slice('1976-01-01T00:00:00', '2006-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv8 = xr.
→open_dataset(d+'V_MPI-ESM-LR_historical_r1i1p1_NAmerica_p250_19500101-20051231_dayavg_mpigrid.
→nc')['V'].sel(time=slice('1976-01-01T00:00:00', '2006-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))

def load_uatm_mpi_future():
    global mdv1,mdv2,mdv3,mdv4,mdv5,mdv6,mdv7,mdv8,mnvars

d='/glade/p/ral/risc/rmccrary/CMIP5_CORDEX/NAmerica/MPI-ESM-LR/native/rcp85/'

mnvars = 8
mdv1 = xr.
→open_dataset(d+'U_MPI-ESM-LR_rcp85_r1i1p1_NAmerica_p850_20060101-21001231_dayavg_mpigrid.
→nc')['U'].sel(time=slice('2006-01-01T00:00:00', '2101-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv2 = xr.
→open_dataset(d+'V_MPI-ESM-LR_rcp85_r1i1p1_NAmerica_p850_20060101-21001231_dayavg_mpigrid.
→nc')['V'].sel(time=slice('2006-01-01T00:00:00', '2101-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv3 = xr.
→open_dataset(d+'Q_MPI-ESM-LR_rcp85_r1i1p1_NAmerica_p850_20060101-21001231_dayavg_mpigrid.
→nc')['Q'].sel(time=slice('2006-01-01T00:00:00', '2101-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv4 = xr.
→open_dataset(d+'T_MPI-ESM-LR_rcp85_r1i1p1_NAmerica_p700_20060101-21001231_dayavg_mpigrid.
→nc')['T'].sel(time=slice('2006-01-01T00:00:00', '2101-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))

```

```

mdv5 = xr.
→open_dataset(d+'Z_MPI-ESM-LR_rcp85_r1i1p1_NAmerica_p700_20060101-21001231_dayavg_mpigrid.
→nc')['Z'].sel(time=slice('2006-01-01T00:00:00', '2101-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv6 = xr.
→open_dataset(d+'Z_MPI-ESM-LR_rcp85_r1i1p1_NAmerica_p500_20060101-21001231_dayavg_mpigrid.
→nc')['Z'].sel(time=slice('2006-01-01T00:00:00', '2101-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv7 = xr.
→open_dataset(d+'U_MPI-ESM-LR_rcp85_r1i1p1_NAmerica_p250_20060101-21001231_dayavg_mpigrid.
→nc')['U'].sel(time=slice('2006-01-01T00:00:00', '2101-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))
mdv8 = xr.
→open_dataset(d+'V_MPI-ESM-LR_rcp85_r1i1p1_NAmerica_p250_20060101-21001231_dayavg_mpigrid.
→nc')['V'].sel(time=slice('2006-01-01T00:00:00', '2101-01-01T00:00:00'), ↴
→lat=slice(23,56), lon=slice(-113,-80))

#load_uatm_mpi_future()

```

4 Averaging code

```
[10]: #####
## UATM averages ##
#####

def calc_uatm_average(mpr_min, mpr_max, rainsignal, ymin, ymax):
    # global inputs: dv[1-8], mdv[1-8], mnvars
    mnvars = 8

    # initialize accumulators
    indices = []
    distribution = []
    raw_ires = len(mdv1[0])
    raininput = np.zeros((mnvars, raw_ires, raw_ires))
    raincount = 0

    for ii in range(0,len(rainsignal)):
        mpr = rainsignal[ii]

        # May = 5
        if mpr["time.month"] == 5 and mpr["time.year"] >= ymin and mpr["time.
→year"] < ymax:

            if mpr >= mpr_min and mpr < mpr_max:
```

```

        distribution.append(mpr)
        indices.append(ii)

        #mpr = dv1[ii].sel(lat=slice(32.125,38.125), lon=slice(-101.
        →875,-93.875)).mean()

        # find matching input sample
        #ot= dv1[ii-1]['time']
        ot = str(np.array(mpr['time']))

        mdv1.sel(time=ot,method='nearest')
        isample = [mdv1.sel(time=ot,method='nearest'),mdv2.
        →sel(time=ot,method='nearest'),mdv3.sel(time=ot,method='nearest'),mdv4.
        →sel(time=ot,method='nearest'),mdv5.sel(time=ot,method='nearest'),mdv6.
        →sel(time=ot,method='nearest'),mdv7.sel(time=ot,method='nearest'),mdv8.
        →sel(time=ot,method='nearest')]
        #ot= dv1[ii]['time']
        #assert ot["time.day"]==isample[0]['time.day'], "Days are not
        →equal"
        isample = np.array(isample)

        raininput += isample
        raincount += 1

        raininput /= raincount
        #print("days:", raincount)

    return raininput, raincount, distribution, indices

```

5 Plot routines

```
[36]: # POSTAGE STAMP LAYOUT
import matplotlib.pyplot as plt
import cartopy.crs as ccrs
import cartopy
import cartopy.feature as cfeature

from os.path import basename
from mpl_toolkits.axes_grid1.inset_locator import inset_axes
import matplotlib.ticker as ticker
from matplotlib import ticker

import warnings
warnings.filterwarnings("ignore")
```

```

def plot_abs_postage(sigfiles, vmin, vmax, mpr_min, mpr_max, title):
    varnames = ['U850', 'V850', 'Q850', 'T700', 'Z700', 'Z500', 'U250', 'V250']
    units = ['m/s', 'm/s', 'kg/kg', 'K', 'mb', 'mb', 'm/s', 'm/s']
    #cmaps = ['PiYG', 'PuOr', 'cividis', 'inferno', 'viridis', 'viridis', ↳
    ↪ 'PiYG', 'PuOr']
    #cmaps = ['PiYG', 'PuOr', 'cubehelix_r', 'inferno', 'terrain', 'Spectral', ↳
    ↪ 'brg', 'PuOr']
    #cmaps = ['PiYG', 'PuOr', 'BrBG', 'RdBu_r', 'Spectral', 'Spectral', 'PiYG', ↳
    ↪ 'PuOr']
    cmaps = ['PiYG', 'PuOr', 'cubehelix_r', 'inferno', 'terrain', 'Spectral', ↳
    ↪ 'brg', 'PuOr']

    # Ranges centered on zero for U, V
    vmin[0] = -max(abs(vmin[0]), abs(vmax[0]))
    vmax[0] = max(abs(vmin[0]), abs(vmax[0]))
    vmin[1] = -max(abs(vmin[1]), abs(vmax[1]))
    vmax[1] = max(abs(vmin[1]), abs(vmax[1]))

    # Q850 cubehelix_r, 0:maximum
    vmin[2] = 0

    # U250 brg, 0:max
    vmin[6] = 0

    # V250 PuOr, symmetric around zero
    vmin[7] = -max(abs(vmin[7]), abs(vmax[7]))
    vmax[7] = max(abs(vmin[7]), abs(vmax[7]))

#fig, axarr = plt.subplots(nrows=3, ncols=8, figsize = (10,10*(3/8.+0.0)), ↳
→ gridspec_kw={'hspace': 0.0, 'wspace': 0.0, 'height_ratios':[1,1,1.3]})
    fig, axarr = plt.subplots(nrows=len(sigfiles), ncols=8, figsize = ↳
    (20,20*(len(sigfiles)/8.+0.0)), subplot_kw={'projection': ccrs.PlateCarree()}, ↳
    gridspec_kw={'hspace': 0.0, 'wspace': 0.0, 'height_ratios': ↳
    [1]*(len(sigfiles)-1)+[1.313]})

    lon = mdv1[0].lon
    lat = mdv1[0].lat

    # counts
    counts = [0]*len(sigfiles)

    # plots
    #for sigfile in sigfiles:

```

```

# for jj, mpr_min, mpr_max, label in [[0, 0., 0.254, 'Dry'], [1, 0.254, 3., 'Moist'], [2, 3., 9999., 'Wet']]::
→ #mpr_min, mpr_max = [0., 0.254]
for jj in range(len(sigfiles)):

    sigfile = sigfiles[jj]

    # load UATM and signal file contents
    if sigfile.lower().find('hist') >= 0:
        load_uatm_mpi_hist()
    elif sigfile.lower().find('rcp85') >= 0:
        load_uatm_mpi_future()
    else:
        print ("ERROR: neither hist or rcp85 found")
    rainsignal = xr.open_dataset(sigfile)['prec']

    # row label
    sigfilename = basename(sigfile)
    #print ("days:", count, ", model:", sigfilename)
    label = ' '.join(sigfile.split('.')[3:4])

    # calc avg atm for criteria
    avginput, count, distribution, indices = calc_uatm_average(mpr_min, u
→ mpr_max, rainsignal, -9999, 9999)

    # use percentages instead of counts (2021-10-26)
    #counts[jj] = count
    allavginput, allcount, alldistribution, allindices = u
→ calc_uatm_average(0, 9999, rainsignal, -9999, 9999)
    counts[jj] = count/allcount


    for ii in range(8):
        axarr[jj,ii].coastlines()
        axarr[jj,ii].add_feature(cfeature.STATES)
        img_extent = (lon.min(), lon.max(), lat.min(), lat.max())

        #plot = axarr[jj,ii].imshow(avginput[ii][::-1,:], vmin=vmin[ii], u
→ vmax=vmax[ii], cmap=cmaps[ii])
        plot = axarr[jj,ii].imshow(avginput[ii][::-1,:], vmin=vmin[ii], u
→ vmax=vmax[ii], cmap=cmaps[ii], origin='upper', extent=img_extent, u
→ transform=ccrs.PlateCarree())

        # show y tics on first column
        if ii==0:
            axarr[jj,ii].get_yaxis().set_visible(True)
            axarr[jj,ii].tick_params(labelsize='xx-small')

```

```

    # We need to draw the canvas, otherwise the labels won't be
→positioned and
    # won't have values yet.
    fig.canvas.draw()

    # lat range: 56 to 23
    labels = [item.get_text() for item in axarr[jj,ii].
→get_yticklabels()]
    #labels = ['56', '46', '36', '26']
    axarr[jj,ii].set_yticklabels(labels)

    ## show y labels on last column
    #if ii==7:
        ##axarr[jj,ii].get_yaxis().set_visible(True)
        ##axarr[jj,ii].tick_params(labelsize='xx-small')
        #
        #cbar = fig.colorbar(plot, ax=axarr[jj,ii],□
→orientation="horizontal", fraction=0.03, pad=0.2)
        #
        #
        ##ax.set_ylabel("Label", rotation=270)
        #
        ##cbar = fig.colorbar(plot, ax=axarr[jj,ii],□
→orientation="vertical", fraction=0.046, pad=0.016)
        #cbar.set_label('dry', rotation=90, size='xx-small')
        #cbar.ax.tick_params(labelsize='xx-small')

    if ii>=1:
        axarr[jj,ii].get_yaxis().set_visible(False)
        axarr[jj,ii].tick_params(labelsize='xx-small')

    if jj == 0:
        axarr[jj,ii].set_title(varnames[ii])
        axarr[jj,ii].get_xaxis().set_visible(False)
        axarr[jj,ii].tick_params(labelsize='xx-small')

    if jj==1:
        axarr[jj,ii].get_xaxis().set_visible(False)
        #axarr[jj,ii].tick_params(labelsize='xx-small')

    # show custom tics on bottom row: lon=slice(-113,-80)
    if jj==len(sigfiles)-1:
        axarr[jj,ii].get_xaxis().set_visible(True)

```

```

    axarr[jj,ii].tick_params(labelsize='xx-small')

    # We need to draw the canvas, otherwise the labels won't be
    ↪positioned and
        # won't have values yet.
    fig.canvas.draw()

    labels = [item.get_text() for item in axarr[jj,ii].
    ↪get_xticklabels()]
        #labels[1] = '-113'
        #labels[2] = '-103'
        #labels[3] = '-93'
        ##labels[4] = '-83'
    axarr[jj,ii].set_xticklabels(labels)

    # colorbar only on 3rd postage stamp
if jj==len(sigfiles)-1:
    # use scientific notation on 3rd column colorbar only
    if ii == 2:
        def fmt(x, pos):
            a, b = '{:.1e}'.format(x).split('e')
            b = int(b)
            return r'$\u2248{}e{}$'.format(a, b)
        cbar = fig.colorbar(plot, ax=axarr[jj,ii], ↪
    ↪orientation="horizontal", fraction=0.0385, pad=0.2, format=ticker.
    ↪FuncFormatter(fmt))
            #cbar = fig.colorbar(plot, ax=axarr[jj,ii], ↪
    ↪orientation="horizontal", fraction=0.0385, pad=0.2, format='%.0e') ↪
    ↪#format=ticker.FuncFormatter(fmt))
            #cbar.set_ticks([0.2, 0.4, 0.6, 0.8])
            #cbar.set_ticklabels(["A", "B", "C", "D"])
            tick_locator = ticker.MaxNLocator(nbins=4)
            cbar.locator = tick_locator
            cbar.update_ticks()
    else:
        cbar = fig.colorbar(plot, ax=axarr[jj,ii], ↪
    ↪orientation="horizontal", fraction=0.0385, pad=0.2, format=None)

        cbar.set_label(units[ii], size='xx-small')
        cbar.ax.tick_params(labelsize='xx-small')

    # row titles
nrows = len(sigfiles)

```

```

        #plt.figtext(0.09, 1-(1.4/nrows)-jj*(.73/nrows), label+':'
→ '+str(int(counts[jj]*100))+'%', fontsize=11, rotation=90)
        #plt.figtext(0.095, 1-(1.55/9)-jj*(.74/nrows), label+':'
→ '+str(int(counts[jj]*100))+'%', fontsize=11, weight='normal', rotation=90)
        plt.figtext(0.095, 1-(1.55/9)-jj*(.74/nrows), label+':'
→ '+str(int(counts[jj]*100))+'%', fontsize=11, weight='normal', rotation=90)

#
# row title
#
sigfilename = basename(sigfile)
#
#print ("days:", count, ", model:", sigfilename)
rowtitle = ' '.join(sigfilename.split('.')[0:4]) # + ' Count:' → '+str(counts)

#
# title
#fig.suptitle(title, y=1.05, fontsize=14)
#fig.suptitle(title, y=1-(.5/nrows), fontsize=14, fontweight="bold")
fig.suptitle(title, y=0.92, fontsize=14)

#
# plt.subplots_adjust(left=0.1, right=0.9, bottom=0.1, top=0.9, wspace=0, hspace=0)
# plt.subplots_adjust(wspace=0, hspace=0)
# plt.subplots_adjust(wspace=0.0, hspace=0, right=0.7)

plt.show()

```

6 Run over all models

6.0.1 Hist

```
[53]: ## find max/min for each variable accross ALL hist files

# files to consider
#sigfiles_hist = [model2absfilepath(ff, 'hist', 98, 36) for ff in
→ ['obs', 'raw', 'RegCM4', 'WRF', 'MPAS', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
sigfiles = [model2absfilepath(ff, 'hist', 98, 36) for ff in
→ ['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
#sigfiles_rcp85 = [model2absfilepath(ff, 'rcp85', 98, 36) for ff in
→ ['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]

# find min/max values for entire sigfiles set
vmin = 9999*np.ones(8)
vmax = -9999*np.ones(8)
```

```

for ii in range(len(sigfiles)):
    sigfile = sigfiles[ii]

    # load UATM and signal file contents
    if sigfile.lower().find('hist') >= 0:
        load_uatm_mpi_hist()
    elif sigfile.lower().find('rcp85') >= 0:
        load_uatm_mpi_future()
    else:
        print ("ERROR: neither hist or rcp85 found")
    rainsignal = xr.open_dataset(sigfile)['prec']

    for mpr_min, mpr_max in [(0,0.254), (0.254, 3.0), (3.0, 9999.0)]:
        avginput, count, distribution, indices = calc_uatm_average(mpr_min, ↴
→mpr_max, rainsignal, -9999, 9999)

        vmin = [min(avginput[ii].min(),vmin[ii]) for ii in range(8)]
        vmax = [max(avginput[ii].max(),vmax[ii]) for ii in range(8)]

```

[54]: # *vmin* = [-4.916603983447539, -4.051575228699252, 0.0025785945087385873, 263.
→8739134241323, 2956.7088469774735, 5487.189293032787, 7.954999614694265, -8.
→684108990069015]
vmax = [6.563090901979258, 9.227594636615954, 0.011953578519751318, 283.36436

[55]: `print(vmin)
print(vmax)`

```

[-4.916603983447539, -4.051575228699252, 0.0025785945087385873,  
263.8739134241323, 2956.7088469774735, 5487.189293032787, 7.954999614694265,  
-8.684108990069015]  
[6.563090901979258, 9.227594636615954, 0.011953578519751318, 283.3643630178351,  
3168.244394313024, 5860.813843893348, 27.612042756673926, 14.221995142886513]


```

[56]: `# plot Hist: dry
print("Hist DRY:")

sigfiles = [model2absfilepath(ff, 'hist', 98, 36) for ff in ↴
→['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
#sigfiles = [model2absfilepath(ff, 'rcp85', 98, 36) for ff in ↴
→['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]

#plot_models(sigfiles_hist, vmin, vmax)
plot_abs_postage(sigfiles, vmin, vmax, 0, 0.254, 'Hist: Dry')`

Hist DRY:

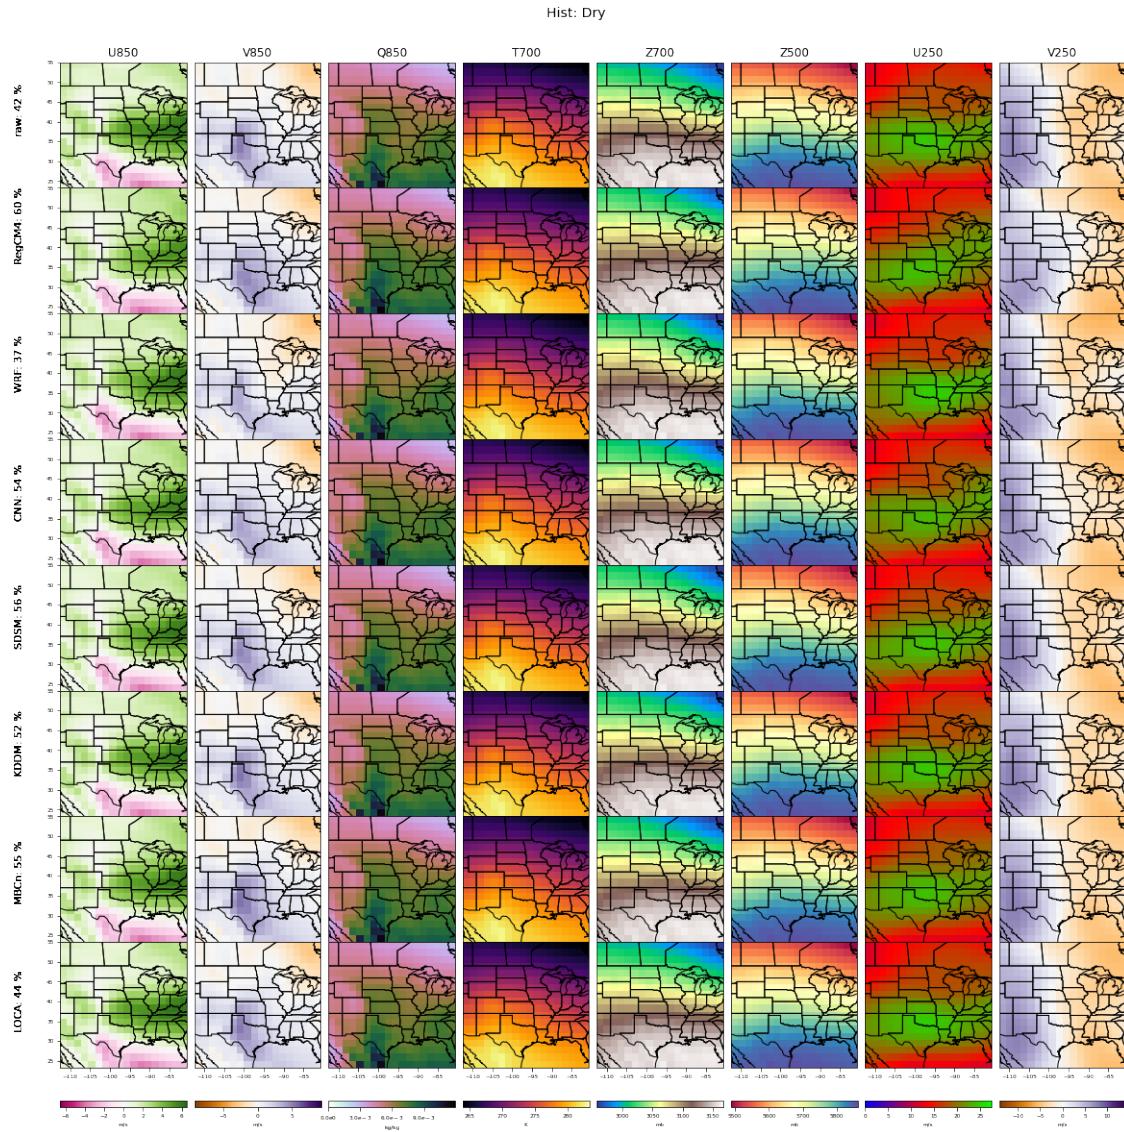


```
[57]: # plot Hist: Moist
print("Hist MOIST:")

sigfiles = [model2absfilepath(ff, 'hist', 98, 36) for ff in
    →['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
#sigfiles = [model2absfilepath(ff, 'rcp85', 98, 36) for ff in
    →['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]

#plot_models(sigfiles_hist, vmin, vmax)
plot_abs_postage(sigfiles, vmin, vmax, 0.254, 3, 'Hist: Moist')
```

Hist MOIST:

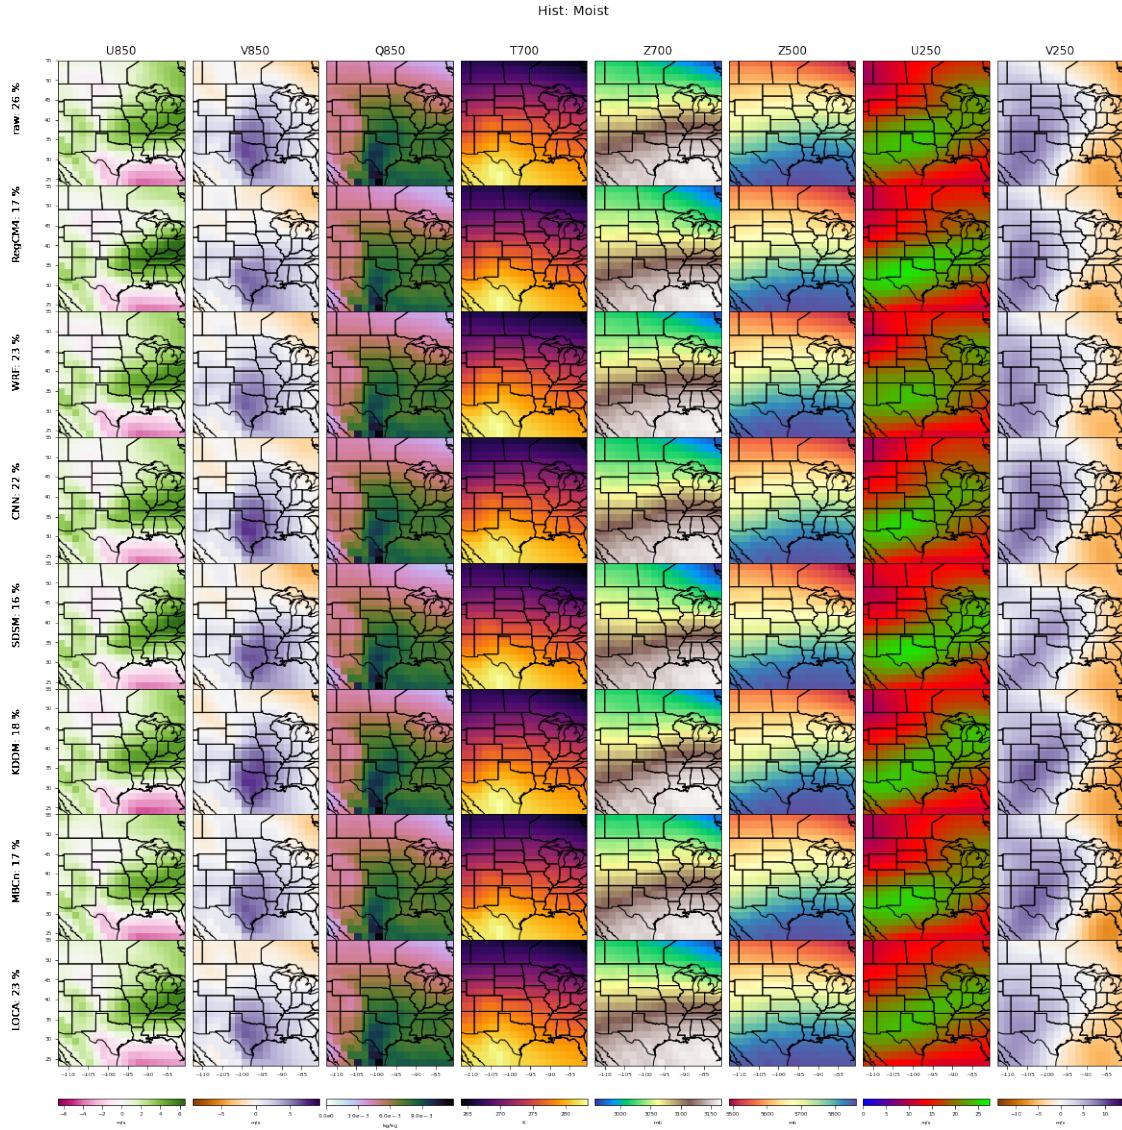


```
[58]: # plot Hist: Wet
print("Hist WET:")

sigfiles = [model2absfilepath(ff, 'hist', 98, 36) for ff in
    →['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
#sigfiles = [model2absfilepath(ff, 'rcp85', 98, 36) for ff in
    →['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]

#plot_models(sigfiles_hist, vmin, vmax)
plot_abs_postage(sigfiles, vmin, vmax, 3., 9999, 'Hist: Wet')
```

Hist WET:

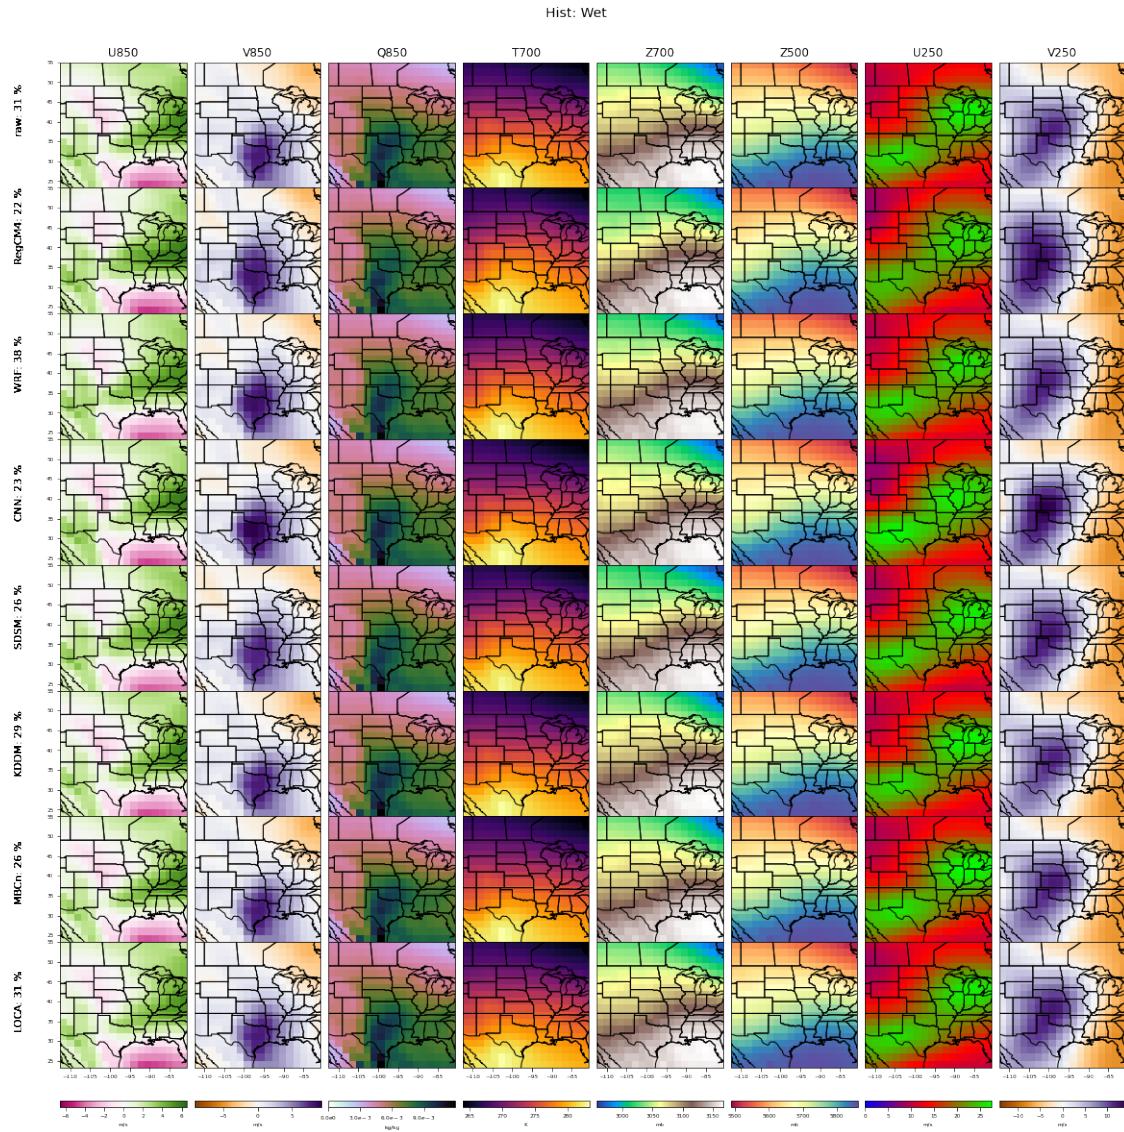

6.0.2 Rcp85

```
[59]: ## find max/min for each variable accross ALL hist files
```

```
# files to consider
#sigfiles_hist = [model2absfilepath(ff, 'hist', 98, 36) for ff in
→ ['obs', 'raw', 'RegCM4', 'WRF', 'MPAS', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
sigfiles = [model2absfilepath(ff, 'hist', 98, 36) for ff in
→ ['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
sigfiles = [model2absfilepath(ff, 'rcp85', 98, 36) for ff in
→ ['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
```

```

# find min/max values for entire sigfiles set
vmin = 9999*np.ones(8)
vmax = -9999*np.ones(8)
for ii in range(len(sigfiles)):
    sigfile = sigfiles[ii]

    # load UATM and signal file contents
    if sigfile.lower().find('hist') >= 0:
        load_uatm_mpi_hist()
    elif sigfile.lower().find('rcp85') >= 0:
        load_uatm_mpi_future()
    else:
        print ("ERROR: neither hist or rcp85 found")
    rainsignal = xr.open_dataset(sigfile)['prec']

    for mpr_min, mpr_max in [(0,0.254), (0.254, 3.0), (3.0, 9999.0)]:
        avginput, count, distribution, indices = calc_uatm_average(mpr_min,
→mpr_max, rainsignal, -9999, 9999)

        vmin = [min(avginput[ii].min(),vmin[ii]) for ii in range(8)]
        vmax = [max(avginput[ii].max(),vmax[ii]) for ii in range(8)]

```

[60]:

```

# vmin = [-5.254681877164177, -3.3876612345377604, 0.003264548383603178, 267.
→02289592685986, 2986.3818474102736, 5554.487581623134, 8.374554520133156, -6.
→-5.585132271902902]
# vmax = [7.652347383045015, 10.0453096703638, 0.015112950643300113, 288.
→6095920713608, 3221.7559111973023, 5953.858705357143, 28.817723630079584, 13.
→73383026681977]

```

[61]:

```

print(vmin)
print(vmax)

```

```

[-5.254681877164177, -3.3876612345377604, 0.003264548383603178,
267.02289592685986, 2986.3818474102736, 5554.487581623134, 8.374554520133156,
-6.585132271902902]
[7.652347383045015, 10.0453096703638, 0.015112950643300113, 288.6095920713608,
3221.7559111973023, 5953.858705357143, 28.817723630079584, 13.73383026681977]

```

[62]:

```


# plot Rcp85: dry
print("Rcp85 DRY:")

#sigfiles = [model2absfilepath(ff, 'hist', 98, 36) for ff in
→['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
sigfiles = [model2absfilepath(ff, 'rcp85', 98, 36) for ff in
→['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]

```

```
#plot_models(sigfiles_hist, vmin, vmax)
plot_abs_postage(sigfiles, vmin, vmax, 0, 0.254, 'Rcp85: Dry')
```

Rcp85 DRY:

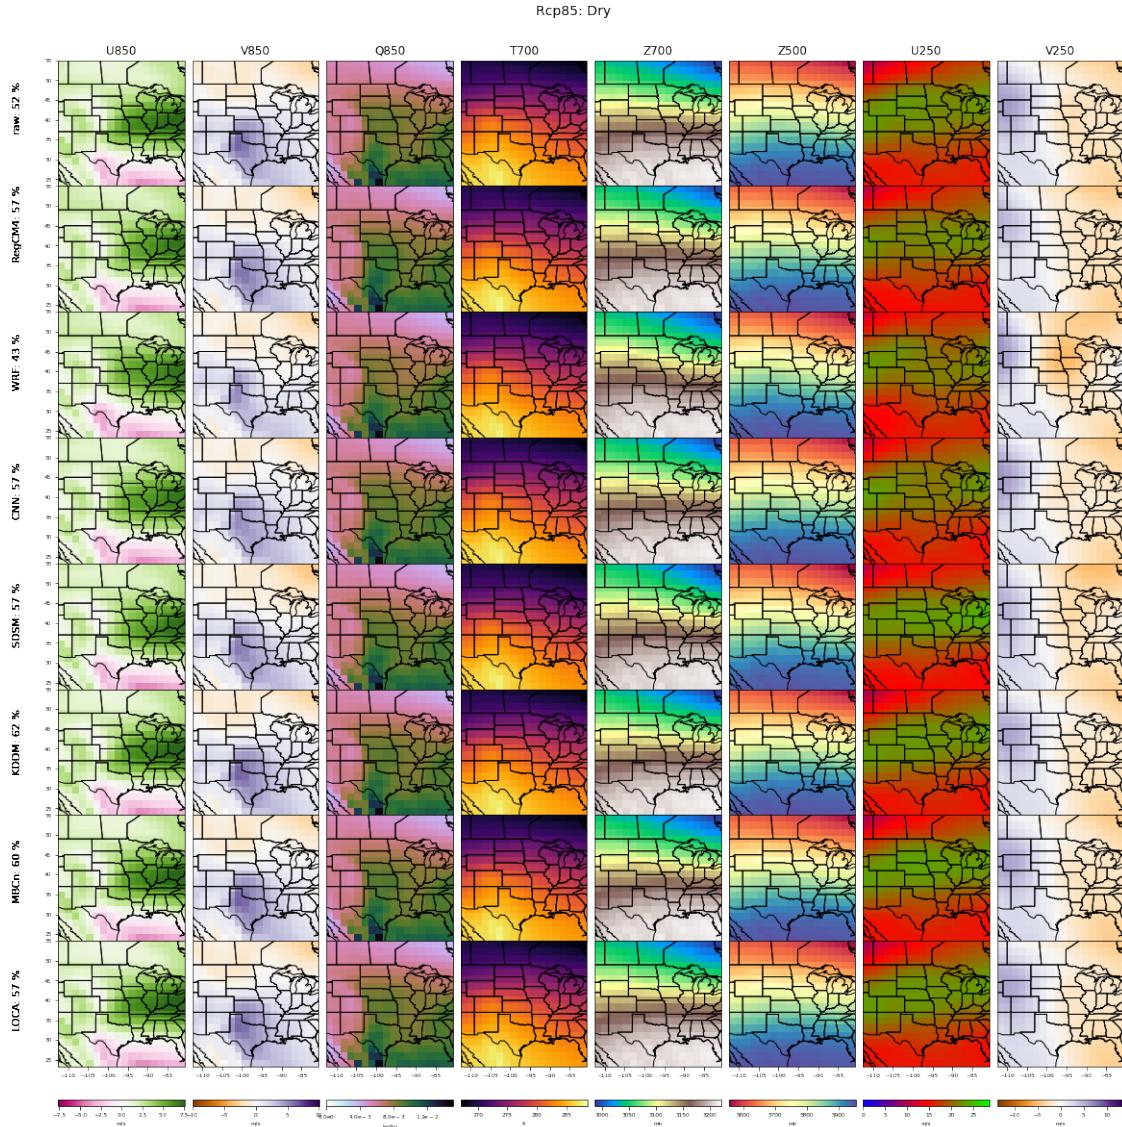


```
[63]: # plot Rcp85: Moist
print("Rcp85 MOIST:")

#sigfiles = [model2absfilepath(ff, 'hist', 98, 36) for ff in
→ ['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
sigfiles = [model2absfilepath(ff, 'rcp85', 98, 36) for ff in
→ ['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
```

```
#plot_models(sigfiles_hist, vmin, vmax)
plot_abs_postage(sigfiles, vmin, vmax, 0.254, 3, 'Rcp85: Moist')
```

Rcp85 MOIST:

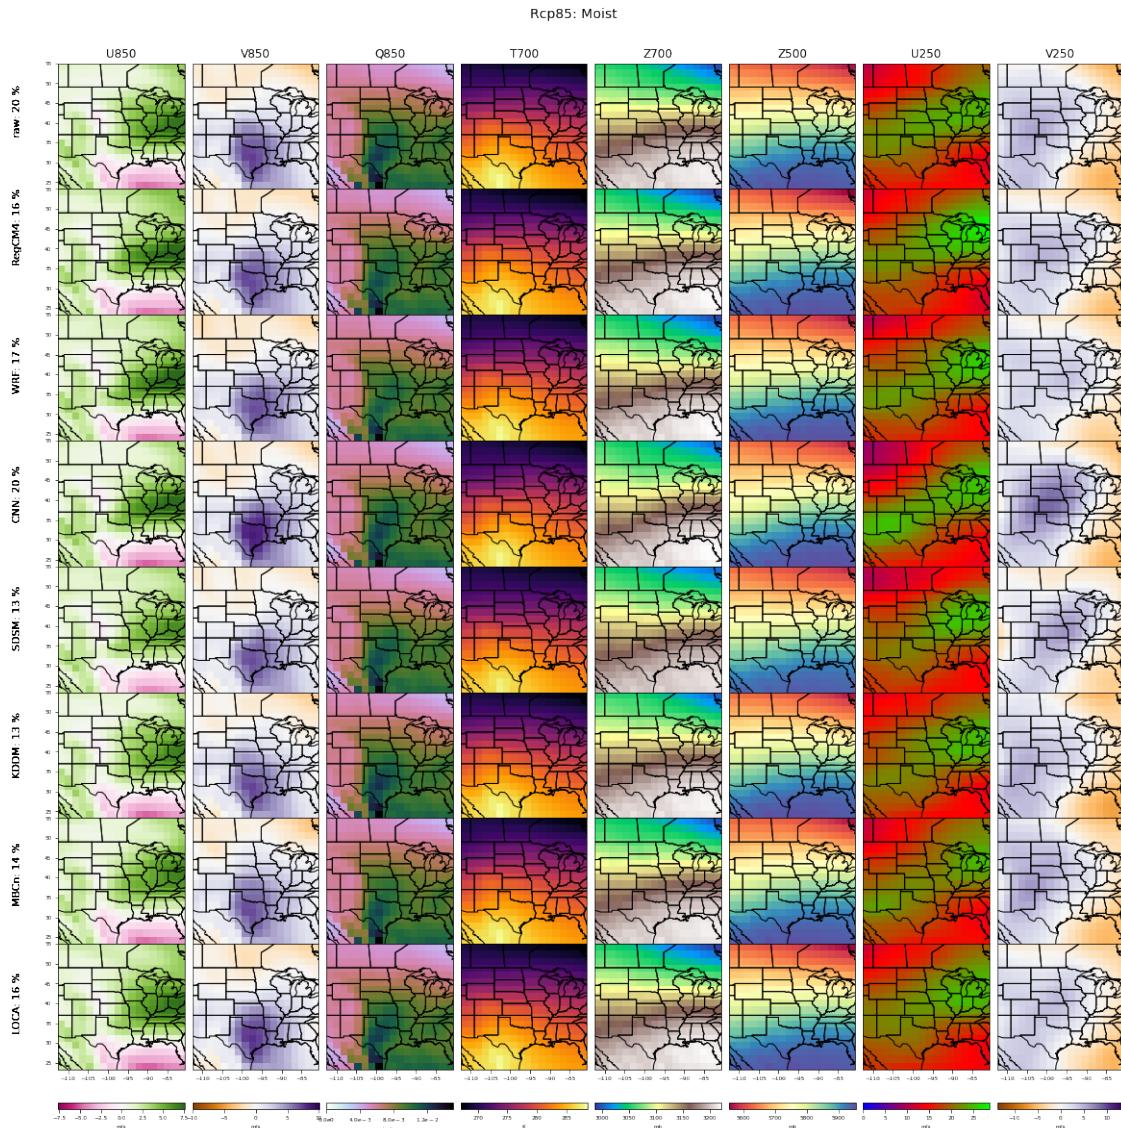


```
[64]: # plot Rcp85: Wet
print("Rcp85 WET:")

sigfiles = [model2absfilepath(ff, 'hist', 98, 36) for ff in
→ ['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
sigfiles = [model2absfilepath(ff, 'rcp85', 98, 36) for ff in
→ ['raw', 'RegCM4', 'WRF', 'CNN', 'SDSM', 'KDDM', 'MBCn', 'LOCA']]
```

```
#plot_models(sigfiles_hist, vmin, vmax)
plot_abs_postage(sigfiles, vmin, vmax, 3., 9999, 'Rcp85: Wet')
```

Rcp85 WET:

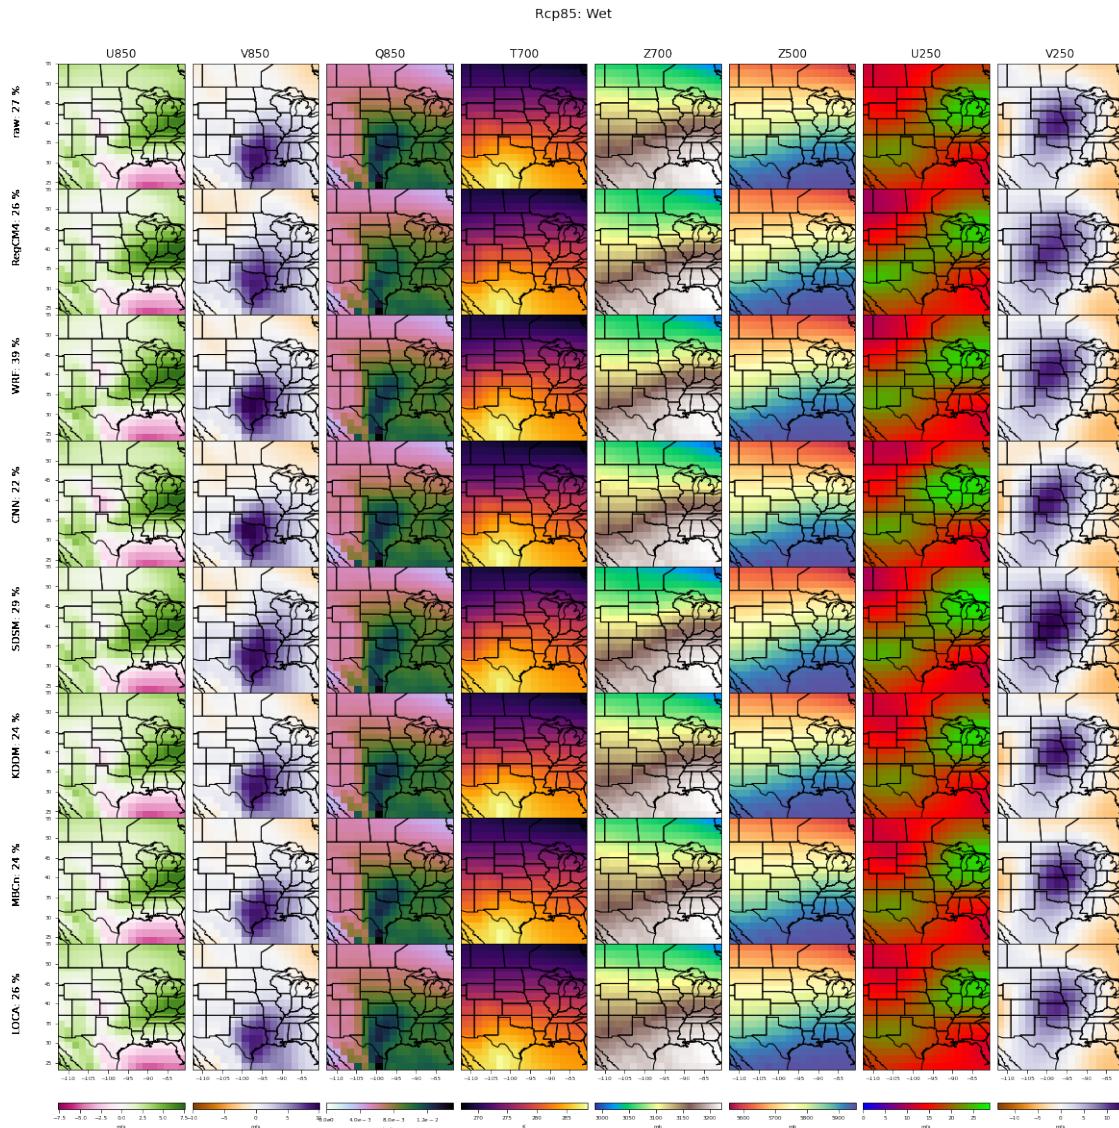

[65]: 3

[65]: 3

[]: