

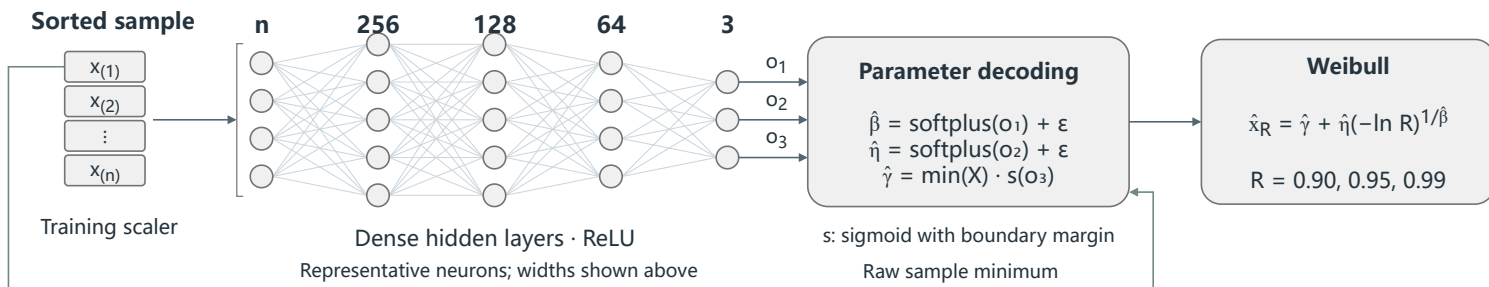
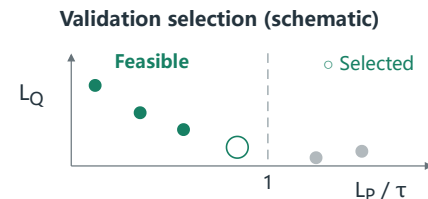
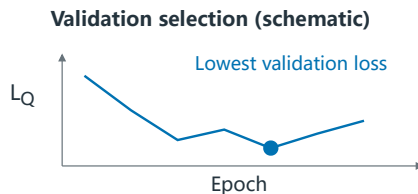


(a) Three-parameter neural estimator and life-point calculation

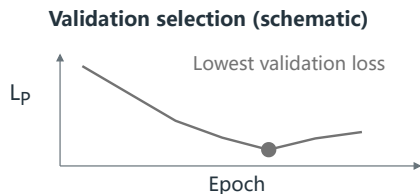

Fixed-network inference uses lifetime samples only; truth supplies simulation labels.

(b) Same architecture, three supervision rules; independent fits

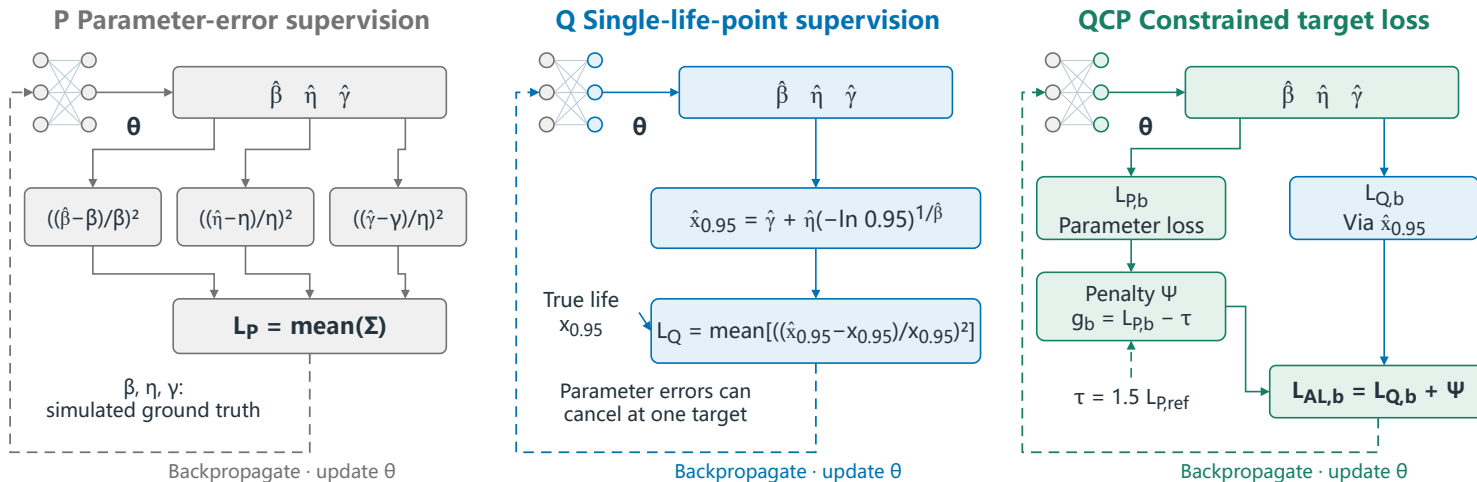

Solid: forward computation. Dashed: gradients or thresholds. QCP feasibility uses mean validation parameter loss.