


Example 27 - Starting and stopping data logging based on one sensor being greater than another sensor in value.

Real world example is where data gathering is based on a temperature being higher than another temperature.

Demonstrates use of 2 inputs, Analog Input, Compare and Data Logging Function Blocks

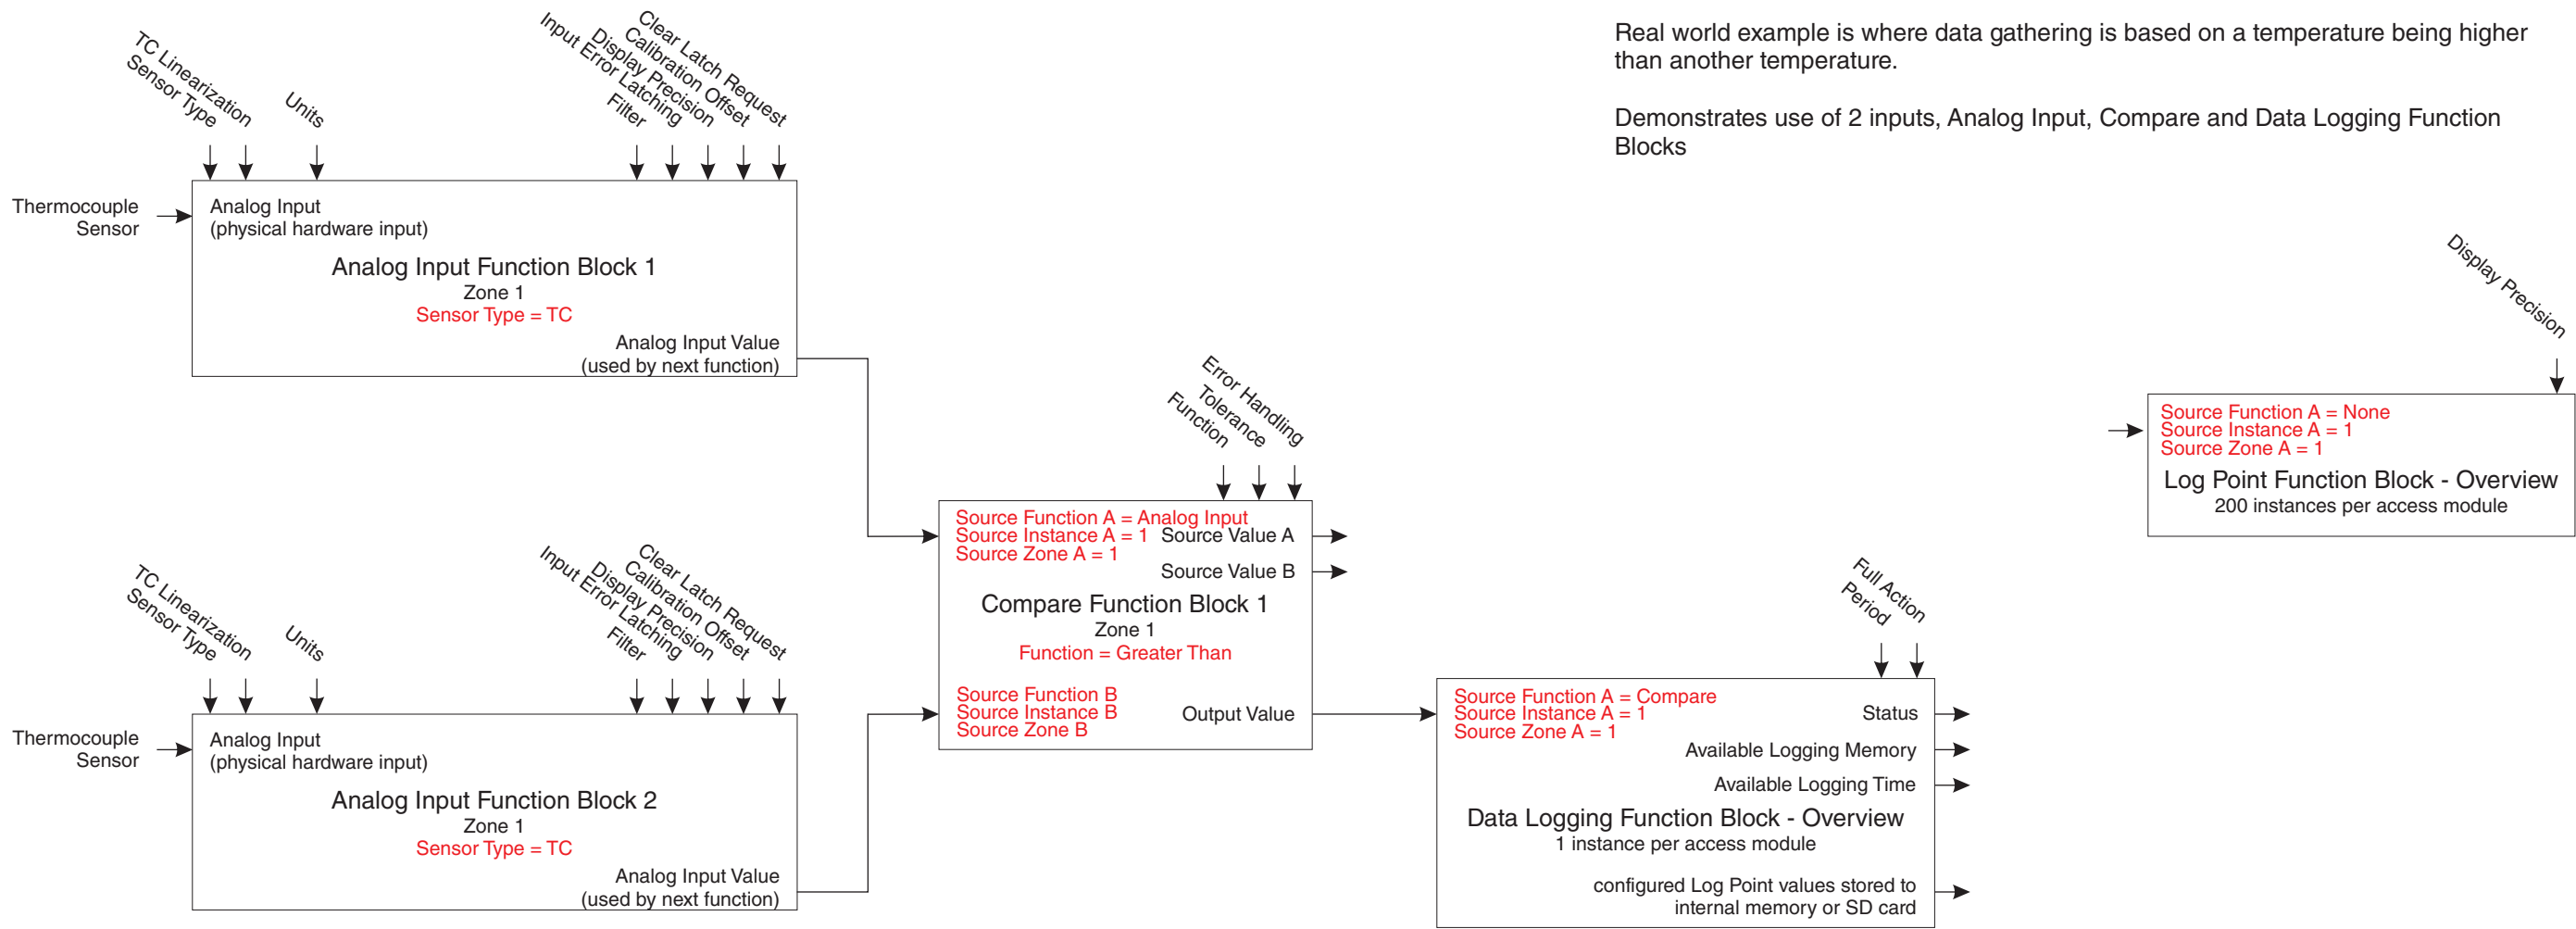

When Source A is greater than Source B an Output Value will be ON causing the data logging to be active.



EZ-ZONE RM Application Example - using function blocks
Print on 11" x 17" landscape paper for best viewing

User parameter settings in RED