


TITAN Endpoint — Application Walkthrough

A page-by-page guide to what the application shows and why it matters

Report generated 2026-09-01 | Prepared for presentation | Screenshots taken from a live, freshly-started run with real activity
— nothing shown here is mocked or staged data

TITAN Endpoint is a modular, cross-endpoint security monitoring platform: five independent native collectors (Process, Network, Applications, Files, Port/USB) each watch one part of the machine and write their own evidence log, a Correlator ties related evidence across those collectors into real incidents, and a set of optional layers on top — a Custom Rule engine, an Alerts & Evidence log, and a STIX 2.1/OpenCTI export — turn that raw telemetry into something a human, a SOC, or another security tool can act on. It is deliberately built as a *monitoring substrate* rather than a standalone antivirus replacement: the goal is rich, trustworthy visibility that other systems (Defender, a SOC, an AI analyst) can attach to, not a closed detection product.

1. Overview

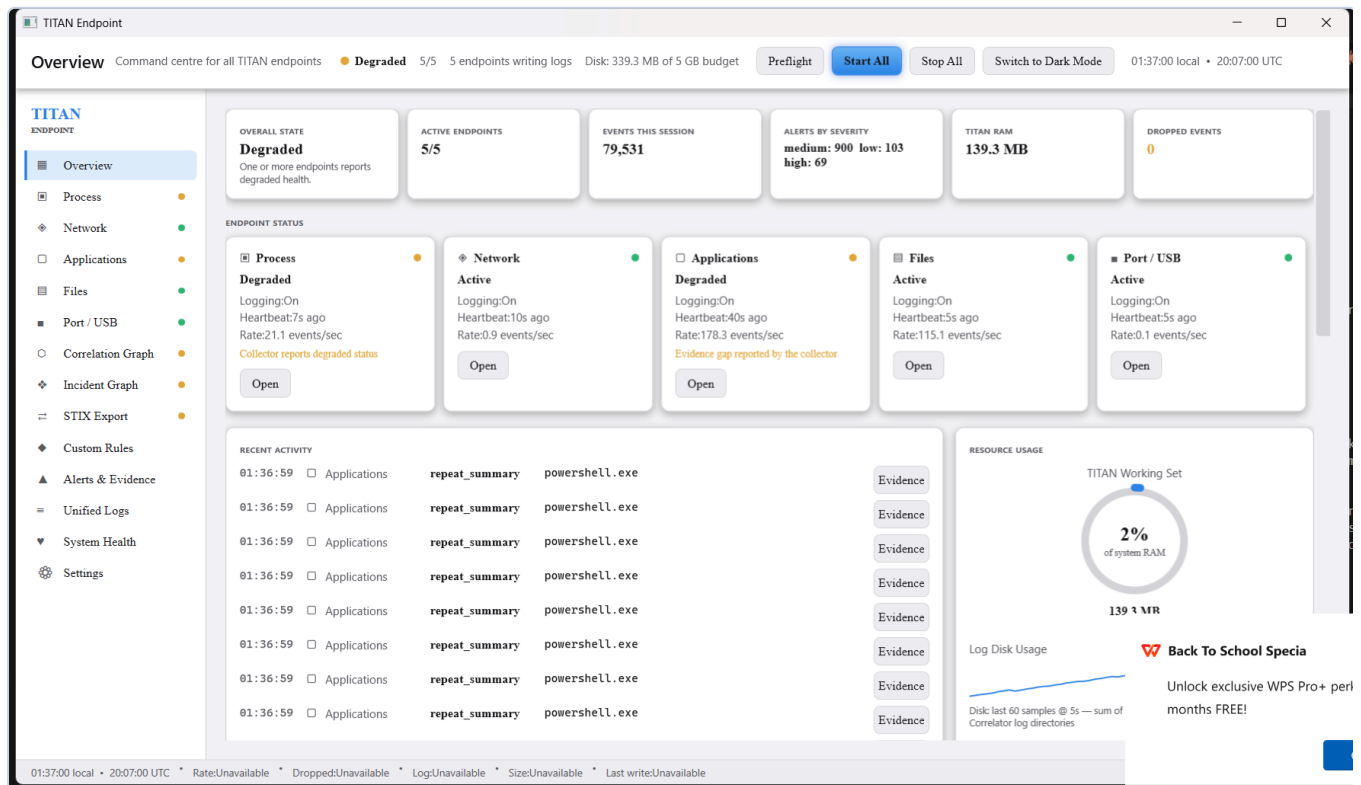

WHAT THIS IS

The command centre. It's the first page TITAN opens on, and it summarizes every endpoint's state in one place rather than making you check five separate pages.

WHAT THE OUTPUT SHOWS

An overall fleet state (Active/Degraded/Stopped), a 5-card status row — one per endpoint — each with its own Logging on/off, last heartbeat age, and live events/sec; session totals (events this session, alerts by severity, TITAN's own RAM use, dropped events); a live Recent Activity feed with a per-row Evidence button; and a Resource Usage panel tracking TITAN's own memory and disk footprint over time.

WHAT IT INDICATES

A green dot and recent heartbeat means that collector is alive and current. A "Degraded" badge means the collector itself reported a problem or its heartbeat is stale — worth checking before trusting data from that specific endpoint. Dropped Events staying at 0 means nothing is being silently lost under load.

USE CASE

The single screen to glance at before trusting anything else in the app, and the fastest way to show an audience "yes, this is actually running and watching the machine right now."

2. Process

TITAN Endpoint

Process Process and thread lifecycle activity Degraded 5/5 5 endpoints writing logs Disk: 339.3 MB of 5 GB budget Preflight **Start All** Stop All Switch to Dark Mode 01:37:02 local • 20:07:02 UTC

Process Degraded

Process and thread lifecycle activity
Started 01:26:02 — running 11m 0s

STOP ENDPOINT MONITORING ON SAVE LOGS ON LOG DESTINATION C:\Users\msant\OneDrive\Desktop... RATE / LOSS 20.4 events/sec Source loss: 112 RESOURCE USE CPU: 0.6% RAM: 22.9 MB Endpoint Details Diagnostics

3,000 events in view (bounded) — 374 distinct process(es) observed this session.

Time	Action	Process	PID	PPID	User	Integrity	Elevation	Signer	Command Line
01:32:38.812	process_stop		23216	14182				Unsigned / unverified	
01:32:39.809	process_stop		23472	14179				Unsigned / unverified	
01:32:40.811	process_stop		22284	14180				Unsigned / unverified	
01:32:40.811	process_stop		21368	14178				Unsigned / unverified	
01:32:38.834	process_snapsho	wmiprvse.exe	15844	6868	NT AUTHORITY\NETWORK	system	default	Unsigned / unverified	c:\windows\system32\wbem
01:32:39.093	process_snapsho	msedgeview2.exe	16636	16892	SANTOSH\msant	medium	limited	Microsoft Corporation	"c:\program files (x86)\
01:32:39.386	process_snapsho	widgetservice.exe	7712	2708	SANTOSH\msant	medium	limited	Unsigned / unverified	"c:\program files\window
01:32:40.256	process_snapsho		3116	23584	NT AUTHORITY\SYSTEM	system	default	Unsigned / unverified	
01:32:40.256	process_snapsho		3116	15564	NT AUTHORITY\SYSTEM	system	default	Unsigned / unverified	
01:32:40.256	process_snapsho		3116	17284	NT AUTHORITY\SYSTEM	system	default	Unsigned / unverified	
01:32:40.256	process_snapsho		3116	22128	NT AUTHORITY\SYSTEM	system	default	Unsigned / unverified	
01:32:40.256	process_snapsho		3116	17856	NT AUTHORITY\SYSTEM	system	default	Unsigned / unverified	
01:32:40.970	process_snapsho	runtimebroker.exe	18940	26896	SANTOSH\msant	medium	limited	Microsoft Windows	c:\windows\system32\run

Command Line Signer Parent / Children Related Evidence Raw Record

Back To School Special

Unlock exclusive WPS Pro+ per month FREE!

01:37:02 local • 20:07:02 UTC • Rate:20.4 events/sec • Dropped:0 • Log:C:\Users\msant\OneDrive\Desktop\TITAN ENDPOINT\PROCESS ENDPOINT\titan_fixed\out\build\release-manifest\bin\logs • Size:6.9 MB • Last write:01:

WHAT THIS IS

The Process endpoint's live view — every process start/stop and periodic snapshot on the machine, with a detail pane underneath for whatever row is selected.

WHAT THE OUTPUT SHOWS

A table of Time / Action / Process / PID / PPID / User / Integrity / Elevation / Signer / Command Line, plus tabs below (Command Line, Signer, Parent/Children, Related Evidence, Raw Record) for deeper inspection of one selected process.

WHAT IT INDICATES

The Signer column is the one to watch — "Unsigned / unverified" next to a process running as NT AUTHORITY\SYSTEM or under an elevated context is exactly the kind of row a real investigation starts from. Parent/Children lets you trace whether a process was spawned by something expected (e.g. explorer.exe) or something suspicious.

USE CASE

Core EDR-style visibility: catching unauthorized or unusual process launches, privilege escalation, and unsigned tooling — the same category of signal commercial EDR products lead with.

3. Network

WHAT THIS IS

The Network endpoint's live view — real packet capture via Npcap, decoded and attributed to the process that owns each connection.

WHAT THE OUTPUT SHOWS

A live capture stat bar (packets captured/dropped, source loss, rate), a flow table (Process / Local / Remote / Protocol / Direction / State / bytes sent-received), a Protocol Hierarchy panel breaking traffic down by protocol (HTTPS_TLS, DNS, ICMP, QUIC, etc.), and — when a row is selected — a Protocol Details tree plus a link to the exact raw packet bytes.

WHAT IT INDICATES

Which process is talking to which address, over what protocol, and whether that traffic actually matches what its own port implies. A connection flagged "Expected protocol: HTTPS_TLS / Protocol mismatch: Yes" in the detail pane means something is running non-TLS traffic over port 443 — a real evasion technique, not a false alarm.

USE CASE

Full network visibility with real process attribution, plus a protocol/port-mismatch detector (built and verified this session) that catches traffic dressed up as something it isn't — the same class of technique malware uses to blend in with normal HTTPS traffic on a firewall-friendly port.

4. Applications

TITAN Endpoint

Applications

Overview

Process

Network

Applications

Files

Port / USB

Correlation Graph

Incident Graph

STIX Export

Custom Rules

Alerts & Evidence

Unified Logs

System Health

Settings

Installed and running application activity

Degraded

5/5

5 endpoints writing logs

Disk: 338.8 MB of 5 GB budget

Preflight

Start All

Stop All

Switch to Dark Mode

01:37:08 local • 20:07:08 UTC

Applications

Degraded (heartbeat 48s old)

Endpoint

Monitoring

Save Logs

Log Destination

Rate / Loss

Resource Use

Endpoint Details

Diagnostics

Catalog (Discovered / Installed / Running)

Activity

139 discovered, 79 running, 6 actively monitored

Refreshed 17s ago

Application	Executable	Publisher	Signature	State	PIDs	Path	Monitor
acpowernotification.exe	acpowernotification.e		trusted	Running	1	C:\Program Files (C	☐
appactions.exe	appactions.exe		unsigned	Running	1	C:\Windows\SystemA	☐
applicationframehost.exe	applicationframehost.		trusted	Running	1	C:\Windows\System3	☐
armourycrate.exe	armourycrate.exe		unsigned	Running	1	C:\Program Files\W	☐
armourycrate.usersessionhelper.	armourycrate.usersess		trusted	Running	1	C:\Program Files\A	☐
armouryhtmldebugserver.exe	armouryhtmldebugserve		trusted	Running	1	C:\Program Files (C	☐
armourysocketserver.exe	armourysocketserver.e		trusted	Running	1	C:\Program Files (C	☐
armouryswagent.exe	armouryswagent.exe		trusted	Running	1	C:\Program Files (C	☐
ASUS Framework Service	asus_framework.exe	ASUSTek Computer Inc.	trusted	Installed, Running	4	C:\Program Files (C	☐
asusoptimizationstartuptask.exe	asusoptimizationstart		trusted	Running	1	C:\Windows\System3	☐
asusosd.exe	asusosd.exe		trusted	Running	1	C:\Windows\System3	☐
asussoftwaremanageragent.exe	asussoftwaremanagerag		trusted	Running	1	C:\Windows\System3	☐
asus_frq_control.exe	asus_frq_control.exe		trusted	Running	1	C:\Program Files (C	☐
backgroundtaskhost.exe	backgroundtaskhost.ex		trusted	Running	1	C:\Windows\Syster	☐
Brave	brave.exe	Brave Software Inc	trusted	Installed, Running	17	C:\Program Files\	☐
castsrv.exe	castsrv.exe		trusted	Running	1	C:\Windows\Syster	☐
claud.exe	claud.exe		trusted	Running	2	C:\Users\msant\Ap	☐

◀ Prev Page 1 of 6 (139 matching) Next ▶

01:37:08 local • 20:07:08 UTC

Rate:168.1 events/sec

Dropped:0

Log:C:\Users\msant\OneDrive\Desktop\TITAN ENDPOINT\AP\out\build\release-manifest\bin\logs

Size:4 KB

Last write:01:37:07

Back To School Special

Unlock exclusive WPS Pro+ per month FREE!

WHAT THIS IS

The Applications endpoint's live view — application-layer activity (installs, file and network actions tied to a named application) tracked separately from the lower-level Process/Network/File endpoints.

WHAT THE OUTPUT SHOWS

A live feed of application-attributed events, and a monitored-application list that can be explicitly added to or removed from — scoping which applications get this extra layer of attention.

WHAT IT INDICATES

Activity here is application-attributed rather than raw-process-attributed, so it answers "what did this specific application do" even when that maps to several underlying processes.

USE CASE

Tracking the behavior of specific applications of interest (e.g. a browser, an office suite, a custom tool) as a named unit, rather than having to reconstruct that story by hand from Process and Network rows.

5. Files

The screenshot displays the TITAN Endpoint Files interface. On the left is a sidebar with navigation options: Overview, Process, Network, Applications, Files (selected), Port / USB, Correlation Graph, Incident Graph, STIX Export, Custom Rules, Alerts & Evidence, Unified Logs, System Health, and Settings. The main panel shows the 'Files' endpoint with a status of 'Active' and 'Degraded'. It includes controls for 'STOP ENDPOINT', 'MONITORING' (ON), 'SAVE LOGS' (ON), and 'LOG DESTINATION'. A table lists file events with columns: Time, Category, Operation, Process, PID, Hash Status, and Path. The table shows various operations like write, delete, create, rename, and close. On the right, there's a 'HASH A FILE' section with a 'Choose File...' button and a 'Save as Baseline' button. At the bottom, a status bar shows system information like 'Rate: 91.9 events/sec' and 'Dropped: 0'.

Time	Category	Operation	Process	PID	Hash Status	Path
01:36:49.424	Normal	write	unknown	23268	unchanged	C:\Users\msant\AppData\Local\Micros...
01:36:49.445	Normal	write	MsMpEng.exe	6828	unchanged	C:\ProgramData\Microsoft\Windows De...
01:36:49.831	Temporary	delete	application_endpr	8180		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:48.723	Temporary	create	application_endpr	8180		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.794	Temporary	rename	application_endpr	2320		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.325	Temporary	write	correlator.exe	2320		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:48.832	Temporary	create	application_endpr	8180		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:48.832	Temporary	write	application_endpr	8180		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.794	Temporary	write	application_endpr	2320		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.325	Normal	close	Code.exe	13076		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.325	Temporary	write	application_endpr	2320		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.594	Normal	write	python.exe	2320	unavailable	C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.325	Temporary	rename	correlator.exe	2320		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.325	Temporary	rename	application_endpr	2320		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.325	Temporary	rename	application_endpr	2320		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.325	Temporary	rename	correlator.exe	2320		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.794	Temporary	rename	application_endpr	2320		C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.769	Normal	write	application_endpr	8180	changed	C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.793	Normal	write	application_endpr	8180	changed	C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.812	Normal	write	application_endpr	8180	unchanged	C:\Users\msant\OneDrive\Desktop\TIT...
01:36:49.767	Temporary	rename	application_endpr	8180		C:\Users\msant\OneDrive\Desktop\TIT...

WHAT THIS IS

The File Integrity Monitoring (FIM) endpoint's live view — tracks create/write/delete activity and content hashes for files under watch (by default the user's Desktop, Documents, and other sensitive paths).

WHAT THE OUTPUT SHOWS

A live feed of file events with the path, the action (create/write/delete), and the file's hash at that point in time.

WHAT IT INDICATES

A hash that changes between two events on the same path means the file's actual content changed — verified this session with a real live test (create a file, confirm its hash, modify it, confirm the hash changed).

USE CASE

Tamper detection: catching unauthorized modification of sensitive files — configuration tampering, ransomware touching user documents, malware planting itself in a startup path.

6. Port / USB

The screenshot displays the TITAN Endpoint interface for the Port / USB section. The top bar shows the status as 'Degraded' with 5/5 endpoints writing logs and a disk usage of 353.6 MB of 5 GB budget. The main panel features a 'Port / USB' header with an 'Active' status. Below this, a 'USB Input Device' is highlighted, showing it is a USB storage device connected at 11:56:31.133. The interface includes controls for 'STOP ENDPOINT', 'MONITORING' (ON), 'SAVE LOGS' (ON), and 'LOG DESTINATION' (C:\ProgramData\TitanUSB\Logs). A table of active sessions shows one event: a USB device arrived at 11:56:31.133. The bottom status bar provides real-time metrics like rate (0.1 events/sec) and log file details.

Time	Event	Device	VID:PID	Mount	Detail
11:56:31.133	USB_DEVICE_ARRIVED	USB Input Device	1BCF:08A0		{"record_id":8,"session_id":"port-23620-1788157461023","source_file":"t

WHAT THIS IS

The Port/USB endpoint's live view — tracks removable media and other peripheral device insertion/removal.

WHAT THE OUTPUT SHOWS

A live feed of device connect/disconnect events, distinguishing storage devices (USB drives) from non-storage peripherals.


WHAT IT INDICATES

An unexpected storage device appearing on a machine that shouldn't have one plugged in is the classic signal this page exists to catch.

USE CASE

Data-exfiltration awareness and physical asset control — knowing when removable media touches a monitored machine, not just what happens over the network.

7. Correlation Graph

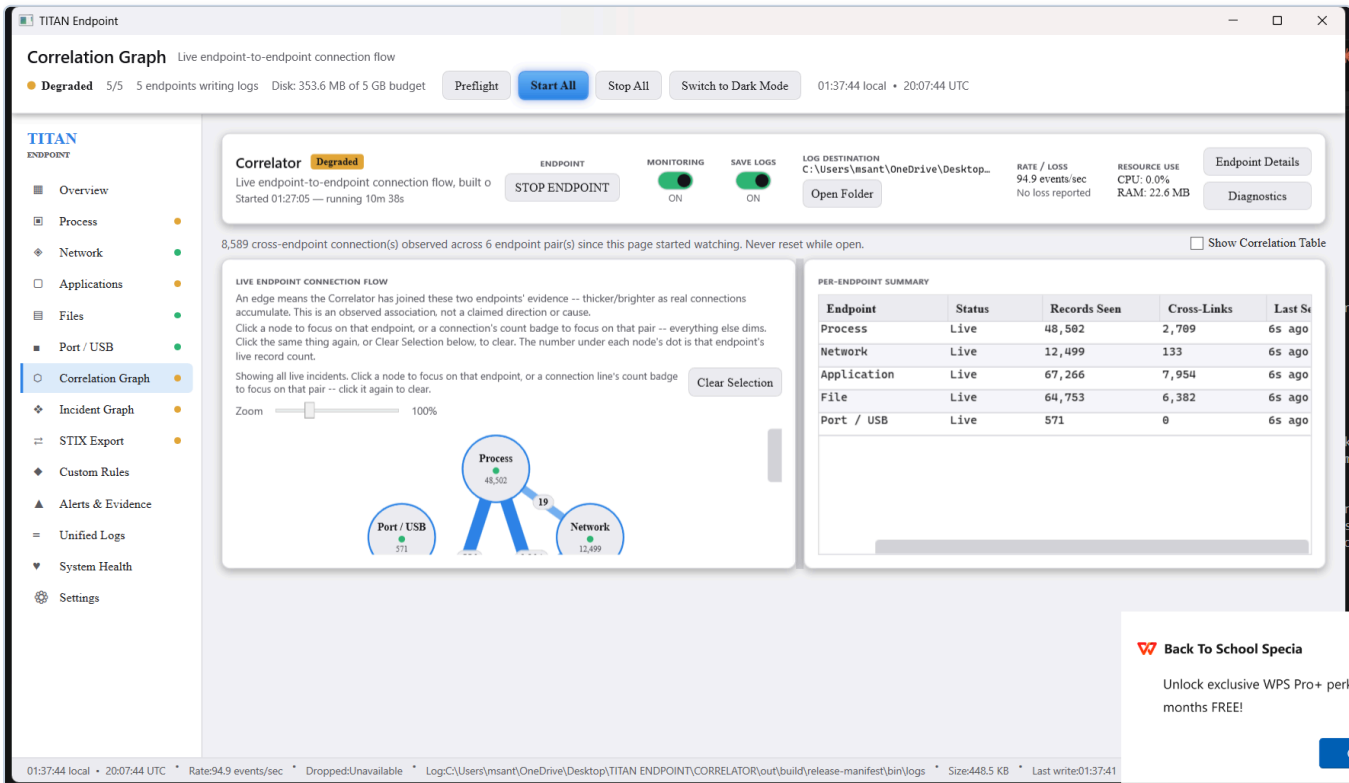

WHAT THIS IS

A live node-graph visualization of the Correlator's own work: which endpoints are currently being tied together by shared evidence, and how strongly.

WHAT THE OUTPUT SHOWS

One node per endpoint (with its live record count), edges between nodes that the Correlator has actually joined evidence across, a numeric badge per edge showing how many connections back that association, and a Per-Endpoint Summary table (Status/Records Seen/Cross-Links/Last Seen).

WHAT IT INDICATES

An edge is an observed association, not a claimed direction or cause — it means the Correlator found evidence from both endpoints that belongs to the same real-world activity (e.g. the same PID). A thicker/brighter edge means more shared evidence has accumulated between that pair.

USE CASE

The fastest visual answer to "is anything actually being correlated right now, and between which parts of the system" — useful both for monitoring and for spotting an endpoint that's gone quiet (no edges forming).

8. Incident Graph

TITAN Endpoint

Incident Graph Every real correlated incident, one full page

● **Degraded** 5/5 5 endpoints writing logs Disk: 356.3 MB of 5 GB budget Preflight **Start All** Stop All Switch to Dark Mode 01:37:48 local • 20:07:48 UTC

TITAN ENDPOINT

- Overview
- Process
- Network
- Applications
- Files
- Port / USB
- Correlation Graph
- Incident Graph**
- STIX Export
- Custom Rules
- Alerts & Evidence
- Unified Logs
- System Health
- Settings

Correlator **Degraded**

Live endpoint-to-endpoint connection flow, built c Started 01:27:05 — running 10m 43s

ENDPOINT **STOP ENDPOINT**

MONITORING **ON**

SAVE LOGS **ON**

LOG DESTINATION C:\Users\msant\OneDrive\Desktop... **Open Folder**

RATE / LOSS 192.5 events/sec No loss reported

RESOURCE USE CPU: 0.4% RAM: 24.7 MB

Endpoint Details

Diagnostics

INCIDENT GRAPH — LIVE INCIDENTS

Each incident below is one real correlated group: every endpoint it actually touched, in order, plus what is common across all of them (process, PID, time span). New incidents appear here continuously as the Correlator joins real activity; click a connection badge on the Correlation Graph page to narrow this list to a specific pair, or Pause Live Updates above to hold the list still. Showing all live incidents. Click a node to focus on that endpoint, or a connection line's count badge to focus on that pair — click it again to clear.

☐ Pause Live Updates **Show All Incidents**

01:37:45.716 INC-140412 — Process → Network

armourycrate.useressionhelper.exe, ArmouryCrate.UserSessionHelper.exe | PID(s): 13172 | 807 ms span | 2 real event(s) across 2 endpoint record(s)

Process **Evidence**

```
process_snapshot
armourycrate.useressionhelpe
r.exe - c:\program files\asus
\armoury crate service
\armourycrate.useressionhelp
er.exe | "c:\program files
\asus\armoury crate service
\armourycrate.useressionhelp
er.exe" 00000000000000ef4
00000000000000e08
00000000000000ef0
00000000000000f08
00000000000000fc
00000000000000f04
00000000000000f10 | SANTOSH
pid 13172
```

Network **Evidence**

```
network_packet
ArmouryCrate.UserSessionHelp
r.exe - 169.254.248.49:65527
→ 224.77.77.12177
[UNKNOWN OUTBOUND]
pid 13172
```

→ same_pid

01:37:43.345 INC-140364 — Application → Application → Application → Application → Application → Application → Application → Application → Application → File → File

powershell.exe | PID(s): 26464 | 446 ms span | 11 real event(s) across 11 endpoint record(s)

Application **Evidence** **Application**

01:37:48 local • 20:07:48 UTC • Rate:192.5 events/sec • Dropped:Unavailable • Log:C:\Users\msant\OneDrive\Desktop\TITAN ENDPOINT\CORRELATOR\out\build\release-manifest\bin\logs • Size:822.6 KB • Last write:01:37:47

Back To School Special

Unlock exclusive WPS Pro+ per months FREE!

WHAT THIS IS

The full-page list of every real correlated incident the Correlator has produced, each shown as one expandable card rather than a graph node.

WHAT THE OUTPUT SHOWS

Per incident: the endpoints it touched, in order (e.g. Process → Network), what's common across every member of the incident (process name, PID, time span), and one small card per endpoint segment with its own Evidence button linking back to the raw record.

WHAT IT INDICATES

This is the connected story a human actually reads: e.g. one process that both wrote a file and opened a network connection within the same short window — a shared PID linking Process, File, and Network evidence into a single real incident instead of three unrelated log lines.

USE CASE

Incident triage: this is the page an analyst opens to understand "what happened" as a narrative, not a table. Pause Live Updates freezes the list so a specific card can be read or clicked before it scrolls away.

9. STIX Export

TITAN Endpoint

STIX Export Convert correlated incidents into STIX 2.1 for OpenCTI

● Degraded 5/5 5 endpoints writing logs Disk: 376.8 MB of 5 GB budget Preflight **Start All** Stop All Switch to Dark Mode 01:38:38 local • 20:08:38 UTC

TITAN ENDPOINT

- Overview
- Process
- Network
- Applications
- Files
- Port / USB
- Correlation Graph
- Incident Graph
- STIX Export**
- Custom Rules
- Alerts & Evidence
- Unified Logs
- System Health
- Settings

Correlator Degraded

Converts the Correlator's own correlated_events.json

Started 01:27:05 — running 11m 33s

ENDPOINT **STOP ENDPOINT**

MONITORING **ON**

SAVE LOGS **ON**

LOG DESTINATION C:\Users\msant\OneDrive\Desktop... **Open Folder**

RATE / LOSS 106.3 events/sec No loss reported

RESOURCE USE CPU: 1.5% RAM: 24.4 MB

Endpoint Details

Diagnostics

CORRELATED LOGS TO STIX

Reads the Correlator's own correlated_events.json and converts every correlated incident that has a real observable (an IP address, a file with a real SHA-256, a process) into a STIX 2.1 Bundle -- the format OpenCTI (and most other threat-intel platforms) expects. Only 'observed-data' objects are written, never 'indicator' objects: TITAN records what it actually saw, it does not judge anything malicious -- that comparison is OpenCTI's job once you point it at this file. Nothing is sent over the network by this button; it only writes a file to disk, ready to hand to OpenCTI once it is set up.

Source: C:\Users\msant\OneDrive\Desktop\TITAN_ENDPOINT\CORRELATOR\out\build\release-manifest\bin\logs\correlated_events.json (49,64,431 bytes, last written 01:33:57)

Convert to STIX **Open Output Folder** **Refresh**

LAST CONVERSION RESULT

No conversion run yet this session.

SEND & RECEIVE (2-WAY EXCHANGE)

Send the last converted bundle to another machine (e.g. wherever OpenCTI is being set up), and receive a report pushed back from it whenever it's ready -- this does not wait for a synchronous reply.

Send to (their address): **Send**

Shared token (both sides must match): 18f9cbb1225d4706939171e3cdc97fbd

Send result:

Give this to the other machine: http://169.254.248.49:8766/titan/report (reachable from other machines on this network)

RECEIVED REPORTS

Back To School Special

Unlock exclusive WPS Pro+ per month FREE!

01:38:38 local • 20:08:38 UTC • Rate:106.3 events/sec • Dropped:Unavailable • Log:C:\Users\msant\OneDrive\Desktop\TITAN_ENDPOINT\CORRELATOR\out\build\release-manifest\bin\logs • Size:1.5 MB • Last write:01:38:35

WHAT THIS IS

Converts the Correlator's own correlated incidents into a STIX 2.1 Bundle — the standard format OpenCTI and most other threat-intelligence platforms expect — plus a Send & Receive feature to hand the resulting file to another machine.

WHAT THE OUTPUT SHOWS

The live source file being read (correlated_events.json, with its size and last-write time), a Convert to STIX button, the last conversion result, and a Send & Receive panel with a shared token and a reachable address for pushing the bundle to another machine running OpenCTI.


WHAT IT INDICATES

Only "observed-data" STIX objects are written — never "indicator" objects. TITAN records what it actually saw (a real IP, a real file hash, a real process); judging whether that's malicious is deliberately left to OpenCTI or whoever consumes the export, not asserted here.

USE CASE

This is what turns TITAN from a standalone viewer into a feed for a real SOC pipeline: any platform that speaks STIX 2.1 can ingest TITAN's evidence directly, which is the concrete version of "TITAN is meant to be attached to other systems" rather than replace them.

10. Custom Rules

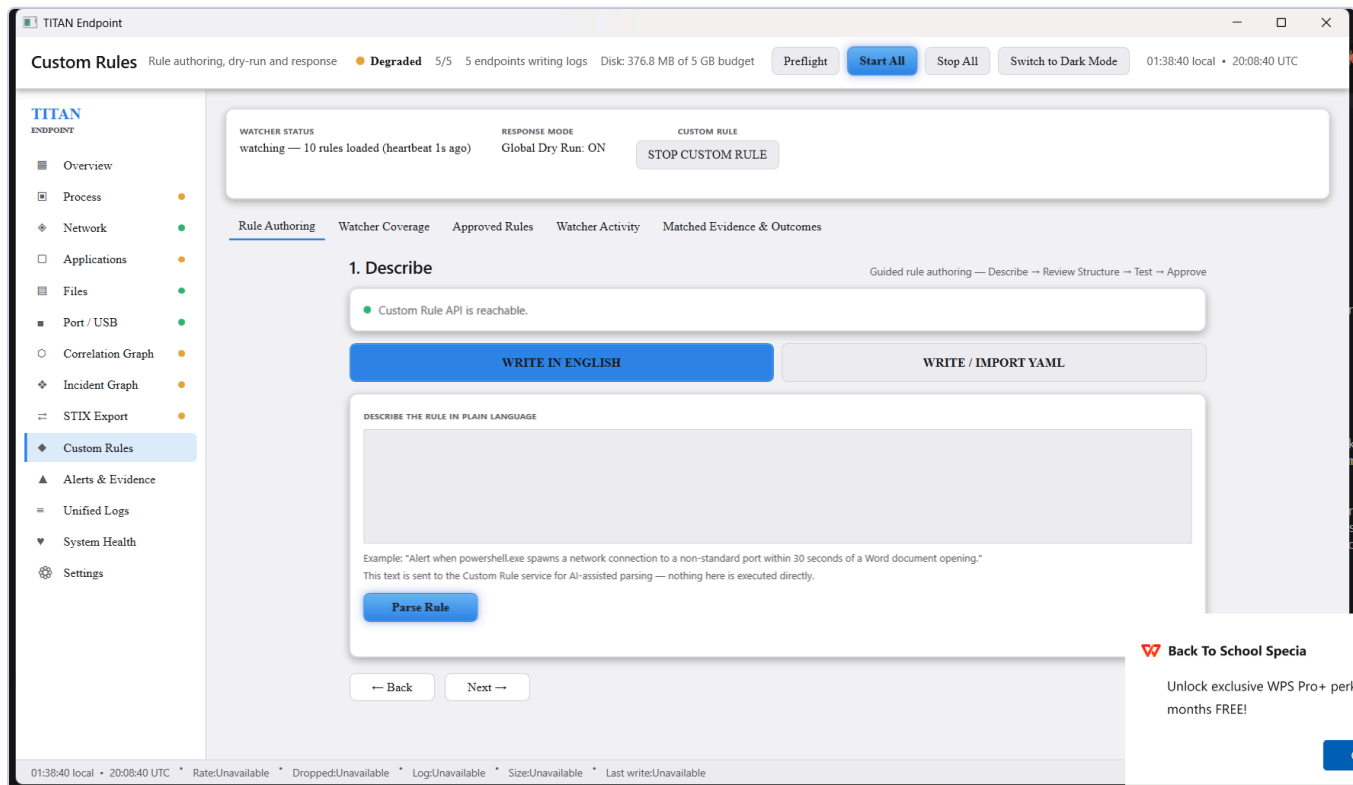

WHAT THIS IS

A guided rule-authoring wizard (Describe → Review Structure → Test → Approve) for defining detection rules against live activity, without writing code.

WHAT THE OUTPUT SHOWS

Watcher status (rules loaded, dry-run state), two authoring paths — "Write in English" (parsed by a local LLM-assisted service into a structured rule) or "Write / Import YAML" directly — plus tabs for Watcher Coverage, Approved Rules, Watcher Activity, and Matched Evidence & Outcomes.

WHAT IT INDICATES

A rule described in plain English (e.g. "Alert when powershell.exe spawns a network connection to a non-standard port within 30 seconds of a Word document opening") gets turned into a real structured rule the Watcher can evaluate against live events — nothing is executed directly from the description text.

USE CASE

Lets a non-programmer describe detection logic in their own words instead of learning a rule syntax — the same detection engine, but with the authoring barrier removed.

11. Alerts & Evidence

TITAN Endpoint

Alerts and Evidence Matched rules and recorded evidence

Degraded 5/5

5 endpoints writing logs

Disk: 380.2 MB of 5 GB budget

Preflight

Start All

Stop All

Switch to Dark Mode

01:38:41 local • 20:08:41 UTC

TITAN

ENDPOINT

Overview

Process

Network

Applications

Files

Port / USB

Correlation Graph

Incident Graph

STIX Export

Custom Rules

Alerts & Evidence

Unified Logs

System Health

Settings

WATCHER STATUS

watching (heartbeat 1s ago)

RESPONSE MODE

Dry run is ON — responses are recorded but not executed

1,092 alerts in view (86 this session) — medium: 919 low: 104 high: 69

Load older verified alerts

Time	Severity	Event	Rule	Rule ID	Mode	Action Results	Evidence Integrity	Ack	
12:44:57	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:44:57	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:45:03	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:45:24	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:45:26	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:45:26	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:45:54	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:45:56	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:45:56	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:46:24	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:46:25	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:46:25	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:46:54	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:46:55	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by backend HMAC check Pr	Ack	
12:46:55	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by ba	Ack	
12:46:56	low	process.start	alert if wps office in my l.5bc39510-570b	Dry run	alert:alerted	Verified by ba	Back To School Special	Ack	
12:47:08	low	process.start	alert if wps office in my l.5bc39510-570b	Dry run	alert:alerted	Verified by ba	Unlock exclusive WPS Pro+ per	Ack	
18:58:16	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by ba	months FREE!	Ack
18:58:16	medium	process.start	Alert if PowerShell is started	9b60de43-70e4	Dry run	alert:alerted	Verified by ba		Ack

01:38:41 local • 20:08:41 UTC

Rate:Unavailable

Dropped:Unavailable

Log:Unavailable

Size:Unavailable

Last write:Unavailable

WHAT THIS IS

The output side of the Custom Rule Watcher — every time a live event matches an approved rule, it lands here as an alert with its supporting evidence.

WHAT THE OUTPUT SHOWS

Watcher status and response mode (Dry Run on/off), session alert totals by severity (low/medium/high), and a table of Time / Severity / Event / Rule / Rule ID / Mode / Action Results / Evidence Integrity / Ack — e.g. "Alert if PowerShell is started" firing on real powershell.exe launches.

WHAT IT INDICATES

Evidence Integrity shows "Verified by backend HMAC check" — each alert's supporting evidence is cryptographically tied to the record it was raised from, so it can't be silently altered after the fact. Dry Run ON means matched actions are recorded but not actually executed.

USE CASE

The place to answer "did anything actually get flagged, and can I trust that flag" — tamper-evident alerting on top of the raw telemetry the other pages show.

12. Unified Logs

TITAN Endpoint

Unified Logs

Every collector's evidence in one catalogue

Degraded

5/5

5 endpoints writing logs

Disk: 380.2 MB of 5 GB budget

Preflight

Start All

Stop All

Switch to Dark Mode

01:38:44 local • 20:08:44 UTC

TITAN ENDPOINT

Overview

Process

Network

Applications

Files

Port / USB

Correlation Graph

Incident Graph

STIX Export

Custom Rules

Alerts & Evidence

Unified Logs

System Health

Settings

Total retained: 379 MB of 5 GB budget — Normal (7%).

All endpoints

From

Select a date

To

Select a date

Contains

Type/action

Limit

500

Search

Export...

Cancel

Endpoint	Active File	Write State	Current Size	Total Retained	Retained (graph)	Records (session)	Last Write	Last Write Error
Process	titan_20260901_012602.json	Writing	7.8 MB	114.5 MB		4,577	2026-09-01 01:38:44	112 loss/failure
Network	titan_20260901_012619_470	Writing	958.6 KB	14.8 MB		433	2026-09-01 01:38:40	No error reported
Applications	application_events.jsonl	Writing	239.5 KB	449.9 KB		62,899	2026-09-01 01:38:44	79 malformed JSON
Files	file_events.json	Writing	1.5 MB	11.5 MB		38,844	2026-09-01 01:38:44	No error reported
Port / USB	usb_events.json	Writing	498.9 KB	498.9 KB		21	2026-09-01 01:38:35	No error reported
Correlator	correlator_20260831_20084	Writing	596.3 KB	234.9 MB		47,351	2026-09-01 01:38:44	No error reported
Custom Rule	alerts.jsonl	Writing	2.3 MB	2.3 MB		87	2026-09-01 01:38:42	No error reported

Reload newest

Load 100 older

Select an endpoint to inspect bounded historical evidence.

Back To School Special

Unlock exclusive WPS Pro+ performance months FREE!

01:38:44 local • 20:08:44 UTC

Rate:Unavailable

Dropped:Unavailable

Log:Unavailable

Size:Unavailable

Last write:Unavailable

WHAT THIS IS

One searchable stream merging every endpoint's raw event log in a single place, instead of checking five separate pages one at a time.

WHAT THE OUTPUT SHOWS

The full raw JSON record for every event across Process, Network, Applications, Files, and Port/USB, filterable and searchable in one view.


WHAT IT INDICATES

This is the ground truth — every field any other page summarizes or visualizes ultimately comes from a raw record visible here, unabridged.

USE CASE

Free-text investigation across the whole machine at once (e.g. "show me everything that mentions this IP" or "everything from this PID"), and the fastest way to confirm a new field or event actually reached the log during development.

13. System Health

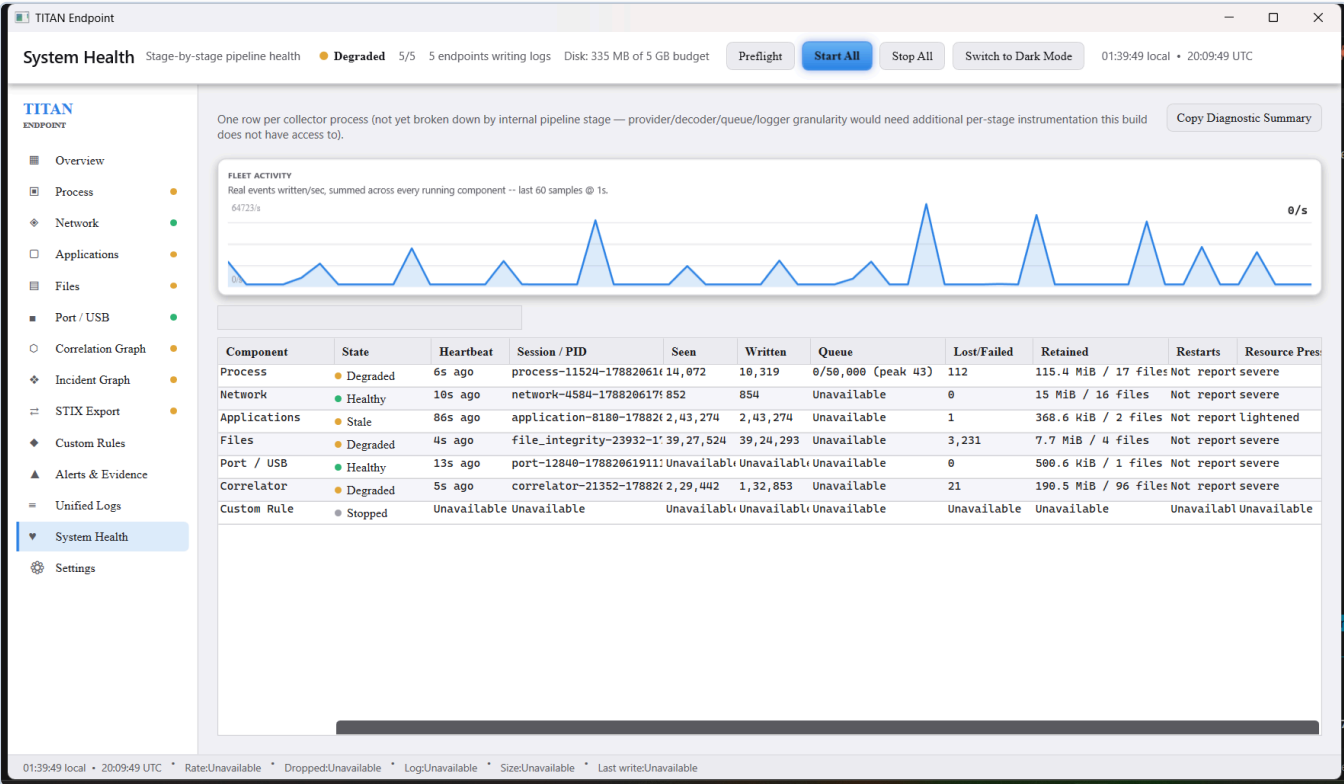

WHAT THIS IS

An operational health monitor for TITAN's own pipeline — not the endpoint data itself, but whether the collectors, Correlator, and Custom Rule components are running correctly.

WHAT THE OUTPUT SHOWS

A fleet-wide events/sec sparkline, and one row per component with State (Healthy/Degraded/Stale/Stopped), last heartbeat, session/PID, records Seen vs. Written, queue depth, Lost/Failed count, disk retained, restart count, and resource pressure.


WHAT IT INDICATES

Lost/Failed staying near zero and Seen $\approx$ Written means the pipeline isn't silently dropping data under load; a Degraded or Stale state on a specific component pinpoints exactly which one needs attention rather than a vague "something's wrong."

USE CASE

Pre-flight and ongoing operational confidence — the page to check before trusting a demo or a real deployment, and the first place to look if a page elsewhere seems to be missing data.

14. Settings

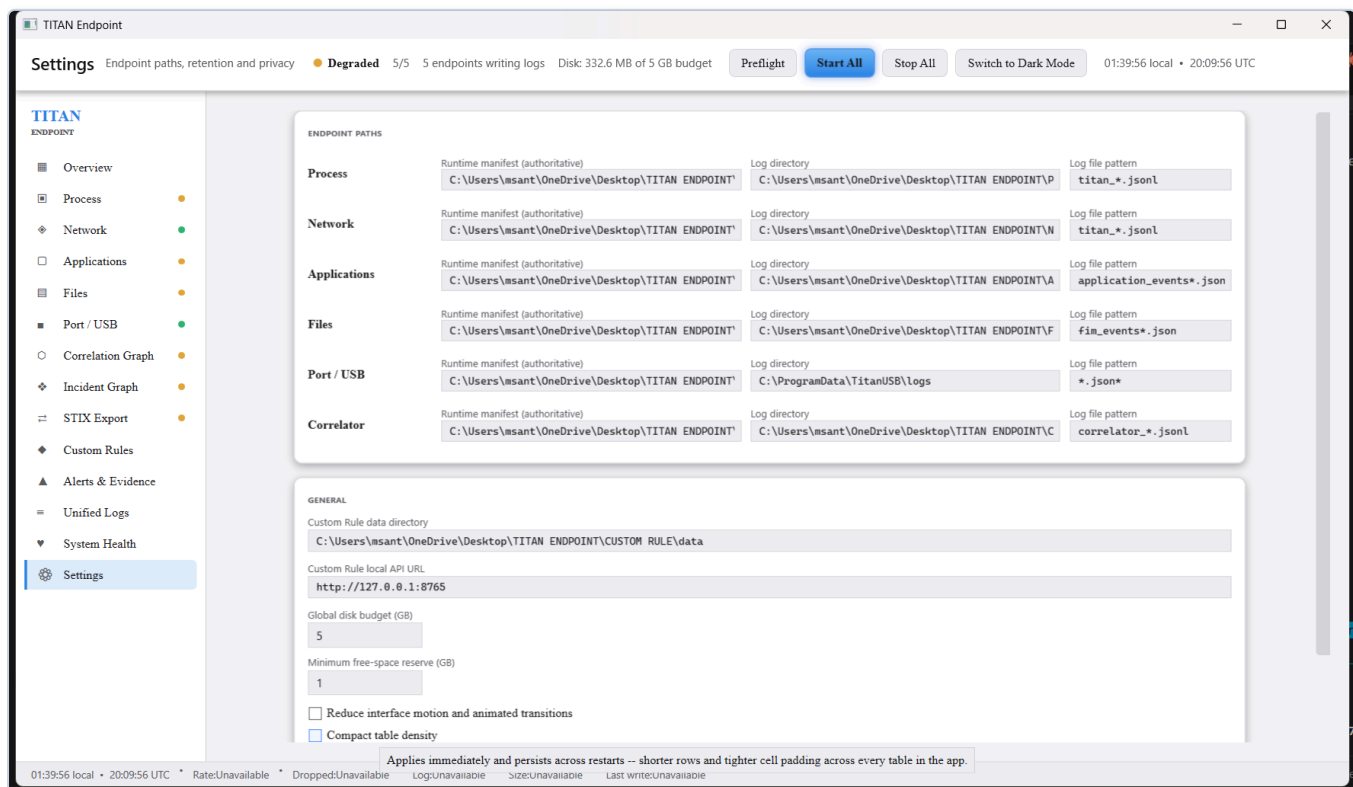

WHAT THIS IS

Configuration for endpoint executable/log paths, the Custom Rule service, disk retention budgets, and interface preferences.

WHAT THE OUTPUT SHOWS

Per-endpoint runtime manifest path, log directory, and log file pattern (manifest-owned fields shown read-only); Custom Rule data directory and local API URL; global disk budget and minimum free-space reserve in GB; Reduced Motion and Compact Table Density toggles.

WHAT IT INDICATES

Paths marked as coming from the "Runtime manifest (authoritative)" are generated automatically after each native rebuild and are intentionally not hand-editable here, to prevent the GUI and the actual built executables from drifting out of sync.

USE CASE

Where disk usage is kept bounded (so TITAN doesn't fill the disk with its own logs) and where the interface can be tuned for a specific machine or presentation (e.g. Reduced Motion for a low-power projector setup).

How it fits together

Process, Network, Applications, Files, and Port/USB each run as independent native collectors, writing their own evidence log regardless of whether anything else is running. The **Correlator** reads all five logs and joins evidence that belongs to the same real activity into incidents, visualized on **Correlation Graph** (the live association map) and **Incident Graph** (the readable per-incident story). On top of that, three optional consumer layers each do one job: **Custom Rules** + **Alerts & Evidence** turn matching activity into tamper-evident alerts; **STIX Export** turns correlated incidents into a standard format any real threat-intel platform can ingest; and **Unified Logs** + **System Health** give raw, unabridged access to everything for investigation

and operational trust. Nothing shown in this report is simulated — every screenshot came from a live TITAN instance watching real activity on this machine.