
**IRIS: Asistente virtual para la redacción personalizada
de correos electrónicos**
IRIS: Virtual Assistant for Personalized Email Writing



**Trabajo de Fin de Grado
Curso 2018–2019**

Autor
Carlos Moreno Morera

Director
Raquel Hervás Ballesteros
Gonzalo Méndez Pozo

Doble Grado en Ingeniería Informática y Matemáticas
Facultad de Informática
Universidad Complutense de Madrid

IRIS: Asistente virtual para la redacción personalizada de correos electrónicos

IRIS: Virtual Assistant for Personalized Email Writing

Trabajo de Fin de Grado en Ingeniería Informática
Departamento de Ingeniería del Software e Inteligencia Artificial

Autor
Carlos Moreno Morera

Director
Raquel Hervás Ballesteros
Gonzalo Méndez Pozo

Convocatoria: Junio 2020
Calificación: *Nota*

Doble Grado en Ingeniería Informática y Matemáticas
Facultad de Informática
Universidad Complutense de Madrid

8 de octubre de 2019

*A Pedro Pablo y Marco Antonio, por crear TeXiS
e iluminar nuestro camino*

Acknowledgments

A Guillermo, por el tiempo empleado en hacer estas plantillas. A Adrián, Enrique y Nacho, por sus comentarios para mejorar lo que hicimos. Y a Narciso, a quien no le ha hecho falta el Anillo Único para coordinarnos a todos.

Resumen

IRIS: Asistente virtual para la redacción personalizada de correos electrónicos

Un resumen en castellano de media página, incluyendo el título en castellano. A continuación, se escribirá una lista de no más de 10 palabras clave.

Palabras clave

Máximo 10 palabras clave separadas por comas

Abstract

IRIS: Virtual Assistant for Personalized Email Writing

An abstract in English, half a page long, including the title in English. Below, a list with no more than 10 keywords.

Keywords

10 keywords max., separated by commas.

Contents

v

1. Introduction	1
1.1. Incentive	1
1.2. Objectives	1
1.3. Working plan	2
1.4. Explicaciones adicionales sobre el uso de esta plantilla	2
1.4.1. Texto de prueba	2
2. State of the Art	3
2.1. Gmail API	3
2.1.1. OAuth 2.0 Protocol	3
2.1.2. Building a Gmail Resource	6
2.1.3. Users resource	6
2.1.4. Labels resource	7
2.1.5. Messages resource	8
2.1.6. Attachments resource	13
2.1.7. Threads resource	13
3. Descripción del Trabajo	15
4. Conclusiones y Trabajo Futuro	17
Bibliography	19
A. Título del Apéndice A	21
B. Título del Apéndice B	23

List of figures

2.1. OAuth 2.0 for Web Server Applications and Installed Applications	4
2.2. MIME types tree structure of an email example	12
3.1. Ejemplo de imagen	15

List of tables

3.1. Tabla de ejemplo	15
---------------------------------	----

Chapter 1

Introduction

“Have you ever retired a human by mistake?”
— Rachael - Blade Runner (1982)

Smartphone development meant not only a technological advance but a social revolution too. They have brought with them countless paradigm shift in terms of social sphere. Since then, we are able to speak of a new model of human relationship both between people and with our technology. This current relation standard is due to the easily and quickly way to access to the different information that our mobile devices provide us. Long waits (nowadays the meaning of “long” waits has changed too, people consider more than two or three second too many time) for obtaining anything such as accessing to a website or showing any operation result, are excessively tedious and could be even frustrating for some smartphone users. When we are using our mobile, we want, as fast as possible, the information we are looking for. Precisely because of this, human-computer interaction (HCI) becomes a very important part in the process of development of the most of apps, not only in terms of speed of response and efficiency of our algorithms, but also in how we show the different informations and the easiness for obtaining them.

As for the relationships between people, as we have said, they have dramatically changed. There is no doubt that the main driving technologies behind this transformation of our relational paradigm are the social networks and the instant messaging. Focusing on the last type of mobile application we have mentioned, it is necessary to make a break-down of what consequences to our interpersonal interaction the instant communication have brought with itself. Just as it happens with the HCI, easiness and speed are probably the first features we look for when we are going to send any information to anybody. If we also expect a reply, the ideal would be to obtain it as quickly as possible. Therefore, in most of occasions, in practice we are looking for an automatic response from a human, what practically implies that everyone is “obligated” to be connected at any time with the answer we are asking for prepared.

1.1. Incentive

Introducción al tema del TFM.

1.2. Objectives

Descripción de los objetivos del trabajo.

1.3. Working plan

Aquí se describe el plan de trabajo a seguir para la consecución de los objetivos descritos en el apartado anterior.

1.4. Explicaciones adicionales sobre el uso de esta plantilla

Si quieras cambiar el **estilo del título** de los capítulos, edita `TeXiS\TeXiS_pream.tex` y comenta la línea `\usepackage[Lenny]{fncychap}` para dejar el estilo básico de L^AT_EX.

Si no te gusta que no haya **espacios entre párrafos** y quieres dejar un pequeño espacio en blanco, no metas saltos de línea (`\backslash`) al final de los párrafos. En su lugar, busca el comando `\setlength{\parskip}{0.2ex}` en `TeXiS\TeXiS_pream.tex` y aumenta el valor de `0.2ex` a, por ejemplo, `1ex`.

TFMTeXiS se ha elaborado a partir de la plantilla de TeXiS¹, creada por Marco Antonio y Pedro Pablo Gómez Martín para escribir su tesis doctoral. Para explicaciones más extensas y detalladas sobre cómo usar esta plantilla, recomendamos la lectura del documento `TeXiS-Manual-1.0.pdf` que acompaña a esta plantilla.

El siguiente texto se genera con el comando `\lipsum[2-20]` que viene a continuación en el fichero `.tex`. El único propósito es mostrar el aspecto de las páginas usando esta plantilla. Quita este comando y, si quieres, comenta o elimina el paquete `lipsum` al final de `TeXiS\TeXiS_pream.tex`

1.4.1. Texto de prueba

¹<http://gaia.fdi.ucm.es/research/texis/>

Chapter 2

State of the Art

2.1. Gmail API

In order to be able to read and send emails, it is necessary to access to the user's email data. For this reason, the different ways to obtain this information were studied. One of them is the Gmail API, which allows developers to perform all the actions we need in an easy way.

Gmail API can be used in several programming languages such as Python, PHP, Go, Java, .NET, ... Due to the greater number of examples in the starting guides of the Gmail API (Google, 2019a) and the previous knowledge that was already had of it, Python was chosen for the first contact with this technology.

The following is a step-by-step explanation of what is necessary to do to access the user's Gmail account, create a message, send an email previously created, create and update a draft, reply a received message (for this it is necessary to know how to create an email) and read important information of message threads and individual emails (such as who is the sender, who has received the message, the subject, the date, the email's body, the attached files, ...).

2.1.1. OAuth 2.0 Protocol

Gmail API, as it also happens in the case of other Google APIs, uses OAuth 2.0 protocol (Google, 2019f) to handle authentication and authorization. As it will be seen later in this section, it is needed to be in possession of OAuth 2.0 client credentials from the Google API Console for having the appropriate permissions to use the Gmail API.

The Google API Console, also known as Google Console Developer¹, built into Google Cloud Platform, makes possible an authorized access to a user's Gmail data. In order to achieve it, having a Google account is a prerequisite because it will be necessary to access to this platform. Once this web has been accessed, at first we have to create a new development project by clicking in "New Project" in the control panel (which is the main tab of the Google Console Developer and the one that opens by default when you access it). When we have already created a project, we will enable the API we are going to work with, in this case the Gmail API. To do this we will look for it in the search engine that we can find in the library of APIs of this platform. Now we can apply for the credentials we need. Accessing to the "Credentials" tab and clicking on "Create Credentials" will lead us

¹<https://console.developers.google.com/>

to an easy questionnaire, about what type of credentials we prefer, that we have to answer by basing on what type of application we are building. Then we must download the .json file and save it in the folder we are going to work in.

Before starting the development of the implementation of the OAuth 2.0 protocol which will provide us a secure and trusted login system to access to the user's Gmail data, we must install the Google Client Library² of our choice of language (as we have said we will use Python for this, so we have to install the libraries *google-api-python-client*, *google-auth*, *httpplib2* and *google-auth-oauthlib*).

There are many ways to obtain the necessary permissions for accessing to the user's emails data following the OAuth 2.0 protocol. As this is a first contact with the Gmail API only with the intention of knowing the possibilities it offers to us and its advantages and disadvantages of using it in our future implementation of our virtual assistant, we are going to develop a simple script which is using a class very useful for local development and applications that are installed on a desktop operating system. The class *InstalledAppFlow*, in *google_auth_oauthlib.flow* (Google, 2019b), is a *Flow* subclass (which belongs to the same library). Thanks to this last class we have mentioned, *InstalledAppFlow* uses a *requests_oauthlib.OAuth2Session* instance at *oauth2session* to perform all of the OAuth 2.0 logic. Besides it also inherits from *Flow* the class method *from_client_secrets_file* which creates a *Flow* instance from a Google client secrets file (this file will be the .json file that we obtained through the Google API Console) and a list of OAuth 2.0 Scopes (Google, 2019e), which are a mechanism in OAuth 2.0 to limit an application's access to a user's account. An application can request one or more scopes, this information is then presented to the user in the consent screen, and the access token issued to the application will be limited to the scopes granted (we will use the Gmail API OAuth 2.0 Scope which allows us to read, compose, send, and permanently delete all your email).

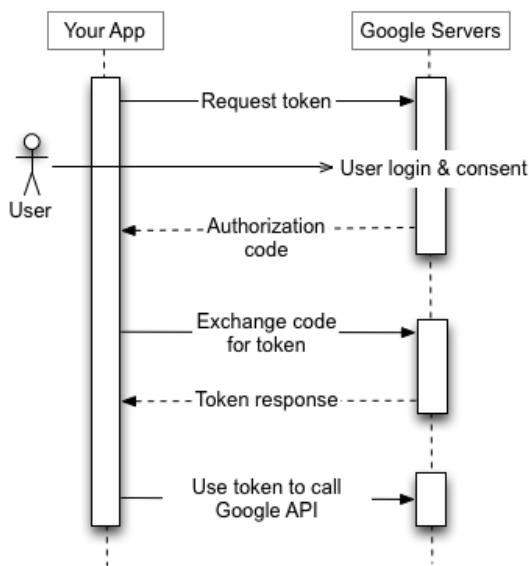


Figure 2.1: OAuth 2.0 for Web Server Applications and Installed Applications.
Image extracted from Google (2019f)

After constructing an *InstalledAppFlow* by calling *from_client_secrets_file* as we have explained, we can invoke the class method *run_local_server* which instructs the user to

²<https://developers.google.com/gmail/api/downloads>

open the authorization URL in the browser and will try to automatically open it. This function will start a local web server to listen for the authorization response. Once there is a reply, the authorization server will redirect the user's browser to the local web server. As we can see in 2.1, the web server will get the authorization code from the response and shutdown, that code is then exchanged for a token.

Then, we will be in possession of the OAuth 2.0 credentials for the user (Google, 2019d) which we are going to use for accessing the user's Gmail account. In summary, it is possible to obtain the necessary permissions from the user and to follow the OAuth 2.0 protocol, by executing these instructions (written in Python):

```
from google_auth_oauthlib.flow import InstalledAppFlow

# Create a flow instance
flow = InstalledAppFlow.from_client_secrets_file('credentials.json',
    ['https://mail.google.com/'])
# Obtain OAuth 2.0 credentials for the user
creds = flow.run_local_server(port = 0)
```

Now, we are able to call Gmail API by using the token (which is stored in the variable *creds*). However, before starting working on the email data, we should save the OAuth 2.0 credentials since otherwise the user would need to go through the consent screen every time the application is opened. To prevent the latter from happening, to differentiate access from mail management and consequently to reuse as much code as possible; we have implemented the following class *auth*, in *auth.py*, with a main method *get_credentials*:

```
1 import pickle
import os.path
from google_auth_oauthlib.flow import InstalledAppFlow
from google.auth.transport.requests import Request
5
5
10 class auth:
    def __init__(self, SCOPES, CLIENT_SECRET_FILE):
        self.SCOPES = SCOPES
        self.CLIENT_SECRET_FILE = CLIENT_SECRET_FILE
15
15
20     def get_credentials(self):
        """
        Obtains valid credentials for accessing Gmail API
        """
        creds = None
        # The file token.pickle stores the user's access and refresh tokens
        if os.path.exists('token.pickle'):
            with open('token.pickle', 'rb') as token:
                creds = pickle.load(token)
        # If there are no (valid) credentials available, let the user log in
        if not creds or not creds.valid:
            if creds and creds.expired and creds.refresh_token:
                creds.refresh(Request())
            else:
25                flow = InstalledAppFlow.from_client_secrets_file(
                    self.CLIENT_SECRET_FILE, self.SCOPES)
                creds = flow.run_local_server(port=0)
            # Create token.pickle and save the credentials for the next run
            with open('token.pickle', 'wb') as token:
                pickle.dump(creds, token)
30
        return creds
```

As we can observe in line 17 within *get_credentials* method, at first we check if the file called *token.pickle* exists, and in that case, it is opened and its information is stored in the variable *creds*. Thus, we avoid to force the user to open the authorization screen. By contrast, as we have seen before, if it does not exists, we obtain the credentials by calling the class methods *from_client_secrets_file* and *run_local_server* (it is written between lines 25 and 30).

There is another case that is also reflected in the code above (in lines 23 and 24): the credentials are expired (it is possible to check it by executing *creds.expired*) and they can be refreshed (the OAuth 2.0 refresh token is *creds.refresh_token*) (Google, 2019d). In this situation, we will refresh the access token by invoking the method known as *refresh* and by giving it a *Request* object (Google, 2019c) from *google.auth.transport.requests* as the function parameter which used to make HTTP requests.

2.1.2. Building a Gmail Resource

At this point, with the OAuth 2.0 credentials, we are able to call the Gmail API. For this purpose, it is necessary to construct a resource (Google, 2019a, /v1/reference) for interacting with the API. The *build* method, from *googleapiclient.discovery* library (Gregorio, 2019), create that object. As we will see later, this resource will lead us to manage emails, drafts, threads and everything we will like to do with the user's Gmail data. This is why, using the *auth.py* file explained in section 2.1.1, we are going to start every user session with the instructions below (or their equivalents in the language we are using):

```
from googleapiclient.discovery import build
import auth

SCOPES = [ 'https://mail.google.com/' ]
CLIENT_SECRET_FILE = 'credentials.json'

# Creation of an auth instance
authInst = auth.auth(SCOPES, CLIENT_SECRET_FILE)
# Constructing the resource API object
service = build('gmail', 'v1', credentials = authInst.get_credentials())
```

Henceforth, we will use the *service* variable to relate it with the resource object created by the *build* method.

2.1.3. Users resource

The *build* method could be called for obtaining any resource of any Google API (by giving it the suitable parameters). Our specific *service* created³ has an important instance method that we are going to invoke for every execution: *users()* method. It returns what is known as users resource (Google, 2019a, /v1/reference/users).

The users resource has also instance methods, which return other Gmail API resources that we are going to need, such as *drafts()*, *labels()*, *messages()* and *threads()* which return drafts, labels, messages and threads resources respectively. Moreover, it possesses the three methods that we explain hereunder (we must remember that for being able to execute any method that we are going to explain in this and next sections, it is necessary to have the appropriate authorization with at least one of the required scopes that we can look up in its documentation):

³http://googleapis.github.io/google-api-python-client/docs/dyn/gmail_v1.html

- *getProfile(userId)*: it returns an object with a dictionary structure as it follows:

```
{
  'threadsTotal' : integer, # Total number of threads in the mailbox
  'emailAddress' : string, # User's email address
  'historyId' : string, # ID of the mailbox's current history record
  'messagesTotal' : integer # Total number of messages in the mailbox
}
```

The parameter is a string with the user's email address. If we remember the authentication process, at no time we ask the user about the email address because we decided to let the Google API functions to handle all that procedure. Therefore we have no way to know this information. Nevertheless, the special string value '*me*' can be used to indicate the authenticated user. For knowing the required scopes for invoking this function look up in (Google, 2019a, /v1/reference/users/getProfile).

- *stop(userId)*: stop receiving push notifications for the given user mailbox. As it happens with *getProfile*, the parameter is a string with the user's email address, but it is possible to use the especial string value '*me*'.
- *whatch(userId, body)*: set up or update a push notification watch on the given user mailbox.

As we are going to call only the *getProfile* method, we have described on details this first function and we have just given an idea about what the rest of them do. Now, in next sections, we are going to explain all the resources we can create with the user resource.

2.1.4. Labels resource

As we have seen in the explanation of users resource (section 2.1.3), we can obtain labels resource (Google, 2019a, /v1/reference/users/labels) by invoking *labels()* instance method of our users resource, that is to say, by using our *service* variable, the instruction *service.users().labels()* will return the label resource.

Thanks to labels we are able to categorize messages and threads within the user's mailbox. They have a dictionary structure and their representation is what we can observe hereunder:

```
{
  'id' : string, # The immutable identifier of the label
  'name' : string, # The display name
  # The visibility of messages in the Gmail web interface
  'messageListVisibility' : string,
  'labelListVisibility' : string, # The visibility of label
  'type' : string, # The owner type of the label ('system' or 'user')
  'messagesTotal' : integer, # Total number of messages with the label
  'messagesUnread' : integer, # Number of unread messages with the label
  'threadsTotal' : integer, # Total number of threads with the label
  'threadsUnread' : integer, # Number of unread threads with the label
  'color' : {
    'textColor' : string, # Text color of the label, represented as hex string
    'backgroundColor' : string # Background color represented as hex string #RRGGBB
  }
}
```

The important fields we are going to need are the *name* and the *type*. Labels with *system* type, such as *INBOX*, *SENT*, *DRAFTS* and *UNREAD*, are internally created and cannot be added, modified or deleted.

In order to obtain a label object, we will use the methods of this resource: create, delete, get, list, patch and update. In this manner, for example, we can store a label object by calling the next instructions:

```
labels = service.users().labels()
labelList = labels.list(userId = 'me').execute()
label = labels.get(id = labelList[0]['id'], userId = 'me')
```

It is necessary to use the *get* method because, as we can look up in (Google, 2019a, /v1/reference/users/labels/list), the *list* method only contains an *id*, *name*, *messageListVisibility*, *labelListVisibility* and *type* of each label, whereas the *get* method returns the label resource with all the information.

2.1.5. Messages resource

In most of the operations we are going to execute, it will be essential the correct management of messages. Therefore, knowing how the emails are represented in Gmail API and how to use them is imperative to understand how to work with this API. For this reason, in this section we are going to delve into the messages resource of the Gmail API, its structure and its methods. As we saw in section 2.1.3, we can access to this resource by invoking the *messages()* method when we have a users resource.

2.1.5.1. Resource representation

Regardless of which programming language is used, messages resource (Google, 2019a, /v1/reference/users/messages) internally has a dictionary structure as we can see down below:

```
{
  'id' : string,
  'threadId' : string,
  'labelIds' : [ string ],
  'snippet' : string,
  'historyId' : unsigned long,
  'internalDate' : long,
  'payload' : {
    'partId' : string,
    'mimeType' : string,
    'filename' : string,
    'headers' : [
      {
        'name' : string,
        'value' : string
      }
    ],
    'body' : users.messages.attachments.resource,
    'parts' : [ (MessagePart) ]
  },
  'sizeEstimate' : integer,
  'raw' : bytes
}
```

The more important keys (for us) of this data structure are (at least the most useful keys for our purpose):

- *id*: an immutable string which identifies the message.
- *threadId*: we will explain the thread resource in 2.1.7 and we will see that a thread is composed of different messages that share common characteristics. The value of this field is a string which represent the identifier of the thread the message belongs to.
- *labelIds*: a list of the identifiers of labels (see section 2.1.4) applied to the message.
- *payload*: as we can see in the resource representation above, it has a dictionary data structure. The *payload* field is the parsed email structure in the message parts. The more important keys of the *payload* field are:
 - *headers*: a list of headers. It contains the standard RFC 2822 (Resnick, 2001) email headers such as *To*, *From*, *Subject* and *Date*. Each header has a *name* field, which is the name of the header (for example *From*), and a *value* field, which is the value of the header (following the same example as with the *name* field: *example@gmail.com* could be the value).
 - *parts*: a list which contains the different child MIME message parts (we will delve into this field in section 2.1.5.3).
- *raw*: the entire email message in an RFC 2822 (Resnick, 2001) formatted and base64url (see section 2.1.5.4) encoded string.

2.1.5.2. Methods

As any other resource we have studied and we will study, messages resource has a lot of methods, many of whom we are going to call for our purposes. We will limit ourselves to describing the methods we are going to use:

- *attachments()*: returns the attachments resource (see section 2.1.6)
- *get(userId, id, format = 'full', metadataHeaders = None)*: if successful, this method returns the requested messages resource. Its parameters are:
 - *id*: the identifier string of the message we are looking for.
 - *userId*: the user's email address. As it happens with the *getProfile* method of the users resource (see section 2.1.3), the special string value '*me*' can be used to indicate the authenticated user.
 - *format* (optional parameter): the format in which we want the message returned. This field can take the following punctual values: '*full*' (returns the entirely email data with body content parsed in the *payload* messages resource field and the *raw* field is empty), '*metadata*' (returns only an email message with its identifier, email headers and labels), '*minimal*' (returns only an email message with its identifier and labels) and '*raw*' (returns the entirely email message data with the body content in the *raw* messages resource field as a base64url (see section 2.1.5.4) encoded string and the *payload* field is empty).
 - *metadataHeaders* (optional parameter): it is only used when the format parameter takes the punctual value of '*metadata*'. It is a string list where we have to insert the headers we want to be included.

For knowing the required scopes for invoking this function look up in (Google, 2019a, /v1/reference/users/messages/get)

- *list(userId, includeSpamTrash = false, labelIds = None, maxResults = None, pageToken = None, q = None)*: returns a resource with the following structure:

```
{
  'messages' : [ users.messages resource ],
  'nextPageToken' : string,
  'resultSizeEstimate' : unsigned integer
}
```

As it happens with the *list* method of the labels resource (see section 2.1.4), '*messages*' list does not contain all of a message information (for obtaining the full email data we can use *get* method). Each element of this list only contains the *id* and *threadId* field.

The parameters of this method are:

- *userId*: user's email address (we can use the special string value '*me*').
- *includeSpamTrash* (optional parameter): boolean parameter which determines if it includes messages with the labels *SPAM* and *TRASH* in the result of the operation.
- *labelIds* (optional parameter): it is a list which let us filter the messages by only returning emails with labels that match all of the identifiers that belong to this list.
- *maxResults* (optional parameter): an integer which determines the maximum number of messages to return.
- *pageToken* (optional parameter): string which specifies a page of results.
- *q* (optional parameter): string which let us do an specific query (with the same query format as the Gmail search box) and filter the messages by only returning emails that match with it.

For knowing the required scopes for invoking this function look up in (Google, 2019a, /v1/reference/users/messages/list)

- *send(userId, body = None, media_body = None, media_mime_type = None)*: it sends the given message to the email addresses specified in the *To*, *Cc* and *Bcc* headers. The first two parameters are the only ones we will use. The first (*userId*) is the user's email address (we can use the special string value '*me*') and the second is the message we want to send in an RFC 2822 (Resnick, 2001) formatted. For knowing the required scopes for invoking this function look up in (Google, 2019a, /v1/reference/users/messages/send)

2.1.5.3. MIME

To be able to create messages and read the body of the emails, it is essential to understand what the MIME standard consist of. Hence, in this section, we are going to give a general idea about this for, then, being able to draw on it in our development step.

MIME, whose acronym stands for Multipurpose Internet Mail Extensions (contributors, 2019b), is an Internet standard for the exchange of several file types (text, audio, video,

etc.) which provides support to text with characters other than ASCII, non-text attachments, body messages with numerous pars (known as multi-part messages) and headers information with characters other than ASCII. Each data type has a different name in MIME. This names follows the format: type/subtype (both type and subtype are strings), in such a way that the first denotes the general data category and the second the specific type of that information. The values that the type can take are:

- *text*: means that the content is simple text. Subtypes like *html*, *xml* and *plain* can follow this type.
- *multipart*: indicates that the message has numerous parts with independent data. Subtypes like *form-data* and *digest* can follow this type.
- *message*: it is used to encapsulate an existing message, for example when we want to reply a email and add the previous message. Subtypes like *partial* and *rfc822* can follow this type.
- *image*: means that the content is an image. Subtypes like *png*, *jpeg* and *gif* can follow this type.
- *audio*: indicates that the content is an audio. Subtypes like *mp3* and *32kadpcm* can follow this type.
- *video*: denotes that the content is an video. Subtypes like *mpeg* and *avi* can follow this type.
- *application*: it is used for application data that could be binary. Subtypes like *json* and *pdf* can follow this type.
- *font*: means that the content is a file which defines a font format. Subtypes like *woff* and *ttf* can follow this type.

MIME has several headers which are in all emails sent with this standard. Most important of them are the following:

- *Content-type*: the value of this header is the type and subtype of the message with the same structure that we have explained before. For example *Content-Type: text/plain* means that the message is a plain text. By using the type *multipart* make the creation of messages with parts and subparts organized in a tree structure (in which leaf nodes can belong to any type and the rest of them can belong to any multipart subtype variety) possible (Consortium, 2019b). A feasible composition of a message with a part with plain text and other non-text parts could be constructed by using *multipart/mixed* as the root node like in figure 2.2. Indeed, in the example of the figure 2.2, we can observe the use of *multipart/alternative* for a message which contains the body both in plain text and in html text. Other different emails constructions are possible (like forwarding with the original message attached by using *multipart/mixed* with a *text/plain* part and a *message/rfc822* part) thanks to the tree structure of the *Content-type* header.

Another important detail, that we can repair by observing the message example in figure 2.2, is the fact that each node of the tree structure of the emails is visited and showed following the pre-order traversal.

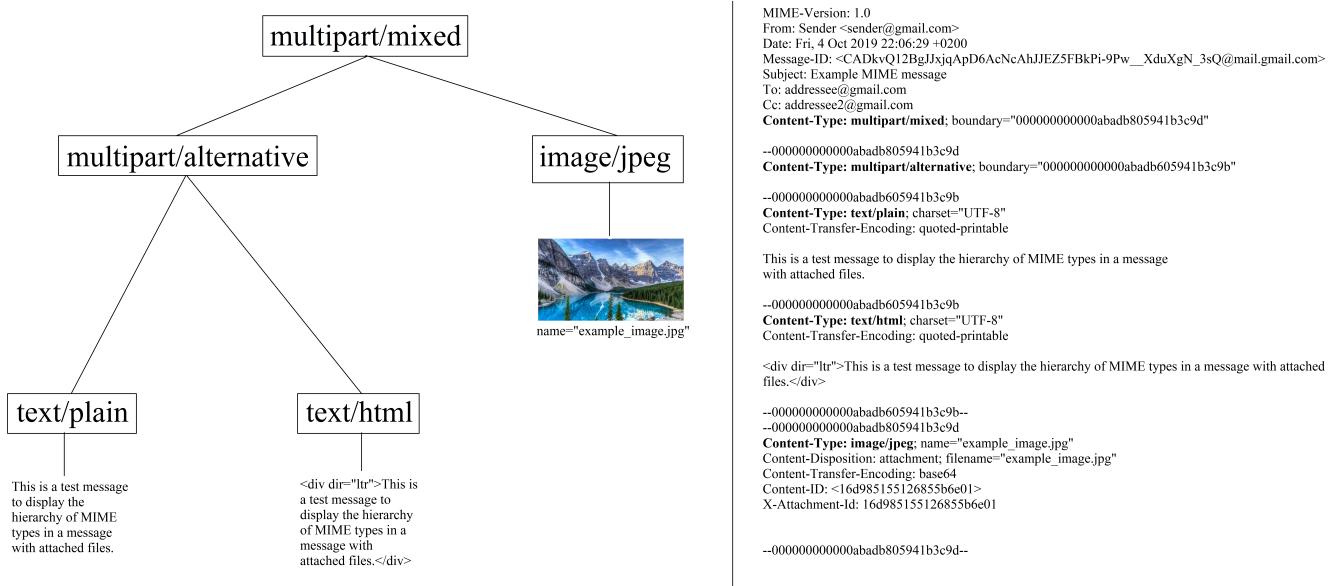


Figure 2.2: MIME types tree structure of an email example

- *Content-Disposition*: this header is used to indicate the presentation style of the part of the message. There are two ways to show the part: *inline* content-disposition (which means that the content must be displayed at the same time as the message) and *attachment* content-disposition (the part is not displayed at the same time as the message and it requires some form or action from the user to see it). Furthermore, this header also provides several fields for specifying other type of information about the content, such as the name of the file and the creation or modification date. The following example is taken from Troost (1997) (and, as we will explain after the example, it does not match with the syntax of this same header in the example that we can see in the last part of the example message of figure 2.2):

```
Content-Disposition: attachment; filename=genome.jpeg;
modification-date="Wed, 12 Feb 1997 16:29:51 -0500";
```

As we have said, this syntax is different from the used in the email example of the figure 2.2. This results from the fact that, in HTTP, the header we find in that figure (*Content-Disposition: attachment*) is usually used for instructing the client to show the response body as a downloadable file. As we can observe, it has a *filename* field which is used for establishing the default file name when the user is going to download it.

- *Content-Transfer-Encoding*: when we want to send some files in a message, sometimes they are represented as 8-bit character or binary data, which are not allowed in some protocols. On this account, it is necessary to have a standard that indicates how we should re-encoding such data into a 7-bit short-line format. The Content-Transfer-Encoding header (Consortium, 2019a) will tell the client which transformation has been used for being able to transport that data. Therefore and for lack of a previous standard which states a single Content-Transfer-Encoding mechanism, the possible values, which specify the type of encoding, this header can take are: '*base64*' (see section 2.1.5.4), '*quoted-printable*' (see section 2.1.5.5), '*8bit*', '*7bit*', '*binary*' and '*x-token*'. All these values are not case sensitive. If this header does not exist, we can assume that the value of this header is '*7bit*', which means that the body of

the message is already in a seven-bit mail-ready representation, in other words, all the body of the message is represented as short lines of US-ASCII data. Despite the '*8bit*', '*7bit*' and '*binary*' indicate that the content has not been transformed, they are useful for knowing the kind of encoding that the data has. This header will generally be omitted when the Content-Type has the *multipart* or '*message*' type (as it happens in the message example of the figure 2.2), because it also admits the last three types we have mentioned.

It is common to add another header (as we can see in figure 2.2) called *charset*, which value instructs the client the original encoding of data for, then, being able to decode it.

2.1.5.4. Base64

As we have seen, in the field *raw* of the messages resource (see section 2.1.5.1) the entire email message has to be encoded using base64url; and, as we have studied when we learnt how the MIME standard (see section 2.1.5.3) is, we can find email whose content encoding is base64. Base64 (contributors, 2019a) is a group of binary-to-text encoding schemes which represent binary data as a sequence of ASCII printable characters. It makes use of a radix-64 to translate each character, because 64 is the more power of two than can be represented using only printable ASCII characters. Indeed all the Base64 variants (like base64url) utilise the characters range A-Z, a-z and 0-9 in that order for the first 62 digits, but the chosen symbol for the last two digits are very different between them. In particular, MIME (see section 2.1.5.3) specification, established in Freed and Borenstein (1996), describes base64 based on Privacy-enhanced Electronic Mail (PEM) protocol (contributors, 2019c), which means that the last two characters are '+' and '/' and the symbol '=' is used for output padding suffix. In the same way, MIME does not establish a fixed size for the base64 encoded lines, by contrast it specifies a maximum size of 76 characters.

If we try to apply standard base64 in a URL encoder, it will translate the characters '+' and '/' to its hexadecimal representation ('+' = '%2B' y '/' = '%2F'). This will cause a conflict in heterogeneous systems or if we use it in data base storage, because of the character '%' produced by the encoder (it is a special symbol of ANSI SQL). This is why modified Base64 for URL variants exists (such as base64url in Josefsson (2006)), where the '=' character has no usefulness and the '+' and '/' symbols are replaced by '-' and '_' respectively. Besides it has no impact on the size of encoded lines.

2.1.5.5. Quoted-printable

Other binary-to-text encoding that could be used in the content of a MIME message is the quoted-printable encoding (contributors, 2019d).

2.1.6. Attachments resource

2.1.7. Threads resource

Chapter 3

Descripción del Trabajo

Aquí comienza la descripción del trabajo realizado. Se deben incluir tantos capítulos como sea necesario para describir de la manera más completa posible el trabajo que se ha llevado a cabo. Como muestra la figura 3.1, está todo por hacer.



Figure 3.1: Ejemplo de imagen

Si te sirve de utilidad, puedes incluir tablas para mostrar resultados, tal como se ve en la tabla 3.1.

Col 1	Col 2	Col 3
3	3.01	3.50
6	2.12	4.40
1	3.79	5.00
2	4.88	5.30
4	3.50	2.90
5	7.40	4.70

Table 3.1: Tabla de ejemplo

Chapter **4**

Conclusiones y Trabajo Futuro

Conclusiones del trabajo y líneas de trabajo futuro.

Antes de la entrega de actas de cada convocatoria, en el plazo que se indica en el calendario de los trabajos de fin de máster, el estudiante entregará en el Campus Virtual la versión final de la memoria en PDF. En la portada de la misma deberán figurar, como se ha señalado anteriormente, la convocatoria y la calificación obtenida. Asimismo, el estudiante también entregará todo el material que tenga concedido en préstamo a lo largo del curso.

Bibliography

Y así, del mucho leer y del poco dormir, se le secó el celebro de manera que vino a perder el juicio.
(modificar en Cascaras\bibliografia.tex)

Miguel de Cervantes Saavedra

CONSORTIUM, W. W. W. 5 the content-transfer-encoding header field. https://www.w3.org/Protocols/rfc1341/5_Content-Transfer-Encoding.html, 2019a. [Online; accessed 23-September-2019].

CONSORTIUM, W. W. W. Rfc1341(mime) : 7 the multipart content type. https://www.w3.org/Protocols/rfc1341/7_2_Multipart.html, 2019b. [Online; accessed 23-September-2019].

CONTRIBUTORS, W. Base64 — Wikipedia, the free encyclopedia. <https://en.wikipedia.org/wiki/Base64>, 2019a. [Online; accessed 23-September-2019].

CONTRIBUTORS, W. Mime — Wikipedia, the free encyclopedia. <https://en.wikipedia.org/w/index.php?title=MIME&oldid=916901691>, 2019b. [Online; accessed 23-September-2019].

CONTRIBUTORS, W. Privacy-enhanced mail — Wikipedia, the free encyclopedia. https://en.wikipedia.org/wiki/Privacy-Enhanced_Mail, 2019c. [Online; accessed 23-September-2019].

CONTRIBUTORS, W. Quoted-printable — Wikipedia, the free encyclopedia. <https://en.wikipedia.org/wiki/Quoted-printable>, 2019d. [Online; accessed 23-September-2019].

FREED, N. and BORENSTEIN, N. Rfc 2045 - multipurpose internet mail extensions (mime) part one: Format of internet message bodies. <https://tools.ietf.org/html/rfc2045>, 1996. [Online; accessed 08-October-2019].

GOOGLE. Gmail api | google developers. <https://developers.google.com/gmail/api>, 2019a. [Online; accessed 23-September-2019].

GOOGLE. google_auth_oauthlib.flow module. https://google-auth-oauthlib.readthedocs.io/en/latest/reference/google_auth_oauthlib.flow.html, 2019b. [Online; accessed 23-September-2019].

- GOOGLE. google.auth.transport package. <https://google-auth.readthedocs.io/en/stable/reference/google.auth.transport.html#google.auth.transport.Request>, 2019c. [Online; accessed 23-September-2019].
- GOOGLE. google.oauth2.credentials module. <https://google-auth.readthedocs.io/en/stable/reference/google.oauth2.credentials.html#google.oauth2.credentials.Credentials>, 2019d. [Online; accessed 23-September-2019].
- GOOGLE. Oauth 2.0 scopes for google apis. <https://developers.google.com/identity/protocols/googlescopes>, 2019e. [Online; accessed 23-September-2019].
- GOOGLE. Using oauth 2.0 to access google apis. <https://developers.google.com/identity/protocols/OAuth>, 2019f. [Online; accessed 23-September-2019].
- GREGORIO, J. googleapiclient.discovery. <https://googleapis.github.io/google-api-python-client/docs/epy/googleapiclient.discovery-module.html#build>, 2019. [Online; accessed 23-September-2019].
- JOSEFSSON, S. Rfc 4648 - the base16, base32, and base64 data encodings. <https://tools.ietf.org/html/rfc4648>, 2006. [Online; accessed 08-October-2019].
- RESNICK, P. Rfc 2822 - internet message format. <https://tools.ietf.org/html/rfc2822>, 2001. [Online; accessed 23-September-2019].
- TROOST, R. Rfc 2183 - communicating presentation information in internet messages: The content-disposition header field. <https://tools.ietf.org/html/rfc2183>, 1997. [Online; accessed 06-October-2019].

Appendix A

Título del Apéndice A

Contenido del apéndice

Appendix **B**

Título del Apéndice B

Este texto se puede encontrar en el fichero Cascaras/fin.tex. Si deseas eliminarlo, basta con comentar la línea correspondiente al final del fichero TFMTeXiS.tex.

*-¿Qué te parece desto, Sancho? – Dijo Don Quijote –
Bien podrán los encantadores quitarme la ventura,
pero el esfuerzo y el ánimo, será imposible.*

*Segunda parte del Ingenioso Caballero
Don Quijote de la Mancha
Miguel de Cervantes*

*-Buena está – dijo Sancho –; fírmela vuestra merced.
–No es menester firmarla – dijo Don Quijote–,
sino solamente poner mi rúbrica.*

*Primera parte del Ingenioso Caballero
Don Quijote de la Mancha
Miguel de Cervantes*

