
**IRIS: Asistente virtual para la redacción personalizada
de correos electrónicos**
IRIS: Virtual Assistant for Personalized Email Writing



**Trabajo de Fin de Grado
Curso 2019–2020**

Autor
Carlos Moreno Morera

Director
Raquel Hervás Ballesteros
Gonzalo Méndez Pozo

Doble Grado en Ingeniería Informática y Matemáticas
Facultad de Informática
Universidad Complutense de Madrid

IRIS: Asistente virtual para la redacción personalizada de correos electrónicos

IRIS: Virtual Assistant for Personalized Email Writing

Trabajo de Fin de Grado en Ingeniería Informática
Departamento de Ingeniería del Software e Inteligencia Artificial

Autor
Carlos Moreno Morera

Director
Raquel Hervás Ballesteros
Gonzalo Méndez Pozo

Convocatoria: Junio 2020
Calificación: *Nota*

Doble Grado en Ingeniería Informática y Matemáticas
Facultad de Informática
Universidad Complutense de Madrid

30 de mayo de 2020

*A Pedro Pablo y Marco Antonio, por crear TeXiS
e iluminar nuestro camino*

Acknowledgments

A Guillermo, por el tiempo empleado en hacer estas plantillas. A Adrián, Enrique y Nacho, por sus comentarios para mejorar lo que hicimos. Y a Narciso, a quien no le ha hecho falta el Anillo Único para coordinarnos a todos.

Resumen

IRIS: Asistente virtual para la redacción personalizada de correos electrónicos

Un resumen en castellano de media página, incluyendo el título en castellano. A continuación, se escribirá una lista de no más de 10 palabras clave.

Palabras clave

Máximo 10 palabras clave separadas por comas

Abstract

IRIS: Virtual Assistant for Personalized Email Writing

An abstract in English, half a page long, including the title in English. Below, a list with no more than 10 keywords.

Keywords

10 keywords max., separated by commas.

Contents

v

1. Introduction	1
1.1. Incentive	1
1.2. Objectives	2
1.3. Working plan	2
1.4. Explicaciones adicionales sobre el uso de esta plantilla	2
1.4.1. Texto de prueba	2
2. State of the Art	3
2.1. Electronic Mail	3
2.1.1. MIME	3
2.1.2. Simple Mail Transfer Protocol	7
2.1.3. Post Office Protocol	8
2.1.4. Internet Message Access Protocol	8
2.1.5. Gmail API	9
2.1.6. Advantages and disadvantages of email protocols versus the use of Gmail API	14
2.2. Computational stylometry	14
2.2.1. Introduction	14
2.2.2. Applications and techniques	15
2.2.3. Style in emails	16
2.2.4. Style metrics	17
3. Used technologies	19
3.1. How to work with Gmail API	19
3.1.1. How to obtain OAuth 2.0 credentials	19
3.1.2. Building a Gmail Resource	21
3.1.3. Users resource	22
3.1.4. Labels resource	23
3.1.5. Messages resource	23
3.1.6. Threads resource	24
4. Work Description	27

4.1.	Style Analyser	27
4.1.1.	Architecture	27
4.1.2.	Extracting Module	28
4.1.3.	Preprocessing Module	28
4.1.4.	Typographic Correction Module	28
4.1.5.	Measuring module	28
4.1.6.	Results and conclusions	28
5.	Conclusiones y Trabajo Futuro	29
	Bibliography	31
A.	Título del Apéndice A	37
B.	Título del Apéndice B	39

List of figures

2.1. MIME types tree structure of an email example	5
2.2. OAuth 2.0 for Web Server Applications and Installed Applications.	10

List of tables

2.1. Main methods' quota units	13
--	----

Chapter 1

Introduction

“Have you ever retired a human by mistake?”
— Rachael - Blade Runner (1982)

Smartphone development meant not only a technological advance but a social revolution too. This intelligent telephones have brought with them countless paradigm shifts in terms of the social sphere. Since then, we are able to speak of a new model of human relationship both between people and with our technology. This current relation standard is due to the easy and quick way of accessing the different information that our mobile devices provide us. Long waits (nowadays the meaning of “long” waits has changed too, people consider more than two or three second too much time) for obtaining anything such as accessing to a website or showing any operation result, are excessively tedious and could be even frustrating for some smartphone users. When we are using our mobile, we want, as fast as possible, the information we are looking for. Precisely because of this, Human-Computer Interaction (HCI) becomes a very important part in the process of development of most applications, not only in terms of speed of response and efficiency of algorithms, but also in how we show different information and the easiness for obtaining it.

As for the relationships between people, as we have said, they have dramatically changed. There is no doubt that the main driving technologies behind this transformation of our relational paradigm are the social networks and the instant messaging. Focusing on the latter, it is necessary to make a breakdown of what consequences to our interpersonal interaction the instant communication have brought with itself. Just as it happens with the HCI, easiness and speed are probably the first features we look for when we are going to send or receive any information to anybody. If we also expect a reply, the ideal would be to obtain it as quickly as possible. Therefore, in most of occasions, in practice we are looking for an “automatic” response from a human, what practically implies that everyone is “obligated” to be connected at any time with the answer we are asking for prepared. This new insight into the relationships between people, that perceives the humans as servers who send a request waiting for a quickly reply with the expected data, has promoted a very fast sending of short messages which intends to substitute and simulate an spoken conversation. These little texts are often concise and summarised, and they form an atomic semantic unit, namely they have their own independent meaning.

1.1. Incentive

Introducción al tema del TFM.

1.2. Objectives

Descripción de los objetivos del trabajo.

1.3. Working plan

Aquí se describe el plan de trabajo a seguir para la consecución de los objetivos descritos en el apartado anterior.

1.4. Explicaciones adicionales sobre el uso de esta plantilla

Si quieras cambiar el **estilo del título** de los capítulos, edita `TeXiS\TeXiS_pream.tex` y comenta la línea `\usepackage[Lenny]{fncychap}` para dejar el estilo básico de L^AT_EX.

Si no te gusta que no haya **espacios entre párrafos** y quieres dejar un pequeño espacio en blanco, no metas saltos de línea (\textbackslash\textbackslash) al final de los párrafos. En su lugar, busca el comando `\setlength{\parskip}{0.2ex}` en `TeXiS\TeXiS_pream.tex` y aumenta el valor de `0.2ex` a, por ejemplo, `1ex`.

TFMTeXiS se ha elaborado a partir de la plantilla de TeXiS¹, creada por Marco Antonio y Pedro Pablo Gómez Martín para escribir su tesis doctoral. Para explicaciones más extensas y detalladas sobre cómo usar esta plantilla, recomendamos la lectura del documento `TeXiS-Manual-1.0.pdf` que acompaña a esta plantilla.

El siguiente texto se genera con el comando `\lipsum[2-20]` que viene a continuación en el fichero `.tex`. El único propósito es mostrar el aspecto de las páginas usando esta plantilla. Quita este comando y, si quieres, comenta o elimina el paquete `lipsum` al final de `TeXiS\TeXiS_pream.tex`

1.4.1. Texto de prueba

¹<http://gaia.fdi.ucm.es/research/texis/>

Chapter 2

State of the Art

*“Who controls the past controls the future.
Who controls the present controls the past.”
— 1984 - George Orwell (1949)*

2.1. Electronic Mail

Electronic Mail (Guide, 2005, Chapter 11) is a communication service which has been used since 1971 (Wikipedia contributors, 2019b) when the first network email with the text “QWERTYUIOP” was sent through ARPAnet (Advanced Research Projects Agency Network, the first network which implements the TCP/IP protocol) with the experimental protocol CYPNET. Nowadays, the messages are delivered by using a client/server architecture. In this way, an email is created by using a client-side mail program. Then, this software sends the message to a server, which will redirect to the recipient’s mail server. From it, the email is going to be provided to the addressee.

In order to make all this process possible, an Internet standard, that extends the format of email messages, and a wide range of network protocols exist for allowing different machines (often they execute distinct operative systems and make use of different mail programs) to share emails. In this section, we are going to study this standard, these protocols and the API which is going to be used for reading, sending emails and accessing to the user’s email data. First of all, we are going to explain the MIME standard (see Section 2.1.1) which specifies the format of email message. Then we are going to explain the main email management protocols, both electronic mail transmission protocol (such as Simple Mail Transfer Protocol, which is explained in Section 2.1.2) and message access protocol (such as Internet Message Access Protocol and Post Office Protocol, which are studied in Sections 2.1.4 and 2.1.3, respectively).

In spite of being a mail server-independent solution, as we will see, we are going to find security issues which are going to hinder our user’s email data access. These trials come from the automatic server access. For this reason, Gmail API is going to be introduced (see Section 2.1.5) and, finally, the assessment of the advantages and disadvantages of making use of the email protocols or the Gmail API is discussed (see Section 2.1.6).

2.1.1. MIME

To be able to create messages and read the body of the emails, it is essential to understand what the MIME standard consists of. Hence, in this section we are going to give a

general idea about this.

MIME, whose acronym stands for Multipurpose Internet Mail Extensions (Wikipedia contributors, 2019c), is an Internet standard for the exchange of several file types (text, audio, video, etc.) which provides support to text with characters other than ASCII, non-text attachments, body messages with numerous parts (known as multi-part messages) and headers information with characters other than ASCII. It is defined in a series of request for comments (RFC): RFC 2045 (Freed and Borenstein, 1996b), RFC 2046 (Freed and Borenstein, 1996c), RFC 2047 (Moore, 1996), RFC 2049 (Freed and Borenstein, 1996a), RFC 2077 (Nelson and Parks, 1997), RFC 4288 (Freed and Klensin, 2005a) and RFC 4289 (Freed and Klensin, 2005b).

Virtually all e-mails written by people on the Internet and a considerable proportion of these automatically generated messages are transmitted in MIME format via SMTP (see Section 2.1.2). Internet e-mail messages are so closely associated with SMTP and MIME that they are usually called SMTP/MIME messages.

The content types defined by the MIME standard are of great importance also outside the context of e-mails. Examples of this are some network protocols such as HTTP from the Web. HTTP requires data to be transmitted in an e-mail-type message context although the data may not be an e-mail itself.

Nowadays, no e-mail program or Internet browser can be considered complete if it does not accept MIME in its various facets (text and file formats).

In this section we will learn how the MIME type nomenclature is (see Section 2.1.1.1), which is necessary for being able to exchange a several file types. Then, we will illustrate the MIME structure of an email, consisting of MIME headers (see Section 2.1.1.2) and, finally, two common MIME message encoding (base64 and quoted-printable) are explained (see Sections 2.1.1.3 and 2.1.1.4, respectively).

2.1.1.1. Type Nomenclature

Each data type has a different name in MIME. These names follow the format: type-/subtype (both type and subtype are strings), in such a way that the first denotes the general data category and the second the specific type of that information. The values the type can take are:

- *text*: means that the content is simple text. Subtypes like *html*, *xml* and *plain* can follow this type.
- *multipart*: indicates that the message has numerous parts with independent data. Subtypes like *form-data* and *digest* can follow this type.
- *message*: it is used to encapsulate an existing message, for example when we want to reply a email and add the previous message. Subtypes like *partial* and *rfc822* can follow this type.
- *image*: means that the content is an image. Subtypes like *png*, *jpeg* and *gif* can follow this type.
- *audio*: indicates that the content is an audio. Subtypes like *mp3* and *32kadpcm* can follow this type.
- *video*: denotes that the content is an video. Subtypes like *mpeg* and *avi* can follow this type.

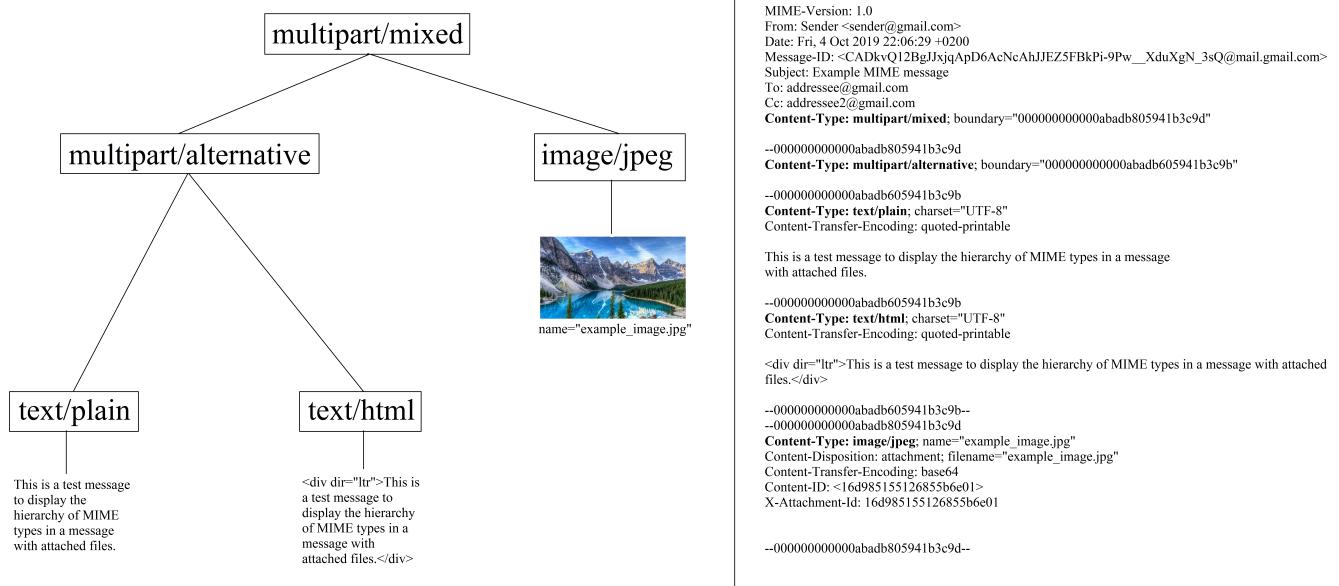


Figure 2.1: MIME types tree structure of an email example

- *application*: it is used for application data that could be binary. Subtypes like *json* and *pdf* can follow this type.
- *font*: means that the content is a file which defines a font format. Subtypes like *woff* and *ttf* can follow this type.

2.1.1.2. MIME headers

MIME has several headers which appear in all emails sent with this standard. The most important of them are the following:

- *Content-Type*: the value of this header is the type and subtype of the message with the same structure that we have explained before. For example, if we have the header *Content-Type: text/plain*, it means that the message is a plain text. By using the type *multipart* make the creation of messages with parts and subparts organized in a tree structure (in which leaf nodes can belong to any type and the rest of them can belong to any multipart subtype variety) possible (Freed and Borenstein, 1992, Section 7.2). A feasible composition of a message with a part with plain text and other non-text parts could be constructed by using *multipart/mixed* as the root node like in Figure 2.1. Indeed, in the example of Figure 2.1, we can observe the use of *multipart/alternative* for a message which contains the body both in plain text and in html text. Other different emails constructions are possible (like forwarding with the original message attached by using *multipart/mixed* with a *text/plain* part and a *message/rfc822* part) thanks to the tree structure of the *Content-type* header.

Another important detail, that we can observe in the example in figure 2.1, is the fact that each node of the tree structure of the emails is visited and showed following the pre-order traversal.

- *Content-Disposition*: this header is used to indicate the presentation style of the part of the message. There are two ways to show the part: *inline* content-disposition (which means that the content must be displayed at the same time as the message)

and *attachment* content-disposition (the part is not displayed at the same time as the message and it requires some form or action from the user to see it). Furthermore, this header also provides several fields for specifying other type of information about the content, such as the name of the file and the creation or modification date. The following example is taken from RFC 2183 (Troost et al., 1997) and, as we will explain after the example, it does not match with the syntax of this same header in the example that we can see in the last part of the example message of figure 2.1:

```
Content-Disposition: attachment; filename=genome.jpeg;
modification-date="Wed, 12 Feb 1997 16:29:51 -0500";
```

As we have said, this syntax is different from the used in the email example of Figure 2.1. This results from the fact that, in HTTP, the header we find in that figure (*Content-Disposition: attachment*) is usually used for instructing the client to show the response body as a downloadable file. As we can observe, it has a *filename* field which is used for establishing the default file name when the user is going to download it.

- *Content-Transfer-Encoding*: when we want to send some files in a message, sometimes they are represented as 8-bit character or binary data, which are not allowed in some protocols. On this account, it is necessary to have a standard that indicates how we should re-encoding such data into a 7-bit short-line format. The Content-Transfer-Encoding header (Freed and Borenstein, 1992, Section 5) will tell the client which transformation has been used for being able to transport that data. Therefore and for lack of a previous standard which states a single Content-Transfer-Encoding mechanism, the possible values, which specify the type of encoding are: '*base64*' (see Section 2.1.1.3), '*quoted-printable*' (see Section 2.1.1.4), '*8bit*', '*7bit*', '*binary*' and '*x-token*'. All these values are not case sensitive. If this header does not exist, we can assume that the value of this header is '*7bit*', which means that the body of the message is already in a seven-bit mail-ready representation, in other words, all the body of the message is represented as short lines of US-ASCII data. Despite the '*8bit*', '*7bit*' and '*binary*' indicate that the content has not been transformed, they are useful for knowing the kind of encoding that the data has. This header will generally be omitted when the Content-Type has the *multipart* or '*message*' type (as it happens in the message example of Figure 2.1), because it also admits the last three types we have mentioned.

It is common to add another header (as we can see in Figure 2.1) called *charset*, which value represents the original encoding of data so the client is able to decode it.

2.1.1.3. Base64

As we have studied when we learnt how the MIME headers (see Section 2.1.1.2) are, we can find email whose content encoding is base64. Base64 (Wikipedia contributors, 2019a; Josefsson, 2006) is a group of reversible binary-to-text encoding schemes which represent binary data as a sequence of ASCII printable characters. It makes use of a radix-64 to translate each character, because 64 is the higher power of two than can be represented using only printable ASCII characters. Indeed all the Base64 variants (like base64url) utilise the characters range A-Z, a-z and 0-9 in that order for the first 62 digits, but the chosen symbol for the last two digits are very different between them. In particular, the MIME (see Section 2.1.1) specification, established in RFC 2045 (Freed and

Borenstein, 1996b), describes base64 based on Privacy-enhanced Electronic Mail (PEM) protocol (Wikipedia contributors, 2019d; Josefsson and Leonard, 2015), which means that the last two characters are '+' and '/' and the symbol '=' is used for output padding suffix. In the same way, MIME does not establish a fixed size for the base64 encoded lines, by contrast it specifies a maximum size of 76 characters.

If we try to apply standard base64 in a URL encoder, it will translate the characters '+' and '/' to its hexadecimal representation ('+' = '%2B' y '/' = '%2F'). This will cause a conflict in heterogeneous systems or if we use it in data base storage, because of the character '%' produced by the encoder (it is a special symbol of ANSI SQL). This is why modified Base64 for URL variants exists (such as base64url in Josefsson (2006)), where the '=' character has no usefulness and the '+' and '/' symbols are replaced by '-' and '_' respectively. Besides it has no impact on the size of encoded lines.

2.1.1.4. Quoted-printable

Other reversible binary-to-text encoding that could be used in the content of a MIME message is the quoted-printable encoding (Wikipedia contributors, 2019e; Borenstein and Freed, 1993). Making use of printable characters (such as alphanumeric and '=') proved capable of transmitting 8 bit data over a 7 bit protocol. Unlike base64, if the original message is mostly composed of ASCII characters, the encoded text is readable and compact.

Each byte could be represented via two hexadecimal character. On this basis, the '=' symbol followed by two hexadecimal digits are enough to encode all the characters except the printable ASCII ones and the end of line. For example, if we want to represent the 12th ASCII character we can encode it as '=0C' or if the equality symbol (whose decimal value is 61) is in our original message, it could be encoded as '=3D' (note that despite being a printable ascii character it must be encoded as it is a special character in this encoding). This is how quoted-printable encodes the different characters.

In respect of the maximum line size, as it happens with the MIME specification of the base64 (see Section 2.1.1.3), it is 76 characters each encoded line. To achieve this goal and still be able to decode the text getting the original message, quoted-printable adds *soft line breaks* at the end of the line consisting of the '=' symbol and it does not modify the encoded text.

2.1.2. Simple Mail Transfer Protocol

Simple Mail Transfer Protocol (also known as SMTP) is a network connection-oriented communication protocol used for the exchange of e-mail messages. It was originally defined in Postel (1982) (for the transfer) and in Crocker (1982) (for the message). It is currently defined in Klensin (2008) and Resnick (2008). However, this protocol has some limitations when it comes to receiving messages on the destination server. For this reason, this task is intended for other protocols such as the Internet Message Access Protocol (see Section 2.1.4) or the Post Office Protocol (refer to Section 2.1.3), and SMTP is used specifically to send messages.

Making use of SMTP, an email is “pushed” from one mail server to another (next-hop mail server) until it reaches its destination. The message is not routed according to the message recipients specified during the client’s connection to the SMTP server, but from the destination mail server. Thanks to the fact that this protocol has a feature to initiate mail queue processing, an intermittently connected mail server can extract messages from another remote server when necessary.

2.1.3. Post Office Protocol

Post Office Protocol (also known as POP) is an application protocol (in OSI Model) for obtaining e-mails stored in a remote Internet server called POP server. It was originally defined in Reynolds (1984) (it was POP version 1, also known as POP1). Current POP version (POP3, in general when we talk about POP we refer to this version) is detailed in Myers et al. (1996).

POP was designed for receiving emails. Using POP, users with intermittent or very slow Internet connections (such as modem connections) can download their email while online and check it later even when offline. The general operation is: a client using POP3 connects, gets all messages, stores them on the user's computer as new messages, deletes them from the server, and finally disconnects. However some mail clients include the option to leave messages on the server. They use the order UIDL (Unique IDentification Listing) which, unlike most POP3 commands, does not identify messages depending on their mail server ordinal number. This results from the fact that the mail server ordinal number creates problems when a client tries to leave messages on the server, since messages with numbers change from one connection to the server to another. Accordingly, server which makes use of UIDL, assigns a unique and permanent character string to each message. Thus, when a POP3-compatible mail client connects to the server, it uses the UIDL command to map the message identifier. This way the client can use that mapping to determine which messages to download and which to save at the time of downloading.

Like other old Internet protocols, POP3 used a signature mechanism without encryption. The transmission of POP3 passwords in plain text still occurs. Nowadays POP3 has various authentication methods that offer a diverse range of levels of protection against illegal access to users' mailboxes.

The advantage over other protocols is that between server-client you do not have to send so many commands for communication between them. The POP protocol also works properly if you do not use a constant connection to the Internet or to the network that contains the mail server.

2.1.4. Internet Message Access Protocol

Internet Message Access Protocol (also known as IMAP) is an application protocol, designed as an alternative to Post Office Protocol (see Section 2.1.3) in 1986, which allows the access to stored messages in an Internet server. As with the Post Office Protocol, with IMAP you can access your e-mail from any computer with an Internet connection. The current version of IMAP (IMAP version 4 review 1 or IMAP4rev1) is defined in Crispin (2003).

In contrast to Post Office Protocol, IMAP allows multiple clients to manage the same mailbox. This fact results from the main differences between these two protocols: IMAP does not remove email from server until the client specifically requests it (as POP removes them by default, it is impossible to accessing them from another device which has not the downloaded messages) and it does not download the messages to the user's computer (clients may optionally store a local copy of them). This last property gives raise to several advantages with regard to Post Office Protocol: the immediate notification of the arrival of a mail (due to it works in permanent connection mode) while POP checks if there are new e-mails every few minutes (which causes an appreciable rise in traffic and in the time the user has to wait to send a request to the server, because it is necessary to complete the download of all new messages first), it is possible to create shared folders with other users (it depends on the mail server), the e-mails do not take up memory in the user's local

device while POP downloads them regardless of whether they are going to be read or not (effectively IMAP has to download a message when it is going to be read, but they are temporary files and only the e-mail headers are downloaded to manage the mailbox) and it allows the user to manage folders, templates and drafts in server in addition to be able to search a mail from keywords.

2.1.5. Gmail API

Gmail is a free email service developed by the company Google. Users can access Gmail on the web itself and through third-party programs that synchronize email content via POP or IMAP protocols. It also has a mobile application to manage the user's email. Gmail began as a limited beta version on April 1, 2004 and completed its testing phase on July 7, 2009. As stated in BBC news (3rd July 2018): "Gmail is the world's most popular email service with 1.4 billion users".

As we will see in Section 2.1.6, due to the automatic server access, directly using the communication protocol for electronic mail transmission (SMTP) and for retrieving email messages from a mail server (POP or IMAP) will cause us security problems in accessing the user's email data. For this reason, we are going to make use of Gmail API. In this section we are going to study it. Thus in Section 2.1.5.1, we are going to study the necessary protocol for accessing the Gmail API and consequently for being able to get into the user's email data. Further on, we will require a resource (like a programming object) we can work with and represent all the Gmail structure (see Section 2.1.5.2). Once we count on this general resource, we have the necessary tools to be able to understand and handle the internal architecture of the Gmail API and the different means it provides in order to achieve our goal. Therefore, in Sections 2.1.5.3, 2.1.5.4, 2.1.5.5 and 2.1.5.6 we are going to delve into the essential resources for our purpose: labels, messages, threads and drafts, respectively.

Finally, as this API is not the only means of accessing the user's mail data (we have studied other ways in previous sections), we will end with a brief description about the API usage limits (in Section 2.1.5.7) to assess its use with respect to other methods of email access.

2.1.5.1. OAuth 2.0 Protocol

Open Authorization or OAuth (Cook and Messina, 2019a) is an open standard which allows simple authorization flows for web services or applications. It is a protocol defined in Hardt (2012) which allows the site's users to share their information with another site without providing their full identity. This mechanism is used by companies like Google, Facebook, Twitter and Microsoft to allow users to share information about their accounts with third-party applications or websites

Gmail API, as it also happens in the case of other Google APIs, uses OAuth 2.0 protocol (Google, 2019f) to handle authentication and authorization. It will provide us a secure and trusted login system to access to the user's Gmail data.

The basic working process of OAuth 2.0 protocol can be seen in Figure 2.2. As we can observe, at first our application carries out a request in which it sends a token. This token includes, among other things, a credential, which helps Google Servers to identify the application, and a list of OAuth 2.0 Scopes (Google, 2019e), which are a "mechanism in OAuth 2.0 to limit an application's access to a user's account. An application can request one or more scopes. This information is then presented to the user in a consent screen, and the access token issued to the application will be limited to the scopes granted" (Cook and

Messina, 2019c). We will use the Gmail API OAuth 2.0 Scope which allows us to read, compose, send, and delete emails.

Once the user has logged in the Gmail account (authentication) and accepted all the necessary permissions that our application needs (authorization), our process receives an authorization code which is going to be exchanged for an access token (Cook and Messina, 2019b). Then, we will be in possession of the OAuth 2.0 credentials for the user (Google, 2019d) which we are going to use for accessing the user's Gmail account.

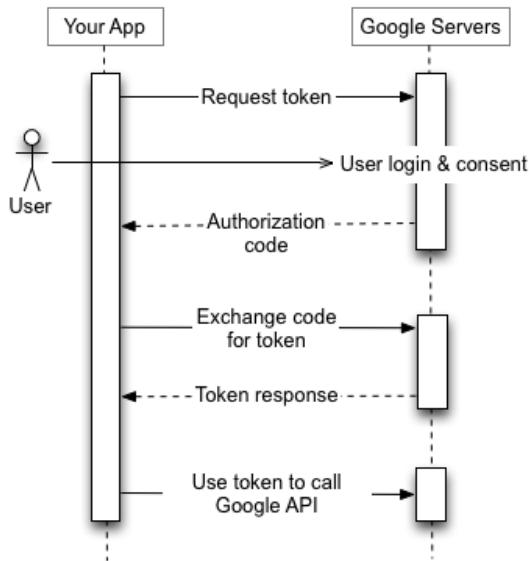


Figure 2.2: OAuth 2.0 for Web Server Applications and Installed Applications.
Image extracted from Google (2019f)

2.1.5.2. Users resource

At this point, with the OAuth 2.0 credentials, we are able to call the Gmail API. For this purpose, it is necessary to construct a resource (Google, 2019a, /v1/reference) for interacting with the API. As we will see later, this resource will lead us to manage emails, drafts, threads and everything we will like to do with the user's Gmail data.

By using the OAuth 2.0 credentials, we are able to get in contact with the Google Servers and request for what is known as users resource (Google, 2019a, /v1/reference/users), which holds all the necessary resources for our task, such as labels (see Section 2.1.5.3), messages (see Section 2.1.5.4), threads (see Section 2.1.5.5) and drafts (see Section 2.1.5.6). In practice, the users resource has instance methods which get in contact with Google Servers and return these other Gmail API resources that we are going to need (the methods' names are *labels()*, *messages()*, *threads()* and *drafts()*, respectively). Now, in next sections, we are going to explain all the resources we can create with the user resource.

2.1.5.3. Labels resource

As we have seen in the explanation of the users resource (Section 2.1.5.2), we can obtain the labels resource (Google, 2019a, /v1/reference/users/labels) by invoking *labels()* instance method of our users resource. It manages the entire set of our email labels, which categorize messages and threads within the user's mailbox.

Labels resource is an object which allows us to access to the different email labels of the user, such as *INBOX*, *UNREAD* and *SENT*. With the labels resource methods, we can obtain each of these “user’s labels” which have a dictionary structure and their representation is what we can observe hereunder:

```
{
  'id' : string, # The immutable identifier of the label
  'name' : string, # The display name
  # The visibility of messages in the Gmail web interface
  'messageListVisibility' : string,
  'labelListVisibility' : string, # The visibility of label
  'type' : string, # The owner type of the label ('system' or 'user')
  'messagesTotal' : integer, # Total number of messages with the label
  'messagesUnread' : integer, # Number of unread messages with the label
  'threadsTotal' : integer, # Total number of threads with the label
  'threadsUnread' : integer, # Number of unread threads with the label
  'color' : {
    # Text color of the label, represented as hex string
    'textColor' : string,
    # Background color represented as hex string #RRGGBB
    'backgroundColor' : string
  }
}
```

The important fields we are going to need are the *name*, the *type* and the number of total messages and threads with the label (which are *messagesTotal* and *threadsTotal* fields, respectively). Labels with *system* type, such as *INBOX*, *SENT*, *DRAFTS* and *UNREAD*, are internally created and cannot be added, modified or deleted.

2.1.5.4. Messages resource

In most of the operations we are going to execute, the correct management of messages will be essential. Therefore, knowing how the emails are represented in Gmail API and how to use them is imperative to understand how to work with this API. For this reason, in this section we are going to delve into the messages resource (Google, 2019a, /v1/reference/users/messages) of the Gmail API. As we saw in Section 3.1.3, we can access to this resource by invoking the *messages()* instance method when we have a users resource.

As with the labels resource, the messages resource manages the set of all messages of the user’s email. With the messages resource methods, we can obtain each of these “user’s messages” which, regardless of which programming language is used, have a dictionary structure and their representation is what we can see down below:

```
{
  'id' : string,
  'threadId' : string,
  'labelIds' : [ string ],
  'snippet' : string,
  'historyId' : unsigned long,
  'internalDate' : long,
  'payload' : {
    'partId' : string,
    'mimeType' : string,
    'filename' : string,
    'headers' : [
      ...
    ]
  }
}
```

```

{
  'name' : string,
  'value' : string
},
],
'body' : {
  'attachmentId' : string,
  'size' : integer,
  'data' : bytes
},
'parts' : [ (MessagePart) ]
},
'sizeEstimate' : integer,
'raw' : bytes
}

```

The more important keys of this data structure for this work are:

- *id*: an immutable string which identifies the message.
- *threadId*: we will explain the thread resource in Section 2.1.5.5 and we will see that a thread is composed of different messages that share common characteristics. The value of this field is a string which represent the identifier of the thread the message belongs to.
- *labelIds*: a list of the identifiers of labels (see Section 2.1.5.3) applied to the message.
- *payload*: as we can see in the resource representation above, it has a dictionary data structure. The *payload* field is the parsed email structure in the message parts. The more important keys of the *payload* field are:
 - *mimeType*: the MIME type (see the explanation of *Content-Type* header in Section 2.1.1.2) of the message part.
 - *headers*: a list of headers. It contains the standard RFC 2822 (Resnick, 2001) email headers such as *To*, *From*, *Subject* and *Date*. Each header has a *name* field, which is the name of the header (for example *From*), and a *value* field, which is the value of the header (following the same example as with the *name* field: *example@gmail.com* could be the value).
 - *parts*: a list which contains the different MIME message child parts (we have gone into it in depth in the Section 2.1.1).
 - *body*: a dictionary structure which contains the body data of this part (see Section 2.1.1) in case it does not contain MIME message parts (otherwise it will be empty). This structure should not be confused with an attached file. Each MIME part contains a *body* property regardless of MIME type of the part.
- *raw*: the entire email message in an RFC 2822 (Resnick, 2001) formatted and base64url (see Section 2.1.1.3) encoded string.

2.1.5.5. Threads resource

When we access to our inbox, we are actually seeing the inbox threads instead of the messages resource. Every message, even if it is an only email without a reply, is enclosed in a thread resource (Google, 2019a, /v1/reference/users/threads) which is essentially a list,

perhaps unitary, of messages resources. In fact, as we can observe in the following resource representation, each thread (which can be obtained thanks to the threads resource due to it manages the entire set of threads of a user's email), in its dictionary structure, has a list of messages resources:

```
{
  'id' : string, # The identifier of the thread
  'snippet' : string, # A short part of the text
  'historyId' : unsigned long,
  'messages' : [ users.messages resource ]
}
```

2.1.5.6. Drafts resource

The last Gmail API resource we will study is the most easy to understand after knowing all the structures related with emails that we have explained in the above sections: the drafts resource (Google, 2019a, /v1/reference/users/drafts). Its representation is very simple:

```
{
  'id' : string # The immutable identifier of the draft
  'message' : users.messages resource
}
```

As we can observe, a draft is virtually a messages resource with an identifier. Indeed, in order to create a new draft with the *DRAFT* label we must create a MIME message (see Section 2.1.1) as we have to do when we want to send a new email by using the *send* messages resource method.

2.1.5.7. API Usage Limits

One factor to be taken into account is the limitations of the Gmail API (Google, 2019a, /v1/reference/quota) which could become a drawback in the application development. It has a limit on the daily usage and on the per-user rate. In order to measure the usage rate, "quota units" are defined depending on the method invoked (main methods of each resource are explained in Section 3.1). In Table 2.1 we can consult the value of some methods in quota units (we have selected the more important methods for our purpose, for the quota units of other methods it is recommended to refer to (Google, 2019a, /v1/reference/quota)).

Method	Where the method is explained	Quota units
<i>getProfile</i>	3.1.3	1
<i>labels.get</i>	3.1.4	1
<i>messages.get</i>	3.1.5	5
<i>messages.list</i>	3.1.5	5
<i>messages.send</i>	3.1.5	100
<i>threads.get</i>	3.1.6	10
<i>threads.list</i>	3.1.6	10
<i>drafts.create</i>	(Google, 2019a, /v1/reference/users/drafts)	10

Table 2.1: Main methods' quota units

However, both daily usage limit and per-user rate limit are acceptable for the type of software we want to build: 1,000,000,000 quota units per day and 250 quota units per user

per second. Therefore there are no constraints (for our purpose) that avoid us to use this API.

2.1.6. Advantages and disadvantages of email protocols versus the use of Gmail API

Without using the Gmail API, we may be able to access mail accounts by implementing the different email protocols that we have studied. Indeed, this implementation would allow us to access them regardless of the mail server, in other words, we would be able to work with any email account without the need of being a Gmail one. However, when we try to developed an application which is going to access to a user's email account, Google Servers detect it as a non-authorised login and block the authentication process. Then they send to the user a warning titled "A login attempt has been blocked" with the following information:

"Someone just used your password to try to sign in to your account from a non-Google application. Although Google has blocked access, you should find out what happened. Check your account activity and make sure that only you have access to your account."

Against this background, it is possible to change the user's security settings for allowing the automatic accessing to the account. However, it is not recommended (due to possible security issues) and creates a sense of insecurity for the user of the application that requires this configuration.

In the other hand we have the Gmail API, which facilitates the access to email's data. Besides, its only disadvantage is to limit the daily usage of this technology by imposing quota units. However, this quota units are enough for achieving our aim. For these reasons, and because of the email accounts that we will study belongs to Gmail, the Gmail API has been chosen as the most suitable way for managing the user's email account.

2.2. Computational stylometry

This field of Artificial Intelligence (related with the Natural Language Processing and Natural Language Generation) is in charge of studying the writing style in natural language written documents (although it is often use in applications like the detection of plagiarism in programmes). In this section we are going to delve into it in order to known the state of art of this field of study. To achieve this, first a brief introduction is presented (see Section 2.2.1) and, then, the different applications and techniques used in Computational stylometry are explained (see Section 2.2.2).

In addition, it will be necessary to explain the presentation of computational stylometry in the specific field of e-mails (see Section 2.2.3) since, as we can deduce, these present singularities with respect to other types of documents.

Finally, various style writing metrics are going to be explained (see Section 2.2.4) for the purpose of calculating and studying them in the extracted dataset (the entire set of emails that have been extracted).

2.2.1. Introduction

Stylometry (Wikipedia contributors, 2020) is the application of the study of linguistic style to written language, although it has also been successfully applied to music and painting. It could be defined as the linguistic discipline that applies statistical analysis to literature in order to evaluate the author's style through various quantitative criteria.

Stylometry is characterized by the assumption that there are implicit features in the texts that the author introduces unconsciously, such as the use of a specific vocabulary that makes up the writer's mental lexicon, the lexical-syntactic structure of the sentences in the document, etc (Burrows, 1992).

According to Holmes (1998), the stylometry was born in 1851 when Augustus de Morgan, an English logician, hypothesized that the problem of authorship could be addressed by determining whether one text "does not deal in longer words" (De Morgan and De Morgan, 1882) than another. Following this idea, three decades later, the American physicist Thomas Mendenhall carried out research in which he measured the length of several hundred thousand words from the works of Bacon, Marlowe and Shakespeare (Mendenhall, 1887). However its results showed that word length is not an effective writing style features which allow us to discriminate between different authors. Since then numerous investigations have been carried out to analyse the parameters that define writing style more precisely.

Tweedie et al. (1996) defines the writing style as "a set of measurable patterns which may be unique to an author". For this reason, various machine learning and statistical techniques have been used to discover the characteristics that determine it. One of the first and most famous successes was the resolution of the controversial authorship of twelve of the Federalist Papers. These documents, a total of eighty-five papers, were published anonymously in 1787 to convince the citizens of New York State to ratify the constitution. They are known to have been written by Alexander Hamilton, John Jay and James Madison, who subsequently claimed their contributions from each of them. However, twelve were claimed both Madison and Hamilton. By using the frequency of occurrence of function words, previously used in Ellegard (1962), and employing numerical probabilities adjusted by Bayes' theorem, in Mosteller and Wallace (1964) the twelve papers disputed were attributed to James Madison. Thereafter, Federalist Papers is a famous example in this area for testing the different solutions, as it happens in Tweedie et al. (1996), which make use of neural networks to solve this problem.

2.2.2. Applications and techniques

In addition to the detection and verification of authorship in historical, literary and even forensic investigations, stylometry is used in other areas such as the detection of fraud and plagiarism, the classification of documents according to their genre or audience, etc. Other possible applications of this area are the prediction of the gender, age or personality of the author as it happens in Schwartz et al. (2013) and the natural language generation with Style (Gatt and Krahmer, 2018, Section 5.1).

To address all these problems, mostly statistical techniques are used. Some of them, which are more complex, are more recognized for belonging to the field of machine learning such as neural networks (Ng et al., 1997), Support Vector Machines (Abbasi and Chen, 2005), Principal Components Analysis (Binongo and Smith, 1999), decision trees (Apte et al., 1998), Adaboost (Cheng et al., 2011), K-Nearest Neighbors (Kucukyilmaz et al., 2008) and Naive Bayes (Sahami et al., 1998); while others are based on purely statistical approaches (such as cusum in Summers (1999) or Thisted and Efron (1987)) or merely syntactic-statistical concepts as in the well-known software implementations such as stylo (Eder et al., 2016) and STYLENE (Daelemans et al., 2017). To this last type also belongs techniques based on dictionary word counting using Linguistic Inquiry and Word Count also known as LIWC (Pennebaker et al., 2015), while more recent ones which use simple lexico-syntactic patterns, such as n-grams and part-of-speech (POS) tags (Mihalcea and

Strapparava, 2009; Ott et al., 2011), belongs to the machine learning approach. We can also find techniques outside this paradigm, such as the writing style features driven from Context Free Grammar (CFG), as we can observe in Feng et al. (2012), genetic algorithms (Holmes and Forsyth, 1995) and Markov chains (Tweedie and Baayen, 1998).

In order to address our work, we are going to make use of writing style metrics (which will be explained in Section 2.2.4), based on simple statistics like the mean and easy probabilistic metrics like the entropy.

2.2.3. Style in emails

Electronic mails are a very specific type of document in stylometry. Their length, usually shorter, and level of reliability, in most occasion between the informality of spoken word and the relative formality of an official letter, are two of their characteristic that make them so peculiar. For this reason, a lot of researches have focused their attention on these type of texts, taking special interest the identification pertaining to the authorship of e-mail messages such as the published thesis Corney (2003) or Thomson and Murachver (2001), which have investigated the existence of gender-preferential language styles in e-mail communications.

Despite being able to use most of the techniques mentioned above, both the machine learning (such as K-Nearest Neighbors used in Calix et al. (2008) or Support Vector Machines used in De Vel et al. (2001)) and the purely statistical approaches (such as regression algorithms used in Iqbal et al. (2010) for analysing 292 different features in order to verify the email authorship), it is possible to find big differences with other documents such as structural features that pure text lacks. The usage of greeting text, farewell text and the inclusion of a signature are three examples of these structural features that we must to take into account.

Due to e-mail documents have several features which difference from with longer formal text documents (such as literary works or published articles), they make any computational stylometry problem challenging compared with others. First of all, as we have previously said, length of the emails is much shorter than other documents, which results in certain language-based metrics may not being appropriate (such as hapax legomena or hapax dislegomena, that is to say, the number or ratio of words used once or twice, respectively). This e-mail's feature also makes contents profiling based on traditional text document analysis techniques, such as the “bag-of-words” representation (for example when Naive Bayes approach is being used) more difficult.

Other electronic mail's particularity is the composition style used in formulating them. That is, an author profile derived from normal text documents (for example published articles) could not be the same as that obtained from a common e-mail document (De Vel et al., 2001). For example, the brevity of the e-mails causes a greater tendency to get to the point without excessive detours on the subject, in other words, they have a concise nature. We may also find that they contain a greater number of grammatical errors or even a quick compositional style that is more similar to an oral interaction, as these can become a dialogue between two or more interlocutors. In this way, the authoring composition style and interactivity features attributed to electronic mails shares some elements of both formal writing and speech.

Main feature of e-mail against other type of documents that we are interested in is the variation in the individual style of e-mail messages due to the fact that they, as an informal and fast-paced medium, exhibit variations in an individual's writing styles due to the adaptation to distinct contexts or correspondents (Argamon et al., 2003). Many

authors such as Allen (1974) and De Vel et al. (2001) support the hypothesis that each writer has certain unconscious habits when writing an email that depend on the target audience. However, we hardly find any research that uses stylometry to set the parameters of writing style according to the recipient of the message.

2.2.4. Style metrics

Chapter 3

Used technologies

3.1. How to work with Gmail API

In order to be able to read and send emails, it is necessary to access to the user's email data. For this reason, the different ways to obtain this information were studied. One of them is the Gmail API, which allows developers to perform all the actions we need in an easy way.

Gmail API can be used in several programming languages such as Python, PHP, Go, Java, .NET, ... Due to the greater number of examples in the starting guides of the Gmail API (Google, 2019a) and the previous knowledge that was already had of it, Python was chosen for the first contact with this technology.

The following tries to be a step-by-step explanation of what is necessary to know to access the user's Gmail account, create a message, send an email previously created, create and update a draft, reply a received message (for this it is necessary to know how to create an email) and read important information of message threads and individual emails (such as who is the sender, who has received the message, the subject, the date, the email's body, the attached files, ...). Methods of Gmail API resources (explained in Section 2.1.5) are studied to achieve this aim.

As we have seen in Section 2.1.5.1, in order to work with Gmail API, it is necessary to obtain the required OAuth 2.0 credentials. For this reason, we are going to developed an implementation which gets them (see Section 3.1.1). Then, with that credentials, we are going to build a Gmail resource (see section 3.1.2), which is necessary for obtaining the rest of the resources that we have explained. Finally, in the rest of this Section, we are going to delve into the methods of each resource that we already know.

3.1.1. How to obtain OAuth 2.0 credentials

As we have seen before (see Figure 2.2), to be in possession of OAuth 2.0 client credentials from the Google API Console is required for having the appropriate permissions to use the Gmail API (this credential is the first request token that is sent to the Google Servers in the OAuth 2.0 exchange of information).

The Google API Console, also known as Google Console Developer¹, built into Google Cloud Platform, makes possible an authorized access to a user's Gmail data. In order to achieve it, having a Google account is a prerequisite because accessing to this platform

¹<https://console.developers.google.com/>

will be necessary. Once this web has been accessed, at first we have to create a new development project by clicking in “New Project” in the control panel (which is the main tab of the Google Console Developer and the one that opens by default when you access it). When we have already created a project, we will enable the API we are going to work with, in this case the Gmail API. To do this we will look for it in the search engine that we can find in the library of APIs of this platform. Now we can apply for the credentials we need. Accessing to the “Credentials” tab and clicking on “Create Credentials” will lead us to an easy questionnaire, about what type of credentials we prefer, that we have to answer by basing on what type of application we are building. Then we must download the .json file and save it in the folder we are going to work in.

Before starting the development of the implementation of the OAuth 2.0 protocol which will provide us a secure and trusted login system to access to the user’s Gmail data, we must install the Google Client Library² of our choice of language (we will use Python, so we have to install the libraries *google-api-python-client*, *google-auth-httplib2* and *google-auth-oauthlib*).

There are many ways to obtain the necessary permissions for accessing to the user’s emails data following the OAuth 2.0 protocol. As this is a first contact with the Gmail API only with the intention of knowing the possibilities it offers to us and its advantages and disadvantages for future implementations, we are going to develop a simple script which is using a class very useful for local development and applications that are installed on a desktop operating system. The class *InstalledAppFlow*, in *google_auth_oauthlib.flow* (Google, 2019b), is a *Flow* subclass (which belongs to the same library). Thanks to this last class we have mentioned, *InstalledAppFlow* uses a *requests_oauthlib OAuth2Session* instance at *oauth2session* to perform all of the OAuth 2.0 logic. Besides it also inherits from *Flow* the class method *from_client_secrets_file* which creates a *Flow* instance from a Google client secrets file (this file will be the .json file that we obtained through the Google API Console) and a list of OAuth 2.0 Scopes (Cook and Messina, 2019c).

After constructing an *InstalledAppFlow* by calling *from_client_secrets_file* as we have explained, we can invoke the class method *run_local_server* which instructs the user to open the authorization URL in the browser and will try to automatically open it. This function will start a local web server to listen for the authorization response. Once there is a reply, the authorization server will redirect the user’s browser to the local web server. As we can see in Figure 2.2, the web server will get the authorization code from the response and shutdown, that code is then exchanged for a token.

In summary, it is possible to obtain the necessary permissions from the user and to follow the OAuth 2.0 protocol, by executing these instructions (written in Python):

```
from google_auth_oauthlib.flow import InstalledAppFlow

# Create a flow instance
flow = InstalledAppFlow.from_client_secrets_file('credentials.json',
['https://mail.google.com/'])
# Obtain OAuth 2.0 credentials for the user
creds = flow.run_local_server(port = 0)
```

Now, we are able to call Gmail API by using the token (which is stored in the variable *creds*). However, before starting working on the email data, we should save the OAuth 2.0 credentials since otherwise the user would need to go through the consent screen every time the application is opened. To prevent the latter from happening, to differentiate access from mail management and consequently to reuse as much code as possible, we have

²<https://developers.google.com/gmail/api/downloads>

implemented the following class *auth*, in *auth.py*, with a main method *get_credentials*:

```

1   import pickle
2   import os.path
3   from google_auth_oauthlib.flow import InstalledAppFlow
4   from google.auth.transport.requests import Request
5
6   class auth:
7       def __init__(self, SCOPES, CLIENT_SECRET_FILE):
8           self.SCOPES = SCOPES
9           self.CLIENT_SECRET_FILE = CLIENT_SECRET_FILE
10
11      def get_credentials(self):
12          """
13              Obtains valid credentials for accessing Gmail API
14          """
15
16          creds = None
17          # The file token.pickle stores the user's access and refresh tokens
18          if os.path.exists('token.pickle'):
19              with open('token.pickle', 'rb') as token:
20                  creds = pickle.load(token)
21
22          # If there are no (valid) credentials available, let the user log in
23          if not creds or not creds.valid:
24              if creds and creds.expired and creds.refresh_token:
25                  creds.refresh(Request())
26
27          flow = InstalledAppFlow.from_client_secrets_file(
28              self.CLIENT_SECRET_FILE, self.SCOPES)
29          creds = flow.run_local_server(port=0)
30
31          # Create token.pickle and save the credentials for the next run
32          with open('token.pickle', 'wb') as token:
33              pickle.dump(creds, token)
34
35          return creds

```

As we can observe in line 17 within *get_credentials* method, at first we check if the file called *token.pickle* exists, and in that case, it is opened and its information is stored in the variable *creds*. Thus, we avoid to force the user to open the authorization screen. By contrast, as we have seen before, if it does not exists, we obtain the credentials by calling the class methods *from_client_secrets_file* and *run_local_server* (it is written between lines 25 and 30).

There is another case that is also reflected in the code above (in lines 23 and 24): the credentials are expired (it is possible to check it by executing *creds.expired*) and they can be refreshed (the OAuth 2.0 refresh token is *creds.refresh_token*) (Google, 2019d). In this situation, we will refresh the access token by invoking the method known as *refresh* and by giving it a *Request* object (Google, 2019c) from *google.auth.transport.requests* as the function parameter which used to make HTTP requests.

3.1.2. Building a Gmail Resource

At this point, with the OAuth 2.0 credentials, we are able to call the Gmail API. For this purpose, it is necessary to construct a resource (Google, 2019a, /v1/reference) for interacting with the API. The *build* method, from *googleapiclient.discovery* library (Gregorio, 2019), create that object. As we will see later, this resource will lead us to manage emails, drafts, threads and everything we will like to do with the user's Gmail

data. This is why, using the *auth.py* file explained in Section 3.1.1, we are going to start every user session with the instructions below (or their equivalents in the language we are using):

```
from googleapiclient.discovery import build
import auth

SCOPES = [ 'https://mail.google.com/' ]
CLIENT_SECRET_FILE = 'credentials.json'

# Creation of an auth instance
authInst = auth.auth(SCOPES, CLIENT_SECRET_FILE)
# Constructing the resource API object
service = build('gmail', 'v1', credentials = authInst.get_credentials())
```

Henceforth, we will use the *service* variable to relate it with the resource object created by the *build* method.

3.1.3. Users resource

The *build* method could be called for obtaining any resource of any Google API (by giving it the suitable parameters). Our specific created *service*³ has an important instance method that we are going to invoke for every execution: the *users()* method. It returns what is known as users resource (Google, 2019a, /v1/reference/users).

The users resource has also instance methods, which return other Gmail API resources that we are going to need, such as *drafts()* (see Section ??), *labels()* (see Section 3.1.4), *messages()* (see Section 3.1.5) and *threads()* (see Section 3.1.6) which return drafts, labels, messages and threads resources respectively. Moreover, it possesses the three methods that we explain hereunder (we must remember that for being able to execute any method that we are going to explain in this and next sections, it is necessary to have the appropriate authorization with at least one of the required scopes that we can look up in its documentation):

- *getProfile(userId)*: it returns an object with a dictionary structure as it follows:

```
{
    'threadsTotal' : integer, # Total number of threads in the mailbox
    'emailAddress' : string, # User's email address
    'historyId' : string, # ID of the mailbox's current history record
    'messagesTotal' : integer # Total number of messages in the mailbox
}
```

The parameter is a string with the user's email address. If we remember the authentication process, at no time we ask the user about the email address because we decided to let the Google API functions to handle all that procedure. Therefore we have no way to know this information. Nevertheless, the special string value '*me*' can be used to indicate the authenticated user. For knowing the required scopes for invoking this function look up in (Google, 2019a, /v1/reference/users/getProfile).

- *stop(userId)*: stop receiving push notifications for the given user mailbox. As it happens with *getProfile*, the parameter is a string with the user's email address, but it is possible to use the especial string value '*me*'.

³http://googleapis.github.io/google-api-python-client/docs/dyn/gmail_v1.html

- *whatch(userId, body)*: set up or update a push notification watch on the given user mailbox.

As we are going to call only the *getProfile* method, we have described on details this first function and we have just given an idea about what the rest of them do. Now, in next sections, we are going to explain all the resources we can create with the user resource.

3.1.4. Labels resource

As we have studied, we can obtain the mentioned labels resource (Google, 2019a, /v1/reference/users/labels) by invoking *labels()* instance method of our users resource, that is to say, by using our *service* variable, the instruction *service.users().labels()* will return the label resource.

In order to obtain a label object, we will use the methods of this resource: create, delete, get, list, patch and update. In this manner, for example, we can store a label object by calling the next instructions:

```
labels = service.users().labels()
labelList = labels.list(userId = 'me').execute()
label = labels.get(id = labelList[0]['id'], userId = 'me')
```

It is necessary to use the *get* method because, as we can look up in (Google, 2019a, /v1/reference/users/labels/list), the *list* method only contains an *id*, *name*, *messageListVisibility*, *labelListVisibility* and *type* of each label, whereas the *get* method returns the label resource with all the information.

3.1.5. Messages resource

As any other resource, the messages resource has different methods, many of whom we are going to need in the work. Therefore, be aware of these methods and the operations that we are able to do with them is imperative for face our goals. For this reason, in this section we are going to delve into the messages resource methods. As we saw in Section 3.1.3, we can access to this resource by invoking the *messages()* method when we have a users resource. We will limit ourselves to describing the methods we may need to use:

- *attachments()*: returns the attachments resource (for more information about this resource refer to (Google, 2019a, /v1/reference/users/messages/attachments)).
- *get(userId, id, format = 'full', metadataHeaders = None)*: if successful, this method returns the requested messages resource. Its parameters are:
 - *id*: the identifier string of the message we are looking for.
 - *userId*: the user's email address. As it happens with the *getProfile* method of the users resource (see Section 3.1.3), the special string value '*me*' can be used to indicate the authenticated user.
 - *format* (optional parameter): the format in which we want the message returned. This field can take the following punctual values: '*full*' (returns the entirely email data with body content parsed in the *payload* messages resource field and the *raw* field is empty), '*metadata*' (returns only an email message with its identifier, email headers and labels), '*minimal*' (returns only an email message with its identifier and labels) and '*raw*' (returns the entirely email message data with the body content in the *raw* messages resource field as a base64url (see Section 2.1.1.3) encoded string and the *payload* field is empty).

- *metadataHeaders* (optional parameter): it is only used when the format parameter takes the punctual value of '*metadata*'. It is a string list where we have to insert the headers we want to be included.

For knowing the required scopes for invoking this function refer to (Google, 2019a, /v1/reference/users/messages/get).

- *list(userId, includeSpamTrash = false, labelIds = None, maxResults = None, pageToken = None, q = None)*: returns a resource with the following structure:

```
{
    'messages' : [ users.messages resource ],
    'nextPageToken' : string,
    'resultSizeEstimate' : unsigned integer
}
```

As it happens with the *list* method of the labels resource (see Section 3.1.4), '*messages*' list does not contain all of a message information (for obtaining the full email data we can use *get* method). Each element of this list only contains the *id* and *threadId* field.

The parameters of this method are:

- *userId*: user's email address (we can use the special string value '*me*').
- *includeSpamTrash* (optional parameter): boolean parameter which determines if it includes messages with the labels *SPAM* and *TRASH* in the result of the operation.
- *labelIds* (optional parameter): it is a list which let us filter the messages by only returning emails with labels that match all of the identifiers that belong to this list.
- *maxResults* (optional parameter): an integer which determines the maximum number of messages to return.
- *pageToken* (optional parameter): string which specifies a page of results.
- *q* (optional parameter): string which let us do an specific query (with the same query format as the Gmail search box) and filter the messages by only returning emails that match with it.

For knowing the required scopes for invoking this function refer to (Google, 2019a, /v1/reference/users/messages/list).

- *send(userId, body = None, media_body = None, media_mime_type = None)*: it sends the given message to the email addresses specified in the *To*, *Cc* and *Bcc* headers. The first two parameters are the only ones we will use. The first (*userId*) is the user's email address (we can use the special string value '*me*') and the second is the message we want to send in an RFC 2822 (Resnick, 2001) formatted. For knowing the required scopes for invoking this function refer to (Google, 2019a, /v1/reference/users/messages/send).

3.1.6. Threads resource

In addition to messages, we will also manage the threads of the user. Because of it, knowing the main operation with them will be necessary. The most important methods of this resource are:

- *get(userId, id, format = 'full', metadataHeaders = None)*: if successful, this method returns the requested threads resource. In respect of the parameters, they are defined in the same way as in *get* messages resource method (see Section ??) with the exception of the parameter *format*, whose only difference is that it does not accept the '*raw*' value. For knowing the required scopes for invoking this function look up in (Google, 2019a, /v1/reference/users/threads/get).
- *list(userId, includeSpamTrash = False, labelIds = None, maxResults = None, pageToken = None, q = None)*: if successful, it returns a dictionary structure analogous to the view in the *list* message resource method (see Section ??). Needless to say, instead of returning a messages resource list it will give us a threads resource list, which does not contain the complete information of each thread (for example each element of the list has not a list of messages resource). Full thread data can be fetched using the previous method. The parameters of this method are defined in the same way as the *list* messages resource method. For knowing the required scopes for invoking this function refer to (Google, 2019a, /v1/reference/users/threads/list).

Chapter 4

Work Description

4.1. Style Analyser

In order to generate messages with the user's writing style, it is necessary to define parameters which will determine and describe it. For this purpose, we have developed a style analyser that extracts the messages written by the user and obtains the value of various metrics from them. Then it will be useful for analysing different user's emails and drawing conclusions about what parameters describe the writing style of each person more accurately. Besides most of the developed code will be reusable in the final application for analysing the user's messages.

In this section we are going to explain the architecture of this analyser (see 4.1.1) and each of the modules that compose it (they are explained in sections 4.1.2, 4.1.3, 4.1.4 and 4.1.5). Finally, we are going to discuss the obtained results and analyse them for drawing a conclusion (this discussion can be looked up in 4.1.6).

4.1.1. Architecture

The first step when we are designing a system's architecture is to know its input and output. In this case, we want to implement a natural language processing system that analyses the writing style of emails. As we have previously mentioned, the writing style analysis will be represented through chosen metrics. Therefore, our system's output is going to be those chosen metrics (they are explained in section 4.1.5).

In respect of the system's input, because of the nature of the problem we face, it is reasonable to think that it must be a single email. However, we do not have the corpus of emails to analyse. For this reason, our first step will be to extract the emails that will be analysed. Hence, our system's input is going to be the Gmail user for accessing to the information that we are interested in. Therefore, we are going to develop a system which receives a Gmail user as input and obtains different metrics of each message sent by the given user as output.

Once we clearly know the input and output of our system, we need to define the different steps that a message has to take for being analysed.

- 4.1.2. Extracting Module
- 4.1.3. Preprocessing Module
- 4.1.4. Typographic Correction Module
- 4.1.5. Measuring module
- 4.1.6. Results and conclusions

Chapter 5

Conclusiones y Trabajo Futuro

Conclusiones del trabajo y líneas de trabajo futuro.

Antes de la entrega de actas de cada convocatoria, en el plazo que se indica en el calendario de los trabajos de fin de máster, el estudiante entregará en el Campus Virtual la versión final de la memoria en PDF. En la portada de la misma deberán figurar, como se ha señalado anteriormente, la convocatoria y la calificación obtenida. Asimismo, el estudiante también entregará todo el material que tenga concedido en préstamo a lo largo del curso.

Bibliography

*And thus I clothe my naked villany
With old odd ends stolen out of holy writ;
And seem a saint, when most I play the devil.*

Richard III, Act I Scene 3
William Shakespeare

ABBASI, A. and CHEN, H. Applying authorship analysis to extremist-group web forum messages. *IEEE Intelligent Systems*, Vol. 20(5), 67–75, 2005.

ALLEN, J. R. Methods of author identification through stylistic analysis. *The French Review*, Vol. 47(5), 904–916, 1974.

APTE, C., DAMERAU, F., WEISS, S. ET AL. *Text mining with decision rules and decision trees*. Citeseer, 1998.

ARGAMON, S., ŠARIĆ, M. and STEIN, S. S. Style mining of electronic messages for multiple authorship discrimination: first results. In *Proceedings of the ninth ACM SIGKDD international conference on Knowledge discovery and data mining*, 475–480. 2003.

BBC news (3rd July 2018). Gmail messages 'read by human third parties'. *Technology*, 2018. <https://www.bbc.com/news/technology-44699263>.

BINONGO, J. N. G. and SMITH, M. W. A. The application of principal component analysis to stylometry. *Literary and Linguistic Computing*, Vol. 14(4), 445–466, 1999.

BORENSTEIN, N. and FREED, N. Mime (multipurpose internet mail extensions) part one: Mechanisms for specifying and describing the format of internet message bodies. Tech. Rep. RFC 1521, Internet Engineering Task Force (IETF), 1993.

BURROWS, J. F. Computers and the study of literature. *Computers and written texts*, 167–204, 1992.

CALIX, K., CONNORS, M., LEVY, D., MANZAR, H., MCABE, G. and WESTCOTT, S. Stylometry for e-mail author identification and authentication. *Proceedings of CSIS research day, Pace University*, 1048–1054, 2008.

CHENG, N., CHANDRAMOULI, R. and SUBBALAKSHMI, K. Author gender identification from text. *Digital Investigation*, Vol. 8(1), 78–88, 2011.

- COOK, B. and MESSINA, C. OAuth 2.0. <https://oauth.net/2/>, 2019a. [Online; accessed 27-September-2019].
- COOK, B. and MESSINA, C. OAuth 2.0 Authorization Code Exchange. <https://www.oauth.com/oauth2-servers/pkce/authorization-code-exchange/>, 2019b. [Online; accessed 27-September-2019].
- COOK, B. and MESSINA, C. OAuth 2.0 Scope. <https://oauth.net/2/scope/>, 2019c. [Online; accessed 27-September-2019].
- CORNEY, M. W. *Analysing e-mail text authorship for forensic purposes*. PhD thesis, Queensland University of Technology, 2003.
- CRISPIN, M. Internet message access protocol - version 4rev1. Tech. Rep. RFC 3501, University of Washington, 2003.
- CROCKER, D. H. Standard for the format of arpa internet text messages. Tech. Rep. RFC 822, Dept. of Electrical Engineering, University of Delaware, 1982.
- DAELEMANS, W., DE CLERCQ, O. and HOSTE, V. STYLENE: an environment for stylometry and readability research for Dutch. In *CLARIN in the Low Countries*, 195–210. Ubiquity Press, 2017.
- DE MORGAN, S. E. and DE MORGAN, A. *Memoir of Augustus De Morgan*. Longmans, Green, and Company, 1882.
- DE VEL, O., ANDERSON, A., CORNEY, M. and MOHAY, G. Mining e-mail content for author identification forensics. *ACM Sigmod Record*, Vol. 30(4), 55–64, 2001.
- EDER, M., RYBICKI, J. and KESTEMONT, M. Stylometry with r: a package for computational text analysis. *R journal*, Vol. 8(1), 2016.
- ELLEGARD, A. A statistical method for determining authorship: the junius letter. *Gothenburg studies in Engilsh*, Vol. 13, 1769–1772, 1962.
- FENG, S., BANERJEE, R. and CHOI, Y. Syntactic stylometry for deception detection. In *Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics: Short Papers-Volume 2*, 171–175. Association for Computational Linguistics, 2012.
- FREED, N. and BORENSTEIN, N. Mime (multipurpose internet mail extensions). Tech. Rep. RFC 1341, Internet Engineering Task Force (IETF), 1992.
- FREED, N. and BORENSTEIN, N. Multipurpose internet mail extensions (mime) part five: Conformance criteria and examples. Tech. Rep. RFC 2049, Internet Engineering Task Force (IETF), 1996a.
- FREED, N. and BORENSTEIN, N. Multipurpose internet mail extensions (mime) part one: Format of internet message bodies. Tech. Rep. RFC 2045, Internet Engineering Task Force (IETF), 1996b.
- FREED, N. and BORENSTEIN, N. Multipurpose internet mail extensions (mime) part two: Media types. Tech. Rep. RFC 2046, Internet Engineering Task Force (IETF), 1996c.
- FREED, N. and KLENSIN, J. Media type specifications and registration procedures. Tech. Rep. RFC 4288, Internet Engineering Task Force (IETF), 2005a.

- FREED, N. and KLENSIN, J. Multipurpose internet mail extensions (mime) part four: Registration procedures. Tech. Rep. RFC 4289, Internet Engineering Task Force (IETF), 2005b.
- GATT, A. and KRAHMER, E. Survey of the state of the art in natural language generation: Core tasks, applications and evaluation. *Journal of Artificial Intelligence Research*, Vol. 61, 65–170, 2018.
- GOOGLE. Gmail api | google developers. <https://developers.google.com/gmail/api>, 2019a. [Online; accessed 17-October-2019].
- GOOGLE. google_auth_oauthlib.flow module. https://google-auth-oauthlib.readthedocs.io/en/latest/reference/google_auth_oauthlib.flow.html, 2019b. [Online; accessed 27-September-2019].
- GOOGLE. google.auth.transport package. <https://google-auth.readthedocs.io/en/stable/reference/google.auth.transport.html#google.auth.transport.Request>, 2019c. [Online; accessed 27-September-2019].
- GOOGLE. google.oauth2.credentials module. <https://google-auth.readthedocs.io/en/stable/reference/google.oauth2.credentials.html#google.oauth2.credentials.Credentials>, 2019d. [Online; accessed 27-September-2019].
- GOOGLE. OAuth 2.0 Scopes for Google APIs. <https://developers.google.com/identity/protocols/googlescopes>, 2019e. [Online; accessed 27-September-2019].
- GOOGLE. Using OAuth 2.0 to Access Google APIs. <https://developers.google.com/identity/protocols/OAuth>, 2019f. [Online; accessed 27-September-2019].
- GREGORIO, J. googleapiclient.discovery. <https://googleapis.github.io/google-api-python-client/docs/epy/googleapiclient.discovery-module.html#build>, 2019. [Online; accessed 23-September-2019].
- GUIDE, S. *Red Hat Enterprise Linux 4: Reference Guide*. Red Hat Inc., 2005. <http://web.mit.edu/rhel-doc/OldFiles/4/RH-DOCS/rhel-rg-en-4/index.html>.
- HARDT, D. The oauth 2.0 authorization framework. Tech. Rep. RFC 6749, Internet Engineering Task Force (IETF), 2012.
- HOLMES, D. I. The evolution of tylometry in humanities. *Literary and Linguistic Computing*, Vol. 13(3), 1998.
- HOLMES, D. I. and FORSYTH, R. S. The federalist revisited: New directions in authorship attribution. *Literary and Linguistic computing*, Vol. 10(2), 111–127, 1995.
- IQBAL, F., BINSALLEEH, H., FUNG, B. C. and DEBBABI, M. Mining writeprints from anonymous e-mails for forensic investigation. *digital investigation*, Vol. 7(1-2), 56–64, 2010.
- JOSEFSSON, S. The base16, base32, and base64 data encodings. Tech. Rep. RFC 4648, Internet Engineering Task Force (IETF), 2006.
- JOSEFSSON, S. and LEONARD, S. Textual encodings of pkix, pkcs, and cms structures. Tech. Rep. RFC 7468, Internet Engineering Task Force (IETF), 2015.

- KLENSIN, J. Simple mail transfer protocol. Tech. Rep. RFC 5321, Internet Engineering Task Force (IETF), 2008.
- KUCUKYILMAZ, T., CAMBAZOGLU, B. B., AYKANAT, C. and CAN, F. Chat mining: Predicting user and message attributes in computer-mediated communication. *Information Processing & Management*, Vol. 44(4), 1448–1466, 2008.
- MENDENHALL, T. C. The characteristic curves of composition. *Science*, Vol. 9(214), 237–249, 1887.
- MIHALCEA, R. and STRAPPARAVA, C. The lie detector: Explorations in the automatic recognition of deceptive language. In *Proceedings of the ACL-IJCNLP 2009 Conference Short Papers*, 309–312. Association for Computational Linguistics, 2009.
- MOORE, K. Multipurpose internet mail extensions (mime) part three: Message header extensions for non-ascii text. Tech. Rep. RFC 2047, Internet Engineering Task Force (IETF), 1996.
- MOSTELLER, F. and WALLACE, D. L. *Applied Bayesian and classical inference: the case of the Federalist papers*. Springer Science & Business Media, 1964.
- MYERS, J., MELLON, C. and ROSE, M. Post office protocol - version 3. Tech. Rep. RFC 1939, Dover Beach Consulting, Inc., 1996.
- NELSON, S. and PARKS, C. The model primary content type for multipurpose internet mail extensions. Tech. Rep. RFC 2077, Internet Engineering Task Force (IETF), 1997.
- NG, H. T., GOH, W. B. and LOW, K. L. Feature selection, perceptron learning, and a usability case study for text categorization. In *Proceedings of the 20th annual international ACM SIGIR conference on Research and development in information retrieval*, 67–73. 1997.
- OTT, M., CHOI, Y., CARDIE, C. and HANCOCK, J. T. Finding deceptive opinion spam by any stretch of the imagination. In *Proceedings of the 49th annual meeting of the association for computational linguistics: Human language technologies-volume 1*, 309–319. Association for Computational Linguistics, 2011.
- PENNEBAKER, J. W., BOYD, R. L., JORDAN, K. and BLACKBURN, K. The development and psychometric properties of liwc2015. Tech. rep., University of Texas at Austin, 2015.
- POSTEL, J. B. Simple mail transfer protocol. Tech. Rep. RFC 821, Information Sciences Institute, University of Southern California, 1982.
- RESNICK, P. Internet message format. Tech. Rep. RFC 2822, Internet Engineering Task Force (IETF), 2001.
- RESNICK, P. Internet message format. Tech. Rep. RFC 5322, Qualcomm Incorporated, 2008.
- REYNOLDS, J. K. Post office protocol. Tech. Rep. RFC 918, Information Sciences Institute, 1984.
- SAHAMI, M., DUMAIS, S., HECKERMAN, D. and HORVITZ, E. A bayesian approach to filtering junk e-mail. In *Learning for Text Categorization: Papers from the 1998 workshop*, Vol. 62, 98–105. Madison, Wisconsin, 1998.

- SCHWARTZ, H. A., EICHSTAEDT, J. C., KERN, M. L., DZIURZYNSKI, L., RAMONES, S. M., AGRAWAL, M., SHAH, A., KOSINSKI, M., STILLWELL, D., SELIGMAN, M. E. ET AL. Personality, gender, and age in the language of social media: The open-vocabulary approach. *PloS one*, Vol. 8(9), e73791, 2013.
- SUMMERS, K. Analysing for authorship: A guide to the cusum technique. 1999.
- THISTED, R. and EFRON, B. Did shakespeare write a newly-discovered poem? *Biometrika*, Vol. 74(3), 445–455, 1987.
- THOMSON, R. and MURACHVER, T. Predicting gender from electronic discourse. *British Journal of Social Psychology*, Vol. 40(2), 193–208, 2001.
- TROOST, R., DORNER, S. and MOORE, K. Communicating presentation information in internet messages: The content-disposition header field. Tech. Rep. RFC 2183, Internet Engineering Task Force (IETF), 1997.
- TWEEDIE, F. J. and BAAYEN, R. H. How variable may a constant be? measures of lexical richness in perspective. *Computers and the Humanities*, Vol. 32(5), 323–352, 1998.
- TWEEDIE, F. J., SINGH, S. and HOLMES, D. I. Neural network applications in stylometry: The federalist papers. *Computers and the Humanities*, Vol. 30(1), 1–10, 1996.
- WIKIPEDIA CONTRIBUTORS. Base64 — Wikipedia, the free encyclopedia. <https://en.wikipedia.org/wiki/Base64>, 2019a. [Online; accessed 17-October-2019].
- WIKIPEDIA CONTRIBUTORS. Email — Wikipedia, the free encyclopedia. <https://en.wikipedia.org/w/index.php?title=Email&oldid=954020305>, 2019b. [Online; accessed 21-September-2019].
- WIKIPEDIA CONTRIBUTORS. Mime — Wikipedia, the free encyclopedia. <https://en.wikipedia.org/w/index.php?title=MIME&oldid=916901691>, 2019c. [Online; accessed 23-September-2019].
- WIKIPEDIA CONTRIBUTORS. Privacy-enhanced mail — Wikipedia, the free encyclopedia. https://en.wikipedia.org/wiki/Privacy-Enhanced_Mail, 2019d. [Online; accessed 23-September-2019].
- WIKIPEDIA CONTRIBUTORS. Quoted-printable — Wikipedia, the free encyclopedia. <https://en.wikipedia.org/wiki/Quoted-printable>, 2019e. [Online; accessed 23-September-2019].
- WIKIPEDIA CONTRIBUTORS. Stylometry — Wikipedia, the free encyclopedia. <https://en.wikipedia.org/w/index.php?title=Stylometry&oldid=957882878>, 2020. [Online; accessed 28-May-2020].

Appendix **A**

Título del Apéndice A

Contenido del apéndice

Appendix **B**

Título del Apéndice B

Este texto se puede encontrar en el fichero Cascaras/fin.tex. Si deseas eliminarlo, basta con comentar la línea correspondiente al final del fichero TFMTeXiS.tex.

*-¿Qué te parece desto, Sancho? – Dijo Don Quijote –
Bien podrán los encantadores quitarme la ventura,
pero el esfuerzo y el ánimo, será imposible.*

*Segunda parte del Ingenioso Caballero
Don Quijote de la Mancha
Miguel de Cervantes*

*-Buena está – dijo Sancho –; fírmela vuestra merced.
–No es menester firmarla – dijo Don Quijote–,
sino solamente poner mi rúbrica.*

*Primera parte del Ingenioso Caballero
Don Quijote de la Mancha
Miguel de Cervantes*

