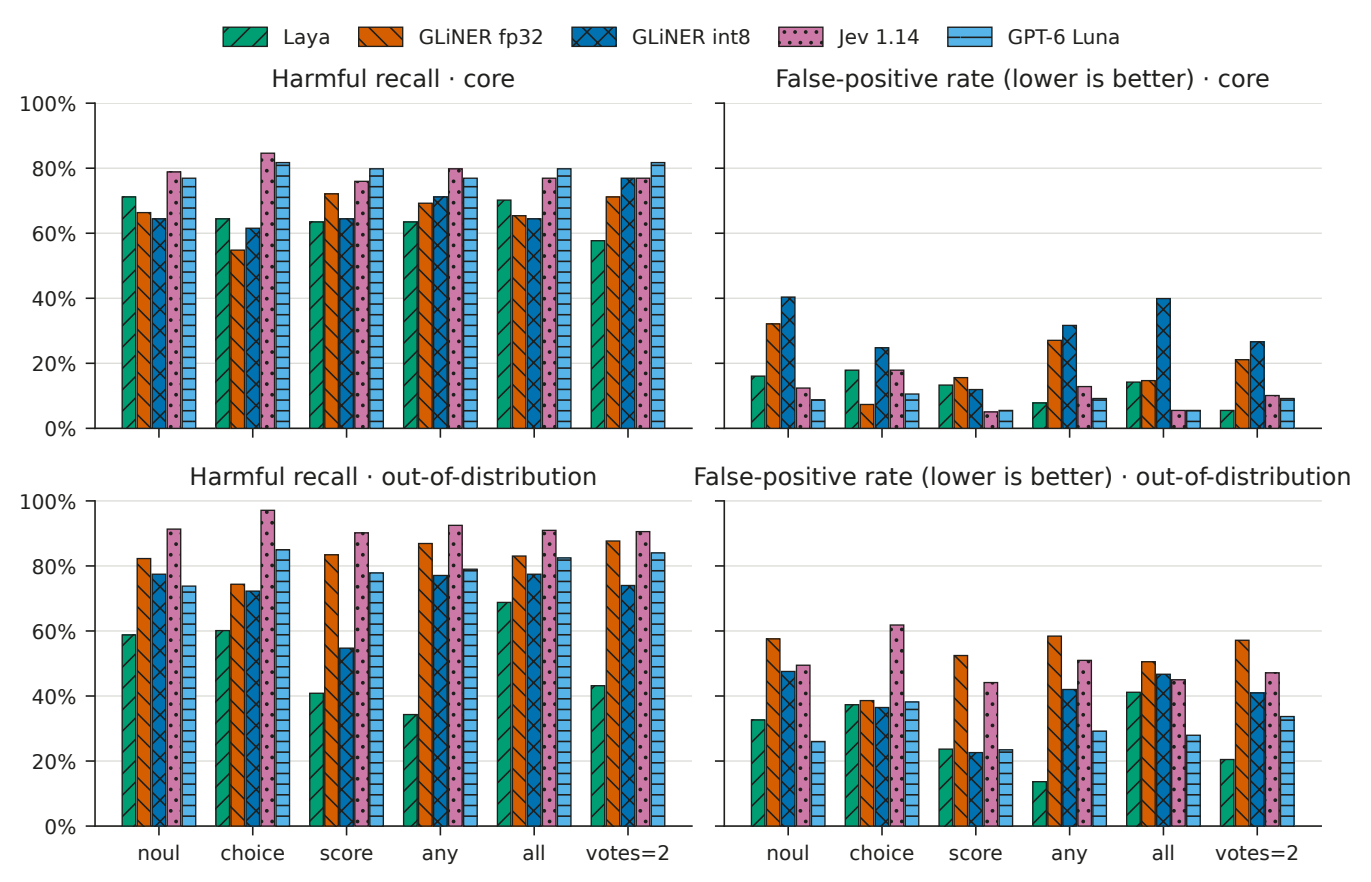

Each config's threshold is tuned on the core dev split and applied unchanged to both sets; false positives count benign and hard-negative prompts.