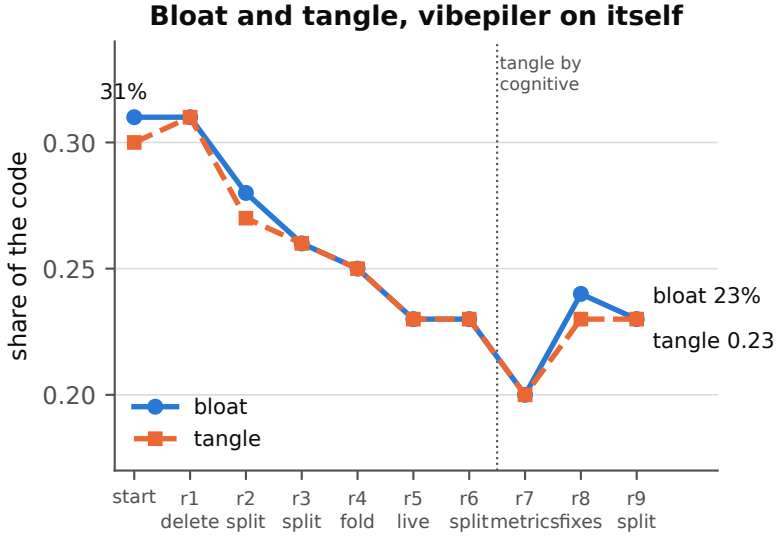

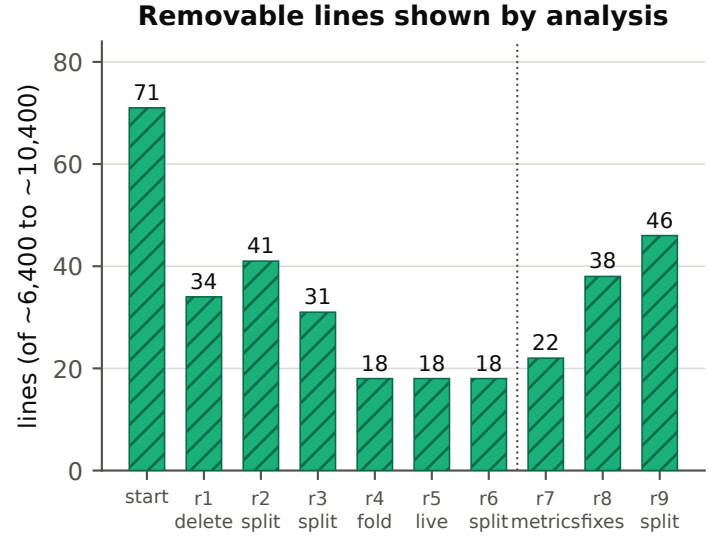

Each round: apply the top remarks of `vibepiler compile . -R`, re-run with --baseline. Round 1 deleted waste; rounds 2–3 split the most tangled functions; round 4 folded duplicates and accepted the judgment calls. Round 5 added the liveness pass, whose own new code brought 55 removable lines, and worked them off. Round 6 followed v0.2: it split the dependency check (complexity 51 to 18) and folded the decorator code both adapters had copied. Round 7 (v0.4.0) measured tangle by cognitive complexity and split the eight worst functions. Round 8 (v0.4.5) came after four feature releases; it fixed four analyzer bugs its self-report exposed and removed no code. Round 9 (v0.4.9, after the typed linker) split the nine most tangled functions and fixed the semantic tier's caller/callee pairs. Tangle is the share-weighted noisy OR of per-function terms; bloat = $1 - (1 - \text{waste})(1 - \text{tangle})$. Measured at -O3 by each round's own vibepiler, 54–64% of call sites linked.