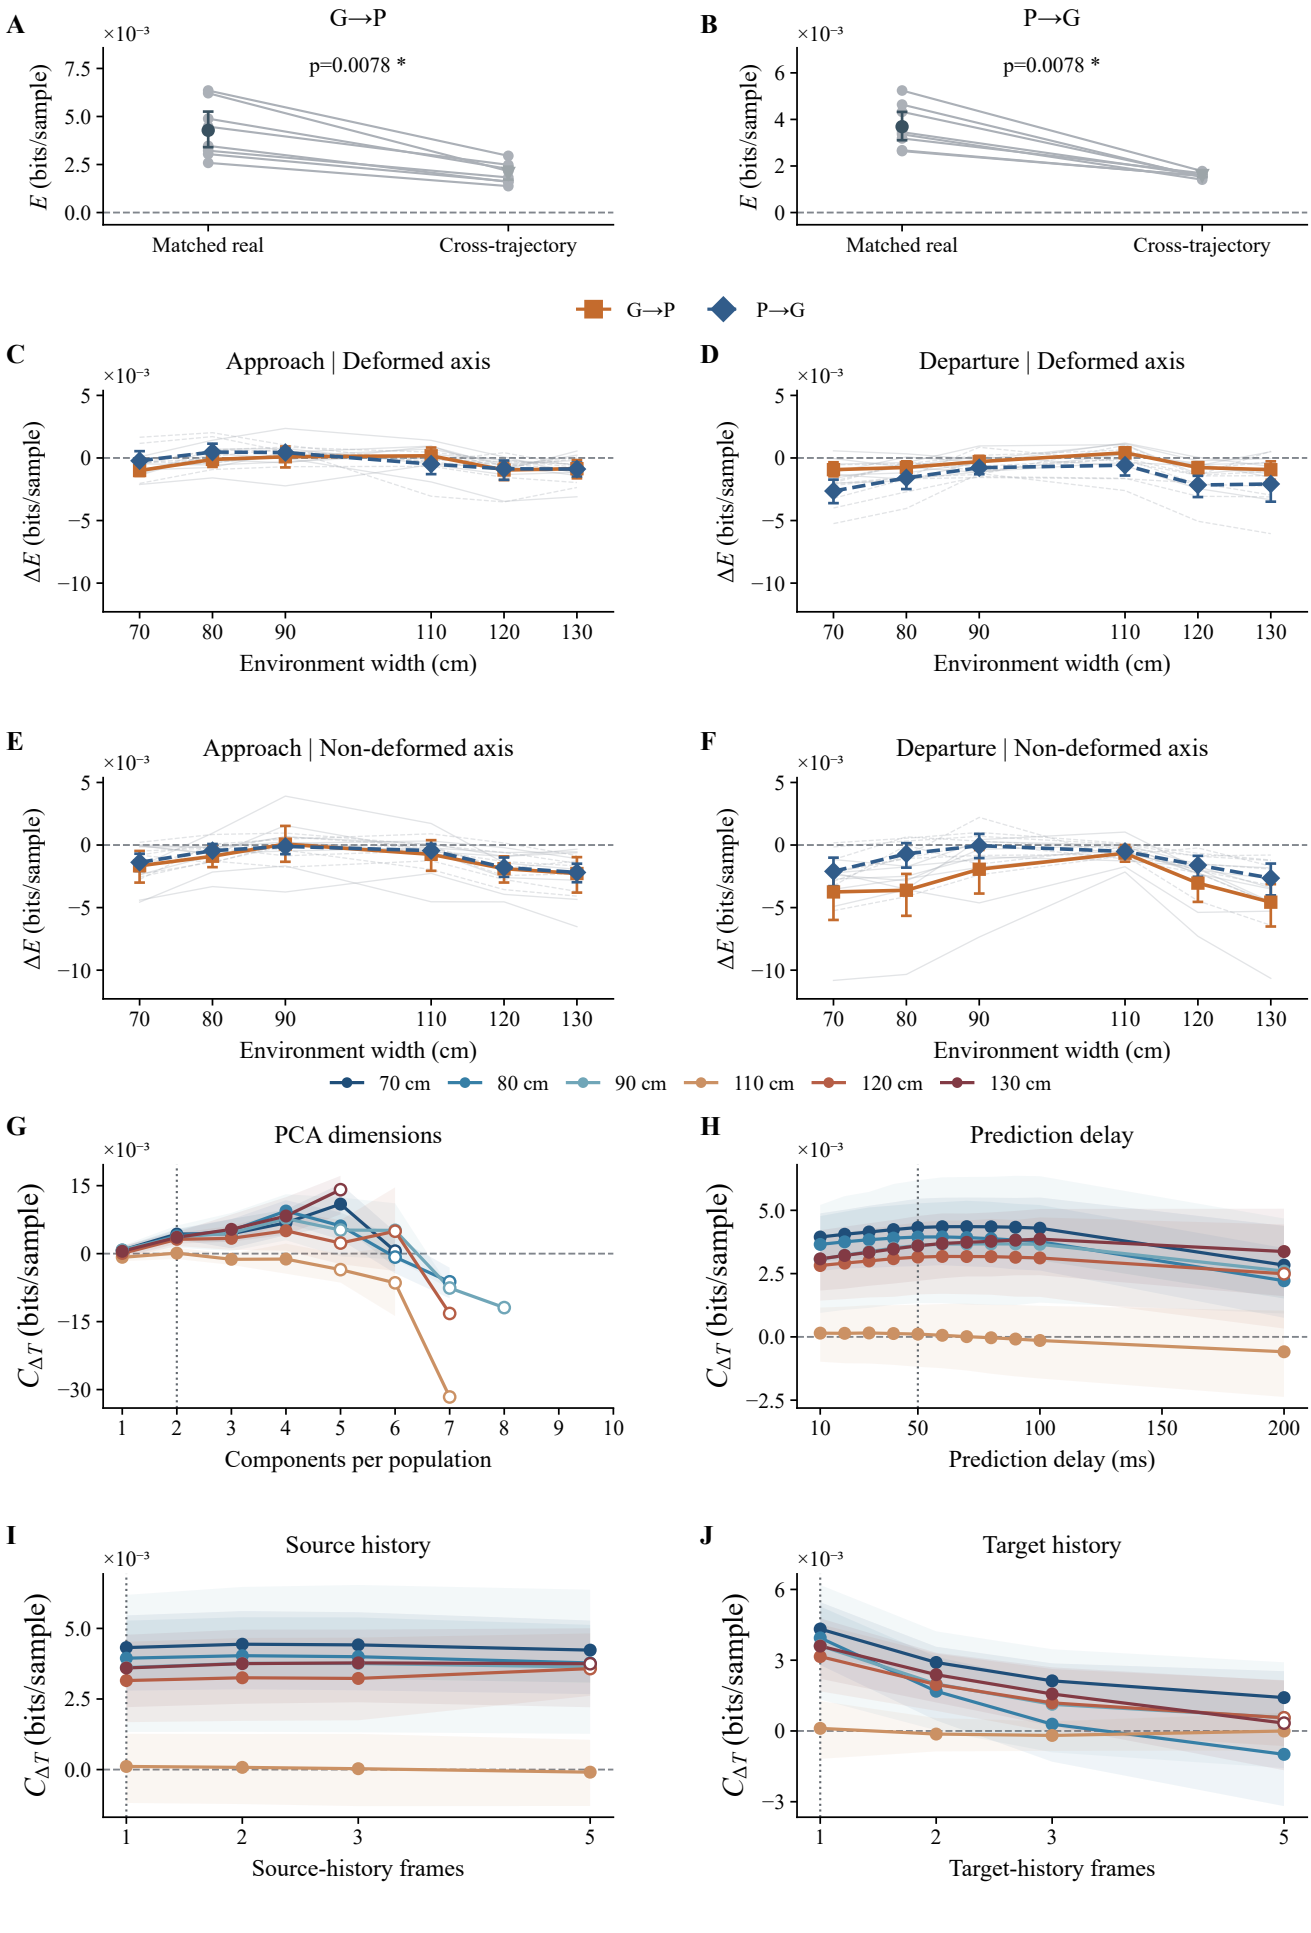

A
G→P
p=0.0078 *
E (bits/sample)
Matched real
Cross-trajectory
B
P→G
p=0.0078 *
E (bits/sample)
Matched real
Cross-trajectory
G→P
P→G
C
Approach | Deformed axis
ΔE (bits/sample)
Environment width (cm)
D
Departure | Deformed axis
ΔE (bits/sample)
Environment width (cm)
E
Approach | Non-deformed axis
ΔE (bits/sample)
Environment width (cm)
F
Departure | Non-deformed axis
ΔE (bits/sample)
Environment width (cm)
70 cm
80 cm
90 cm
110 cm
120 cm
130 cm
G
PCA dimensions
$C_{\Delta T}$ (bits/sample)
Components per population
H
Prediction delay
$C_{\Delta T}$ (bits/sample)
Prediction delay (ms)
I
Source history
$C_{\Delta T}$ (bits/sample)
Source-history frames
J
Target history
$C_{\Delta T}$ (bits/sample)
Target-history frames