SET UP A SINGLE HADOOP CLUSTER AND SHOW THE PROCESS USING WEB UI

AIM:

To set up a single hadoop cluster and show the process using web UI.

PROCEDURE:

Installation steps:

Step 1: Download and install Java

Hadoop is built on Java, so you must have Java installed on your PC. You can get the most recent version of Java from the official website. After downloading, follow the installation wizard to install Java on your system.

JDK: https://www.oracle.com/java/technologies/javase-downloads.html

Step 2: Download Hadoop

Hadoop can be downloaded from the Apache Hadoop website. Make sure to have the latest stable release of Hadoop. Once downloaded, extract the contents to a convenient location.

Hadoop: https://hadoop.apache.org/releases.html

Step 3: Set Environment Variables

You must configure environment variables after downloading and unpacking Hadoop. Launch the Start menu, type "Edit the system environment variables," and select the result. This will launch the System Properties dialogue box. Click on "Environment Variables" button to open.

Click "New" under System Variables to add a new variable. Enter the variable name "HADOOP_HOME" and the path to the Hadoop folder as the variable value. Then press "OK."

Then, under System Variables, locate the "Path" variable and click "Edit." Click "New" in the Edit

Environment Variable window and enter "%HADOOP_HOME%bin" as the variable value. To close all the windows, use the "OK" button.

Step 4: Setup Hadoop

You must configure Hadoop in this phase by modifying several configuration files. Navigate to the "etc/hadoop" folder in the Hadoop folder. You must make changes to three files:

core-site.xml

hdfs-site.xml

mapred-site.xml

Open each file in a text editor and edit the following properties:

In core-site.xml

```
<configuration>
<name>fs.default.name</name>

<value>hdfs://localhost:9000
```

In hdfs-site.xml

In mapred-site.xml

```
<configuration>
<name>mapred.job.tracker</name>
<value>localhost:54311</value>

</configuration>
```

Step 5: Format Hadoop NameNode

Save the changes in each file.

You must format the NameNode before you can start Hadoop. Navigate to the Hadoop bin folder using a command prompt. Execute this command:

hdfs namenode -format

Step 6: Start Hadoop

To start Hadoop, open a command prompt and navigate to the Hadoop bin folder. Run the following command:


start-dfs.cmd start-yarn.cmd


This command will start all the required Hadoop services, including the NameNode, DataNode, and JobTracker. Wait for a few minutes until all the services are started.


Step 7: Verify Hadoop Installation


To ensure that Hadoop is properly installed, open a web browser and go to http://localhost:9870. This will launch the web interface for the Hadoop NameNode. You should see a page with Hadoop cluster information.

OUTPUT:

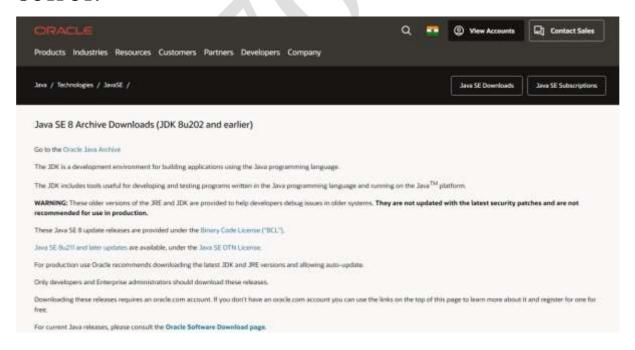

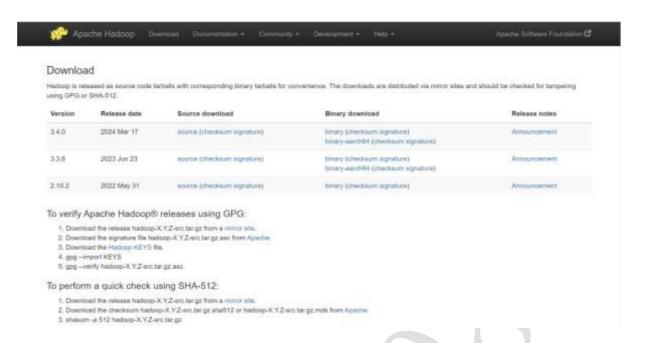

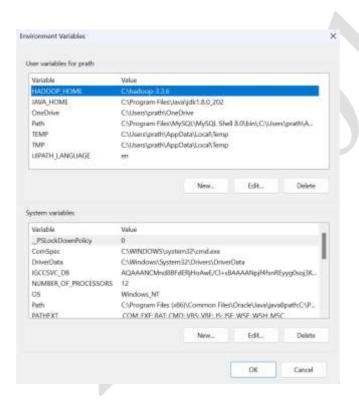


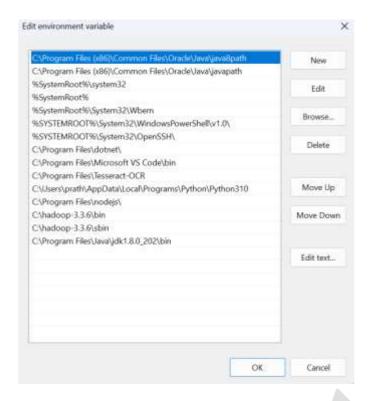

C:\Users\prath>hadoop version
Hadoop 3.3.6
Source code repository https://github.com/apache/hadoop.git -r 1be78238728da9266a4f88195858f08fd012bf9c
Compiled by ubuntu on 2023-06-18T08:22Z
Compiled on platform linux-x86_64
Compiled with protoc 3.7.1
From source with checksum 5652179ad55f76cb287d9c633bb53bbd
This command was run using /C:/hadoop-3.3.6/share/hadoop/common/hadoop-common-3.3.6.jar

C:\Users\prath>java -version java version "1.8.0_421" Java(TM) SE Runtime Environment (build 1.8.0_421-b09) Java HotSpot(TM) Client VM (build 25.421-b09, mixed mode, sharing)

```
2024-08-19 19:13:26,652 INFO util.GSet: Computing capacity for map NameNodeRetryCache
2024-08-19 19:13:26,652 INFO util.GSet: VM type = 64-bit
2024-08-19 19:13:26,652 INFO util.GSet: 0.02999999329447746% max memory 889 MB = 273.1 KB
2024-08-19 19:13:26,652 INFO util.GSet: capacity = 2°15 = 32768 entries
2024-08-19 19:13:26,684 INFO namenode.FSImage: Allocated new BlockPoolId: BP-1561018181-192.168.1.46-1724975006684
2024-08-19 19:13:26,746 INFO common.Storage: Storage directory C:\hadoop-3.3.6\data\namenode has been successfully forma tted.
```

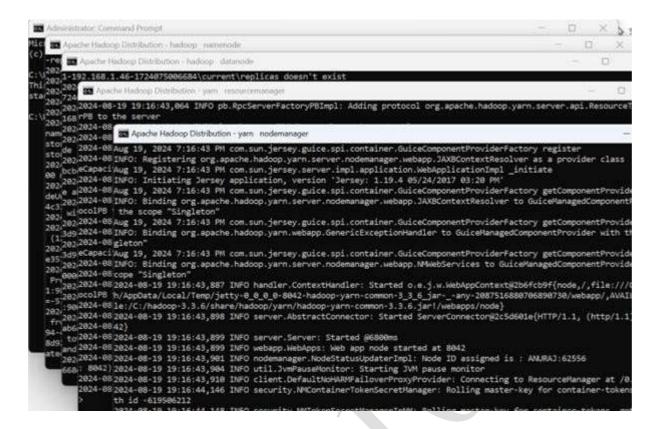

C:\Windows\System32>jps

14256 NodeManager

21760 Jps

14100 DataNode

20552 ResourceManager

22584 NameNode

Hadoop Derster Decembe Decembe VAvia Failure Singular Status Programs Littles -

Overview "localhost:9000" (ractive)

Stated	Mon Aug 19 19 19 39 +0530 2024
Version:	3.3.6. rtbe782387286w8266w488166058668012866
Compiled:	Sun Jun 16 13:52:00 +0530 2025 by ultumb from (HEAD detached at release-5.3.6 RC1)
Chester IO	GID-64(x)1x40-35(3-4013-64)(24966x)10x(51
Block Pool ID:	BP-1501018181-192-166.1.48-1724075006684

Summary

Security is off.

Safemode is off.

1 files and directories, () blocks (i) replicated blocks, () ensure coded block groups) = 1 total Sesystem object(s).

Heap Memory used 100.56 MB of 300.5 MB Heap Memory, Max Heap Memory is 505 MB

Non-Heap Memory used \$1.2565 of \$3.48 MB Committed Non-Heap Memory, Max Non-Heap Memory is furnished.



RESULT:

Thus, to set up a single hadoop cluster and show the process using web UI was completed successfully.